



MEMORIAL HALL

KITCHEN & AUDIO- VISUAL RENOVATIONS

ISSUED FOR BID

MARCH 27, 2025

PROJECT NUMBER: B41456

INTERNATIONAL ARCHITECTS ATELIER

PROFESSIONAL SEALS AND CERTIFICATIONS

THE FOLLOWING DESIGN PROFESSIONALS HAVE SIGNED AND SEALED THE ORIGINAL PLANS AND SPECIFICATIONS FOR THIS PROJECT:

1. MAJID AMIRAHMADI, AIA
INTERNATIONAL ARCHITECTS ATELIER, INC.

DRAWINGS

Sheet G001	General Information
Sheet G002	Key Plans
Sheet G003	Life Safety Plan / Code Analysis
Sheet D100	Floor Plans for Kitchen Demolition
Sheet D101	Arena AV Demo Plans
Sheet D102	Roof Demo Plan
Sheet D400	Basement Demo Ceiling Plan
Sheet D800	Demolition Photographs
Sheet D801	Demolition Photographs
Sheet A001	Wall Types
Sheet A100	Floor Plans - Kitchen & Dining
Sheet A101	AV Booth Modifications
Sheet A102	Roof Plan
Sheet A300	Enlarged Floorplan - Mixing Console Platform - Alt. #1
Sheet A400	Basement Ceiling Plan & Details
Sheet A600	Elevations & Finish Schedule
Sheet A610	Interior Details
Sheet A700	Door Schedule, Types, & Details

**TECHNICAL SPECIFICATIONS**

Section 011000	Summary
Section 012300	Alternates
Section 012500	Substitution Procedures
Section 012600	Contract Modification Procedures
Section 012900	Payment Procedures
Section 013100	Project Management and Coordination
Section 013200	Construction Progress Documentation
Section 013233	Photographic Documentation
Section 013300	Submittal Procedures
Section 013516	Alteration Project Procedures
Section 014000	Quality Requirements
Section 014200	References
Section 015000	Temporary Facilities and Controls
Section 016000	Product Requirements
Section 017300	Execution
Section 017700	Closeout Procedures
Section 017823	Operation and Maintenance Data
Section 017839	Project Record Documents

TECHNICAL SPECIFICATIONS, cont.

Section 024119	Selective Demolition
Section 055213	Pipe and Tube Railings
Section 061000	Rough Carpentry
Section 064023	Interior Architectural Woodwork
Section 066400	Plastic Paneling
Section 075552	Modified Bituminous Protected Membrane Roofing
Section 076200	Sheet Metal Flashing and Trim
Section 078413	Penetration Firestopping
Section 078443	Joint Firestopping
Section 079200	Joint Sealants
Section 080152	Historic Treatment of Wood Windows
Section 081113	Hollow Metal Doors & Frames
Section 081119	Stainless-Steel Doors and Frames
Section 081416	Flush Wood Doors
Section 087100	Door Hardware
Section 088000	Glazing
Section 092216	Non-Structural Metal Framing
Section 092900	Gypsum Board
Section 093013	Ceramic Tiling
Section 095113	Acoustical Panel Ceilings
Section 096513	Resilient Base and Accessories
Section 096723	Resinous Flooring
Section 099123	Interior Painting


PROFESSIONAL SEALS AND CERTIFICATIONS

THE FOLLOWING DESIGN PROFESSIONALS HAVE SIGNED AND SEALED THE ORIGINAL PLANS AND SPECIFICATIONS FOR THIS PROJECT:

1. STUART G. BRADEN, PE
IMEG, CORP.

DRAWINGS

Sheet PM000	Mechanical Coversheet
Sheet F100	Fire Protection Plans
Sheet P100	Basement Plans - Plumbing
Sheet P100.1	Enlarged Basement Plans - Plumbing
Sheet M100	Basement Plans - Mechanical
Sheet M101	1st & Mezzanine Plans - Mechanical
Sheet M102	1st & Mezzanine Plans - Mechanical
Sheet M103	2nd & Roof Plans - Mechanical
Sheet M300	Mechanical Details
Sheet M301	Mechanical Details
Sheet ME500	Mechanical Schedules
Sheet ME600	Mechanical Control Diagrams
Sheet ME601	Mechanical Control Diagrams
Sheet T000	Technology Coversheet
Sheet T302	1st Floor Plan - Technology
Sheet T303	Mezzanine Floor Plan - Technology
Sheet T304	2nd Floor Plan - Technology
Sheet T305	Technology Elevations
Sheet T306	Mezz. Plan - Tech. - Alt. 2 - L-Acoustics
Sheet T307	2nd Floor Plan - Tech. - Alt. 2 - L-Acoustics
Sheet T308	Technology Elev. - Alt. 2. - L-Acoustics
Sheet T309	Technology Alternate #1
Sheet T400	Technology Details
Sheet T500	Technology Riser Diagrams
Sheet T501	Technology Riser Diagrams
Sheet T502	Technology Riser Diagrams
Sheet T600	Technology Schedules

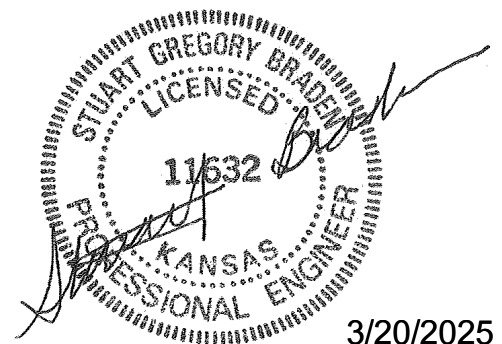

3/20/2025

STUART BRADEN - ENGINEER
KS#: 11632

TECHNICAL SPECIFICATIONS

Section 210500	Basic Fire Suppression Requirements
Section 210503	Through Penetration Firestopping
Section 210505	Fire Suppression Demolition for Remodeling
Section 210529	Fire Suppression Supports and Anchors

TECHNICAL SPECIFICATIONS, cont.

Section 210550	Seismic Requirements for Equipment and Supports
Section 210553	Fire Suppression Identification
Section 211300	Fire Protection Systems
Section 220500	Basic Plumbing Requirements
Section 220503	Through Penetration Firestopping
Section 220505	Plumbing Demolition for Remodeling
Section 220513	Motors
Section 220529	Plumbing Supports and Anchors
Section 220530	Roof Support
Section 220553	Plumbing Identification
Section 220593	Plumbing Testing, Adjusting, and Balancing
Section 220719	Plumbing Piping Insulation
Section 220800	Commissioning of Plumbing
Section 220900	Instrumentation
Section 221000	Plumbing Piping
Section 221023	Natural Gas Piping
Section 221030	Plumbing Specialties
Section 221123	Domestic Water Pumps
Section 224000	Plumbing Fixtures
Section 230500	Basic HVAC Requirements
Section 230503	Through Penetration Firestopping
Section 230505	HVAC Demolition for Remodeling
Section 230513	Motors
Section 230529	HVAC Supports and Anchors
Section 230530	Roof Supports and Anchors
Section 230548	HVAC Vibration Insulation
Section 230553	HVAC Identification
Section 230593	Testing, Adjusting, and Balancing
Section 230713	Ductwork Insulation
Section 230719	HVAC Piping Insulation
Section 230800	Commissioning of HVAC
Section 230900	Controls
Section 232200	Steam and Steam Condensate Piping
Section 232218	Steam and Steam Condensate Specialties
Section 232300	Refrigeration Piping and Specialties
Section 233100	Ductwork
Section 233300	Ductwork Accessories
Section 233423	Power Ventilators
Section 233700	Air Inlets and Outlets
Section 234000	Air Cleaning
Section 237200	Energy Recovery Devices
Section 237416.14	Packaged Rooftop Air Conditioning Units with High Percentage Outside Air
Section 238126	Split System Air Conditioning Units


PROFESSIONAL SEALS AND CERTIFICATIONS

THE FOLLOWING DESIGN PROFESSIONALS HAVE SIGNED AND SEALED THE ORIGINAL PLANS AND SPECIFICATIONS FOR THIS PROJECT:

1. LINDSAY ROBERTSON, PE
IMEG, CORP.

DRAWINGS

Sheet E000	Electrical Coversheet
Sheet E001	Electrical Lighting Coversheet
Sheet E100	Basement Plans - Lighting
Sheet E110	Basement Plans - Power
Sheet E111	Basement Plans - Power
Sheet E112	1st & Mezzanine Plans - Electrical
Sheet E113	2nd Floor Plans - Power
Sheet E114	Roof Plan - Electrical
Sheet E400	Electrical Details
Sheet E500	Electrical Diagrams
Sheet E600	Electrical Schedules

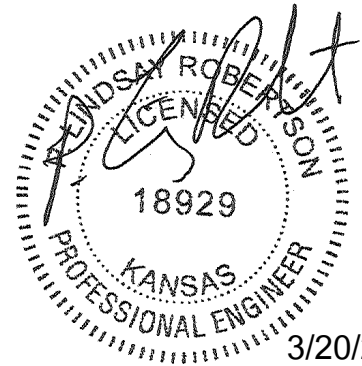

LINDSAY ROBERTSON - ENGINEER
KS#: 18929

TECHNICAL SPECIFICATIONS

Section 260500	Basic Electrical Requirements
Section 260503	Through Penetration Firestopping
Section 260505	Electrical Demolition for Remodeling
Section 260513	Wire and Cable
Section 260533	Conduit and Boxes
Section 260800	Commissioning of Electrical
Section 260933	Lighting Control Systems
Section 262726	Wiring Devices
Section 265119	LED Lighting

TABLE OF CONTENTS

<u>DIVISION 1</u>	<u>GENERAL REQUIREMENTS</u>	
011000	Summary	5
012300	Alternates	2
012500	Substitution Procedures	4
012600	Contract Modification Procedures	3
012900	Payment Procedures	5
013100	Project Management and Coordination	7
013200	Construction Progress Documentation	6
013233	Photographic Documentation	2
013300	Submittal Procedures	8
013516	Alteration Project Procedures	8
014000	Quality Requirements	8
014200	References	2
015000	Temporary Facilities and Controls	8
016000	Product Requirements	7
017300	Execution	7
017700	Closeout Procedures	6
017823	Operation and Maintenance Data	7
017839	Project Record Documents	3
<u>DIVISION 2</u>	<u>EXISTING CONDITIONS</u>	
024119	Selective Demolition	6
<u>DIVISION 3</u>	<u>CONCRETE</u>	
033000	Cast-In-Place Concrete	18
<u>DIVISION 4</u>	<u>MASONRY (NOT USED)</u>	
<u>DIVISION 5</u>	<u>METALS</u>	
054000	Cold-Formed Metal Framing	8
055213	Pipe and Tube Railings	5
<u>DIVISION 6</u>	<u>WOODS, PLASTICS, AND COMPOSITES</u>	
061000	Rough Carpentry	6
064023	Interior Architectural Woodwork	7
066400	Plastic Paneling	3
<u>DIVISION 7</u>	<u>THERMAL AND MOISTURE PROTECTION</u>	
075552	Modified Bituminous Protected Membrane Roofing	10
076200	Sheet Metal Flashing and Trim	10
078413	Penetration Firestopping	6
078443	Joint Firestopping	4
079200	Joint Sealants	7
<u>DIVISION 8</u>	<u>DOORS, WINDOWS & GLASS</u>	
080352	Historic Treatment of Wood Windows	7
081113	Hollow Metal Doors and Frames	6
081119	Stainless-Steel Doors and Frames	6
081416	Flush Wood Doors	4
087100	Door Hardware	9
088000	Glazing	7

<u>DIVISION 9</u>	<u>FINISHES</u>	
092216	Non-Structural Metal Framing	5
092900	Gypsum Board	7
093013	Ceramic Tiling	7
095113	Acoustical Panel Ceilings	7
096513	Resilient Base and Accessories	4
096723	Resinous Flooring	6
099123	Interior Painting	8
<u>DIVISION 10</u>	<u>SPECIALTIES (NOT USED)</u>	
<u>DIVISION 11</u>	<u>EQUIPMENT</u>	
114000	Food Service Equipment	
<u>DIVISION 12</u>	<u>FURNISHINGS (NOT USED)</u>	
<u>DIVISION 13</u>	<u>SPECIAL CONSTRUCTION (NOT USED)</u>	
<u>DIVISION 14</u>	<u>CONVEYING SYSTEMS (NOT USED)</u>	
<u>DIVISION 21</u>	<u>FIRE SUPPRESSION</u>	
210500	Basic Fire Suppression Requirements	
210503	Through Penetration Firestopping	
210505	Fire Suppression Demolition for Remodeling	
210529	Fire Suppression Supports and Anchors	
210550	Seismic Requirements for Equipment and Supports	
210553	Fire Suppression Identification	
211300	Fire Protection Systems	
<u>DIVISION 22</u>	<u>PLUMBING</u>	
220500	Basic Plumbing Requirements	
220503	Through Penetration Firestopping	
220505	Plumbing Demolition for Remodeling	
220513	Motors	
220529	Plumbing Supports and Anchors	
220530	Roof Support	
220553	Plumbing Identification	
220593	Plumbing Testing, Adjusting, and Balancing	
220719	Plumbing Piping Insulation	
220800	Commissioning of Plumbing	
220900	Instrumentation	
221000	Plumbing Piping	
221023	Natural Gas Piping	
221030	Plumbing Specialties	
221123	Domestic Water Pipes	
224000	Plumbing Fixtures	
<u>DIVISION 23</u>	<u>HEATING, VENTILATING, AND AIR-CONDITIONING (HVAC)</u>	
230500	Basic HVAC Requirements	
230503	Through Penetration Firestopping	
230505	HVAC Demolition for Remodeling	
230513	Motors	
230529	HVAC Supports and Anchors	

230530	Roof Support and Wind Bracing
230548	HVAC Vibration Isolation
230553	HVAC Identification
230593	Testing, Adjusting, and Balancing
230713	Ductwork Insulation
230719	HVAC Piping Insulation
230800	Commissioning of HVAC
230900	Controls
232200	Steam and Steam Condensate Piping
232218	Steam and Steam Condensate Specialties
232300	Refrigeration Piping and Specialties
233100	Ductwork
233300	Ductwork Accessories
233423	Power Ventilators
233700	Air Inlets and Outlets
234000	Air Cleaning
237200	Energy Recovery Devices
237416.14	Packaged Rooftop Air Conditioning Units with High Percentage Outside Air
238126	Split System Air Conditioning Units

DIVISION 26 **ELECTRICAL**

260500	Basic Electrical Requirements
260503	Through Penetration Firestopping
260505	Electrical Demolition for Remodeling
260513	Wire and Cable
260533	Conduit and Boxes
260800	Commissioning of Electrical
260933	Lighting Control Systems
262416	Panelboards
262726	Wiring Devices
265119	LED Lighting

DIVISION 27 **COMMUNICATIONS**

270500	Basic Communication Systems Requirements
270503	Through Penetration Firestopping
270505	Technology Demolition for Remodeling
270528	Interior Communication Pathways
270553	Identification for Communication Systems
271500	Horizontal Cabling Requirements
271710	Testing
271720	Structured Cabling System Warrant
274100	Professional Audio/Visual System

END OF SECTION

SECTION 011000 - SUMMARY

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:

- 1. Project information.
 - 2. Work covered by Contract Documents.
 - 3. Phased construction.
 - 4. Contractor's use of site and premises.
 - 5. Coordination with occupants.
 - 6. Work restrictions.
 - 7. Specification and Drawing conventions.

- B. Related Requirements:

- 1. Section 015000 "Temporary Facilities and Controls" for limitations and procedures governing temporary use of Owner's facilities.
 - 2. Section 017300 "Execution" for coordination of Owner-installed products.

1.3 DEFINITIONS

- A. Work Package: A group of specifications, drawings, and schedules prepared by the design team to describe a portion of the Project Work for pricing, permitting, and construction.

1.4 PROJECT INFORMATION

- A. Project Identification: WYCO-KCK MEMORIAL HALL KITCHEN & AUDIO/VISUAL RENOVATIONS.

- 1. Project Location: 600 N. 7th Street Trfy, Kansas City, Kansas, 66101.

- B. Owner: Unified Government of Wyandotte County and Kansas City, Kansas.

- 1. Owner's Representative: Rocki Mayes
 - 2. Phone Number: (913) 573-2995

- C. Architect: International Architects Atelier. 912 Broadway, Suite 300, Kansas City, MO 64105

-
1. Architect's Representative: Majid Amirahmadi, AIA.
 2. Phone Number: 816-471-6522
- D. Architect's Consultants: Architect has retained the following design professionals, who have prepared designated portions of the Contract Documents:
1. MEP Engineer: IMEG Corp.
 - a. MEP Representative: Stuart Braden.
 - b. Phone Number: 816-842-8437.
 2. Foodservice Design Consultant: Ricca Design Studios.
 - a. Foodservice Consultant Representative: Lona Homersham.
 - b. Phone Number: 303-221-0500.
 3. Audio/Visual Design Consultant: IMEG Corp.
 - a. Audio/Visual Representative: Davin Huston.
 - b. Phone Number: 317-848-5045.
 4. Structural Engineer: Bob D. Campbell.
 - a. Structural Representative: Wayne Davis.
 - b. Phone Number: 816-531-4144.

1.5 WORK COVERED BY CONTRACT DOCUMENTS

- A. The Work of Project is defined by the Contract Documents and includes, but is not limited to, the following:
1. Renovation of the kitchen in the lower level, including demolition of hollow clay tile walls, door replacement, new wall partition, new foodservice equipment, new wall surfaces, new floor finishes, and new ceilings.
 2. Mechanical work to serve renovated kitchen and dining space, including exhaust systems, a new rooftop unit, and fan coil system.
 3. Plumbing work, including new underslab piping, to support foodservice equipment in kitchen space.
 4. Electrical work for equipment rough-ins, connections, and new lighting for renovated kitchen space and new audio/visual technologies.
 5. Fire sprinkler piping modifications in areas affected by kitchen and dining renovation.
 6. New audio/visual technology in the arena, including projection system, LED displays, and loudspeaker system.
 7. Other Work indicated in the Contract Documents.

B. Type of Contract:

1. Project will be constructed under a single prime contract.

1.6 CONTRACTOR'S USE OF SITE AND PREMISES

- A. Restricted Use of Site: Contractor shall have limited use of Project site for construction operations as indicated on Drawings by the Contract limits and as indicated by requirements of this Section.
- B. Limits on Use of Site: Limit use of Project site to areas within the Contract limits indicated. Do not disturb portions of Project site beyond areas in which the Work is indicated.
 1. Driveways, Walkways and Entrances: Keep driveways, parking garage, loading areas, and entrances serving premises clear and available to Owner, Owner's employees, and emergency vehicles at all times. Do not use these areas for parking or for storage of materials.
 - a. Schedule deliveries to minimize use of driveways and entrances by construction operations.
 - b. Schedule deliveries to minimize space and time requirements for storage of materials and equipment on-site.
- C. Condition of Existing Building: Maintain portions of existing building affected by construction operations in a weathertight condition throughout construction period. Repair damage caused by construction operations.
- D. Condition of Existing Grounds: Maintain portions of existing grounds, landscaping, and hardscaping affected by construction operations throughout construction period. Repair damage caused by construction operations.

1.7 COORDINATION WITH OCCUPANTS

- A. Full Owner Occupancy: Owner will occupy Project site and existing building(s) during entire construction period. Cooperate with Owner during construction operations to minimize conflicts and facilitate Owner usage. Perform the Work so as not to interfere with Owner's day-to-day operations. Maintain existing exits unless otherwise indicated.
 1. Maintain access to existing walkways, corridors, and other adjacent occupied or used facilities. Do not close or obstruct walkways, corridors, or other occupied or used facilities without written permission from Owner and approval of authorities having jurisdiction.
 2. Notify Owner not less than 72 hours in advance of activities that will affect Owner's operations.

1.8 WORK RESTRICTIONS

- A. Comply with restrictions on construction operations.
 1. Comply with limitations on use of public streets, work on public streets, rights of way, and other requirements of authorities having jurisdiction.

- B. On-Site Work Hours: Limit work to between 7:00 a.m. to 7:00 p.m., Monday through Friday, unless otherwise indicated. Work hours may be modified to meet Project requirements if approved by Owner and authorities having jurisdiction.
 - 1. Hours for Utility Shutdowns: All utility shutdowns must take place after 7 p.m. and the exact times and dates shall be coordinated with the Owner as described in this Section.
 - 2. All working hours to be coordinated and confirmed with Owner's Representative.
- C. Existing Utility Interruptions: Do not interrupt utilities serving facilities occupied by Owner or others unless permitted under the following conditions and then only after arranging for temporary utility services according to requirements indicated:
 - 1. Notify Owner not less than three days in advance of proposed utility interruptions.
 - 2. Obtain Owner's written permission before proceeding with utility interruptions.
- D. Noise, Vibration, Dust, and Odors: Coordinate operations that may result in high levels of noise and vibration, dust, odors, or other disruption to Owner occupancy with Owner.
 - 1. Notify Owner not less than two days in advance of proposed disruptive operations.
 - 2. Obtain Owner's written permission before proceeding with disruptive operations.
- E. Smoking and Controlled Substance Restrictions: Use of tobacco products, alcoholic beverages, and other controlled substances on Project site is not permitted.
- F. Employee Identification: Provide identification tags for Contractor personnel working on Project site. Require personnel to use identification tags at all times.

1.9 SPECIFICATION AND DRAWING CONVENTIONS

- A. Specification Content: The Specifications use certain conventions for the style of language and the intended meaning of certain terms, words, and phrases when used in particular situations. These conventions are as follows:
 - 1. Imperative mood and streamlined language are generally used in the Specifications. The words "shall," "shall be," or "shall comply with," depending on the context, are implied where a colon (:) is used within a sentence or phrase.
 - 2. Text Color: Text used in the Specifications, including units of measure, manufacturer and product names, and other text may appear in multiple colors or underlined as part of a hyperlink; no emphasis is implied by text with these characteristics.
 - 3. Hypertext: Text used in the Specifications may contain hyperlinks. Hyperlinks may allow for access to linked information that is not residing in the Specifications. Unless otherwise indicated, linked information is not part of the Contract Documents.
 - 4. Specification requirements are to be performed by Contractor unless specifically stated otherwise.
- B. Division 00 Contracting Requirements: General provisions of the Contract, including General and Supplementary Conditions, apply to all Sections of the Specifications.
- C. Division 01 General Requirements: Requirements of Sections in Division 01 apply to the Work of all Sections in the Specifications.

- D. Drawing Coordination: Requirements for materials and products identified on Drawings are described in detail in the Specifications. One or more of the following are used on Drawings to identify materials and products:
1. Terminology: Materials and products are identified by the typical generic terms used in the individual Specifications Sections.
 2. Abbreviations: Materials and products are identified by abbreviations scheduled on Drawings.
 3. Keynoting: Materials and products are identified by reference keynotes referencing Specification Section numbers found in this Project Manual.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION (Not Used)

END OF SECTION 011000

SECTION 012300 - ALTERNATES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes administrative and procedural requirements for alternates.

1.3 DEFINITIONS

- A. Alternate: An amount proposed by bidders and stated on the Bid Form for certain work defined in the bidding requirements that may be added to or deducted from the base bid amount if the Owner decides to accept a corresponding change either in the amount of construction to be completed or in the products, materials, equipment, systems, or installation methods described in the Contract Documents.
 - 1. Alternates described in this Section are part of the Work only if enumerated in the Agreement.
 - 2. The cost or credit for each alternate is the net addition to or deduction from the Contract Sum to incorporate alternates into the Work. No other adjustments are made to the Contract Sum.

1.4 PROCEDURES

- A. Coordination: Revise or adjust affected adjacent work as necessary to completely integrate work of the alternate into Project.
 - 1. Include, as part of each alternate, miscellaneous devices, accessory objects, and similar items incidental to or required for a complete installation, whether or not indicated as part of alternate.
- B. Execute accepted alternates under the same conditions as other Work of the Contract.
- C. Schedule: A Part 3 "Schedule of Alternates" Article is included at the end of this Section. Specification Sections referenced in schedule contain requirements for materials necessary to achieve the work described under each alternate.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION

3.1 SCHEDULE OF ALTERNATES

- A. Alternate No. 1: Provide and install additional audio/visual equipment.
 - 1. Base Bid: Audio/visual equipment for projection system, LED displays, loudspeaker system, and hearing assistance system.
 - 2. Alternate: Provide and install a new sound mixing console and pan/tilt/zoom cameras with associated electrical support infrastructure and mounting systems. Construct new platform for mixing console on tiered seating area in front of the AV Booth. Refer to Drawing Sheets A101 and A300.
- B. Alternate No. 2: L-Acoustics brand loudspeaker system.
 - 1. Base Bid: Provide and install Martin brand loudspeakers per Technology Drawings and Specifications.
 - 2. Alternate: In lieu of Martin brand, provide and install L-Acoustics brand loudspeaker system per Technology Drawings and Specifications.
- C. Alternate No. 3: Finish out architectural finishes in Dining Room 002.
 - 1. Base Bid: Concrete floor to be cleaned and sealed, new gypsum board wall furring to be added, window soffits and ceiling to be installed, all new lighting to be installed. All mechanical, plumbing, and electrical work to be included in base bid.
 - 2. Alternate: Construct new wall and soffit for casework at serving area, install ceramic wall tile backsplash above serving counter, add plastic laminate wall finishes at exterior walls in dining area, and install new ceramic tile flooring in lieu of applying concrete sealer. Refer to plan on Drawing Sheet A100 and Details on Drawing Sheets A600 and A610.
- D. Alternate No. 4: Provide and install additional food service equipment.
 - 1. Base Bid: All foodservice equipment listed in Foodservice Equipment Schedule on Drawings not labeled as Alternate #4. All plumbing and electrical rough-ins shall be included as part of the base bid scope of work.
 - 2. Alternate: Provide and install additional foodservice equipment, including new fryer with filter, undercounter dishwasher, undercounter refrigerator, and ice maker at locations noted in the Drawings.

END OF SECTION 012300

SECTION 012500 - SUBSTITUTION PROCEDURES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes administrative and procedural requirements for substitutions.
- B. Related Requirements:
 - 1. Section 012300 "Alternates" for products selected under an alternate.
 - 2. Section 016000 "Product Requirements" for requirements for submitting comparable product submittals for products by listed manufacturers.

1.3 DEFINITIONS

- A. Substitutions: Changes in products, materials, equipment, and methods of construction from those required by the Contract Documents.
 - 1. Substitutions for Cause: Changes proposed by Contractor that are required due to changed Project conditions, such as unavailability of product, regulatory changes, or unavailability of required warranty terms.
 - 2. Substitutions for Convenience: Changes proposed by Contractor or Owner that are not required to meet other Project requirements but may offer advantage to Contractor or Owner.

1.4 ACTION SUBMITTALS

- A. Substitution Requests: Submit documentation identifying product or fabrication or installation method to be replaced. Include Specification Section number and title and Drawing numbers and titles.
 - 1. Substitution Request Form: Use form acceptable to Architect.
 - 2. Documentation: Show compliance with requirements for substitutions and the following, as applicable:
 - a. Statement indicating why specified product or fabrication or installation method cannot be provided, if applicable.
 - b. Coordination of information, including a list of changes or revisions needed to other parts of the Work and to construction performed by Owner and separate contractors that will be necessary to accommodate proposed substitution.
 - c. Detailed comparison of significant qualities of proposed substitutions with those of the Work specified. Include annotated copy of applicable Specification Section.

-
- Significant qualities may include attributes, such as performance, weight, size, durability, visual effect, sustainable design characteristics, warranties, and specific features and requirements indicated. Indicate deviations, if any, from the Work specified.
- d. Product Data, including drawings and descriptions of products and fabrication and installation procedures.
 - e. Samples, where applicable or requested.
 - f. Certificates and qualification data, where applicable or requested.
 - g. List of similar installations for completed projects, with project names and addresses as well as names and addresses of architects and owners.
 - h. Material test reports from a qualified testing agency, indicating and interpreting test results for compliance with requirements indicated.
 - i. Research reports evidencing compliance with building code in effect for Project, from ICC-ES.
 - j. Detailed comparison of Contractor's construction schedule using proposed substitutions with products specified for the Work, including effect on the overall Contract Time. If specified product or method of construction cannot be provided within the Contract Time, include letter from manufacturer, on manufacturer's letterhead, stating date of receipt of purchase order, lack of availability, or delays in delivery.
 - k. Cost information, including a proposal of change, if any, in the Contract Sum.
 - l. Contractor's certification that proposed substitution complies with requirements in the Contract Documents, except as indicated in substitution request, is compatible with related materials and is appropriate for applications indicated.
 - m. Contractor's waiver of rights to additional payment or time that may subsequently become necessary because of failure of proposed substitution to produce indicated results.
3. Architect's Action: If necessary, Architect will request additional information or documentation for evaluation within seven days of receipt of a request for substitution. Architect will notify Contractor of acceptance or rejection of proposed substitution within 15 days of receipt of request, or seven days of receipt of additional information or documentation, whichever is later.
- a. Forms of Acceptance: Change Order, Construction Change Directive, or Architect's Supplemental Instructions for minor changes in the Work.
 - b. Use product specified if Architect does not issue a decision on use of a proposed substitution within time allocated.
- 1.5 QUALITY ASSURANCE
- A. Compatibility of Substitutions: Investigate and document compatibility of proposed substitution with related products and materials. Engage a qualified testing agency to perform compatibility tests recommended by manufacturers.
- 1.6 PROCEDURES
- A. Coordination: Revise or adjust affected work as necessary to integrate work of the approved substitutions.

1.7 SUBSTITUTIONS

- A. Substitutions for Cause: Submit requests for substitution immediately on discovery of need for change, but not later than 15 days prior to time required for preparation and review of related submittals.
1. Conditions: Architect will consider Contractor's request for substitution when the following conditions are satisfied. If the following conditions are not satisfied, Architect will return requests without action, except to record noncompliance with these requirements:
- a. Requested substitution is consistent with the Contract Documents and will produce indicated results.
 - b. Substitution request is fully documented and properly submitted.
 - c. Requested substitution will not adversely affect Contractor's construction schedule.
 - d. Requested substitution has received necessary approvals of authorities having jurisdiction.
 - e. Requested substitution is compatible with other portions of the Work.
 - f. Requested substitution has been coordinated with other portions of the Work.
 - g. Requested substitution provides specified warranty.
 - h. If requested substitution involves more than one contractor, requested substitution has been coordinated with other portions of the Work, is uniform and consistent, is compatible with other products, and is acceptable to all contractors involved.
- B. Substitutions for Convenience: Architect will consider requests for substitution if received within 60 days after the Notice to Proceed. Requests received after that time may be considered or rejected at discretion of Architect.
1. Conditions: Architect will consider Contractor's request for substitution when the following conditions are satisfied. If the following conditions are not satisfied, Architect will return requests without action, except to record noncompliance with these requirements:
- a. Requested substitution offers Owner a substantial advantage in cost, time, energy conservation, or other considerations, after deducting additional responsibilities Owner must assume. Owner's additional responsibilities may include compensation to Architect for redesign and evaluation services, increased cost of other construction by Owner, and similar considerations.
 - b. Requested substitution does not require extensive revisions to the Contract Documents.
 - c. Requested substitution is consistent with the Contract Documents and will produce indicated results.
 - d. Substitution request is fully documented and properly submitted.
 - e. Requested substitution will not adversely affect Contractor's construction schedule.
 - f. Requested substitution has received necessary approvals of authorities having jurisdiction.
 - g. Requested substitution is compatible with other portions of the Work.
 - h. Requested substitution has been coordinated with other portions of the Work.
 - i. Requested substitution provides specified warranty.
 - j. If requested substitution involves more than one contractor, requested substitution has been coordinated with other portions of the Work, is uniform and consistent, is compatible with other products, and is acceptable to all contractors involved.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION (Not Used)

END OF SECTION 012500

SECTION 012600 - CONTRACT MODIFICATION PROCEDURES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes administrative and procedural requirements for handling and processing Contract modifications.
- B. Related Requirements:
 - 1. Section 012500 "Substitution Procedures" for administrative procedures for handling requests for substitutions made after the Contract award.
 - 2. Section 013100 "Project Management and Coordination" for requirements for forms for contract modifications provided as part of web-based Project management software.

1.3 MINOR CHANGES IN THE WORK

- A. Architect will issue supplemental instructions authorizing minor changes in the Work, not involving adjustment to the Contract Sum or the Contract Time, on Architect's standard form.

1.4 PROPOSAL REQUESTS

- A. Owner-Initiated Proposal Requests: Architect will issue a detailed description of proposed changes in the Work that may require adjustment to the Contract Sum or the Contract Time. If necessary, the description will include supplemental or revised Drawings and Specifications.
 - 1. Work Change Proposal Requests issued by Architect are not instructions either to stop work in progress or to execute the proposed change.
 - 2. Within time specified in Proposal Request or 20 days, when not otherwise specified, after receipt of Proposal Request, submit a quotation estimating cost adjustments to the Contract Sum and the Contract Time necessary to execute the change.
 - a. Include a list of quantities of products required or eliminated and unit costs, with total amount of purchases and credits to be made. If requested, furnish survey data to substantiate quantities.
 - b. Indicate applicable taxes, delivery charges, equipment rental, and amounts of trade discounts.
 - c. Include costs of labor and supervision directly attributable to the change.
 - d. Include an updated Contractor's construction schedule that indicates the effect of the change, including, but not limited to, changes in activity duration, start and finish

-
- times, and activity relationship. Use available total float before requesting an extension of the Contract Time.
- e. Quotation Form: Use forms acceptable to Architect.
- B. Contractor-Initiated Proposals: If latent or changed conditions require modifications to the Contract, Contractor may initiate a claim by submitting a request for a change to Architect.
1. Include a statement outlining reasons for the change and the effect of the change on the Work. Provide a complete description of the proposed change. Indicate the effect of the proposed change on the Contract Sum and the Contract Time.
 2. Include a list of quantities of products required or eliminated and unit costs, with total amount of purchases and credits to be made. If requested, furnish survey data to substantiate quantities.
 3. Indicate applicable taxes, delivery charges, equipment rental, and amounts of trade discounts.
 4. Include costs of labor and supervision directly attributable to the change.
 5. Include an updated Contractor's construction schedule that indicates the effect of the change, including, but not limited to, changes in activity duration, start and finish times, and activity relationship. Use available total float before requesting an extension of the Contract Time.
 6. Comply with requirements in Section 012500 "Substitution Procedures" if the proposed change requires substitution of one product or system for product or system specified.
 7. Proposal Request Form: Use form acceptable to Architect.
- 1.5 CHANGE ORDER PROCEDURES
- A. On Owner's approval of a Work Change Proposal Request, Architect will issue a Change Order for signatures of Owner and Contractor on AIA Document G701.
- 1.6 CONSTRUCTION CHANGE DIRECTIVE
- A. Construction Change Directive: Architect may issue a Construction Change Directive on AIA Document G714. Construction Change Directive instructs Contractor to proceed with a change in the Work, for subsequent inclusion in a Change Order.
1. Construction Change Directive contains a complete description of change in the Work. It also designates method to be followed to determine change in the Contract Sum or the Contract Time.
- B. Documentation: Maintain detailed records on a time and material basis of work required by the Construction Change Directive.
1. After completion of change, submit an itemized account and supporting data necessary to substantiate cost and time adjustments to the Contract.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION (Not Used)

END OF SECTION 012600

SECTION 012900 - PAYMENT PROCEDURES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes administrative and procedural requirements necessary to prepare and process Applications for Payment.
- B. Related Requirements:
 - 1. Section 012600 "Contract Modification Procedures" for administrative procedures for handling changes to the Contract.
 - 2. Section 013200 "Construction Progress Documentation" for administrative requirements governing the preparation and submittal of the Contractor's construction schedule.

1.3 DEFINITIONS

- A. Schedule of Values: A statement furnished by Contractor allocating portions of the Contract Sum to various portions of the Work and used as the basis for reviewing Contractor's Applications for Payment.

1.4 SCHEDULE OF VALUES

- A. Coordination: Coordinate preparation of the schedule of values with preparation of Contractor's construction schedule.
 - 1. Coordinate line items in the schedule of values with items required to be indicated as separate activities in Contractor's construction schedule.
 - 2. Submit the schedule of values to Architect at earliest possible date, but no later than seven days before the date scheduled for submittal of initial Applications for Payment.
- B. Format and Content: Use Project Manual table of contents as a guide to establish line items for the schedule of values. Provide at least one line item for each Specification Section.
 - 1. Identification: Include the following Project identification on the schedule of values:
 - a. Project name and location.
 - b. Owner's name.
 - c. Owner's Project number.
 - d. Name of Architect.
 - e. Architect's Project number.
 - f. Contractor's name and address.

-
- D. Application for Payment Forms: Use AIA Document G702 and AIA Document G703 as form for Applications for Payment.
- E. Application Preparation: Complete every entry on form. Notarize and execute by a person authorized to sign legal documents on behalf of Contractor. Architect will return incomplete applications without action.
1. Entries shall match data on the schedule of values and Contractor's construction schedule. Use updated schedules if revisions were made.
 2. Include amounts for work completed following previous Application for Payment, whether or not payment has been received. Include only amounts for work completed at time of Application for Payment.
 3. Include amounts of Change Orders and Construction Change Directives issued before last day of construction period covered by application.
- F. Stored Materials: Include in Application for Payment amounts applied for materials or equipment purchased or fabricated and stored, but not yet installed. Differentiate between items stored on-site and items stored off-site.
1. Provide certificate of insurance, evidence of transfer of title to Owner, and consent of surety to payment for stored materials.
 2. Provide supporting documentation that verifies amount requested, such as paid invoices. Match amount requested with amounts indicated on documentation; do not include overhead and profit on stored materials.
 3. Provide summary documentation for stored materials indicating the following:
 - a. Value of materials previously stored and remaining stored as of date of previous Applications for Payment.
 - b. Value of previously stored materials put in place after date of previous Application for Payment and on or before date of current Application for Payment.
 - c. Value of materials stored since date of previous Application for Payment and remaining stored as of date of current Application for Payment.
- G. Transmittal: Submit signed and notarized scanned copy of each Application for Payment to Architect via email. Application for Payment shall include waivers of lien and similar attachments if required.
1. Transmit each copy with a transmittal form listing attachments and recording appropriate information about application.
- H. Waivers of Mechanic's Lien: With each Application for Payment, submit waivers of mechanic's lien from subcontractors, sub-subcontractors, and suppliers for construction period covered by the previous application.
1. Submit partial waivers on each item for amount requested in previous application, after deduction for retainage, on each item.
 2. When an application shows completion of an item, submit conditional final or full waivers.
 3. Owner reserves the right to designate which entities involved in the Work must submit waivers.
 4. Submit final Application for Payment with or preceded by conditional final waivers from every entity involved with performance of the Work covered by the application who is lawfully entitled to a lien.
 5. Waiver Forms: Submit executed waivers of lien on forms acceptable to Owner.

-
- I. Initial Application for Payment: Administrative actions and submittals that must precede or coincide with submittal of first Application for Payment include the following:
1. List of subcontractors.
 2. Schedule of values.
 3. Contractor's construction schedule (preliminary if not final).
 4. Combined Contractor's construction schedule (preliminary if not final) incorporating Work of multiple contracts, with indication of acceptance of schedule by each Contractor.
 5. Products list (preliminary if not final).
 6. Sustainable design action plans, including preliminary project materials cost data.
 7. Schedule of unit prices.
 8. Submittal schedule (preliminary if not final).
 9. List of Contractor's staff assignments.
 10. List of Contractor's principal consultants.
 11. Copies of building permits.
 12. Copies of authorizations and licenses from authorities having jurisdiction for performance of the Work.
 13. Initial progress report.
 14. Report of preconstruction conference.
 15. Certificates of insurance and insurance policies.
 16. Performance and payment bonds.
 17. Data needed to acquire Owner's insurance.
- J. Application for Payment at Substantial Completion: After Architect issues the Certificate of Substantial Completion, submit an Application for Payment showing 100 percent completion for portion of the Work claimed as substantially complete.
1. Include documentation supporting claim that the Work is substantially complete and a statement showing an accounting of changes to the Contract Sum.
 - a. Complete administrative actions, submittals, and Work preceding this application, as described in Section 017700 "Closeout Procedures."
 2. This application shall reflect Certificate(s) of Substantial Completion issued previously for Owner occupancy of designated portions of the Work.
- K. Final Payment Application: After completing Project closeout requirements, submit final Application for Payment with releases and supporting documentation not previously submitted and accepted, including, but not limited, to the following:
1. Evidence of completion of Project closeout requirements.
 2. Certification of completion of final punch list items.
 3. Insurance certificates for products and completed operations where required and proof that taxes, fees, and similar obligations were paid.
 4. Updated final statement, accounting for final changes to the Contract Sum.
 5. AIA Document G706.
 6. AIA Document G706A.
 7. AIA Document G707.
 8. Evidence that claims have been settled.
 9. Final meter readings for utilities, a measured record of stored fuel, and similar data as of date of Substantial Completion or when Owner took possession of and assumed responsibility for corresponding elements of the Work.
 10. Final liquidated damages settlement statement.
 11. Proof that taxes, fees, and similar obligations are paid.
 12. Waivers and releases.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION (Not Used)

END OF SECTION 012900

SECTION 013100 - PROJECT MANAGEMENT AND COORDINATION

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes administrative provisions for coordinating construction operations on Project, including, but not limited to, the following:
 - 1. General coordination procedures.
 - 2. Coordination drawings.
 - 3. RFIs.
 - 4. Digital project management procedures.
 - 5. Web-based Project management software package.
 - 6. Project meetings.
- B. Each contractor shall participate in coordination requirements. Certain areas of responsibility are assigned to a specific contractor.
- C. Related Requirements:
 - 1. Section 013200 "Construction Progress Documentation" for preparing and submitting Contractor's construction schedule.
 - 2. Section 017300 "Execution" for procedures for coordinating general installation and field-engineering services, including establishment of benchmarks and control points.
 - 3. Section 017700 "Closeout Procedures" for coordinating closeout of the Contract.

1.3 DEFINITIONS

- A. BIM: Building Information Modeling.
- B. RFI: Request for Information. Request from Owner, Architect, or Contractor seeking information required by or clarifications of the Contract Documents.

1.4 INFORMATIONAL SUBMITTALS

- A. Subcontract List: Prepare a written summary identifying individuals or firms proposed for each portion of the Work, including those who are to furnish products or equipment fabricated to a special design. Include the following information in tabular form:
 - 1. Name, address, telephone number, and email address of entity performing subcontract or supplying products.

2. Number and title of related Specification Section(s) covered by subcontract.
3. Drawing number and detail references, as appropriate, covered by subcontract.

- B. Key Personnel Names: Within 15 days of starting construction operations, submit a list of key personnel assignments, including superintendent and other personnel in attendance at Project site. Identify individuals and their duties and responsibilities; list addresses, cellular telephone numbers, and e-mail addresses. Provide names, addresses, and telephone numbers of individuals assigned as alternates in the absence of individuals assigned to Project.

1.5 GENERAL COORDINATION PROCEDURES

- A. Coordination: Coordinate construction operations included in different Sections of the Specifications to ensure efficient and orderly installation of each part of the Work. Coordinate construction operations included in different Sections that depend on each other for proper installation, connection, and operation.
1. Schedule construction operations in sequence required to obtain the best results, where installation of one part of the Work depends on installation of other components, before or after its own installation.
 2. Coordinate installation of different components to ensure maximum performance and accessibility for required maintenance, service, and repair.
 3. Make adequate provisions to accommodate items scheduled for later installation.
- B. Prepare memoranda for distribution to each party involved, outlining special procedures required for coordination. Include such items as required notices, reports, and list of attendees at meetings.
1. Prepare similar memoranda for Owner and separate contractors if coordination of their Work is required.
- C. Administrative Procedures: Coordinate scheduling and timing of required administrative procedures with other construction activities to avoid conflicts and to ensure orderly progress of the Work. Such administrative activities include, but are not limited to, the following:
1. Preparation of Contractor's construction schedule.
 2. Preparation of the schedule of values.
 3. Installation and removal of temporary facilities and controls.
 4. Delivery and processing of submittals.
 5. Progress meetings.
 6. Preinstallation conferences.
 7. Project closeout activities.
 8. Startup and adjustment of systems.

1.6 REQUEST FOR INFORMATION (RFI)

- A. General: Immediately on discovery of the need for additional information, clarification, or interpretation of the Contract Documents, Contractor shall prepare and submit an RFI in the form specified.
1. Architect will return without response those RFIs submitted to Architect by other entities controlled by Contractor.

-
2. Coordinate and submit RFIs in a prompt manner to avoid delays in Contractor's work or work of subcontractors.
- B. Content of the RFI: Include a detailed, legible description of item needing information or interpretation and the following:
1. Project name.
 2. Owner name.
 3. Owner's Project number.
 4. Name of Architect.
 5. Date.
 6. Name of Contractor.
 7. RFI number, numbered sequentially.
 8. RFI subject.
 9. Specification Section number and title and related paragraphs, as appropriate.
 10. Drawing number and detail references, as appropriate.
 11. Field dimensions and conditions, as appropriate.
 12. Contractor's suggested resolution. If Contractor's suggested resolution impacts the Contract Time or the Contract Sum, Contractor shall state impact in the RFI.
 13. Contractor's signature.
 14. Attachments: Include sketches, descriptions, measurements, photos, Product Data, Shop Drawings, coordination drawings, and other information necessary to fully describe items needing interpretation.
 - a. Include dimensions, thicknesses, structural grid references, and details of affected materials, assemblies, and attachments on attached sketches.
- C. RFI Forms: Software-generated form with substantially the same content as indicated above, acceptable to Architect.
1. Attachments shall be electronic files in PDF format.
- D. Architect's Action: Architect will review each RFI, determine action required, and respond. Allow seven days for Architect's response for each RFI. RFIs received by Architect after 1:00 p.m. will be considered as received the following working day.
1. The following Contractor-generated RFIs will be returned without action:
 - a. Requests for approval of submittals.
 - b. Requests for approval of substitutions.
 - c. Requests for approval of Contractor's means and methods.
 - d. Requests for coordination information already indicated in the Contract Documents.
 - e. Requests for adjustments in the Contract Time or the Contract Sum.
 - f. Requests for interpretation of Architect's actions on submittals.
 - g. Incomplete RFIs or inaccurately prepared RFIs.
 2. Architect's action may include a request for additional information, in which case Architect's time for response will date from time of receipt by Architect of additional information.
 3. Architect's action on RFIs that may result in a change to the Contract Time or the Contract Sum may be eligible for Contractor to submit Change Proposal according to Section 012600 "Contract Modification Procedures."
 - a. If Contractor believes the RFI response warrants change in the Contract Time or the Contract Sum, notify Architect in writing within 5 days of receipt of the RFI response.

-
- E. RFI Log: Prepare, maintain, and submit a tabular log of RFIs organized by the RFI number. Submit log bi-weekly. Include the following:
1. Project name.
 2. Name and address of Contractor.
 3. Name and address of Architect.
 4. RFI number, including RFIs that were returned without action or withdrawn.
 5. RFI description.
 6. Date the RFI was submitted.
 7. Date Architect's response was received.
 8. Identification of related Minor Change in the Work, Construction Change Directive, and Proposal Request, as appropriate.
 9. Identification of related Field Order, Work Change Directive, and Proposal Request, as appropriate.
- F. On receipt of Architect's action, update the RFI log and immediately distribute the RFI response to affected parties. Review response and notify Architect within seven days if Contractor disagrees with response.

1.7 DIGITAL PROJECT MANAGEMENT PROCEDURES

- A. Use of Architect's Digital Data Files: Digital data files of Architect's CAD drawings will be provided by Architect for Contractor's use during construction.
1. Digital data files may be used by Contractor in preparing coordination drawings, Shop Drawings, and Project Record Drawings.
 2. Architect makes no representations as to the accuracy or completeness of digital data files as they relate to Contract Drawings.
 3. Contractor shall execute a data licensing agreement in the form of Agreement form acceptable to Owner and Architect.
 - a. Subcontractors and other parties granted access by Contractor to Architect's digital data files shall execute a data licensing agreement in the form of Agreement acceptable to Owner and Architect.
- B. PDF Document Preparation: Where PDFs are required to be submitted to Architect, prepare as follows:
1. Assemble complete submittal package into a single indexed file, incorporating submittal requirements of a single Specification Section and transmittal form with links enabling navigation to each item.
 2. Name file with submittal number or other unique identifier, including revision identifier.
 3. Certifications: Where digitally submitted certificates and certifications are required, provide a digital signature with digital certificate on where indicated.

1.8 PROJECT MEETINGS

- A. General: Schedule and conduct meetings and conferences at Project site unless otherwise indicated.

-
1. Attendees: Inform participants and others involved, and individuals whose presence is required, of date and time of each meeting. Notify Owner and Architect of scheduled meeting dates and times a minimum of 10 working days prior to meeting.
 2. Agenda: Prepare the meeting agenda. Distribute the agenda to all invited attendees.
 3. Minutes: Entity responsible for conducting meeting will record significant discussions and agreements achieved. Distribute the meeting minutes to everyone concerned, including Owner and Architect, within three days of the meeting.
- B. Preconstruction Conference: Schedule and conduct a preconstruction conference before starting construction, at a time convenient to Owner and Architect, but no later than 15 days after execution of the Agreement.
1. Attendees: Authorized representatives of Owner, Architect, and their consultants; Contractor and its superintendent; major subcontractors; suppliers; and other concerned parties shall attend the conference. Participants at the conference shall be familiar with Project and authorized to conclude matters relating to the Work.
 2. Agenda: Discuss items of significance that could affect progress, including the following:
 - a. Responsibilities and personnel assignments.
 - b. Tentative construction schedule.
 - c. Phasing.
 - d. Critical work sequencing and long lead items.
 - e. Designation of key personnel and their duties.
 - f. Lines of communications.
 - g. Procedures for processing field decisions and Change Orders.
 - h. Procedures for RFIs.
 - i. Procedures for testing and inspecting.
 - j. Procedures for processing Applications for Payment.
 - k. Distribution of the Contract Documents.
 - l. Submittal procedures.
 - m. Preparation of Record Documents.
 - n. Use of the premises and existing building.
 - o. Work restrictions.
 - p. Working hours.
 - q. Owner's occupancy requirements.
 - r. Responsibility for temporary facilities and controls.
 - s. Procedures for moisture and mold control.
 - t. Procedures for disruptions and shutdowns.
 - u. Construction waste management and recycling.
 - v. Parking availability.
 - w. Office, work, and storage areas.
 - x. Equipment deliveries and priorities.
 - y. First aid.
 - z. Security.
 - aa. Progress cleaning.
 3. Minutes: Entity responsible for conducting meeting will record and distribute meeting minutes.
- C. Preinstallation Conferences: Conduct a preinstallation conference at Project site before each construction activity when required by other Sections and when required for coordination with other construction.

-
1. Attendees: Installer and representatives of manufacturers and fabricators involved in or affected by the installation and its coordination or integration with other materials and installations that have preceded or will follow, shall attend the meeting. Advise Architect of scheduled meeting dates.
 2. Agenda: Review progress of other construction activities and preparations for the particular activity under consideration, including requirements for the following:
 - a. Contract Documents.
 - b. Options.
 - c. Related RFIs.
 - d. Related Change Orders.
 - e. Purchases.
 - f. Deliveries.
 - g. Submittals.
 - h. Review of mockups.
 - i. Possible conflicts.
 - j. Compatibility requirements.
 - k. Time schedules.
 - l. Weather limitations.
 - m. Manufacturer's written instructions.
 - n. Warranty requirements.
 - o. Compatibility of materials.
 - p. Acceptability of substrates.
 - q. Temporary facilities and controls.
 - r. Space and access limitations.
 - s. Regulations of authorities having jurisdiction.
 - t. Testing and inspecting requirements.
 - u. Installation procedures.
 - v. Coordination with other work.
 - w. Required performance results.
 - x. Protection of adjacent work.
 - y. Protection of construction and personnel.
 3. Record significant conference discussions, agreements, and disagreements, including required corrective measures and actions.
 4. Reporting: Distribute minutes of the meeting to each party present and to other parties requiring information.
 5. Do not proceed with installation if the conference cannot be successfully concluded. Initiate whatever actions are necessary to resolve impediments to performance of the Work and reconvene the conference at earliest feasible date.
- D. Progress Meetings: Conduct progress meetings at biweekly intervals.
1. Coordinate dates of meetings with preparation of payment requests.
 2. Attendees: In addition to representatives of Owner and Architect, each contractor, subcontractor, supplier, and other entity concerned with current progress or involved in planning, coordination, or performance of future activities shall be represented at these meetings. All participants at the meeting shall be familiar with Project and authorized to conclude matters relating to the Work.
 3. Agenda: Review and correct or approve minutes of previous progress meeting. Review other items of significance that could affect progress. Include topics for discussion as appropriate to status of Project.

-
- a. Contractor's Construction Schedule: Review progress since the last meeting. Determine whether each activity is on time, ahead of schedule, or behind schedule, in relation to Contractor's construction schedule. Determine how construction behind schedule will be expedited; secure commitments from parties involved to do so. Discuss whether schedule revisions are required to ensure that current and subsequent activities will be completed within the Contract Time.
 - 1) Review schedule for next period.
 - b. Review present and future needs of each entity present, including the following:
 - 1) Status of submittals.
 - 2) Deliveries.
 - 3) Off-site fabrication.
 - 4) Access.
 - 5) Site use.
 - 6) Temporary facilities and controls.
 - 7) Progress cleaning.
 - 8) Quality and work standards.
 - 9) Status of correction of deficient items.
 - 10) Field observations.
 - 11) Status of RFIs.
 - 12) Status of Proposal Requests.
 - 13) Pending changes.
 - 14) Status of Change Orders.
 - 15) Pending claims and disputes.
 - 16) Documentation of information for payment requests.
4. Minutes: Entity responsible for conducting the meeting will record and distribute the meeting minutes to each party present and to parties requiring information.
 - a. Schedule Updating: Revise Contractor's construction schedule after each progress meeting, where revisions to the schedule have been made or recognized. Issue revised schedule concurrently with the report of each meeting.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION (Not Used)

END OF SECTION 013100

SECTION 013200 - CONSTRUCTION PROGRESS DOCUMENTATION

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes administrative and procedural requirements for documenting the progress of construction during performance of the Work, including the following:
 - 1. Contractor's Construction Schedule.
 - 2. Construction schedule updating reports.
 - 3. Daily construction reports.
 - 4. Site condition reports.
 - 5. Unusual event reports.
- B. Related Requirements:
 - 1. Section 014000 "Quality Requirements" for schedule of tests and inspections.
 - 2. Section 012900 "Payment Procedures" for schedule of values and requirements for use of cost-loaded schedule for Applications for Payment.

1.3 DEFINITIONS

- A. Activity: A discrete part of a project that can be identified for planning, scheduling, monitoring, and controlling the construction Project. Activities included in a construction schedule consume time and resources.
 - 1. Critical Activity: An activity on the critical path that must start and finish on the planned early start and finish times.
 - 2. Predecessor Activity: An activity that precedes another activity in the network.
 - 3. Successor Activity: An activity that follows another activity in the network.
- B. Cost Loading: The allocation of the schedule of values for completing an activity as scheduled. The sum of costs for all activities must equal the total Contract Sum.
- C. Critical Path: The longest connected chain of interdependent activities through the network schedule that establishes the minimum overall Project duration and contains no float.
- D. Event: The starting or ending point of an activity.
- E. Float: The measure of leeway in starting and completing an activity.

1. Float time is not for the exclusive use or benefit of either Owner or Contractor, but is a jointly owned, expiring Project resource available to both parties as needed to meet schedule milestones and Contract completion date.
2. Free float is the amount of time an activity can be delayed without adversely affecting the early start of the successor activity.
3. Total float is the measure of leeway in starting or completing an activity without adversely affecting the planned Project completion date.

- F. Resource Loading: The allocation of manpower and equipment necessary for completing an activity as scheduled.

1.4 INFORMATIONAL SUBMITTALS

- A. Format for Submittals: Submit required submittals in the following format:

1. PDF file.

- B. Contractor's Construction Schedule: Initial schedule, of size required to display entire schedule for entire construction period.

- C. Construction Schedule Updating Reports: Submit with Applications for Payment.

- D. Unusual Event Reports: Submit at time of unusual event.

1.5 COORDINATION

- A. Coordinate Contractor's Construction Schedule with the schedule of values, submittal schedule, progress reports, payment requests, and other required schedules and reports.

1. Secure time commitments for performing critical elements of the Work from entities involved.
2. Coordinate each construction activity in the network with other activities, and schedule them in proper sequence.

1.6 CONTRACTOR'S CONSTRUCTION SCHEDULE

- A. Computer Scheduling Software: Prepare schedules using current version of a program that has been developed specifically to manage construction schedules.

- B. Time Frame: Extend schedule from date established for the Notice to Proceed to date of Final Completion.

1. Contract completion date shall not be changed by submission of a schedule that shows an early completion date, unless specifically authorized by Change Order.

- C. Activities: Treat each floor or separate area as a separate numbered activity for each main element of the Work. Comply with the following:

1. Activity Duration: Define activities so no activity is longer than 20 days, unless specifically allowed by Architect.

-
2. Temporary Facilities: Indicate start and completion dates for the following as applicable:
 - a. Securing of approvals and permits required for performance of the Work.
 - b. Temporary facilities.
 - c. Construction of mock-ups, prototypes and samples.
 - d. Regulatory agency approvals.
 - e. Punch list.
 3. Procurement Activities: Include procurement process activities for the following long lead-time items and major items, requiring a cycle of more than 60 days, as separate activities in schedule. Procurement cycle activities include, but are not limited to, submittals, approvals, purchasing, fabrication, and delivery.
 4. Submittal Review Time: Include review and resubmittal times indicated in Section 013300 "Submittal Procedures" in schedule. Coordinate submittal review times in Contractor's Construction Schedule with submittal schedule.
 5. Startup and Testing Time: Include no fewer than 15 days for startup and testing.
 6. Commissioning Time: Include no fewer than 15 days for commissioning.
 7. Substantial Completion: Indicate completion in advance of date established for Substantial Completion, and allow time for Architect's administrative procedures necessary for certification of Substantial Completion.
 8. Punch List and Final Completion: Include not more than 30 days for completion of punch list items and Final Completion.
- D. Constraints: Include constraints and work restrictions indicated in the Contract Documents and as follows in schedule, and show how the sequence of the Work is affected.
1. Phasing: Arrange list of activities on schedule by phase.
 2. Work Restrictions: Show the effect of the following items on the schedule:
 - a. Coordination with existing construction.
 - b. Limitations of continued occupancies.
 - c. Uninterruptible services.
 - d. Partial occupancy before Substantial Completion.
 - e. Use-of-premises restrictions.
 - f. Environmental control.
 3. Work Stages: Indicate important stages of construction for each major portion of the Work, including, but not limited to, the following:
 - a. Subcontract awards.
 - b. Submittals.
 - c. Purchases.
 - d. Mockups.
 - e. Fabrication.
 - f. Sample testing.
 - g. Deliveries.
 - h. Installation.
 - i. Tests and inspections.
 - j. Adjusting.
 - k. Curing.
 4. Construction Areas: Identify each major area of construction for each major portion of the Work. Indicate where each construction activity within a major area must be sequenced or integrated with other construction activities to provide for the following:

- a. Structural completion.
 - b. Temporary enclosure and space conditioning.
 - c. Permanent space enclosure.
 - d. Completion of mechanical installation.
 - e. Completion of electrical installation.
 - f. Substantial Completion.
- E. Milestones: Include milestones indicated in the Contract Documents in schedule, including, but not limited to, the Notice to Proceed, Substantial Completion, and Final Completion.
- F. Upcoming Work Summary: Prepare summary report indicating activities scheduled to occur or commence prior to submittal of next schedule update. Summarize the following issues:
 1. Unresolved issues.
 2. Unanswered Requests for Information.
 3. Rejected or unreturned submittals.
 4. Notations on returned submittals.
 5. Pending modifications affecting the Work and the Contract Time.
- G. Contractor's Construction Schedule Updating: At monthly intervals, update schedule to reflect actual construction progress and activities. Issue schedule one week before each regularly scheduled progress meeting.
 1. Revise schedule immediately after each meeting or other activity where revisions have been recognized or made. Issue updated schedule concurrently with the report of each such meeting.
 2. Include a report with updated schedule that indicates every change, including, but not limited to, changes in logic, durations, actual starts and finishes, and activity durations.
 3. As the Work progresses, indicate Final Completion percentage for each activity.
- H. Recovery Schedule: When periodic update indicates the Work is 14 or more calendar days behind the current approved schedule, submit a separate recovery schedule indicating means by which Contractor intends to regain compliance with the schedule. Indicate changes to working hours, working days, crew sizes, equipment required to achieve compliance, and date by which recovery will be accomplished.
- I. Distribution: Distribute copies of approved schedule to Architect, Owner, separate contractors, testing and inspecting agencies, and other parties identified by Contractor with a need-to-know schedule responsibility.
 1. Post copies in Project meeting rooms and temporary field offices.
 2. When revisions are made, distribute updated schedules to the same parties and post in the same locations. Delete parties from distribution when they have completed their assigned portion of the Work and are no longer involved in performance of construction activities.

1.7 GANTT-CHART SCHEDULE REQUIREMENTS

- A. Gantt-Chart Schedule: Submit a comprehensive, fully developed, horizontal, Gantt-chart-type, Contractor's Construction Schedule within 30 days of date established for the Notice to Proceed.

1. Base schedule on the startup construction schedule and additional information received since the start of Project.
- B. Preparation: Indicate each significant construction activity separately. Identify first workday of each week with a continuous vertical line.
 1. For construction activities that require three months or longer to complete, indicate an estimated completion percentage in 10 percent increments within time bar.

1.8 REPORTS

- A. Daily Construction Reports: Prepare a daily construction report recording the following information concerning events at Project site:
 1. List of subcontractors at Project site.
 2. List of separate contractors at Project site.
 3. Approximate count of personnel at Project site.
 4. Equipment at Project site.
 5. Material deliveries.
 6. High and low temperatures and general weather conditions, including presence of rain or snow.
 7. Testing and inspection.
 8. Accidents.
 9. Meetings and significant decisions.
 10. Unusual events.
 11. Stoppages, delays, shortages, and losses.
 12. Meter readings and similar recordings.
 13. Emergency procedures.
 14. Orders and requests of authorities having jurisdiction.
 15. Change Orders received and implemented.
 16. Construction Change Directives received and implemented.
 17. Services connected and disconnected.
 18. Equipment or system tests and startups.
 19. Partial completions and occupancies.
 20. Substantial Completions authorized.
- B. Site Condition Reports: Immediately on discovery of a difference between site conditions and the Contract Documents, prepare and submit a detailed report. Submit with a Request for Information. Include a detailed description of the differing conditions, together with recommendations for changing the Contract Documents.
- C. Unusual Event Reports: When an event of an unusual and significant nature occurs at Project site, whether or not related directly to the Work, prepare and submit a special report. List chain of events, persons participating, responses by Contractor's personnel, evaluation of results or effects, and similar pertinent information. Advise Owner in advance when these events are known or predictable.
 1. Submit unusual event reports directly to Owner within one day(s) of an occurrence. Distribute copies of report to parties affected by the occurrence.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION (Not Used)

END OF SECTION 013200

SECTION 013233 - PHOTOGRAPHIC DOCUMENTATION

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes administrative and procedural requirements for the following:
 - 1. Preconstruction photographs.
 - 2. Concealed Work photographs.
 - 3. Periodic construction photographs.
- B. Related Requirements:
 - 1. Section 017700 "Closeout Procedures" for submitting photographic documentation as Project Record Documents at Project closeout.
 - 2. Section 024119 "Selective Demolition" for photographic documentation before selective demolition operations commence.

1.3 INFORMATIONAL SUBMITTALS

- A. Key Plan: Submit key plan of Project site and building with notation of vantage points marked for location and direction of each photograph. Indicate elevation or story of construction. Include same information as corresponding photographic documentation.
- B. Digital Photographs: Submit image files within three days of taking photographs.
 - 1. Submit photos by uploading to web-based Project management software site. Include copy of key plan indicating each photograph's location and direction.
 - 2. Identification: Provide the following information with each image description in web-based Project management software site]:
 - a. Date photograph was taken.
 - b. Description of location, vantage point, and direction.
 - c. Unique sequential identifier keyed to accompanying key plan.

1.4 FORMATS AND MEDIA

- A. Digital Photographs: Provide color images in JPG format, produced by a digital camera with minimum sensor size of 12 megapixels, and at an image resolution of not less than 3200 by 2400. Use flash in low light levels or backlit conditions.

- B. Digital Images: Submit digital media as originally recorded in the digital camera, without alteration, manipulation, editing, or modifications using image-editing software.
- C. File Names: Name media files with date, Project area and sequential numbering suffix.

1.5 CONSTRUCTION PHOTOGRAPHS

- A. General: Take photographs with maximum depth of field and in focus.
 - 1. Maintain key plan with each set of construction photographs that identifies each photographic location.
- B. Preconstruction Photographs: Before commencement of the Work, take photographs of Project site and surrounding properties, including existing items to remain during construction, from different vantage points, as directed by Architect.
 - 1. Take 50 photographs to show existing conditions adjacent to property before starting the Work.
 - 2. Take additional photographs as required to record settlement or cracking of adjacent structures, pavements, and improvements.
- C. Concealed Work Photographs: Before proceeding with installing work that will conceal other work, take photographs sufficient in number, with annotated descriptions, to record nature and location of concealed Work, including, but not limited to, the following:
 - 1. Underground utilities.
 - 2. Underslab services.
 - 3. Piping.
 - 4. Electrical conduit.
 - 5. Waterproofing and weather-resistant barriers.
- D. Periodic Construction Photographs: Take 20 photographs weekly. Select vantage points to show status of construction and progress since last photographs were taken.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION (Not Used)

END OF SECTION 013233

SECTION 013300 - SUBMITTAL PROCEDURES

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Submittal schedule requirements.
2. Administrative and procedural requirements for submittals.

B. Related Requirements:

1. Section 012900 "Payment Procedures" for submitting Applications for Payment and the schedule of values.
2. Section 013100 "Project Management and Coordination" for submitting coordination drawings and subcontract list and for requirements for web-based Project software.
3. Section 013200 "Construction Progress Documentation" for submitting schedules and reports, including Contractor's construction schedule.
4. Section 013233 "Photographic Documentation" for submitting preconstruction photographs, periodic construction photographs, and Final Completion construction photographs.
5. Section 014000 "Quality Requirements" for submitting test and inspection reports, and schedule of tests and inspections.
6. Section 017700 "Closeout Procedures" for submitting closeout submittals and maintenance material submittals.
7. Section 017823 "Operation and Maintenance Data" for submitting operation and maintenance manuals.
8. Section 017839 "Project Record Documents" for submitting record Drawings, record Specifications, and record Product Data.

1.2 DEFINITIONS

- A. Action Submittals: Written and graphic information and physical samples that require Architect's responsive action. Action submittals are those submittals indicated in individual Specification Sections as "action submittals."
- B. Informational Submittals: Written and graphic information and physical samples that do not require Architect's responsive action. Submittals may be rejected for not complying with requirements. Informational submittals are those submittals indicated in individual Specification Sections as "informational submittals."

1.3 SUBMITTAL SCHEDULE

- A. Submittal Schedule: Submit, as an action submittal, a list of submittals, arranged in chronological order by dates required by construction schedule. Include time required for review, ordering, manufacturing, fabrication, and delivery when establishing dates. Include

additional time required for making corrections or revisions to submittals noted by Architect and additional time for handling and reviewing submittals required by those corrections.

1. Coordinate submittal schedule with list of subcontracts, the schedule of values, and Contractor's construction schedule.
2. Initial Submittal Schedule: Submit concurrently with startup construction schedule. Include submittals required during the first 60 days of construction. List those submittals required to maintain orderly progress of the Work and those required early because of long lead time for manufacture or fabrication.
3. Final Submittal Schedule: Submit concurrently with the first complete submittal of Contractor's construction schedule.
 - a. Submit revised submittal schedule as required to reflect changes in current status and timing for submittals.
4. Format: Arrange the following information in a tabular format:
 - a. Scheduled date for first submittal.
 - b. Specification Section number and title.
 - c. Submittal Category: Action; informational.
 - d. Name of subcontractor.
 - e. Description of the Work covered.
 - f. Scheduled date for Architect's final release or approval.
 - g. Scheduled dates for purchasing.
 - h. Scheduled date of fabrication.
 - i. Scheduled dates for installation.
 - j. Activity or event number.

1.4 SUBMITTAL FORMATS

A. Submittal Information: Include the following information in each submittal:

1. Project name.
2. Date.
3. Name of Architect.
4. Name of Contractor.
5. Name of firm or entity that prepared submittal.
6. Names of subcontractor, manufacturer, and supplier.
7. Unique submittal number, including revision identifier. Include Specification Section number with sequential alphanumeric identifier and alphanumeric suffix for resubmittals.
8. Category and type of submittal.
9. Submittal purpose and description.
10. Number and title of Specification Section, with paragraph number and generic name for each of multiple items.
11. Drawing number and detail references, as appropriate.
12. Indication of full or partial submittal.
13. Location(s) where product is to be installed, as appropriate.
14. Other necessary identification.
15. Remarks.
16. Signature of transmitter.

B. Options: Identify options requiring selection by Architect.

- C. Deviations and Additional Information: On each submittal, clearly indicate deviations from requirements in the Contract Documents, including minor variations and limitations; include relevant additional information and revisions, other than those requested by Architect on previous submittals. Indicate by highlighting on each submittal or noting on attached separate sheet.
- D. Electronic Submittals: Prepare submittals as PDF package, incorporating complete information into each PDF file. Name PDF file with submittal number.

1.5 SUBMITTAL PROCEDURES

- A. Prepare and submit submittals required by individual Specification Sections. Types of submittals are indicated in individual Specification Sections.
 - 1. Email: Prepare submittals as PDF package and transmit to Architect by sending via email. Include PDF transmittal form. Include information in email subject line as requested by Architect.
 - a. Architect will return annotated file. Annotate and retain one copy of file as a digital Project Record Document file.
- B. Coordination: Coordinate preparation and processing of submittals with performance of construction activities.
 - 1. Coordinate each submittal with fabrication, purchasing, testing, delivery, other submittals, and related activities that require sequential activity.
 - 2. Submit all submittal items required for each Specification Section concurrently unless partial submittals for portions of the Work are indicated on approved submittal schedule.
 - 3. Submit action submittals and informational submittals required by the same Specification Section as separate packages under separate transmittals.
 - 4. Coordinate transmittal of submittals for related parts of the Work specified in different Sections, so processing will not be delayed because of need to review submittals concurrently for coordination.
 - a. Architect reserves the right to withhold action on a submittal requiring coordination with other submittals until related submittals are received.
- C. Processing Time: Allow time for submittal review, including time for resubmittals, as follows. Time for review shall commence on Architect's receipt of submittal. No extension of the Contract Time will be authorized because of failure to transmit submittals enough in advance of the Work to permit processing, including resubmittals.
 - 1. Initial Review: Allow 15 days for initial review of each submittal. Allow additional time if coordination with subsequent submittals is required. Architect will advise Contractor when a submittal being processed must be delayed for coordination.
 - 2. Intermediate Review: If intermediate submittal is necessary, process it in same manner as initial submittal.
 - 3. Resubmittal Review: Allow 15 days for review of each resubmittal.
 - 4. Sequential Review: Where sequential review of submittals by Architect's consultants, Owner, or other parties is indicated, allow 21 days for initial review of each submittal.

5. Concurrent Consultant Review: Where the Contract Documents indicate that submittals may be transmitted simultaneously to Architect and to Architect's consultants, allow 15 days for review of each submittal. Submittal will be returned to Architect before being returned to Contractor.
 - a. Submit one copy of submittal to concurrent reviewer in addition to specified number of copies to Architect.
- D. Resubmittals: Make resubmittals in same form and number of copies as initial submittal.
 1. Note date and content of previous submittal.
 2. Note date and content of revision in label or title block, and clearly indicate extent of revision.
 3. Resubmit submittals until they are marked with approval notation from Architect's stamp.
- E. Distribution: Furnish copies of final submittals to manufacturers, subcontractors, suppliers, fabricators, installers, authorities having jurisdiction, and others as necessary for performance of construction activities. Show distribution on transmittal forms.
- F. Use for Construction: Retain complete copies of submittals on Project site. Use only final action submittals that are marked with approval notation from Architect's action stamp.

1.6 SUBMITTAL REQUIREMENTS

- A. Product Data: Collect information into a single submittal for each element of construction and type of product or equipment.
 1. If information must be specially prepared for submittal because standard published data are unsuitable for use, submit as Shop Drawings, not as Product Data.
 2. Mark each copy of each submittal to show which products and options are applicable.
 3. Include the following information, as applicable:
 - a. Manufacturer's catalog cuts.
 - b. Manufacturer's product specifications.
 - c. Standard color charts.
 - d. Statement of compliance with specified referenced standards.
 - e. Testing by recognized testing agency.
 - f. Application of testing agency labels and seals.
 - g. Notation of coordination requirements.
 - h. Availability and delivery time information.
 4. For equipment, include the following in addition to the above, as applicable:
 - a. Wiring diagrams that show factory-installed wiring.
 - b. Printed performance curves.
 - c. Operational range diagrams.
 - d. Clearances required to other construction, if not indicated on accompanying Shop Drawings.
 5. Submit Product Data before Shop Drawings, and before or concurrently with Samples.

-
- B. Shop Drawings: Prepare Project-specific information, drawn accurately to scale. Do not base Shop Drawings on reproductions of the Contract Documents or standard printed data.
1. Preparation: Fully illustrate requirements in the Contract Documents. Include the following information, as applicable:
 - a. Identification of products.
 - b. Schedules.
 - c. Compliance with specified standards.
 - d. Notation of coordination requirements.
 - e. Notation of dimensions established by field measurement.
 - f. Relationship and attachment to adjoining construction clearly indicated.
 - g. Seal and signature of professional engineer if specified.
- C. Samples: Submit Samples for review of type, color, pattern, and texture for a check of these characteristics with other materials.
1. Transmit Samples that contain multiple, related components, such as accessories together in one submittal package.
 2. Identification: Permanently attach label on unexposed side of Samples that includes the following:
 - a. Project name and submittal number.
 - b. Generic description of Sample.
 - c. Product name and name of manufacturer.
 - d. Sample source.
 - e. Number and title of applicable Specification Section.
 - f. Specification paragraph number and generic name of each item.
 3. Email Transmittal: Provide PDF transmittal. Include digital image file illustrating Sample characteristics and identification information for record.
 4. Paper Transmittal: Include paper transmittal, including complete submittal information indicated.
 5. Disposition: Maintain sets of approved Samples at Project site, available for quality-control comparisons throughout the course of construction activity. Sample sets may be used to determine final acceptance of construction associated with each set.
 - a. Samples that may be incorporated into the Work are indicated in individual Specification Sections. Such Samples must be in an undamaged condition at time of use.
 - b. Samples not incorporated into the Work, or otherwise designated as Owner's property, are the property of Contractor.
 6. Samples for Initial Selection: Submit manufacturer's color charts consisting of units or sections of units, showing the full range of colors, textures, and patterns available.
 - a. Number of Samples: Submit one full set(s) of available choices where color, pattern, texture, or similar characteristics are required to be selected from manufacturer's product line. Architect will return submittal with options selected.
 7. Samples for Verification: Submit full-size units or Samples of size indicated, prepared from same material to be used for the Work, cured and finished in manner specified, and physically identical with material or product proposed for use, and that show full range of

color and texture variations expected. Samples include, but are not limited to, the following: partial sections of manufactured or fabricated components; small cuts or containers of materials; complete units of repetitively used materials; swatches showing color, texture, and pattern; color range sets; and components used for independent testing and inspection.

- a. Number of Samples: Submit three sets of Samples. Architect will retain one Sample sets; remainder will be returned
 - 1) Submit a single Sample where assembly details, workmanship, fabrication techniques, connections, operation, and other similar characteristics are to be demonstrated.
 - 2) If variation in color, pattern, texture, or other characteristic is inherent in material or product represented by a Sample, submit at least three sets of paired units that show approximate limits of variations.
- D. Product Schedule: As required in individual Specification Sections, prepare a written summary indicating types of products required for the Work and their intended location. Include the following information in tabular form:
 1. Type of product. Include unique identifier for each product indicated in the Contract Documents or assigned by Contractor if none is indicated.
 2. Manufacturer and product name, and model number if applicable.
 3. Number and name of room or space.
 4. Location within room or space.
- E. Qualification Data: Prepare written information that demonstrates capabilities and experience of firm or person. Include lists of completed projects with project names and addresses, contact information of architects and owners, and other information specified.
- F. Design Data: Prepare and submit written and graphic information indicating compliance with indicated performance and design criteria in individual Specification Sections. Include list of assumptions and summary of loads. Include load diagrams if applicable. Provide name and version of software, if any, used for calculations. Number each page of submittal.
- G. Certificates:
 1. Certificates and Certifications Submittals: Submit a statement that includes signature of entity responsible for preparing certification. Certificates and certifications shall be signed by an officer or other individual authorized to sign documents on behalf of that entity. Provide a notarized signature where indicated.
 2. Installer Certificates: Submit written statements on manufacturer's letterhead, certifying that Installer complies with requirements in the Contract Documents and, where required, is authorized by manufacturer for this specific Project.
 3. Manufacturer Certificates: Submit written statements on manufacturer's letterhead, certifying that manufacturer complies with requirements in the Contract Documents. Include evidence of manufacturing experience where required.
 4. Material Certificates: Submit written statements on manufacturer's letterhead, certifying that material complies with requirements in the Contract Documents.
 5. Product Certificates: Submit written statements on manufacturer's letterhead, certifying that product complies with requirements in the Contract Documents.
 6. Welding Certificates: Prepare written certification that welding procedures and personnel comply with requirements in the Contract Documents. Submit record of AWS B2.1/B2.1M on AWS forms. Include names of firms and personnel certified.

H. Test and Research Reports:

1. Compatibility Test Reports: Submit reports written by a qualified testing agency, on testing agency's standard form, indicating and interpreting results of compatibility tests performed before installation of product. Include written recommendations for substrate preparation and primers required.
2. Field Test Reports: Submit written reports indicating and interpreting results of field tests performed either during installation of product or after product is installed in its final location, for compliance with requirements in the Contract Documents.
3. Material Test Reports: Submit reports written by a qualified testing agency, on testing agency's standard form, indicating and interpreting test results of material for compliance with requirements in the Contract Documents.
4. Preconstruction Test Reports: Submit reports written by a qualified testing agency, on testing agency's standard form, indicating and interpreting results of tests performed before installation of product, for compliance with performance requirements in the Contract Documents.
5. Product Test Reports: Submit written reports indicating that current product produced by manufacturer complies with requirements in the Contract Documents. Base reports on evaluation of tests performed by manufacturer and witnessed by a qualified testing agency, or on comprehensive tests performed by a qualified testing agency.
6. Research Reports: Submit written evidence, from a model code organization acceptable to authorities having jurisdiction, that product complies with building code in effect for Project. Include the following information:
 - a. Name of evaluation organization.
 - b. Date of evaluation.
 - c. Time period when report is in effect.
 - d. Product and manufacturers' names.
 - e. Description of product.
 - f. Test procedures and results.
 - g. Limitations of use.

1.7 CONTRACTOR'S REVIEW

- A. Action Submittals and Informational Submittals: Review each submittal and check for coordination with other Work of the Contract and for compliance with the Contract Documents. Note corrections and field dimensions. Mark with approval stamp before submitting to Architect.
- B. Contractor's Approval: Indicate Contractor's approval for each submittal with a uniform approval stamp. Include name of reviewer, date of Contractor's approval, and statement certifying that submittal has been reviewed, checked, and approved for compliance with the Contract Documents.
 1. Architect will not review submittals received from Contractor that do not have Contractor's review and approval.

1.8 ARCHITECT'S REVIEW

- A. Action Submittals: Architect[and Construction Manager] will review each submittal, indicate corrections or revisions required[, and return].

1. PDF Submittals: Architect will indicate, via markup on each submittal, the appropriate action.
 2. Submittals by Web-Based Project Management Software: Architect[and Construction Manager] will indicate, on Project management software website, the appropriate action.
- B. Informational Submittals: Architect will review each submittal and will not return it, or will return it if it does not comply with requirements. Architect will forward each submittal to appropriate party.
- C. Partial submittals prepared for a portion of the Work will be reviewed when use of partial submittals has received prior approval from Architect and Construction Manager.
- D. Incomplete submittals are unacceptable, will be considered nonresponsive, and will be returned for resubmittal without review.
- E. Architect will return without review submittals received from sources other than Contractor.
- F. Submittals not required by the Contract Documents will be returned by Architect without action.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION (Not Used)

END OF SECTION 013300

SECTION 013516 - ALTERATION PROJECT PROCEDURES

PART 1 - GENERAL

1.1 SUMMARY

- A. Section includes special procedures for alteration work.

1.2 DEFINITIONS

- A. Alteration Work: This term includes remodeling, renovation, repair, and maintenance work performed within existing spaces or on existing surfaces as part of the Project.
- B. Consolidate: To strengthen loose or deteriorated materials in place.
- C. Design Reference Sample: A sample that represents the Architect's prebid selection of work to be matched; it may be existing work or work specially produced for the Project.
- D. Dismantle: To remove by disassembling or detaching an item from a surface, using gentle methods and equipment to prevent damage to the item and surfaces; disposing of items unless indicated to be salvaged or reinstalled.
- E. Match: To blend with adjacent construction and manifest no apparent difference in material type, species, cut, form, detail, color, grain, texture, or finish; as approved by Architect.
- F. Refinish: To remove existing finishes to base material and apply new finish to match original, or as otherwise indicated.
- G. Repair: To correct damage and defects, retaining existing materials, features, and finishes. This includes patching, piecing-in, splicing, consolidating, or otherwise reinforcing or upgrading materials.
- H. Replace: To remove, duplicate, and reinstall entire item with new material. The original item is the pattern for creating duplicates unless otherwise indicated.
- I. Replicate: To reproduce in exact detail, materials, and finish unless otherwise indicated.
- J. Reproduce: To fabricate a new item, accurate in detail to the original, and from either the same or a similar material as the original, unless otherwise indicated.
- K. Retain: To keep an element or detail secure and intact.
- L. Strip: To remove existing finish down to base material unless otherwise indicated.

1.3 COORDINATION

- A. Alteration Work Subschedule: A construction schedule coordinating the sequencing and scheduling of alteration work for entire Project, including each activity to be performed, and

based on Contractor's Construction Schedule. Secure time commitments for performing critical construction activities from separate entities responsible for alteration work.

1. Schedule construction operations in sequence required to obtain best Work results.
 2. Coordinate sequence of alteration work activities to accommodate the following:
 - a. Owner's continuing occupancy of portions of existing building.
 - b. Owner's partial occupancy of completed Work.
 - c. Other known work in progress.
 - d. Tests and inspections.
 3. Detail sequence of alteration work, with start and end dates.
 4. Utility Services: Indicate how long utility services will be interrupted. Coordinate shutoff, capping, and continuation of utility services.
 5. Use of elevator and stairs.
 6. Equipment Data: List gross loaded weight, axle-load distribution, and wheel-base dimension data for mobile and heavy equipment proposed for use in existing structure. Do not use such equipment without certification from Contractor's professional engineer that the structure can support the imposed loadings without damage.
- B. Pedestrian and Vehicular Circulation: Coordinate alteration work with circulation patterns within Project building(s) and site. Some work is near circulation patterns. Circulation patterns cannot be closed off entirely and in places can be only temporarily redirected around small areas of work. Plan and execute the Work accordingly.

1.4 PROJECT MEETINGS FOR ALTERATION WORK

- A. Preliminary Conference for Alteration Work: Before starting alteration work, conduct conference at Project site.
1. Attendees: In addition to representatives of Owner, Architect, and Contractor, testing service representative, specialists, and chemical-cleaner manufacturer(s) shall be represented at the meeting.
 2. Agenda: Discuss items of significance that could affect progress of alteration work, including review of the following:
 - a. Alteration Work Subschedule: Discuss and finalize; verify availability of materials, specialists' personnel, equipment, and facilities needed to make progress and avoid delays.
 - b. Fire-prevention plan.
 - c. Governing regulations.
 - d. Areas where existing construction is to remain and the required protection.
 - e. Hauling routes.
 - f. Sequence of alteration work operations.
 - g. Storage, protection, and accounting for salvaged and specially fabricated items.
 - h. Existing conditions, staging, and structural loading limitations of areas where materials are stored.
 - i. Qualifications of personnel assigned to alteration work and assigned duties.
 - j. Requirements for extent and quality of work, tolerances, and required clearances.
 - k. Embedded work such as flashings and lintels, special details, collection of waste, protection of occupants and the public, and condition of other construction that affects the Work or will affect the work.

3. Reporting: Record conference results and distribute copies to everyone in attendance and to others affected by decisions or actions resulting from conference.

1.5 MATERIALS OWNERSHIP

- A. Historic items, relics, and similar objects including, but not limited to, cornerstones and their contents, commemorative plaques and tablets, antiques, and other items of interest or value to Owner that may be encountered or uncovered during the Work, regardless of whether they were previously documented, remain Owner's property.
 1. Carefully dismantle and salvage each item or object in a manner to prevent damage and protect it from damage, then promptly deliver it to Owner where directed at Project site.

1.6 INFORMATIONAL SUBMITTALS

- A. Alteration Work Subschedule:
 1. Submit alteration work subschedule within seven days of date established for commencement of alteration work.
- B. Preconstruction Documentation: Show preexisting conditions of adjoining construction and site improvements that are to remain, including finish surfaces, that might be misconstrued as damage caused by Contractor's alteration work operations.
- C. Alteration Work Program: Submit 30 days before work begins.
- D. Fire-Prevention Plan: Submit 30 days before work begins.

1.7 QUALITY ASSURANCE

- A. Title X Requirement: Each firm conducting activities that disturb painted surfaces shall be a "Lead-Safe Certified Firm" according to 40 CFR 745, Subpart E, and use only workers that are trained in lead-safe work practices.
- B. Alteration Work Program: Prepare a written plan for alteration work for whole Project, including each phase or process and protection of surrounding materials during operations. Show compliance with indicated methods and procedures specified in this and other Sections. Coordinate this whole-Project alteration work program with specific requirements of programs required in other alteration work Sections.
 1. Dust and Noise Control: Include locations of proposed temporary dust- and noise-control partitions and means of egress from occupied areas coordinated with continuing on-site operations and other known work in progress.
 2. Debris Hauling: Include plans clearly marked to show debris hauling routes, turning radii, and locations and details of temporary protective barriers.
- C. Fire-Prevention Plan: Prepare a written plan for preventing fires during the Work, including placement of fire extinguishers, fire blankets, rag buckets, and other fire-control devices during each phase or process. Coordinate plan with Owner's fire-protection equipment and requirements. Include fire-watch personnel's training, duties, and authority to enforce fire safety.

- D. Safety and Health Standard: Comply with ANSI/ASSP A10.6.

1.8 STORAGE AND HANDLING OF SALVAGED MATERIALS

A. Salvaged Materials:

1. Clean loose dirt and debris from salvaged items unless more extensive cleaning is indicated.
2. Pack or crate items after cleaning; cushion against damage during handling. Label contents of containers.
3. Store items in a secure area until delivery to Owner.
4. Transport items to Owner's storage area designated by Owner.
5. Protect items from damage during transport and storage.

B. Salvaged Materials for Reinstallation:

1. Repair and clean items for reuse as indicated.
2. Pack or crate items after cleaning and repairing; cushion against damage during handling. Label contents of containers.
3. Protect items from damage during transport and storage.
4. Reinstall items in locations indicated. Comply with installation requirements for new materials and equipment unless otherwise indicated. Provide connections, supports, and miscellaneous materials to make items functional for use indicated.

- C. Existing Materials to Remain: Protect construction indicated to remain against damage and soiling from construction work. Where permitted by Architect, items may be dismantled and taken to a suitable, protected storage location during construction work and reinstalled in their original locations after alteration and other construction work in the vicinity is complete.

- D. Storage: Catalog and store items within a weathertight enclosure where they are protected from moisture, weather, condensation, and freezing temperatures.

1. Identify each item for reinstallation with a nonpermanent mark to document its original location. Indicate original locations on plans, elevations, sections, or photographs by annotating the identifying marks.
2. Secure stored materials to protect from theft.
3. Control humidity so that it does not exceed 85 percent. Maintain temperatures 5 deg F or more above the dew point.

E. Storage Space:

1. Owner will arrange for limited on-site location(s) for free storage of salvaged material. This storage space does not include security for stored material.
2. Arrange for off-site locations for storage and protection of salvaged material that cannot be stored and protected on-site.

1.9 FIELD CONDITIONS

- A. Survey of Existing Conditions: Record existing conditions that affect the Work by use of [measured drawings] [preconstruction photographs] [and] [preconstruction videotapes] <Insert requirement>.

1. Comply with requirements specified in Section 013233 "Photographic Documentation."
- B. Discrepancies: Notify Architect of discrepancies between existing conditions and Drawings before proceeding with removal and dismantling work.
- C. Size Limitations in Existing Spaces: Materials, products, and equipment used for performing the Work and for transporting debris, materials, and products shall be of sizes that clear surfaces within existing spaces, areas, rooms, and openings, including temporary protection, by 12 inches or more.

PART 2 - PRODUCTS - (Not Used)

PART 3 - EXECUTION

3.1 PROTECTION

- A. Protect persons, motor vehicles, surrounding surfaces of building, building site, plants, and surrounding buildings from harm resulting from alteration work.
 1. Use only proven protection methods, appropriate to each area and surface being protected.
 2. Provide temporary barricades, barriers, and directional signage to exclude the public from areas where alteration work is being performed.
 3. Erect temporary barriers to form and maintain fire-egress routes.
 4. Erect temporary protective covers over walkways and at points of pedestrian and vehicular entrance and exit that must remain in service during alteration work.
 5. Contain dust and debris generated by alteration work, and prevent it from reaching the public or adjacent surfaces.
 6. Provide shoring, bracing, and supports as necessary. Do not overload structural elements.
 7. Protect floors and other surfaces along hauling routes from damage, wear, and staining.
 8. Provide supplemental sound-control treatment to isolate demolition work from other areas of the building.
- B. Temporary Protection of Materials to Remain:
 1. Protect existing materials with temporary protections and construction. Do not remove existing materials unless otherwise indicated.
 2. Do not attach temporary protection to existing surfaces except as indicated as part of the alteration work program.
- C. Comply with each product manufacturer's written instructions for protections and precautions. Protect against adverse effects of products and procedures on people and adjacent materials, components, and vegetation.
- D. Utility and Communications Services:
 1. Notify Owner, Architect, authorities having jurisdiction, and entities owning or controlling wires, conduits, pipes, and other services affected by alteration work before commencing operations.

2. Disconnect and cap pipes and services as required by authorities having jurisdiction, as required for alteration work.
 3. Maintain existing services unless otherwise indicated; keep in service, and protect against damage during operations. Provide temporary services during interruptions to existing utilities.
- E. Existing Drains: Prior to the start of work in an area, test drainage system to ensure that it is functioning properly. Notify Architect immediately of inadequate drainage or blockage. Do not begin work in an area until the drainage system is functioning properly.
1. Prevent solids such as adhesive or mortar residue or other debris from entering the drainage system. Clean out drains and drain lines that become sluggish or blocked by sand or other materials resulting from alteration work.
 2. Protect drains from pollutants. Block drains or filter out sediments, allowing only clean water to pass.
- F. Existing Roofing: Prior to the start of work in an area, install roofing protection as indicated on Drawings.

3.2 PROTECTION FROM FIRE

- A. General: Follow fire-prevention plan and the following:
1. Comply with NFPA 241 requirements unless otherwise indicated.
 2. Remove and keep area free of combustibles, including rubbish, paper, waste, and chemicals, unless necessary for the immediate work.
 - a. If combustible material cannot be removed, provide fire blankets to cover such materials.
- B. Heat-Generating Equipment and Combustible Materials: Comply with the following procedures while performing work with heat-generating equipment or combustible materials, including welding, torch-cutting, soldering, brazing, removing paint with heat, or other operations where open flames or implements using high heat or combustible solvents and chemicals are anticipated:
1. Obtain Owner's approval for operations involving use of welding or other high-heat equipment. Use of open-flame equipment is not permitted. Notify Owner at least 72 hours before each occurrence, indicating location of such work.
 2. As far as practicable, restrict heat-generating equipment to shop areas or outside the building.
 3. Do not perform work with heat-generating equipment in or near rooms or in areas where flammable liquids or explosive vapors are present or thought to be present. Use a combustible gas indicator test to ensure that the area is safe.
 4. Use fireproof baffles to prevent flames, sparks, hot gases, or other high-temperature material from reaching surrounding combustible material.
 5. Prevent the spread of sparks and particles of hot metal through open windows, doors, holes, and cracks in floors, walls, ceilings, roofs, and other openings.
 6. Fire Watch: Before working with heat-generating equipment or combustible materials, station personnel to serve as a fire watch at each location where such work is performed. Fire-watch personnel shall have the authority to enforce fire safety. Station fire watch according to NFPA 51B, NFPA 241, and as follows:

- a. Train each fire watch in the proper operation of fire-control equipment and alarms.
 - b. Prohibit fire-watch personnel from other work that would be a distraction from fire-watch duties.
 - c. Cease work with heat-generating equipment whenever fire-watch personnel are not present.
 - d. Have fire-watch personnel perform final fire-safety inspection each day beginning no sooner than 30 minutes after conclusion of work in each area to detect hidden or smoldering fires and to ensure that proper fire prevention is maintained.
 - e. Maintain fire-watch personnel at each area of Project site until 60 minutes conclusion of daily work.
- C. Fire-Control Devices: Provide and maintain fire extinguishers, fire blankets, and rag buckets for disposal of rags with combustible liquids. Maintain each as suitable for the type of fire risk in each work area. Ensure that nearby personnel and the fire-watch personnel are trained in fire-extinguisher and blanket use.
- D. Sprinklers: Where sprinkler protection exists and is functional, maintain it without interruption while operations are being performed. If operations are performed close to sprinklers, shield them temporarily with guards.
 1. Remove temporary guards at the end of work shifts, whenever operations are paused, and when nearby work is complete.

3.3 PROTECTION DURING APPLICATION OF CHEMICALS

- A. Protect motor vehicles, surrounding surfaces of building, building site, plants, and surrounding buildings from harm or spillage resulting from applications of chemicals and adhesives.
- B. Cover adjacent surfaces with protective materials that are proven to resist chemicals selected for Project unless chemicals being used will not damage adjacent surfaces as indicated in alteration work program. Use covering materials and masking agents that are waterproof and UV resistant and that will not stain or leave residue on surfaces to which they are applied. Apply protective materials according to manufacturer's written instructions. Do not apply liquid masking agents or adhesives to painted or porous surfaces. When no longer needed, promptly remove protective materials.
- C. Do not apply chemicals during winds of sufficient force to spread them to unprotected surfaces.
- D. Neutralize alkaline and acid wastes and legally dispose of off Owner's property.
- E. Collect and dispose of runoff from chemical operations by legal means and in a manner that prevents soil contamination, soil erosion, undermining of paving and foundations, damage to landscaping, or water penetration into building interior.

3.4 GENERAL ALTERATION WORK

- A. Have specialty work performed only by qualified specialists.
- B. Ensure that supervisory personnel are present when work begins and during its progress.

- C. Record existing work before each procedure (preconstruction), and record progress during the work. Use digital preconstruction documentation [photographs] [or] [video recordings]. Comply with requirements in Section 013233 "Photographic Documentation."
- D. Perform surveys of Project site as the Work progresses to detect hazards resulting from alterations.
- E. Notify Architect of visible changes in the integrity of material or components whether from environmental causes including biological attack, UV degradation, freezing, or thawing or from structural defects including cracks, movement, or distortion.
 - 1. Do not proceed with the work in question until directed by Architect.

END OF SECTION 013516

SECTION 014000 - QUALITY REQUIREMENTS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes administrative and procedural requirements for quality assurance and quality control.
- B. Testing and inspection services are required to verify compliance with requirements specified or indicated. These services do not relieve Contractor of responsibility for compliance with the Contract Document requirements.
 - 1. Specific quality-assurance and quality-control requirements for individual work results are specified in their respective Specification Sections. Requirements in individual Sections may also cover production of standard products.
 - 2. Specified tests, inspections, and related actions do not limit Contractor's other quality-assurance and quality-control procedures that facilitate compliance with the Contract Document requirements.
 - 3. Requirements for Contractor to provide quality-assurance and quality-control services required by Architect, Owner, or authorities having jurisdiction are not limited by provisions of this Section.

1.3 DEFINITIONS

- A. Experienced: When used with an entity or individual, "experienced," unless otherwise further described, means having successfully completed a minimum of [five] <Insert number> previous projects similar in nature, size, and extent to this Project; being familiar with special requirements indicated; and having complied with requirements of authorities having jurisdiction.
- B. Field Quality-Control Tests and Inspections: Tests and inspections that are performed on-site for installation of the Work and for completed Work.
- C. Installer/Applicator/Erector: Contractor or another entity engaged by Contractor as an employee, subcontractor, or sub-subcontractor, to perform a particular construction operation, including installation, erection, application, assembly, and similar operations.
 - 1. Use of trade-specific terminology in referring to a Work result does not require that certain construction activities specified apply exclusively to specific trade(s).
- D. Preconstruction Testing: Tests and inspections performed specifically for Project before products and materials are incorporated into the Work, to verify performance or compliance with

specified criteria. Unless otherwise indicated, copies of reports of tests or inspections performed for other than the Project do not meet this definition.

- E. Product Tests: Tests and inspections that are performed by a nationally recognized testing laboratory (NRTL) according to 29 CFR 1910.7, by a testing agency accredited according to NIST's National Voluntary Laboratory Accreditation Program (NVLAP), or by a testing agency qualified to conduct product testing and acceptable to authorities having jurisdiction, to establish product performance and compliance with specified requirements.
- F. Source Quality-Control Tests and Inspections: Tests and inspections that are performed at the source (e.g., plant, mill, factory, or shop).
- G. Testing Agency: An entity engaged to perform specific tests, inspections, or both. The term "testing laboratory" has the same meaning as the term "testing agency."
- H. Quality-Assurance Services: Activities, actions, and procedures performed before and during execution of the Work, to guard against defects and deficiencies and substantiate that proposed construction will comply with requirements.
- I. Quality-Control Services: Tests, inspections, procedures, and related actions during and after execution of the Work, to evaluate that actual products incorporated into the Work and completed construction comply with requirements. Contractor's quality-control services do not include contract administration activities performed by Architect[or Construction Manager].

1.4 CONFLICTING REQUIREMENTS

- A. Conflicting Standards and Other Requirements: If compliance with two or more standards or requirements is specified and the standards or requirements establish different or conflicting requirements for minimum quantities or quality levels, inform the Architect regarding the conflict and obtain clarification prior to proceeding with the Work. Refer conflicting requirements that are different, but apparently equal, to Architect for clarification before proceeding.
- B. Minimum Quantity or Quality Levels: The quantity or quality level shown or specified is the minimum provided or performed. The actual installation may comply exactly with the minimum quantity or quality specified, or it may exceed the minimum within reasonable limits. To comply with these requirements, indicated numeric values are minimum or maximum, as appropriate, for the context of requirements. Refer uncertainties to Architect for a decision before proceeding.

1.5 INFORMATIONAL SUBMITTALS

- A. Contractor's Quality-Control Plan: For quality-assurance and quality-control activities and responsibilities.
- B. Qualification Data: For Contractor's quality-control personnel.
- C. Testing Agency Qualifications: For testing agencies specified in "Quality Assurance" Article to demonstrate their capabilities and experience. Include proof of qualifications in the form of a recent report on the inspection of the testing agency by a recognized authority.
- D. Schedule of Tests and Inspections: Prepare in tabular form and include the following:

1. Specification Section number and title.
2. Entity responsible for performing tests and inspections.
3. Description of test and inspection.
4. Identification of applicable standards.
5. Identification of test and inspection methods.
6. Number of tests and inspections required.
7. Time schedule or time span for tests and inspections.
8. Requirements for obtaining samples.
9. Unique characteristics of each quality-control service.

- E. Reports: Prepare and submit certified written reports and documents as specified.
- F. Permits, Licenses, and Certificates: For Owner's record, submit copies of permits, licenses, certifications, inspection reports, releases, jurisdictional settlements, notices, receipts for fee payments, judgments, correspondence, records, and similar documents established for compliance with standards and regulations bearing on performance of the Work.

1.6 CONTRACTOR'S QUALITY-CONTROL PLAN

- A. Quality-Control Plan, General: Submit quality-control plan within 10 days of Notice to Proceed, and not less than five days prior to preconstruction conference. Submit in format acceptable to Architect. Identify personnel, procedures, controls, instructions, tests, records, and forms to be used to carry out Contractor's quality-assurance and quality-control responsibilities and to coordinate Owner's quality-assurance and quality-control activities. Coordinate with Contractor's Construction Schedule.
- B. Submittal Procedure: Describe procedures for ensuring compliance with requirements through review and management of submittal process. Indicate qualifications of personnel responsible for submittal review.
- C. Testing and Inspection: In quality-control plan, include a comprehensive schedule of Work requiring testing or inspection, including the following:
1. Contractor-performed tests and inspections, including subcontractor-performed tests and inspections. Include required tests and inspections and Contractor-elected tests and inspections. Distinguish source quality-control tests and inspections from field quality-control tests and inspections.
 2. Special inspections required by authorities having jurisdiction and indicated on the Statement of Special Inspections.
 3. Owner-performed tests and inspections indicated in the Contract Documents.
- D. Continuous Inspection of Workmanship: Describe process for continuous inspection during construction to identify and correct deficiencies in workmanship in addition to testing and inspection specified. Indicate types of corrective actions to be required to bring the Work into compliance with standards of workmanship established by Contract requirements and approved mockups.
- E. Monitoring and Documentation: Maintain testing and inspection reports, including log of approved and rejected results. Include Work Architect has indicated as nonconforming or defective. Indicate corrective actions taken to bring nonconforming Work into compliance with requirements. Comply with requirements of authorities having jurisdiction.

1.7 REPORTS AND DOCUMENTS

- A. Test and Inspection Reports: Prepare and submit certified written reports specified in other Sections. Include the following:
1. Date of issue.
 2. Project title and number.
 3. Name, address, telephone number, and email address of testing agency.
 4. Dates and locations of samples and tests or inspections.
 5. Names of individuals making tests and inspections.
 6. Description of the Work and test and inspection method.
 7. Identification of product and Specification Section.
 8. Complete test or inspection data.
 9. Test and inspection results and an interpretation of test results.
 10. Record of temperature and weather conditions at time of sample-taking and testing and inspection.
 11. Comments or professional opinion on whether tested or inspected Work complies with the Contract Document requirements.
 12. Name and signature of laboratory inspector.
 13. Recommendations on retesting and reinspecting.
- B. Manufacturer's Technical Representative's Field Reports: Prepare written information documenting manufacturer's technical representative's tests and inspections specified in other Sections. Include the following:
1. Name, address, telephone number, and email address of technical representative making report.
 2. Statement on condition of substrates and their acceptability for installation of product.
 3. Statement that products at Project site comply with requirements.
 4. Summary of installation procedures being followed, whether they comply with requirements and, if not, what corrective action was taken.
 5. Results of operational and other tests and a statement of whether observed performance complies with requirements.
 6. Statement of whether conditions, products, and installation will affect warranty.
 7. Other required items indicated in individual Specification Sections.
- C. Factory-Authorized Service Representative's Reports: Prepare written information documenting manufacturer's factory-authorized service representative's tests and inspections specified in other Sections. Include the following:
1. Name, address, telephone number, and email address of factory-authorized service representative making report.
 2. Statement that equipment complies with requirements.
 3. Results of operational and other tests and a statement of whether observed performance complies with requirements.
 4. Statement of whether conditions, products, and installation will affect warranty.
 5. Other required items indicated in individual Specification Sections.

1.8 QUALITY ASSURANCE

- A. Qualifications paragraphs in this article establish the minimum qualification levels required; individual Specification Sections specify additional requirements.

-
- B. **Manufacturer Qualifications:** A firm experienced in manufacturing products or systems similar to those indicated for this Project and with a record of successful in-service performance, as well as sufficient production capacity to produce required units. As applicable, procure products from manufacturers able to meet qualification requirements, warranty requirements, and technical or factory-authorized service representative requirements.
- C. **Fabricator Qualifications:** A firm experienced in producing products similar to those indicated for this Project and with a record of successful in-service performance, as well as sufficient production capacity to produce required units.
- D. **Installer Qualifications:** A firm or individual experienced in installing, erecting, applying, or assembling work similar in material, design, and extent to that indicated for this Project, whose work has resulted in construction with a record of successful in-service performance.
- E. **Professional Engineer Qualifications:** A professional engineer who is legally qualified to practice in jurisdiction where Project is located and who is experienced in providing engineering services of the kind indicated. Engineering services are defined as those performed for installations of the system, assembly, or product that is similar in material, design, and extent to those indicated for this Project.
- F. **Specialists:** Certain Specification Sections require that specific construction activities be performed by entities who are recognized experts in those operations. Specialists will satisfy qualification requirements indicated and engage in the activities indicated.
1. Requirements of authorities having jurisdiction supersede requirements for specialists.
- G. **Testing and Inspecting Agency Qualifications:** An NRTL, an NVLAP, or an independent agency with the experience and capability to conduct testing and inspection indicated, as documented in accordance with ASTM E329, and with additional qualifications specified in individual Sections; and, where required by authorities having jurisdiction, that is acceptable to authorities.
- H. **Manufacturer's Technical Representative Qualifications:** An authorized representative of manufacturer who is trained and approved by manufacturer to observe and inspect installation of manufacturer's products that are similar in material, design, and extent to those indicated for this Project.
- I. **Factory-Authorized Service Representative Qualifications:** An authorized representative of manufacturer who is trained and approved by manufacturer to inspect, demonstrate, repair, and perform service on installations of manufacturer's products that are similar in material, design, and extent to those indicated for this Project.
- J. **Preconstruction Testing:** Where testing agency is indicated to perform preconstruction testing for compliance with specified requirements for performance and test methods, comply with the following Contractor's responsibilities, including the following:
1. Provide test specimens representative of proposed products and construction.
2. Submit specimens in a timely manner with sufficient time for testing and analyzing results to prevent delaying the Work.
3. Provide sizes and configurations of test assemblies, mockups, and laboratory mockups to adequately demonstrate capability of products to comply with performance requirements.
4. Build site-assembled test assemblies and mockups, using installers who will perform same tasks for Project.
5. When testing is complete, remove test specimens and test assemblies; do not reuse products on Project.

6. Testing Agency Responsibilities: Submit a certified written report of each test, inspection, and similar quality-assurance service to Architect with copy to Contractor. Interpret tests and inspections, and state in each report whether tested and inspected Work complies with or deviates from the Contract Documents.

1.9 QUALITY CONTROL

- A. Owner Responsibilities: Where quality-control services are indicated as Owner's responsibility, Owner will engage a qualified testing agency to perform these services.
 1. Owner will furnish Contractor with names, addresses, and telephone numbers of testing agencies engaged and a description of types of testing and inspection they are engaged to perform.
 2. Costs for retesting and reinspecting construction that replaces or is necessitated by Work that failed to comply with the Contract Documents will be charged to Contractor, and the Contract Sum will be adjusted by Change Order.
- B. Contractor Responsibilities: Tests and inspections not explicitly assigned to Owner are Contractor's responsibility. Perform additional quality-control activities, whether specified or not, to verify and document that the Work complies with requirements.
 1. Unless otherwise indicated, provide quality-control services specified and those required by authorities having jurisdiction. Perform quality-control services required of Contractor by authorities having jurisdiction, whether specified or not.
 2. Engage a qualified testing agency to perform quality-control services.
 - a. Contractor will not employ same entity engaged by Owner, unless agreed to in writing by Owner.
 3. Notify testing agencies at least 24 hours in advance of time when Work that requires testing or inspection will be performed.
 4. Where quality-control services are indicated as Contractor's responsibility, submit a certified written report, in duplicate, of each quality-control service.
 5. Testing and inspection requested by Contractor and not required by the Contract Documents are Contractor's responsibility.
 6. Submit additional copies of each written report directly to authorities having jurisdiction, when they so direct.
- C. Retesting/Reinspecting: Regardless of whether original tests or inspections were Contractor's responsibility, provide quality-control services, including retesting and reinspecting, for construction that replaced Work that failed to comply with the Contract Documents.
- D. Testing Agency Responsibilities: Cooperate with Architect and Contractor in performance of duties. Provide qualified personnel to perform required tests and inspections.
 1. Notify Architect and Contractor promptly of irregularities or deficiencies observed in the Work during performance of its services.
 2. Determine the locations from which test samples will be taken and in which in-situ tests are conducted.
 3. Conduct and interpret tests and inspections, and state in each report whether tested and inspected Work complies with or deviates from requirements.
 4. Submit a certified written report, in duplicate, of each test, inspection, and similar quality-control service through Contractor.

-
5. Do not release, revoke, alter, or increase the Contract Document requirements or approve or accept any portion of the Work.
 6. Do not perform duties of Contractor.
- E. Manufacturer's Field Services: Where indicated, engage a factory-authorized service representative to inspect field-assembled components and equipment installation, including service connections. Report results in writing as specified in Section 013300 "Submittal Procedures."
- F. Manufacturer's Technical Services: Where indicated, engage a manufacturer's technical representative to observe and inspect the Work. Manufacturer's technical representative's services include participation in preinstallation conferences, examination of substrates and conditions, verification of materials, observation of Installer activities, inspection of completed portions of the Work, and submittal of written reports.
- G. Contractor's Associated Requirements and Services: Cooperate with agencies and representatives performing required tests, inspections, and similar quality-control services, and provide reasonable auxiliary services as requested. Notify agency sufficiently in advance of operations to permit assignment of personnel. Provide the following:
1. Access to the Work.
 2. Incidental labor and facilities necessary to facilitate tests and inspections.
 3. Adequate quantities of representative samples of materials that require testing and inspection. Assist agency in obtaining samples.
 4. Facilities for storage and field curing of test samples.
 5. Delivery of samples to testing agencies.
 6. Preliminary design mix proposed for use for material mixes that require control by testing agency.
 7. Security and protection for samples and for testing and inspection equipment at Project site.
- H. Coordination: Coordinate sequence of activities to accommodate required quality-assurance and quality-control services with a minimum of delay and to avoid necessity of removing and replacing construction to accommodate testing and inspection.
1. Schedule times for tests, inspections, obtaining samples, and similar activities.
- I. Schedule of Tests and Inspections: Prepare a schedule of tests, inspections, and similar quality-control services required by the Contract Documents. Coordinate and submit concurrently with Contractor's Construction Schedule. Update and submit with each Application for Payment.
1. Schedule Contents: Include tests, inspections, and quality-control services, including Contractor- and Owner-retained services, commissioning activities, and other Project-required services paid for by other entities.
 2. Distribution: Distribute schedule to Owner, Architect, testing agencies, and each party involved in performance of portions of the Work where tests and inspections are required.
- 1.10 SPECIAL TESTS AND INSPECTIONS
- A. Special Tests and Inspections: Owner will engage a qualified testing agency and special inspector to conduct special tests and inspections required by authorities having jurisdiction as the responsibility of Owner and as follows:

1. Verifying that manufacturer maintains detailed fabrication and quality-control procedures, and reviewing the completeness and adequacy of those procedures to perform the Work.
2. Notifying Architect and Contractor promptly of irregularities and deficiencies observed in the Work during performance of its services.
3. Submitting a certified written report of each test, inspection, and similar quality-control service to Architect with copy to Contractor and to authorities having jurisdiction.
4. Submitting a final report of special tests and inspections at Substantial Completion, which includes a list of unresolved deficiencies.
5. Interpreting tests and inspections, and stating in each report whether tested and inspected Work complies with or deviates from the Contract Documents.
6. Retesting and reinspecting corrected Work.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION

3.1 TEST AND INSPECTION LOG

- A. Test and Inspection Log: Prepare a record of tests and inspections. Include the following:
 1. Date test or inspection was conducted.
 2. Description of the Work tested or inspected.
 3. Date test or inspection results were transmitted to Architect.
 4. Identification of testing agency or special inspector conducting test or inspection.
- B. Maintain log at Project site. Post changes and revisions as they occur. Provide access to test and inspection log for Architect's and authorities' having jurisdiction reference during normal working hours.
 1. Submit log at Project closeout as part of Project Record Documents.

3.2 REPAIR AND PROTECTION

- A. General: On completion of testing, inspection, sample-taking, and similar services, repair damaged construction and restore substrates and finishes.
 1. Provide materials and comply with installation requirements specified in other Specification Sections or matching existing substrates and finishes. Restore patched areas and extend restoration into adjoining areas with durable seams that are as invisible as possible. Comply with the Contract Document requirements for cutting and patching in Section 017300 "Execution."
- B. Protect construction exposed by or for quality-control service activities.
- C. Repair and protection are Contractor's responsibility, regardless of the assignment of responsibility for quality-control services.

END OF SECTION 014000

SECTION 014200 - REFERENCES

PART 1 - GENERAL

1.1 DEFINITIONS

- A. General: Basic Contract definitions are included in the Conditions of the Contract.
- B. "Approved": When used to convey Architect's action on Contractor's submittals, applications, and requests, "approved" is limited to Architect's duties and responsibilities as stated in the Conditions of the Contract.
- C. "Directed": A command or instruction by Architect. Other terms including "requested," "authorized," "selected," "required," and "permitted" have the same meaning as "directed."
- D. "Indicated": Requirements expressed by graphic representations or in written form on Drawings, in Specifications, and in other Contract Documents. Other terms including "shown," "noted," "scheduled," and "specified" have the same meaning as "indicated."
- E. "Regulations": Laws, ordinances, statutes, and lawful orders issued by authorities having jurisdiction, and rules, conventions, and agreements within the construction industry that control performance of the Work.
- F. "Furnish": Supply and deliver to Project site, ready for unloading, unpacking, assembly, installation, and similar operations.
- G. "Install": Unload, temporarily store, unpack, assemble, erect, place, anchor, apply, work to dimension, finish, cure, protect, clean, and similar operations at Project site.
- H. "Provide": Furnish and install, complete and ready for the intended use.
- I. "Project Site": Space available for performing construction activities. The extent of Project site is shown on Drawings and may or may not be identical with the description of the land on which Project is to be built.

1.2 INDUSTRY STANDARDS

- A. Applicability of Standards: Unless the Contract Documents include more stringent requirements, applicable construction industry standards have the same force and effect as if bound or copied directly into the Contract Documents to the extent referenced. Such standards are made a part of the Contract Documents by reference.
- B. Publication Dates: Comply with standards in effect as of date of the Contract Documents unless otherwise indicated.
- C. Copies of Standards: Each entity engaged in construction on Project should be familiar with industry standards applicable to its construction activity. Copies of applicable standards are not bound with the Contract Documents.

1. Where copies of standards are needed to perform a required construction activity, obtain copies directly from publication source.

1.3 ABBREVIATIONS AND ACRONYMS

- A. Industry Organizations: Where abbreviations and acronyms are used in Specifications or other Contract Documents, they shall mean the recognized name of the entities indicated in Gale's "Encyclopedia of Associations: National Organizations of the U.S." or in Columbia Books' "National Trade & Professional Associations of the United States."
- B. Code Agencies: Where abbreviations and acronyms are used in Specifications or other Contract Documents, they shall mean the recognized name of the entities in the following list. This information is believed to be accurate as of the date of the Contract Documents.
 1. IAPMO - International Association of Plumbing and Mechanical Officials; www.iapmo.org.
 2. ICC - International Code Council; www.iccsafe.org.
 3. ICC-ES - ICC Evaluation Service, LLC; www.icc-es.org.
- C. Federal Government Agencies: Where abbreviations and acronyms are used in Specifications or other Contract Documents, they shall mean the recognized name of the entities in the following list. Information is subject to change and is up to date as of the date of the Contract Documents.
 1. CPSC - Consumer Product Safety Commission; www.cpsc.gov.
 2. DOE - Department of Energy; www.energy.gov.
 3. EPA - Environmental Protection Agency; www.epa.gov.
 4. GSA - General Services Administration; www.gsa.gov.
 5. OSHA - Occupational Safety & Health Administration; www.osha.gov.
 6. USDA - Department of Agriculture; Agriculture Research Service; U.S. Salinity Laboratory; www.ars.usda.gov.
 7. USDA - Department of Agriculture; Rural Utilities Service; www.usda.gov.
 8. USDOJ - Department of Justice; Office of Justice Programs; National Institute of Justice; www.ojp.usdoj.gov.
 9. USPS - United States Postal Service; www.usps.com.
- D. Standards and Regulations: Where abbreviations and acronyms are used in Specifications or other Contract Documents, they shall mean the recognized name of the standards and regulations in the following list. This information is subject to change and is believed to be accurate as of the date of the Contract Documents.
 1. USAB - United States Access Board; www.access-board.gov.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION (Not Used)

END OF SECTION 014200

SECTION 015000 - TEMPORARY FACILITIES AND CONTROLS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes requirements for temporary utilities, support facilities, and security and protection facilities.
- B. Related Requirements:
 - 1. Section 011000 "Summary" for work restrictions and limitations on utility interruptions.

1.3 USE CHARGES

- A. Installation, removal, and use charges for temporary facilities shall be included in the Contract Sum unless otherwise indicated. Allow other entities engaged in the Project to use temporary services and facilities without cost, including, but not limited to, Architect, testing agencies, and authorities having jurisdiction.
- B. Sewer Service: Owner will pay sewer-service use charges for sewer usage by all entities for construction operations.
- C. Water Service: Owner will pay water-service use charges for water used by all entities for construction operations.
- D. Electric Power Service: Owner will pay electric-power-service use charges for electricity used by all entities for construction operations.

1.4 INFORMATIONAL SUBMITTALS

- A. Site Utilization Plan: Show temporary facilities, temporary utility lines and connections, staging areas, construction site entrances, vehicle circulation, and parking areas for construction personnel.
- B. Implementation and Termination Schedule: Within 15 days of date established for commencement of the Work, submit schedule indicating implementation and termination dates of each temporary utility.
- C. Project Identification and Temporary Signs: Show fabrication and installation details, including plans, elevations, details, layouts, typestyles, graphic elements, and message content.

-
- D. Fire-Safety Program: Show compliance with requirements of NFPA 241 and authorities having jurisdiction. Indicate Contractor personnel responsible for management of fire-prevention program.
- E. Moisture- and Mold-Protection Plan: Describe procedures and controls for protecting materials and construction from water absorption and damage and mold. Describe delivery, handling, storage, installation, and protection provisions for materials subject to water absorption or water damage.
1. Indicate procedures for discarding water-damaged materials, protocols for mitigating water intrusion into completed Work, and requirements for replacing water-damaged Work.
 2. Indicate sequencing of work that requires water, such as sprayed fire-resistive materials, plastering, and terrazzo grinding, and describe plans for dealing with water from these operations. Show procedures for verifying that wet construction has dried sufficiently to permit installation of finish materials.
 3. Indicate methods to be used to avoid trapping water in finished work.
- F. Dust- and HVAC-Control Plan: Submit coordination drawing and narrative that indicates the dust- and HVAC-control measures proposed for use, proposed locations, and proposed time frame for their operation. Include the following:
1. Locations of dust-control partitions at each phase of work.
 2. HVAC system isolation schematic drawing.
 3. Location of proposed air-filtration system discharge.
 4. Waste-handling procedures.
 5. Other dust-control measures.
- G. Noise and Vibration Control Plan: Identify construction activities that may impact the occupancy and use of existing spaces within the building or adjacent existing buildings, whether occupied by others, or occupied by the Owner. Include the following:
1. Methods used to meet the goals and requirements of the Owner.
 2. Concrete cutting method(s) to be used.
 3. Location of construction devices on the site.
 4. Show compliance with the use and maintenance of quieted construction devices for the duration of the Project.
 5. Indicate activities that may disturb building occupants and that are planned to be performed during non-standard working hours as coordinated with the Owner.

1.5 QUALITY ASSURANCE

- A. Electric Service: Comply with NECA, NEMA, and UL standards and regulations for temporary electric service. Install service to comply with NFPA 70.
- B. Tests and Inspections: Arrange for authorities having jurisdiction to test and inspect each temporary utility before use. Obtain required certifications and permits.
- C. Accessible Temporary Egress: Comply with applicable provisions in the United States Access Board's ADA-ABA Accessibility Guidelines.

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Portable Chain-Link Fencing: Minimum 2-inch, 0.148-inch- thick, galvanized-steel, chain-link fabric fencing; minimum 6 feet high with galvanized-steel pipe posts; minimum 2-3/8-inch- OD line posts and 2-7/8-inch- OD corner and pull posts, with 1-5/8-inch- OD top and bottom rails. Provide concrete or galvanized-steel bases for supporting posts.
- B. Fencing Windscreen Privacy Screen: Polyester fabric scrim with grommets for attachment to chain-link fence, sized to height of fence, in color selected by Architect from manufacturer's standard colors.
- C. Polyethylene Sheet: Reinforced, fire-resistive sheet, 10-mil minimum thickness, with flame-spread rating of 15 or less in accordance with ASTM E84 and passing NFPA 701 Test Method 2.
- D. Dust-Control Adhesive-Surface Walk-Off Mats: Provide mats, minimum 36 by 60 inches.
- E. Insulation: Unfaced mineral-fiber blanket, manufactured from glass, slag wool, or rock wool; with maximum flame-spread and smoke-developed indexes of 25 and 50, respectively.

2.2 TEMPORARY FACILITIES

- A. Field Offices: Owner will provide conditioned interior space for field offices for duration of Project.

2.3 EQUIPMENT

- A. Fire Extinguishers: Portable, UL rated; with class and extinguishing agent as required by locations and classes of fire exposures.
- B. Air-Filtration Units: Primary and secondary HEPA-filter-equipped portable units with four-stage filtration. Provide single switch for emergency shutoff. Configure to run continuously.

PART 3 - EXECUTION

3.1 TEMPORARY FACILITIES, GENERAL

- A. Conservation: Coordinate construction and use of temporary facilities with consideration given to conservation of energy, water, and materials. Coordinate use of temporary utilities to minimize waste.
 - 1. Salvage materials and equipment involved in performance of, but not actually incorporated into, the Work. See other Sections for disposition of salvaged materials that are designated as Owner's property.

3.2 INSTALLATION, GENERAL

- A. Locate facilities where they will serve Project adequately and result in minimum interference with performance of the Work. Relocate and modify facilities as required by progress of the Work.
 - 1. Locate facilities to limit site disturbance as specified in Section 011000 "Summary."
- B. Provide each facility ready for use when needed to avoid delay. Do not remove until facilities are no longer needed or are replaced by authorized use of completed permanent facilities.
- C. Isolation of Work Areas in Occupied Facilities: Prevent dust, fumes, and odors from entering occupied areas.
 - 1. Maintain dust partitions during the Work. Use vacuum collection attachments on dust-producing equipment. Isolate limited work within occupied areas using portable dust-containment devices.
 - 2. Perform daily construction cleanup and final cleanup using approved, HEPA-filter-equipped vacuum equipment.

3.3 TEMPORARY UTILITY INSTALLATION

- A. General: Install temporary service or connect to existing service.
 - 1. Arrange with utility company, Owner, and existing users for time when service can be interrupted, if necessary, to make connections for temporary services.
- B. Sewers and Drainage: Provide temporary utilities to remove effluent lawfully.
 - 1. Connect temporary sewers to municipal system as directed by authorities having jurisdiction.
- C. Water Service: Install water service and distribution piping in sizes and pressures adequate for construction.
- D. Water Service: Connect to Owner's existing water service facilities. Clean and maintain water service facilities in a condition acceptable to Owner. At Substantial Completion, restore these facilities to condition existing before initial use.
- E. Sanitary Facilities: Provide temporary toilets, wash facilities, safety shower and eyewash facilities, and drinking water for use of construction personnel. Comply with requirements of authorities having jurisdiction for type, number, location, operation, and maintenance of fixtures and facilities.
 - 1. Use of Permanent Toilets: Use of Owner's existing or new toilet facilities will be permitted, as long as facilities are cleaned and maintained in a condition acceptable to Owner. At Substantial Completion, restore these facilities to condition existing before initial use.
- F. Electric Power Service: Connect to Owner's existing electric power service. Maintain equipment in a condition acceptable to Owner.

- G. Lighting: Provide temporary lighting with local switching that provides adequate illumination for construction operations, observations, inspections, and traffic conditions.
 - 1. Install and operate temporary lighting that fulfills security and protection requirements without operating entire system.

3.4 SUPPORT FACILITIES INSTALLATION

- A. Comply with the following:
 - 1. Utilize designated area within existing building for temporary field offices.
 - 2. Maintain support facilities until Architect schedules Substantial Completion inspection. Remove before Substantial Completion. Personnel remaining after Substantial Completion will be permitted to use permanent facilities, under conditions acceptable to Owner.
- B. Traffic Controls: Comply with requirements of authorities having jurisdiction.
 - 1. Protect existing site improvements to remain, including curbs, pavement, and utilities.
 - 2. Maintain access for fire-fighting equipment and access to fire hydrants.
- C. Parking: Use designated areas of Owner's existing parking areas for construction personnel.
- D. Storage and Staging: Use designated areas of Project site for storage and staging needs.
- E. Dewatering Facilities and Drains: Comply with requirements of authorities having jurisdiction. Maintain Project site, excavations, and construction free of water.
 - 1. Dispose of rainwater in a lawful manner that will not result in flooding Project or adjoining properties or endanger permanent Work or temporary facilities.
 - 2. Remove snow and ice as required to minimize accumulations.
- F. Project Signs: Provide Project signs as indicated. Unauthorized signs are not permitted.
 - 1. Identification Signs: Provide Project identification signs as indicated on Drawings.
 - 2. Temporary Signs: Provide other signs as indicated and as required to inform public and individuals seeking entrance to Project.
 - a. Provide temporary, directional signs for construction personnel and visitors.
 - 3. Maintain and touch up signs, so they are legible at all times.
- G. Waste Disposal Facilities: Provide waste-collection containers in sizes adequate to handle waste from construction operations. Comply with requirements of authorities having jurisdiction. Comply with progress cleaning requirements in Section 017300 "Execution."
- H. Lifts and Hoists: Provide facilities necessary for hoisting materials and personnel.
 - 1. Truck cranes and similar devices used for hoisting materials are considered "tools and equipment" and not temporary facilities.
- I. Existing Elevator Use: Use of Owner's existing elevators will be permitted, provided elevators are cleaned and maintained in a condition acceptable to Owner. At Substantial Completion,

restore elevators to condition existing before initial use, including replacing worn cables, guide shoes, and similar items of limited life.

1. Do not load elevators beyond their rated weight capacity.
2. Provide protective coverings, barriers, devices, signs, or other procedures to protect elevator car and entrance doors and frame. If, despite such protection, elevators become damaged, engage elevator Installer to restore damaged work, so no evidence remains of correction work. Return items that cannot be refinished in field to the shop, make required repairs and refinish entire unit, or provide new units as required.

- J. Existing Stair Usage: Use of Owner's existing stairs will be permitted, provided stairs are cleaned and maintained in a condition acceptable to Owner. At Substantial Completion, restore stairs to condition existing before initial use.

1. Provide protective coverings, barriers, devices, signs, or other procedures to protect stairs and to maintain means of egress. If stairs become damaged, restore damaged areas, so no evidence remains of correction work.

3.5 SECURITY AND PROTECTION FACILITIES INSTALLATION

- A. Protection of Existing Facilities: Protect existing vegetation, equipment, structures, utilities, and other improvements at Project site and on adjacent properties, except those indicated to be removed or altered. Repair damage to existing facilities.
1. Where access to adjacent properties is required in order to affect protection of existing facilities, obtain written permission from adjacent property owner to access property for that purpose.
- B. Environmental Protection: Provide protection, operate temporary facilities, and conduct construction as required to comply with environmental regulations and that minimize possible air, waterway, and subsoil contamination or pollution or other undesirable effects.
1. Comply with work restrictions specified in Section 011000 "Summary."
- C. Stormwater Control: Comply with requirements of authorities having jurisdiction. Provide barriers in and around excavations and subgrade construction to prevent flooding by runoff of stormwater from heavy rains.
- D. Site Enclosure Fence: [Before construction operations begin] [Prior to commencing earthwork], furnish and install site enclosure fence in a manner that will prevent people from easily entering site except by entrance gates.
1. Extent of Fence: [As required to enclose entire Project site or portion determined sufficient to accommodate construction operations] [As indicated on Drawings].
- E. Security Enclosure and Lockup: Install temporary enclosure around partially completed areas of construction. Provide lockable entrances to prevent unauthorized entrance, vandalism, theft, and similar violations of security. Lock entrances at end of each workday.
- F. Barricades, Warning Signs, and Lights: Comply with requirements of authorities having jurisdiction for erecting structurally adequate barricades, including warning signs and lighting.

- G. Temporary Egress: Provide temporary egress from existing occupied facilities as indicated and as required by authorities having jurisdiction. Provide signage directing occupants to temporary egress.
- H. Temporary Partitions: Provide floor-to-ceiling dustproof partitions to limit dust and dirt migration and to separate areas occupied by Owner and tenants from fumes and noise.
- I. Temporary Fire Protection: Install and maintain temporary fire-protection facilities of types needed to protect against reasonably predictable and controllable fire losses. Comply with NFPA 241; manage fire-prevention program.
 - 1. Prohibit smoking in construction areas. Comply with additional limits on smoking specified in other Sections.
 - 2. Supervise welding operations, combustion-type temporary heating units, and similar sources of fire ignition in accordance with requirements of authorities having jurisdiction.
 - 3. Develop and supervise an overall fire-prevention and -protection program for personnel at Project site. Review needs with local fire department and establish procedures to be followed. Instruct personnel in methods and procedures. Post warnings and information.
 - 4. Provide temporary standpipes and hoses for fire protection. Hang hoses with a warning sign, stating that hoses are for fire-protection purposes only and are not to be removed. Match hose size with outlet size and equip with suitable nozzles.

3.6 MOISTURE AND MOLD CONTROL

- A. Moisture and Mold Protection: Protect stored materials and installed Work in accordance with Moisture and Mold Protection Plan.
- B. Exposed Construction Period: Before installation of weather barriers, when materials are subject to wetting and exposure and to airborne mold spores, protect as follows:
 - 1. Protect porous materials from water damage.
 - 2. Protect stored and installed material from flowing or standing water.
 - 3. Keep porous and organic materials from coming into prolonged contact with concrete.
 - 4. Remove standing water from decks.
 - 5. Keep deck openings covered or dammed.
- C. Partially Enclosed Construction Period: After installation of weather barriers but before full enclosure and conditioning of building, when installed materials are still subject to infiltration of moisture and ambient mold spores, protect as follows:
 - 1. Do not load or install drywall or other porous materials or components, or items with high organic content, into partially enclosed building.
 - 2. Keep interior spaces reasonably clean and protected from water damage.
 - 3. Periodically collect and remove waste containing cellulose or other organic matter.
 - 4. Discard or replace water-damaged material.
 - 5. Do not install material that is wet.
 - 6. Discard and replace stored or installed material that begins to grow mold.
 - 7. Perform work in a sequence that allows wet materials adequate time to dry before enclosing the material in gypsum board or other interior finishes.
- D. Controlled Construction Period: After completing and sealing of the building enclosure but prior to the full operation of permanent HVAC systems, maintain as follows:

1. Control moisture and humidity inside building by maintaining effective dry-in conditions.
2. Use temporary or permanent HVAC system to control humidity within ranges specified for installed and stored materials.
3. Comply with manufacturer's written instructions for temperature, relative humidity, and exposure to water limits.
 - a. Hygroscopic materials that may support mold growth, including wood and gypsum-based products, that become wet during the course of construction and remain wet for [48] <Insert time period> hours are considered defective and require replacing.
 - b. Measure moisture content of materials that have been exposed to moisture during construction operations or after installation. Record readings beginning at time of exposure and continuing daily for [48] <Insert time period> hours. Identify materials containing moisture levels higher than allowed. Report findings in writing to Architect.
 - c. Remove and replace materials that cannot be completely restored to their manufactured moisture level within [48] <Insert time period> hours.

3.7 OPERATION, TERMINATION, AND REMOVAL

- A. Supervision: Enforce strict discipline in use of temporary facilities. To minimize waste and abuse, limit availability of temporary facilities to essential and intended uses.
- B. Maintenance: Maintain facilities in good operating condition until removal.
 1. Maintain operation of temporary enclosures, heating, cooling, humidity control, ventilation, and similar facilities on a 24-hour basis where required to achieve indicated results and to avoid possibility of damage.
- C. Temporary Facility Changeover: Do not change over from using temporary security and protection facilities to permanent facilities until Substantial Completion.
- D. Termination and Removal: Remove each temporary facility when need for its service has ended, when it has been replaced by authorized use of a permanent facility, or no later than Substantial Completion. Complete or, if necessary, restore permanent construction that may have been delayed because of interference with temporary facility. Repair damaged Work, clean exposed surfaces, and replace construction that cannot be satisfactorily repaired.
 1. Materials and facilities that constitute temporary facilities are property of Contractor. Owner reserves right to take possession of Project identification signs.
 2. At Substantial Completion, repair, renovate, and clean permanent facilities used during construction period. Comply with final cleaning requirements specified in Section 017700 "Closeout Procedures."

END OF SECTION 015000

SECTION 016000 - PRODUCT REQUIREMENTS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes administrative and procedural requirements for selection of products for use in Project; product delivery, storage, and handling; manufacturers' standard warranties on products; special warranties; and comparable products.
- B. Related Requirements:
 - 1. Section 011000 "Summary" for Contractor requirements related to Owner-furnished products.
 - 2. Section 012300 "Alternates" for products selected under an alternate.
 - 3. Section 012500 "Substitution Procedures" for requests for substitutions.
 - 4. Section 014200 "References" for applicable industry standards for products specified.
 - 5. Section 017700 "Closeout Procedures" for submitting warranties.

1.3 DEFINITIONS

- A. Products: Items obtained for incorporating into the Work, whether purchased for Project or taken from previously purchased stock. The term "product" includes the terms "material," "equipment," "system," and terms of similar intent.
 - 1. Named Products: Items identified by manufacturer's product name, including make or model number or other designation shown or listed in manufacturer's published product literature that is current as of date of the Contract Documents.
 - 2. New Products: Items that have not previously been incorporated into another project or facility. Salvaged items or items reused from other projects are not considered new products. Items that are manufactured or fabricated to include recycled content materials are considered new products, unless indicated otherwise.
 - 3. Comparable Product: Product by named manufacturer that is demonstrated and approved through the comparable product submittal process described in Part 2 "Comparable Products" Article, to have the indicated qualities related to type, function, dimension, in-service performance, physical properties, appearance, and other characteristics that equal or exceed those of specified product.
- B. Basis-of-Design Product Specification: A specification in which a single manufacturer's product is named and accompanied by the words "basis-of-design product," including make or model number or other designation. Published attributes and characteristics of basis-of-design product establish salient characteristics of products.

-
1. Evaluation of Comparable Products: In addition to the basis-of-design product description, product attributes and characteristics may be listed to establish the significant qualities related to type, function, in-service performance and physical properties, weight, dimension, durability, visual characteristics, and other special features and requirements for purposes of evaluating comparable products of additional manufacturers named in the specification. Manufacturer's published attributes and characteristics of basis-of-design product also establish salient characteristics of products for purposes of evaluating comparable products.
 - C. Subject to Compliance with Requirements: Where the phrase "Subject to compliance with requirements" introduces a product selection procedure in an individual Specification Section, provide products qualified under the specified product procedure. In the event that a named product or product by a named manufacturer does not meet the other requirements of the specifications, select another named product or product from another named manufacturer that does meet the requirements of the specifications; submit a comparable product request or substitution request, if applicable.
 - D. Comparable Product Request Submittal: An action submittal requesting consideration of a comparable product, including the following information:
 1. Identification of basis-of-design product or fabrication or installation method to be replaced, including Specification Section number and title and Drawing numbers and titles.
 2. Data indicating compliance with the requirements specified in Part 2 "Comparable Products" Article.
 - E. Basis-of-Design Product Specification Submittal: An action submittal complying with requirements in Section 013300 "Submittal Procedures."
 - F. Substitution: Refer to Section 012500 "Substitution Procedures" for definition and limitations on substitutions.
- 1.4 QUALITY ASSURANCE
- A. Compatibility of Options: If Contractor is given option of selecting between two or more products for use on Project, select product compatible with products previously selected, even if previously selected products were also options.
 - B. Identification of Products: Except for required labels and operating data, do not attach or imprint manufacturer or product names or trademarks on exposed surfaces of products or equipment that will be exposed to view in occupied spaces or on the exterior.
 1. Labels: Locate required product labels and stamps on a concealed surface, or, where required for observation following installation, on a visually accessible surface that is not conspicuous.
 2. Equipment Nameplates: Provide a permanent nameplate on each item of service- or power-operated equipment. Locate on a visually accessible but inconspicuous surface. Include information essential for operation, including the following:
 - a. Name of product and manufacturer.
 - b. Model and serial number.
 - c. Capacity.
 - d. Speed.

e. Ratings.

3. See individual identification Sections in Divisions 21, 22, 23, and 26 for additional equipment identification requirements.

1.5 COORDINATION

- A. Modify or adjust affected work as necessary to integrate work of approved comparable products and approved substitutions.

1.6 PRODUCT DELIVERY, STORAGE, AND HANDLING

- A. Deliver, store, and handle products, using means and methods that will prevent damage, deterioration, and loss, including theft and vandalism. Comply with manufacturer's written instructions.

- B. Delivery and Handling:

1. Schedule delivery to minimize long-term storage at Project site and to prevent overcrowding of construction spaces.
2. Coordinate delivery with installation time to ensure minimum holding time for items that are flammable, hazardous, easily damaged, or sensitive to deterioration, theft, and other losses.
3. Deliver products to Project site in an undamaged condition in manufacturer's original sealed container or other packaging system, complete with labels and instructions for handling, storing, unpacking, protecting, and installing.
4. Inspect products on delivery to determine compliance with the Contract Documents and that products are undamaged and properly protected.

- C. Storage:

1. Provide a secure location and enclosure at Project site for storage of materials and equipment.
2. Store products to allow for inspection and measurement of quantity or counting of units.
3. Store materials in a manner that will not endanger Project structure.
4. Store products that are subject to damage by the elements under cover in a weathertight enclosure above ground, with ventilation adequate to prevent condensation and with adequate protection from wind.
5. Protect foam plastic from exposure to sunlight, except to extent necessary for period of installation and concealment.
6. Comply with product manufacturer's written instructions for temperature, humidity, ventilation, and weather-protection requirements for storage.
7. Protect stored products from damage and liquids from freezing.
8. Provide a secure location and enclosure at Project site for storage of materials and equipment by Owner's construction forces. Coordinate location with Owner.

1.7 PRODUCT WARRANTIES

- A. Warranties specified in other Sections shall be in addition to, and run concurrent with, other warranties required by the Contract Documents. Manufacturer's disclaimers and limitations on

product warranties do not relieve Contractor of obligations under requirements of the Contract Documents.

1. Manufacturer's Warranty: Written standard warranty form furnished by individual manufacturer for a particular product and issued in the name of the Owner or endorsed by manufacturer to Owner.
 2. Special Warranty: Written warranty required by the Contract Documents to provide specific rights for Owner and issued in the name of the Owner or endorsed by manufacturer to Owner.
- B. Special Warranties: Prepare a written document that contains appropriate terms and identification, ready for execution.
1. Manufacturer's Standard Form: Modified to include Project-specific information and properly executed.
 2. Specified Form: When specified forms are included in the Project Manual, prepare a written document, using indicated form properly executed.
 3. See other Sections for specific content requirements and particular requirements for submitting special warranties.
- C. Submittal Time: Comply with requirements in Section 017700 "Closeout Procedures."

PART 2 - PRODUCTS

2.1 PRODUCT SELECTION PROCEDURES

- A. General Product Requirements: Provide products that comply with the Contract Documents, are undamaged and, unless otherwise indicated, are new at time of installation.
1. Provide products complete with accessories, trim, finish, fasteners, and other items needed for a complete installation and indicated use and effect.
 2. Standard Products: If available, and unless custom products or nonstandard options are specified, provide standard products of types that have been produced and used successfully in similar situations on other projects.
 3. Owner reserves the right to limit selection to products with warranties meeting requirements of the Contract Documents.
 4. Where products are accompanied by the term "as selected," Architect will make selection.
 5. Descriptive, performance, and reference standard requirements in the Specifications establish salient characteristics of products.
 6. Or Equal: For products specified by name and accompanied by the term "or equal," "or approved equal," or "or approved," comply with requirements in "Comparable Products" Article to obtain approval for use of an unnamed product.
 - a. Submit additional documentation required by Architect in order to establish equivalency of proposed products. Unless otherwise indicated, evaluation of "or equal" product status is by the Architect, whose determination is final.
- B. Product Selection Procedures:

-
1. Sole Product: Where Specifications name a single manufacturer and product, provide the named product that complies with requirements. Comparable products or substitutions for Contractor's convenience will not be considered.
 - a. Sole product may be indicated by the phrase "Subject to compliance with requirements, provide the following."
 2. Sole Manufacturer/Source: Where Specifications name a single manufacturer or source, provide a product by the named manufacturer or source that complies with requirements. Comparable products or substitutions for Contractor's convenience will not be considered.
 - a. Sole manufacturer/source may be indicated by the phrase "Subject to compliance with requirements, provide products by the following."
 3. Limited List of Products: Where Specifications include a list of names of both manufacturers and products, provide one of the products listed that complies with requirements. Comparable products or substitutions for Contractor's convenience will be considered unless otherwise indicated.
 - a. Limited list of products may be indicated by the phrase "Subject to compliance with requirements, provide one of the following."
 4. Non-Limited List of Products: Where Specifications include a list of names of both available manufacturers and products, provide one of the products listed or an unnamed product that complies with requirements.
 - a. Non-limited list of products is indicated by the phrase "Subject to compliance with requirements, available products that may be incorporated in the Work include, but are not limited to, the following."
 - b. Provision of an unnamed product is not considered a substitution, if the product complies with requirements.
 5. Limited List of Manufacturers: Where Specifications include a list of manufacturers' names, provide a product by one of the manufacturers listed that complies with requirements. Comparable products or substitutions for Contractor's convenience will be considered unless otherwise indicated.
 - a. Limited list of manufacturers is indicated by the phrase "Subject to compliance with requirements, provide products by one of the following."
 6. Non-Limited List of Manufacturers: Where Specifications include a list of available manufacturers, provide a product by one of the manufacturers listed or a product by an unnamed manufacturer that complies with requirements.
 - a. Non-limited list of manufacturers is indicated by the phrase "Subject to compliance with requirements, available manufacturers whose products may be incorporated in the Work include, but are not limited to, the following."
 - b. Provision of products of an unnamed manufacturer is not considered a substitution, if the product complies with requirements.
 7. Basis-of-Design Product: Where Specifications name a product, or refer to a product indicated on Drawings, and include a list of manufacturers, provide the specified or

indicated product or a comparable product by one of the other named manufacturers. Drawings and Specifications may additionally indicate sizes, profiles, dimensions, and other characteristics that are based on the product named. Comply with requirements in "Comparable Products" Article for consideration of an unnamed product by one of the other named manufacturers.

- a. For approval of products by unnamed manufacturers, comply with requirements in Section 012500 "Substitution Procedures" for substitutions for convenience.
- C. Visual Matching Specification: Where Specifications require the phrase "match Architect's sample," provide a product that complies with requirements and matches Architect's sample. Architect's decision will be final on whether a proposed product matches.
1. If no product available within specified category matches and complies with other specified requirements, comply with requirements in Section 012500 "Substitution Procedures" for proposal of product.
- D. Visual Selection Specification: Where Specifications include the phrase "as selected by Architect from manufacturer's full range" or a similar phrase, select a product that complies with requirements. Architect will select color, gloss, pattern, density, or texture from manufacturer's product line that includes both standard and premium items.

2.2 COMPARABLE PRODUCTS

- A. Conditions for Consideration of Comparable Products: Architect will consider Contractor's request for comparable product when the following conditions are satisfied. If the following conditions are not satisfied, Architect may return requests without action, except to record noncompliance with the following requirements:
1. Evidence that proposed product does not require revisions to the Contract Documents, is consistent with the Contract Documents, will produce the indicated results, and is compatible with other portions of the Work.
 2. Detailed comparison of significant qualities of proposed product with those of the named basis-of-design product. Significant product qualities include attributes, such as type, function, in-service performance and physical properties, weight, dimension, durability, visual characteristics, and other specific features and requirements.
 3. Evidence that proposed product provides specified warranty.
 4. List of similar installations for completed projects, with project names and addresses and names and addresses of architects and owners, if requested.
 5. Samples, if requested.
- B. Architect's Action on Comparable Products Submittal: If necessary, Architect will request additional information or documentation for evaluation, as specified in Section 013300 "Submittal Procedures."
1. Form of Approval of Submittal: As specified in Section 013300 "Submittal Procedures."
 2. Use product specified if Architect does not issue a decision on use of a comparable product request within time allocated.
- C. Submittal Requirements, Two-Step Process: Approval by the Architect of Contractor's request for use of comparable product is not intended to satisfy other submittal requirements. Comply with specified submittal requirements.

- D. Submittal Requirements, Single-Step Process: When acceptable to Architect, incorporate specified submittal requirements of individual Specification Section in combined submittal for comparable products. Approval by the Architect of Contractor's request for use of comparable product and of individual submittal requirements will also satisfy other submittal requirements.

PART 3 - EXECUTION (Not Used)

END OF SECTION 016000

SECTION 017300 - EXECUTION

PART 1 - GENERAL

1.1 SUMMARY

- A. Section includes general administrative and procedural requirements governing execution of the Work, including, but not limited to, the following:
 - 1. Construction layout.
 - 2. Field engineering and surveying.
 - 3. Installation of the Work.
 - 4. Cutting and patching.
 - 5. Progress cleaning.
 - 6. Starting and adjusting.
 - 7. Protection of installed construction.
 - 8. Correction of the Work.
- B. Related Requirements:
 - 1. Section 011000 "Summary" for coordination of and limits on use of Project site.
 - 2. Section 024119 "Selective Demolition" for demolition and removal of selected portions of the building.
 - 3. Section 078413 "Penetration Firestopping" for patching penetrations in fire-rated construction.

1.2 DEFINITIONS

- A. Cutting: Removal of in-place construction necessary to permit installation or performance of subsequent work.
- B. Patching: Fitting and repair work required to restore construction to original conditions after installation of subsequent work.

1.3 QUALITY ASSURANCE

- A. Cutting and Patching: Comply with requirements for and limitations on cutting and patching of construction elements.
 - 1. Structural Elements: When cutting and patching structural elements, or when encountering the need for cutting and patching of elements whose structural function is not known, notify Architect of locations and details of cutting and await directions from Architect before proceeding. Shore, brace, and support structural elements during cutting and patching. Do not cut and patch structural elements in a manner that could change their load-carrying capacity or increase deflection.
 - 2. Operational Elements: Do not cut and patch operating elements and related components in a manner that results in reducing their capacity to perform as intended or that results in

increased maintenance or decreased operational life or safety. Operational elements include the following:

- a. Primary operational systems and equipment.
 - b. Fire separation assemblies.
 - c. Fire-suppression systems.
 - d. Plumbing piping systems.
 - e. Mechanical systems piping and ducts.
 - f. Control systems.
 - g. Communication systems.
 - h. Fire-detection and -alarm systems.
 - i. Conveying systems.
 - j. Electrical wiring systems.
 - k. Operating systems of special construction.
 3. Other Construction Elements: Do not cut and patch other construction elements or components in a manner that could change their load-carrying capacity, that results in reducing their capacity to perform as intended, or that results in increased maintenance or decreased operational life or safety. Other construction elements include but are not limited to the following:
 - a. Water, moisture, or vapor barriers.
 - b. Membranes and flashings.
 - c. Sprayed fire-resistive material.
 - d. Equipment supports.
 - e. Piping, ductwork, vessels, and equipment.
 - f. Noise- and vibration-control elements and systems.
 4. Visual Elements: Do not cut and patch construction in a manner that results in visual evidence of cutting and patching. Do not cut and patch exposed construction in a manner that would, in Architect's opinion, reduce the building's aesthetic qualities. Remove and replace construction that has been cut and patched in a visually unsatisfactory manner.
- B. Manufacturer's Installation Instructions: Obtain and maintain on-site manufacturer's written recommendations and instructions for installation of specified products and equipment.

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Comply with requirements specified in other Sections.
- B. In-Place Materials: Use materials for patching identical to in-place materials. For exposed surfaces, use materials that visually match in-place adjacent surfaces to the fullest extent possible.
 1. If identical materials are unavailable or cannot be used, use materials that, when installed, will provide a match acceptable to Architect for the visual and functional performance of in-place materials. Use materials that are not considered hazardous.

- C. Cleaning Agents: Use cleaning materials and agents recommended by manufacturer or fabricator of the surface to be cleaned. Do not use cleaning agents that are potentially hazardous to health or property or that might damage finished surfaces.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Existing Conditions: The existence and location of underground and other utilities and construction indicated as existing are not guaranteed. Before beginning sitework, investigate and verify the existence and location of underground utilities, mechanical and electrical systems, and other construction affecting the Work.
 - 1. Before construction, verify the location and invert elevation at points of connection of sanitary sewer, storm sewer, gas service piping, and water-service piping; underground electrical services; and other utilities.
 - 2. Furnish location data for work related to Project that must be performed by public utilities serving Project site.
- B. Examination and Acceptance of Conditions: Before proceeding with each component of the Work, examine substrates, areas, and conditions, with Installer or Applicator present where indicated, for compliance with requirements for installation tolerances and other conditions affecting performance. Record observations.
 - 1. Examine roughing-in for mechanical and electrical systems to verify actual locations of connections before equipment and fixture installation.
 - 2. Examine walls, floors, and roofs for suitable conditions where products and systems are to be installed.
 - 3. Verify compatibility with and suitability of substrates, including compatibility with existing finishes or primers.
- C. Proceed with installation only after unsatisfactory conditions have been corrected. Proceeding with the Work indicates acceptance of surfaces and conditions.

3.2 PREPARATION

- A. Existing Utility Information: Furnish information to Owner that is necessary to adjust, move, or relocate existing utility structures, utility poles, lines, services, or other utility appurtenances located in or affected by construction. Coordinate with authorities having jurisdiction.
- B. Field Measurements: Take field measurements as required to fit the Work properly. Recheck measurements before installing each product. Where portions of the Work are indicated to fit to other construction, verify dimensions of other construction by field measurements before fabrication. Coordinate fabrication schedule with construction progress to avoid delaying the Work.
- C. Space Requirements: Verify space requirements and dimensions of items shown diagrammatically on Drawings.

- D. Review of Contract Documents and Field Conditions: Immediately on discovery of the need for clarification of the Contract Documents, submit a request for information to Architect.

3.3 CONSTRUCTION LAYOUT

- A. Verification: Before proceeding to lay out the Work, verify layout information shown on Drawings, in relation to the property survey and existing benchmarks and existing conditions. If discrepancies are discovered, notify Architect promptly.
- B. Site Improvements: Locate and lay out site improvements, including pavements, grading, fill and topsoil placement, utility slopes, and rim and invert elevations.

3.4 CUTTING AND PATCHING

- A. General: Employ skilled workers to perform cutting and patching. Proceed with cutting and patching at the earliest feasible time, and complete without delay.
 - 1. Cut in-place construction to provide for installation of other components or performance of other construction, and subsequently patch as required to restore surfaces to their original condition.
- B. Existing Warranties: Remove, replace, patch, and repair materials and surfaces cut or damaged during installation or cutting and patching operations, by methods and with materials so as not to void existing warranties.
- C. Temporary Support: Provide temporary support of Work to be cut.
- D. Protection: Protect in-place construction during cutting and patching to prevent damage. Provide protection from adverse weather conditions for portions of Project that might be exposed during cutting and patching operations.
- E. Adjacent Occupied Areas: Where interference with use of adjoining areas or interruption of free passage to adjoining areas is unavoidable, coordinate cutting and patching with Owner's Representative.
- F. Existing Utility Services and Mechanical/Electrical Systems: Where existing services/systems are required to be removed, relocated, or abandoned, bypass such services/systems before cutting to minimize interruption to occupied areas.
 - 1. Cutting: Cut in-place construction by sawing, drilling, breaking, chipping, grinding, and similar operations, including excavation, using methods least likely to damage elements retained or adjoining construction. If possible, review proposed procedures with original Installer; comply with original Installer's written recommendations.
 - 2. In general, use hand or small power tools designed for sawing and grinding, not hammering and chopping. Cut holes and slots neatly to minimum size required, and with minimum disturbance of adjacent surfaces. Temporarily cover openings when not in use.
 - 3. Finished Surfaces: Cut or drill from the exposed or finished side into concealed surfaces.
 - 4. Concrete and Masonry: Cut using a cutting machine, such as an abrasive saw or a diamond-core drill.
 - 5. Excavating and Backfilling: Comply with requirements in applicable Sections where required by cutting and patching operations.

6. Mechanical and Electrical Services: Cut off pipe or conduit in walls or partitions to be removed. Cap, valve, or plug and seal remaining portion of pipe or conduit to prevent entrance of moisture or other foreign matter after cutting.
 7. Proceed with patching after construction operations requiring cutting are complete.
- G. Patching: Patch construction by filling, repairing, refinishing, closing up, and similar operations following performance of other Work. Patch with durable seams that are as invisible as practicable, as judged by Architect. Provide materials and comply with installation requirements specified in other Sections, where applicable.
1. Inspection: Where feasible, test and inspect patched areas after completion to demonstrate physical integrity of installation.
 2. Exposed Finishes: Restore exposed finishes of patched areas and extend finish restoration into retained adjoining construction in a manner that will eliminate evidence of patching and refinishing.
 - a. Clean piping, conduit, and similar features before applying paint or other finishing materials.
 - b. Restore damaged pipe covering to its original condition.
 3. Floors and Walls: Where walls or partitions that are removed extend one finished area into another, patch and repair floor and wall surfaces in the new space. Provide an even surface of uniform finish, color, texture, and appearance. Remove in-place floor and wall coverings and replace with new materials, if necessary, to achieve uniform color and appearance.
 - a. Where patching occurs in a painted surface, prepare substrate and apply primer and intermediate paint coats appropriate for substrate over the patch, and apply final paint coat over entire unbroken surface containing the patch, corner to corner of wall and edge to edge of ceiling. Provide additional coats until patch blends with adjacent surfaces.
 4. Ceilings: Patch, repair, or rehang in-place ceilings as necessary to provide an even-plane surface of uniform appearance.
 5. Exterior Building Enclosure: Patch components in a manner that restores enclosure to a weathertight condition and ensures thermal and moisture integrity of building enclosure.
- H. Cleaning: Clean areas and spaces where cutting and patching are performed. Remove paint, mortar, oils, putty, and similar materials from adjacent finished surfaces.

3.5 PROGRESS CLEANING

- A. Clean Project site and work areas daily, including common areas. Enforce requirements strictly. Dispose of materials lawfully.
1. Comply with requirements in NFPA 241 for removal of combustible waste materials and debris.
 2. Do not hold waste materials more than seven days during normal weather or three days if the temperature is expected to rise above 80 deg F.

3.6 Containerize hazardous and unsanitary waste materials separately from other waste. Mark containers appropriately and dispose of legally, according to regulations.

- A. Use containers intended for holding waste materials of type to be stored.
1. Coordinate progress cleaning for joint-use areas where Contractor and other contractors are working concurrently.

-
- B. Site: Maintain Project site free of waste materials and debris.
 - C. Work Areas: Clean areas where Work is in progress to the level of cleanliness necessary for proper execution of the Work.
 - 1. Remove liquid spills promptly.
 - 2. Where dust would impair proper execution of the Work, broom-clean or vacuum the entire work area, as appropriate.
 - D. Installed Work: Keep installed work clean. Clean installed surfaces according to written instructions of manufacturer or fabricator of product installed, using only cleaning materials specifically recommended. If specific cleaning materials are not recommended, use cleaning materials that are not hazardous to health or property and that will not damage exposed surfaces.
 - E. Concealed Spaces: Remove debris from concealed spaces before enclosing the space.
 - F. Exposed Surfaces: Clean exposed surfaces and protect as necessary to ensure freedom from damage and deterioration at time of Substantial Completion.
 - G. Waste Disposal: Do not bury or burn waste materials on-site. Do not wash waste materials down sewers or into waterways.
 - H. During handling and installation, clean and protect construction in progress and adjoining materials already in place. Apply protective covering where required to ensure protection from damage or deterioration at Substantial Completion.
 - I. Clean and provide maintenance on completed construction as frequently as necessary through the remainder of the construction period. Adjust and lubricate operable components to ensure operability without damaging effects.
 - J. Limiting Exposures: Supervise construction operations to ensure that no part of the construction, completed or in progress, is subject to harmful, dangerous, damaging, or otherwise deleterious exposure during the construction period.

3.7 STARTING AND ADJUSTING

- A. Start equipment and operating components to confirm proper operation. Remove malfunctioning units, replace with new units, and retest.
- B. Adjust equipment for proper operation. Adjust operating components for proper operation without binding.
- C. Test each piece of equipment to verify proper operation. Test and adjust controls and safeties. Replace damaged and malfunctioning controls and equipment.

3.8 PROTECTION OF INSTALLED CONSTRUCTION

- A. Provide final protection and maintain conditions that ensure installed Work is without damage or deterioration at time of Substantial Completion.

- B. Protection of Existing Items: Provide protection and ensure that existing items to remain undisturbed by construction are maintained in condition that existed at commencement of the Work.
- C. Comply with manufacturer's written instructions for temperature and relative humidity.

3.9 CORRECTION OF THE WORK

- A. Repair or remove and replace damaged, defective, or nonconforming Work. Restore damaged substrates and finishes.
 - 1. Repairing includes replacing defective parts, refinishing damaged surfaces, touching up with matching materials, and properly adjusting operating equipment.
- B. Repair Work previously completed and subsequently damaged during construction period. Repair to like-new condition.
- C. Restore permanent facilities used during construction to their specified condition.
- D. Remove and replace damaged surfaces that are exposed to view if surfaces cannot be repaired without visible evidence of repair.
- E. Repair components that do not operate properly. Remove and replace operating components that cannot be repaired.
- F. Remove and replace chipped, scratched, and broken glass or reflective surfaces.

END OF SECTION 017300

SECTION 017700 - CLOSEOUT PROCEDURES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes administrative and procedural requirements for Contract closeout, including, but not limited to, the following:
 - 1. Substantial Completion procedures.
 - 2. Final completion procedures.
 - 3. Warranties.
 - 4. Final cleaning.
- B. Related Requirements:
 - 1. Section 012900 "Payment Procedures" for requirements for Applications for Payment for Substantial Completion and Final Completion.
 - 2. Section 013233 "Photographic Documentation" for submitting Final Completion construction photographic documentation.
 - 3. Section 017823 "Operation and Maintenance Data" for additional operation and maintenance manual requirements.
 - 4. Section 017839 "Project Record Documents" for submitting Record Drawings, Record Specifications, and Record Product Data.

1.3 DEFINITIONS

- A. List of Incomplete Items: Contractor-prepared list of items to be completed or corrected, prepared for the Architect's use prior to Architect's inspection, to determine if the Work is substantially complete.

1.4 ACTION SUBMITTALS

- A. Product Data: For each type of cleaning agent.
- B. Contractor's List of Incomplete Items: Initial submittal at Substantial Completion.
- C. Certified List of Incomplete Items: Final submittal at Final Completion.

1.5 CLOSEOUT SUBMITTALS

- A. Certificates of Release: From authorities having jurisdiction.
- B. Certificate of Insurance: For continuing coverage.
- C. Field Report: For pest-control inspection.

1.6 MAINTENANCE MATERIAL SUBMITTALS

- A. Schedule of Maintenance Material Items: For maintenance material submittal items required by other Sections.

1.7 SUBSTANTIAL COMPLETION PROCEDURES

- A. Contractor's List of Incomplete Items: Prepare and submit a list of items to be completed and corrected (Contractor's "punch list"), indicating the value of each item on the list and reasons why the Work is incomplete.
- B. Submittals Prior to Substantial Completion: Complete the following a minimum of 10 days prior to requesting inspection for determining date of Substantial Completion. List items below that are incomplete at time of request.
 - 1. Certificates of Release: Obtain and submit releases from authorities having jurisdiction, permitting Owner unrestricted use of the Work and access to services and utilities. Include occupancy permits, operating certificates, and similar releases.
 - 2. Submit closeout submittals specified in other Division 01 Sections, including Project Record Documents, operation and maintenance manuals, damage or settlement surveys, property surveys, and similar final record information.
 - 3. Submit closeout submittals specified in individual Sections, including specific warranties, workmanship bonds, maintenance service agreements, final certifications, and similar documents.
 - 4. Submit maintenance material submittals specified in individual Sections, including tools, spare parts, extra materials, and similar items, and deliver to location designated by Architect. Label with manufacturer's name and model number.
 - a. Schedule of Maintenance Material Items: Prepare and submit schedule of maintenance material submittal items, including name and quantity of each item and name and number of related Specification Section. Obtain Owner's signature for receipt of submittals.
 - 5. Submit testing, adjusting, and balancing records.
 - 6. Submit sustainable design submittals not previously submitted.
 - 7. Submit changeover information related to Owner's occupancy, use, operation, and maintenance.
- C. Procedures Prior to Substantial Completion: Complete the following a minimum of 10 days prior to requesting inspection for determining date of Substantial Completion. List items below that are incomplete at time of request.
 - 1. Advise Owner of pending insurance changeover requirements.

2. Make final changeover of permanent locks and deliver keys to Owner. Advise Owner's personnel of changeover in security provisions.
3. Complete startup and testing of systems and equipment.
4. Perform preventive maintenance on equipment used prior to Substantial Completion.
5. Instruct Owner's personnel in operation, adjustment, and maintenance of products, equipment, and systems.
6. Advise Owner of changeover in utility services.
7. Participate with Owner in conducting inspection and walkthrough with local emergency responders.
8. Terminate and remove temporary facilities from Project site, along with mockups, construction tools, and similar elements.
9. Complete final cleaning requirements.
10. Touch up paint and otherwise repair and restore marred exposed finishes to eliminate visual defects.

- D. Inspection: Submit a written request for inspection to determine Substantial Completion a minimum of 10 days prior to date the Work will be completed and ready for final inspection and tests. On receipt of request, Architect will either proceed with inspection or notify Contractor of unfulfilled requirements. Architect will prepare the Certificate of Substantial Completion after inspection or will notify Contractor of items, either on Contractor's list or additional items identified by Architect, that must be completed or corrected before certificate will be issued.

1. Request reinspection when the Work identified in previous inspections as incomplete is completed or corrected.
2. Results of completed inspection will form the basis of requirements for Final Completion.

1.8 FINAL COMPLETION PROCEDURES

- A. Submittals Prior to Final Completion: Before requesting final inspection for determining Final Completion, complete the following:

1. Submit a final Application for Payment in accordance with Section 012900 "Payment Procedures."
2. Certified List of Incomplete Items: Submit certified copy of Architect's Substantial Completion inspection list of items to be completed or corrected (punch list), endorsed and dated by Architect. Certified copy of the list shall state that each item has been completed or otherwise resolved for acceptance.
3. Certificate of Insurance: Submit evidence of final, continuing insurance coverage complying with insurance requirements.

- B. Inspection: Submit a written request for final inspection to determine acceptance a minimum of 10 days prior to date the Work will be completed and ready for final inspection and tests. On receipt of request, Architect will either proceed with inspection or notify Contractor of unfulfilled requirements. Architect will prepare a final Certificate for Payment after inspection or will notify Contractor of construction that must be completed or corrected before certificate will be issued.

1. Request reinspection when the Work identified in previous inspections as incomplete is completed or corrected.

1.9 LIST OF INCOMPLETE ITEMS

- A. Organization of List: Include name and identification of each space and area affected by construction operations for incomplete items and items needing correction including, if necessary, areas disturbed by Contractor that are outside the limits of construction.
 - 1. Organize list of spaces in sequential order, starting with exterior areas first and proceeding from lowest floor to highest floor, listed by room or space number.
 - 2. Organize items applying to each space by major element, including categories for ceilings, individual walls, floors, equipment, and building systems.
 - 3. Include the following information at the top of each page:
 - a. Project name.
 - b. Date.
 - c. Name of Architect.
 - d. Name of Contractor.
 - e. Page number.
 - 4. Submit list of incomplete items in the following format:
 - a. PDF Electronic File: Architect will return annotated file.

1.10 SUBMITTAL OF PROJECT WARRANTIES

- A. Time of Submittal: Submit written warranties on request of Architect for designated portions of the Work where warranties are indicated to commence on dates other than date of Substantial Completion, or when delay in submittal of warranties might limit Owner's rights under warranty.
- B. Partial Occupancy: Submit properly executed warranties within 15 days of completion of designated portions of the Work that are completed and occupied or used by Owner during construction period by separate agreement with Contractor.
- C. Organize warranty documents into an orderly sequence based on the table of contents of Project Manual.
- D. Warranty Electronic File: Provide warranties and bonds in PDF format. Assemble complete warranty and bond submittal package into a single electronic PDF file with bookmarks enabling navigation to each item. Provide bookmarked table of contents at beginning of document.
 - 1. Submit on digital media acceptable to Architect.
- E. Warranties in Paper Form:
 - 1. Bind warranties and bonds in heavy-duty, three-ring, vinyl-covered, loose-leaf binders, thickness as necessary to accommodate contents, and sized to receive 8-1/2-by-11-inch paper.
 - 2. Provide heavy paper dividers with plastic-covered tabs for each separate warranty. Mark tab to identify the product or installation. Provide a typed description of the product or installation, including the name of the product and the name, address, and telephone number of Installer.
 - 3. Identify each binder on the front and spine with the typed or printed title "WARRANTIES," Project name, and name of Contractor.

- F. Provide additional copies of each warranty to include in operation and maintenance manuals.

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Cleaning Agents: Use cleaning materials and agents recommended by manufacturer or fabricator of the surface to be cleaned. Do not use cleaning agents that are potentially hazardous to health or property or that might damage finished surfaces.

PART 3 - EXECUTION

3.1 FINAL CLEANING

- A. General: Perform final cleaning. Conduct cleaning and waste-removal operations to comply with local laws and ordinances and Federal and local environmental and antipollution regulations.
- B. Cleaning: Employ experienced workers or professional cleaners for final cleaning. Clean each surface or unit to condition expected in an average commercial building cleaning and maintenance program. Comply with manufacturer's written instructions.
 - 1. Complete the following cleaning operations before requesting inspection for certification of Substantial Completion for entire Project or for a designated portion of Project:
 - a. Clean Project site of rubbish, waste material, litter, and other foreign substances.
 - b. Sweep paved areas broom clean. Remove petrochemical spills, stains, and other foreign deposits.
 - c. Remove tools, construction equipment, machinery, and surplus material from Project site.
 - d. Remove snow and ice to provide safe access to building.
 - e. Clean exposed exterior and interior hard-surfaced finishes to a dirt-free condition, free of stains, films, and similar foreign substances. Avoid disturbing natural weathering of exterior surfaces. Restore reflective surfaces to their original condition.
 - f. Remove debris and surface dust from limited-access spaces, including roofs, plenums, shafts, trenches, equipment vaults, manholes, attics, and similar spaces.
 - g. Clean flooring, removing debris, dirt, and staining; clean according to manufacturer's recommendations.
 - h. Vacuum and mop concrete.
 - i. Clean transparent materials, including mirrors and glass in doors and windows. Remove glazing compounds and other noticeable, vision-obscuring materials. Polish mirrors and glass, taking care not to scratch surfaces.
 - j. Remove labels that are not permanent.
 - k. Wipe surfaces of mechanical and electrical equipment and similar equipment. Remove excess lubrication, paint and mortar droppings, and other foreign substances.
 - l. Clean plumbing fixtures to a sanitary condition, free of stains, including stains resulting from water exposure.

- m. Replace disposable air filters and clean permanent air filters. Clean exposed surfaces of diffusers, registers, and grills.
 - n. Clean luminaires, lamps, globes, and reflectors to function with full efficiency.
 - o. Clean strainers.
 - p. Leave Project clean and ready for occupancy.
- C. Construction Waste Disposal: Comply with waste-disposal requirements in Section 015000 "Temporary Facilities and Controls."

3.2 REPAIR OF THE WORK

- A. Complete repair and restoration operations required by Section 017300 "Execution" before requesting inspection for determination of Substantial Completion.

END OF SECTION 017700

SECTION 017823 - OPERATION AND MAINTENANCE DATA

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes administrative and procedural requirements for preparing operation and maintenance manuals, including the following:
 - 1. Systems and equipment operation manuals.
 - 2. Systems and equipment maintenance manuals.
 - 3. Product maintenance manuals.
- B. Related Requirements:
 - 1. Section 013300 "Submittal Procedures" for submitting copies of submittals for operation and maintenance manuals.

1.3 DEFINITIONS

- A. System: An organized collection of parts, equipment, or subsystems united by regular interaction.
- B. Subsystem: A portion of a system with characteristics similar to a system.

1.4 CLOSEOUT SUBMITTALS

- A. Submit operation and maintenance manuals indicated. Provide content for each manual as specified in individual Specification Sections, and as reviewed and approved at the time of Section submittals. Submit reviewed manual content formatted and organized as required by this Section.
 - 1. Architect will comment on whether content of operation and maintenance submittals is acceptable.
 - 2. Where applicable, clarify and update reviewed manual content to correspond to revisions and field conditions.
- B. Format: Submit operation and maintenance manuals in the following format:
 - 1. Submit on digital media acceptable to Architect. Enable reviewer comments on draft submittals.
 - 2. Submit two paper copies. Architect, will return two copies.

- C. Comply with Section 017700 "Closeout Procedures" for schedule for submitting operation and maintenance documentation.

1.5 FORMAT OF OPERATION AND MAINTENANCE MANUALS

- A. Manuals, Electronic Files: Submit manuals in the form of a multiple file composite electronic PDF file for each manual type required.
 - 1. Electronic Files: Use electronic files prepared by manufacturer where available. Where scanning of paper documents is required, configure scanned file for minimum readable file size.
 - 2. File Names and Bookmarks: Bookmark individual documents based on file names. Name document files to correspond to system, subsystem, and equipment names used in manual directory and table of contents. Group documents for each system and subsystem into individual composite bookmarked files, then create composite manual, so that resulting bookmarks reflect the system, subsystem, and equipment names in a readily navigated file tree. Configure electronic manual to display bookmark panel on opening file.
- B. Manuals, Paper Copy: Submit manuals in the form of hard-copy, bound and labeled volumes.
 - 1. Binders: Heavy-duty, three-ring, vinyl-covered, **loose-leaf** binders, in thickness necessary to accommodate contents, sized to hold 8-1/2-by-11-inch paper; with clear plastic sleeve on spine to hold label describing contents and with pockets inside covers to hold folded oversize sheets.
 - a. If two or more binders are necessary to accommodate data of a system, organize data in each binder into groupings by subsystem and related components. Cross-reference other binders if necessary to provide essential information for proper operation or maintenance of equipment or system.
 - b. Identify each binder on front and spine, with printed title "OPERATION AND MAINTENANCE MANUAL," Project title or name, and subject matter of contents, and indicate Specification Section number on bottom of spine. Indicate volume number for multiple-volume sets.
 - 2. Dividers: Heavy-paper dividers with plastic-covered tabs for each section of the manual. Mark each tab to indicate contents. Include typed list of products and major components of equipment included in the section on each divider, cross-referenced to Specification Section number and title of Project Manual.
 - 3. Drawings: Attach reinforced, punched binder tabs on drawings and bind with text.
 - a. If oversize drawings are necessary, fold drawings to same size as text pages and use as foldouts.
 - b. If drawings are too large to be used as foldouts, fold and place drawings in labeled envelopes and bind envelopes in rear of manual. At appropriate locations in manual, insert typewritten pages indicating drawing titles, descriptions of contents, and drawing locations.

1.6 REQUIREMENTS FOR EMERGENCY, OPERATION, AND MAINTENANCE MANUALS

- A. Organization of Manuals: Unless otherwise indicated, organize each manual into a separate section for each system and subsystem, and a separate section for each piece of equipment not part of a system. Each manual shall contain the following materials, in the order listed:
 - 1. Title page.
 - 2. Table of contents.
 - 3. Manual contents.
- B. Title Page: Include the following information:
 - 1. Subject matter included in manual.
 - 2. Name and address of Project.
 - 3. Name and address of Owner.
 - 4. Date of submittal.
 - 5. Name and contact information for Contractor.
 - 6. Name and contact information for Architect.
 - 7. Names and contact information for major consultants to the Architect that designed the systems contained in the manuals.
 - 8. Cross-reference to related systems in other operation and maintenance manuals.
- C. Table of Contents: List each product included in manual, identified by product name, indexed to the content of the volume, and cross-referenced to Specification Section number in Project Manual.
 - 1. If operation or maintenance documentation requires more than one volume to accommodate data, include comprehensive table of contents for all volumes in each volume of the set.
- D. Manual Contents: Organize into sets of manageable size. Arrange contents alphabetically by system, subsystem, and equipment. If possible, assemble instructions for subsystems, equipment, and components of one system into a single binder.
- E. Identification: In the documentation directory and in each operation and maintenance manual, identify each system, subsystem, and piece of equipment with same designation used in the Contract Documents. If no designation exists, assign a designation according to ASHRAE Guideline 4, "Preparation of Operating and Maintenance Documentation for Building Systems."

1.7 OPERATION AND MAINTENANCE DOCUMENTATION DIRECTORY MANUAL

- A. Operation and Maintenance Documentation Directory: Prepare a separate manual that provides an organized reference to emergency, operation, and maintenance manuals. List items and their location to facilitate ready access to desired information. Include the following:
 - 1. List of Systems and Subsystems: List systems alphabetically. Include references to operation and maintenance manuals that contain information about each system.
 - 2. List of Equipment: List equipment for each system, organized alphabetically by system. For pieces of equipment not part of system, list alphabetically in separate list.
 - 3. Tables of Contents: Include a table of contents for each emergency, operation, and maintenance manual.

1.8 SYSTEMS AND EQUIPMENT OPERATION MANUALS

- A. Systems and Equipment Operation Manual: Assemble a complete set of data indicating operation of each system, subsystem, and piece of equipment not part of a system. Include information required for daily operation and management, operating standards, and routine and special operating procedures.
 - 1. Engage a factory-authorized service representative to assemble and prepare information for each system, subsystem, and piece of equipment not part of a system.
 - 2. Prepare a separate manual for each system and subsystem, in the form of an instructional manual for use by Owner's operating personnel.
- B. Content: In addition to requirements in this Section, include operation data required in individual Specification Sections and the following information:
 - 1. System, subsystem, and equipment descriptions. Use designations for systems and equipment indicated on Contract Documents.
 - 2. Performance and design criteria if Contractor has delegated design responsibility.
 - 3. Operating standards.
 - 4. Operating procedures.
 - 5. Operating logs.
 - 6. Wiring diagrams.
 - 7. Control diagrams.
 - 8. Piped system diagrams.
 - 9. Precautions against improper use.
 - 10. License requirements including inspection and renewal dates.
- C. Descriptions: Include the following:
 - 1. Product name and model number. Use designations for products indicated on Contract Documents.
 - 2. Manufacturer's name.
 - 3. Equipment identification with serial number of each component.
 - 4. Equipment function.
 - 5. Operating characteristics.
 - 6. Limiting conditions.
 - 7. Performance curves.
 - 8. Engineering data and tests.
 - 9. Complete nomenclature and number of replacement parts.
- D. Operating Procedures: Include the following, as applicable:
 - 1. Startup procedures.
 - 2. Equipment or system break-in procedures.
 - 3. Routine and normal operating instructions.
 - 4. Regulation and control procedures.
 - 5. Instructions on stopping.
 - 6. Normal shutdown instructions.
 - 7. Seasonal and weekend operating instructions.
 - 8. Required sequences for electric or electronic systems.
 - 9. Special operating instructions and procedures.
- E. Systems and Equipment Controls: Describe the sequence of operation, and diagram controls as installed.

- F. Piped Systems: Diagram piping as installed, and identify color coding where required for identification.

1.9 SYSTEMS AND EQUIPMENT MAINTENANCE MANUALS

- A. Systems and Equipment Maintenance Manuals: Assemble a complete set of data indicating maintenance of each system, subsystem, and piece of equipment not part of a system. Include manufacturers' maintenance documentation, preventive maintenance procedures and frequency, repair procedures, wiring and systems diagrams, lists of spare parts, and warranty information.
 - 1. Engage a factory-authorized service representative to assemble and prepare information for each system, subsystem, and piece of equipment not part of a system.
 - 2. Prepare a separate manual for each system and subsystem, in the form of an instructional manual for use by Owner's operating personnel.
- B. Content: For each system, subsystem, and piece of equipment not part of a system, include source information, manufacturers' maintenance documentation, maintenance procedures, maintenance and service schedules, spare parts list and source information, maintenance service contracts, and warranties and bonds as described below.
- C. Source Information: List each system, subsystem, and piece of equipment included in manual, identified by product name and arranged to match manual's table of contents. For each product, list name, address, and telephone number of Installer or supplier and maintenance service agent, and cross-reference Specification Section number and title in Project Manual and drawing or schedule designation or identifier where applicable.
- D. Manufacturers' Maintenance Documentation: Include the following information for each component part or piece of equipment:
 - 1. Standard maintenance instructions and bulletins; include only sheets pertinent to product or component installed. Mark each sheet to identify each product or component incorporated into the Work. If data include more than one item in a tabular format, identify each item using appropriate references from the Contract Documents. Identify data applicable to the Work and delete references to information not applicable.
 - a. Prepare supplementary text if manufacturers' standard printed data are not available and where the information is necessary for proper operation and maintenance of equipment or systems.
 - 2. Drawings, diagrams, and instructions required for maintenance, including disassembly and component removal, replacement, and assembly.
 - 3. Identification and nomenclature of parts and components.
 - 4. List of items recommended to be stocked as spare parts.
- E. Maintenance Procedures: Include the following information and items that detail essential maintenance procedures:
 - 1. Test and inspection instructions.
 - 2. Troubleshooting guide.
 - 3. Precautions against improper maintenance.
 - 4. Disassembly; component removal, repair, and replacement; and reassembly instructions.

-
5. Aligning, adjusting, and checking instructions.
 6. Demonstration and training video recording, if available.
- F. Maintenance and Service Schedules: Include service and lubrication requirements, list of required lubricants for equipment, and separate schedules for preventive and routine maintenance and service with standard time allotment.
1. Scheduled Maintenance and Service: Tabulate actions for daily, weekly, monthly, quarterly, semiannual, and annual frequencies.
 2. Maintenance and Service Record: Include manufacturers' forms for recording maintenance.
- G. Spare Parts List and Source Information: Include lists of replacement and repair parts, with parts identified and cross-referenced to manufacturers' maintenance documentation and local sources of maintenance materials and related services.
- H. Warranties and Bonds: Include copies of warranties and bonds and lists of circumstances and conditions that would affect validity of warranties or bonds.
1. Include procedures to follow and required notifications for warranty claims.
- I. Drawings: Prepare drawings supplementing manufacturers' printed data to illustrate the relationship of component parts of equipment and systems and to illustrate control sequence and flow diagrams. Coordinate these drawings with information contained in record Drawings to ensure correct illustration of completed installation.
1. Do not use original project record documents as part of maintenance manuals.
- 1.10 PRODUCT MAINTENANCE MANUALS
- A. Product Maintenance Manual: Assemble a complete set of maintenance data indicating care and maintenance of each product, material, and finish incorporated into the Work.
- B. Content: Organize manual into a separate section for each product, material, and finish. Include source information, product information, maintenance procedures, repair materials and sources, and warranties and bonds, as described below.
- C. Source Information: List each product included in manual, identified by product name and arranged to match manual's table of contents. For each product, list name, address, and telephone number of Installer or supplier and maintenance service agent, and cross-reference Specification Section number and title in Project Manual and drawing or schedule designation or identifier where applicable.
- D. Product Information: Include the following, as applicable:
1. Product name and model number.
 2. Manufacturer's name.
 3. Color, pattern, and texture.
 4. Material and chemical composition.
 5. Reordering information for specially manufactured products.
- E. Maintenance Procedures: Include manufacturer's written recommendations and the following:

1. Inspection procedures.
 2. Types of cleaning agents to be used and methods of cleaning.
 3. List of cleaning agents and methods of cleaning detrimental to product.
 4. Schedule for routine cleaning and maintenance.
 5. Repair instructions.
- F. Repair Materials and Sources: Include lists of materials and local sources of materials and related services.
- G. Warranties and Bonds: Include copies of warranties and bonds and lists of circumstances and conditions that would affect validity of warranties or bonds.
1. Include procedures to follow and required notifications for warranty claims.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION (Not Used)

END OF SECTION 017823

SECTION 017839 - PROJECT RECORD DOCUMENTS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes administrative and procedural requirements for Project Record Documents, including the following:
 - 1. Record Drawings.
- B. Related Requirements:
 - 1. Section 017700 "Closeout Procedures" for general closeout procedures.
 - 2. Section 017823 "Operation and Maintenance Data" for operation and maintenance manual requirements.

1.3 CLOSEOUT SUBMITTALS

- A. Record Drawings: Comply with the following:
 - 1. Number of Copies: Submit **one** set of marked-up record prints.

1.4 RECORD DRAWINGS

- A. Record Prints: Maintain one set of marked-up paper copies of the Contract Drawings and Shop Drawings, incorporating new and revised drawings as modifications are issued.
 - 1. Preparation: Mark record prints to show the actual installation, where installation varies from that shown originally. Require individual or entity who obtained record data, whether individual or entity is Installer, subcontractor, or similar entity, to provide information for preparation of corresponding marked-up record prints.
 - a. Give particular attention to information on concealed elements that would be difficult to identify or measure and record later.
 - b. Accurately record information in an acceptable drawing technique.
 - c. Record data as soon as possible after obtaining it.
 - d. Record and check the markup before enclosing concealed installations.
 - e. Cross-reference record prints to corresponding photographic documentation.
 - 2. Content: Types of items requiring marking include, but are not limited to, the following:
 - a. Dimensional changes to Drawings.

-
- b. Revisions to details shown on Drawings.
 - c. Locations and depths of underground utilities.
 - d. Revisions to routing of piping and conduits.
 - e. Revisions to electrical circuitry.
 - f. Actual equipment locations.
 - g. Duct size and routing.
 - h. Locations of concealed internal utilities.
 - i. Changes made by Change Order or Construction Change Directive.
 - j. Changes made following Architect's written orders.
 - k. Details not on the original Contract Drawings.
 - l. Field records for variable and concealed conditions.
 - m. Record information on the Work that is shown only schematically.
 3. Mark the Contract Drawings and Shop Drawings completely and accurately. Use personnel proficient at recording graphic information in production of marked-up record prints.
 4. Mark record prints with erasable, red-colored pencil. Use other colors to distinguish between changes for different categories of the Work at same location.
 5. Mark important additional information that was either shown schematically or omitted from original Drawings.
 6. Note Construction Change Directive numbers, alternate numbers, Change Order numbers, and similar identification, where applicable.
 - B. Record Digital Data Files: Immediately before inspection for Certificate of Substantial Completion, review marked-up record prints with Architect. When authorized, prepare a full set of corrected digital data files of the Contract Drawings, as follows:
 1. Format: Annotated PDF electronic file.
 2. Incorporate changes and additional information previously marked on record prints. Delete, redraw, and add details and notations where applicable.
 3. Refer instances of uncertainty to Architect for resolution.
 - C. Format: Identify and date each Record Drawing; include the designation "PROJECT RECORD DRAWING" in a prominent location.
 1. Record Prints: Organize record prints into manageable sets. Bind each set with durable paper cover sheets. Include identification on cover sheets.
 2. Format: Annotated PDF electronic file.
 3. Identification: As follows:
 - a. Project name.
 - b. Date.
 - c. Designation "PROJECT RECORD DRAWINGS."
 - d. Name of Architect.
 - e. Name of Contractor.

1.5 MAINTENANCE OF RECORD DOCUMENTS

- A. Maintenance of Record Documents: Store Record Documents in the field office apart from the Contract Documents used for construction. Do not use Project Record Documents for construction purposes. Maintain Record Documents in good order and in a clean, dry, legible condition, protected from deterioration and loss. Provide access to Project Record Documents for Architect's reference during normal working hours.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION (Not Used)

END OF SECTION 017839

SECTION 024119 - SELECTIVE DEMOLITION

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Demolition and removal of selected portions of building or structure.

B. Related Requirements:

1. Section 011000 "Summary" for restrictions on use of the premises, Owner-occupancy requirements, and phasing requirements.
2. Section 017300 "Execution" for cutting and patching procedures.
3. Section 013516 "Alteration Project Procedures" for general protection and work procedures for alteration projects.

1.2 DEFINITIONS

- A. Remove: Detach items from existing construction and dispose of them off-site unless indicated to be salvaged or reinstalled.
- B. Remove and Salvage: Detach items from existing construction, in a manner to prevent damage, and deliver to Owner.
- C. Remove and Reinstall: Detach items from existing construction, in a manner to prevent damage, prepare for reuse, and reinstall where indicated.
- D. Existing to Remain: Leave existing items that are not to be removed and that are not otherwise indicated to be salvaged or reinstalled.

1.3 MATERIALS OWNERSHIP

- A. Unless otherwise indicated, demolition waste becomes property of Contractor.
- B. Historic items, relics, antiques, and similar objects including, but not limited to, cornerstones and their contents, commemorative plaques and tablets, and other items of interest or value to Owner that may be uncovered during demolition remain the property of Owner.
1. Carefully salvage in a manner to prevent damage and promptly return to Owner.

1.4 PREINSTALLATION MEETINGS

- A. Predemolition Conference: Conduct conference at Project site.
1. Inspect and discuss condition of construction to be selectively demolished.

2. Review and finalize selective demolition schedule and verify availability of materials, demolition personnel, equipment, and facilities needed to make progress and avoid delays.
3. Review requirements of work performed by other trades that rely on substrates exposed by selective demolition operations.
4. Review areas where existing construction is to remain and requires protection.

1.5 INFORMATIONAL SUBMITTALS

- A. Proposed Protection Measures: Submit report, including Drawings, that indicates the measures proposed for protecting individuals and property for dust control and, for noise control. Indicate proposed locations and construction of barriers.
- B. Schedule of Selective Demolition Activities: Indicate the following:
 1. Detailed sequence of selective demolition and removal work, with starting and ending dates for each activity. Ensure Owner's building manager's and other tenants' on-site operations are uninterrupted.
 2. Interruption of utility services. Indicate how long utility services will be interrupted.
 3. Coordination for shutoff, capping, and continuation of utility services.
 4. Use of elevator and stairs.
 5. Coordination of Owner's continuing occupancy of portions of existing building and of Owner's partial occupancy of completed Work.
- C. Predemolition Photographs or Video: Show existing conditions of adjoining construction, including finish surfaces, that might be misconstrued as damage caused by salvage and demolition operations. Comply with Section 013233 "Photographic Documentation." Submit before Work begins.
- D. Statement of Refrigerant Recovery: Signed by refrigerant recovery technician responsible for recovering refrigerant, stating that all refrigerant that was present was recovered and that recovery was performed according to EPA regulations. Include name and address of technician and date refrigerant was recovered.

1.6 CLOSEOUT SUBMITTALS

- A. Inventory: Submit a list of items that have been removed and salvaged.

1.7 QUALITY ASSURANCE

- A. Refrigerant Recovery Technician Qualifications: Certified by an EPA-approved certification program.

1.8 FIELD CONDITIONS

- A. Owner will occupy portions of building immediately adjacent to selective demolition area. Conduct selective demolition so Owner's operations will not be disrupted.
- B. Conditions existing at time of inspection for bidding purpose will be maintained by Owner as far as practical.

1. Before selective demolition, Owner will remove the following items:

a. All loose furniture.

C. Notify Architect of discrepancies between existing conditions and Drawings before proceeding with selective demolition.

D. Hazardous Materials: It is not expected that hazardous materials will be encountered in the Work.
1. If suspected hazardous materials are encountered, do not disturb; immediately notify Architect and Owner.

E. Storage or sale of removed items or materials on-site is not permitted.

F. Utility Service: Maintain existing utilities indicated to remain in service and protect them against damage during selective demolition operations.

1. Maintain fire-protection facilities in service during selective demolition operations.

1.9 COORDINATION

A. Arrange selective demolition schedule so as not to interfere with Owner's operations.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Regulatory Requirements: Comply with governing EPA notification regulations before beginning selective demolition. Comply with hauling and disposal regulations of authorities having jurisdiction.

B. Standards: Comply with ANSI/ASSP A10.6 and NFPA 241.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Verify that utilities have been disconnected and capped before starting selective demolition operations.

B. Review Project Record Documents of existing construction or other existing condition and hazardous material information provided by Owner. Owner does not guarantee that existing conditions are same as those indicated in Project Record Documents.

C. Survey of Existing Conditions: Record existing conditions by use of measured drawings preconstruction photographs.

1. Inventory and record the condition of items to be removed and salvaged.

3.2 PREPARATION

- A. Refrigerant: Before starting demolition, remove refrigerant from mechanical equipment according to 40 CFR 82 and regulations of authorities having jurisdiction.

3.3 UTILITY SERVICES AND MECHANICAL/ELECTRICAL SYSTEMS

- A. Existing Services/Systems to Remain: Maintain services/systems indicated to remain and protect them against damage.
- B. Existing Services/Systems to Be Removed, Relocated, or Abandoned: Locate, identify, disconnect, and seal or cap off utility services and mechanical/electrical systems serving areas to be selectively demolished.
 - 1. If services/systems are required to be removed, relocated, or abandoned, provide temporary services/systems that bypass area of selective demolition and that maintain continuity of services/systems to other parts of building.
 - 2. Disconnect, demolish, and remove fire-suppression systems, plumbing, and HVAC systems, equipment, and components indicated on Drawings to be removed.
 - a. Piping to Be Removed: Remove portion of piping indicated to be removed and cap or plug remaining piping with same or compatible piping material.
 - b. Piping to Be Abandoned in Place: Drain piping and cap or plug piping with same or compatible piping material and leave in place.
 - c. Equipment to Be Removed: Disconnect and cap services and remove equipment.
 - d. Equipment to Be Removed and Reinstalled: Disconnect and cap services and remove, clean, and store equipment; when appropriate, reinstall, reconnect, and make equipment operational.
 - e. Equipment to Be Removed and Salvaged: Disconnect and cap services and remove equipment and deliver to Owner.
 - f. Ducts to Be Removed: Remove portion of ducts indicated to be removed and plug remaining ducts with same or compatible ductwork material.
 - g. Ducts to Be Abandoned in Place: Cap or plug ducts with same or compatible ductwork material and leave in place.

3.4 PROTECTION

- A. Temporary Protection: Provide temporary barricades and other protection required to prevent injury to people and damage to adjacent buildings and facilities to remain.
 - 1. Provide protection to ensure safe passage of people around selective demolition area and to and from occupied portions of building.
 - 2. Provide temporary weather protection, during interval between selective demolition of existing construction on exterior surfaces and new construction, to prevent water leakage and damage to structure and interior areas.
 - 3. Protect walls, ceilings, floors, and other existing finish work that are to remain or that are exposed during selective demolition operations.
 - 4. Cover and protect furniture, furnishings, and equipment that have not been removed.
 - 5. Comply with requirements for temporary enclosures, dust control, heating, and cooling specified in Section 015000 "Temporary Facilities and Controls."

- B. Temporary Shoring: Design, provide, and maintain shoring, bracing, and structural supports as required to preserve stability and prevent movement, settlement, or collapse of construction and finishes to remain, and to prevent unexpected or uncontrolled movement or collapse of construction being demolished.
 - 1. Strengthen or add new supports when required during progress of selective demolition.
- C. Remove temporary barricades and protections where hazards no longer exist.

3.5 SELECTIVE DEMOLITION, GENERAL

- A. General: Demolish and remove existing construction only to the extent required by new construction and as indicated. Use methods required to complete the Work within limitations of governing regulations and as follows:
 - 1. Proceed with selective demolition systematically, from higher to lower level. Complete selective demolition operations above each floor or tier before disturbing supporting members on the next lower level.
 - 2. Neatly cut openings and holes plumb, square, and true to dimensions required. Use cutting methods least likely to damage construction to remain or adjoining construction. Use hand tools or small power tools designed for sawing or grinding, not hammering and chopping. Temporarily cover openings to remain.
 - 3. Cut or drill from the exposed or finished side into concealed surfaces to avoid marring existing finished surfaces.
 - 4. Remove decayed, vermin-infested, or otherwise dangerous or unsuitable materials and promptly dispose of off-site.
 - 5. Locate selective demolition equipment and remove debris and materials so as not to impose excessive loads on supporting walls, floors, or framing.
 - 6. Dispose of demolished items and materials promptly.
- B. Site Access and Temporary Controls: Conduct selective demolition and debris-removal operations to ensure minimum interference with roads, streets, walks, walkways, and other adjacent occupied and used facilities.
- C. Work in Historic Areas: Selective demolition may be performed only in areas of Project that are not designated as historic.
- D. Removed and Salvaged Items:
 - 1. Clean salvaged items.
 - 2. Pack or crate items after cleaning. Identify contents of containers.
 - 3. Store items in a secure area until delivery to Owner.
 - 4. Protect items from damage during transport and storage.
- E. Removed and Reinstalled Items:
 - 1. Clean and repair items to functional condition adequate for intended reuse.
 - 2. Pack or crate items after cleaning and repairing. Identify contents of containers.
 - 3. Protect items from damage during transport and storage.
 - 4. Reinstall items in locations indicated. Comply with installation requirements for new materials and equipment. Provide connections, supports, and miscellaneous materials necessary to make item functional for use indicated.

- F. Existing Items to Remain: Protect construction indicated to remain against damage and soiling during selective demolition. When permitted by Architect, items may be removed to a suitable, protected storage location during selective demolition and cleaned and reinstalled in their original locations after selective demolition operations are complete.

3.6 SELECTIVE DEMOLITION PROCEDURES FOR SPECIFIC MATERIALS

- A. Concrete: Demolish in small sections. Using power-driven saw, cut concrete to a depth of at least 3/4 inch at junctures with construction to remain. Dislodge concrete from reinforcement at perimeter of areas being demolished, cut reinforcement, and then remove remainder of concrete. Neatly trim openings to dimensions indicated.
- B. Concrete Slabs-on-Grade: Saw-cut perimeter of area to be demolished, and then break up and remove.
- C. Roofing: Remove no more existing roofing than what can be covered in one day by new roofing and so that building interior remains watertight and weathertight. See Section 075213 – Atactic-Polypropylene (APP) Modified Bituminous Membrane Roofing for new roofing requirements.

3.7 DISPOSAL OF DEMOLISHED MATERIALS

- A. Remove demolition waste materials from Project site and dispose of them in an EPA-approved construction and demolition waste landfill acceptable to authorities having jurisdiction.
 - 1. Do not allow demolished materials to accumulate on-site.
 - 2. Remove and transport debris in a manner that will prevent spillage on adjacent surfaces and areas.
- B. Burning: Do not burn demolished materials.

3.8 CLEANING

- A. Clean adjacent structures and improvements of dust, dirt, and debris caused by selective demolition operations. Return adjacent areas to condition existing before selective demolition operations began.

END OF SECTION 024119

033000 - CAST-IN-PLACE CONCRETE

PART 1 - GENERAL

1.1 SUMMARY

- A. This Section specifies cast-in place concrete, including formwork, reinforcement, concrete materials, mixture design, placement procedures, joint materials, and finishes, for the following:
 - 1. Footings.
 - 2. Interior and Exterior Slabs-on-grade.
- B. Related Requirements:
 - 1. Section 079200 "Joint Sealants: for sealing nontraffic and traffic joints in locations not specified in this Section.

1.2 DEFINITIONS

- A. Cementitious Materials: Portland cement alone or in combination with one or more of the following: blended hydraulic cement, fly ash and other pozzolans, ground granulated blast-furnace slag, and silica fume; subject to compliance with requirements.
- B. Water/Cement Ratio (w/cm): The ratio by weight of water to cementitious materials.

1.3 SUBMITTALS

- A. Product Data: For each type of product indicated.
- B. Design Mixtures: For each concrete mixture. Submit alternate design mixtures when characteristics of materials, Project conditions, weather, test results, or other circumstances warrant adjustments.
- C. Steel Reinforcement Shop Drawings: Placing drawings that detail fabrication, bending, and placement. Include bar sizes, lengths, material, grade, bar schedules, stirrup spacing, bent bar diagrams, bar arrangement, splices and laps, mechanical connections, tie spacing, hoop spacing, and supports for concrete reinforcement.
- D. Material Test Reports: For the following, from a qualified testing agency, indicating compliance with requirements:
 - 1. Aggregates. Include service record data indicating absence of deleterious expansion of concrete due to alkali aggregate reactivity.
- E. Material Certificates: For each of the following, signed by manufacturers:
 - 1. Cementitious materials.

2. Admixtures.
3. Curing compounds.
4. Vapor retarders.

F. Preconstruction Test Reports: For each mix design.

G. Field quality-control reports.

1.4 QUALITY ASSURANCE

A. Testing Agency Qualifications: An independent agency, qualified according to ASTM C 1077 and ASTM E 329 for testing indicated, as documented according to ASTM E 548.

1. Personnel conducting field tests shall be qualified as ACI Concrete Field Testing Technician, Grade 1, according to ACI CP-01 or an equivalent certification program.
2. Personnel performing laboratory tests shall be ACI-certified Concrete Strength Testing Technician and Concrete Laboratory Testing Technician - Grade I. Testing Agency laboratory supervisor shall be an ACI-certified Concrete Laboratory Testing Technician - Grade II.

B. Source Limitations: Obtain each type or class of cementitious material of the same brand from the same manufacturer's plant, obtain aggregate from one source, and obtain admixtures through one source from a single manufacturer.

C. ACI Publications: Comply with the following unless modified by requirements in the Contract Documents:

1. ACI 301, "Specification for Structural Concrete," Sections 1 through 5.
2. ACI 117, "Specifications for Tolerances for Concrete Construction and Materials."

D. Concrete Testing Service: Engage a qualified independent testing agency to perform material evaluation tests and to design concrete mixtures.

1.5 PRECONSTRUCTION TESTING

A. Preconstruction Testing Service: Engage a qualified testing agency to perform preconstruction testing on each concrete mixture.

1. Include the following information in each test report:
 - a. Admixture dosage rates.
 - b. Slump.
 - c. Air content.
 - d. Seven-day compressive strength.
 - e. 28-day compressive strength.
 - f. Permeability.

1.6 DELIVERY, STORAGE, AND HANDLING

A. Steel Reinforcement: Deliver, store, and handle steel reinforcement to prevent bending and damage.

- B. Waterstops: Store waterstops under cover to protect from moisture, sunlight, dirt, oil, and other contaminants.

PART 2 - PRODUCTS

2.1 CONCRETE, GENERAL

- A. ACI Publications: Comply with ACI 301 unless modified by requirements in the Contract Documents.

2.2 FORMS

- A. Form Materials: Plywood, metal, metal-framed plywood, or other approved panel-type materials to provide full-depth, continuous, straight, and smooth exposed surfaces.
 - 1. Use flexible or uniformly curved forms for curves with a radius of 100 feet or less.
- B. Form-Release Agent: Commercially formulated form-release agent that will not bond with, stain, or adversely affect concrete surfaces and that will not impair subsequent treatments of concrete surfaces.

2.3 STEEL REINFORCEMENT

- A. Reinforcing Bars: ASTM A 615/A 615M, Grade 60, deformed.
- B. Plain-Steel Wire: ASTM A 82, as drawn.
- C. Deformed-Steel Wire: ASTM A 496.
- D. Plain-Steel Welded Wire Reinforcement: ASTM A 185, plain, fabricated from as-drawn steel wire into flat sheets.

2.4 REINFORCEMENT ACCESSORIES

- A. Joint Dowel Bars: ASTM A 615/A 615M, Grade 60, plain-steel bars, cut bars true to length with ends square and free of burrs.
- B. Bar Supports: Bolsters, chairs, spacers, and other devices for spacing, supporting, and fastening reinforcing bars and welded wire reinforcement in place. Manufacture bar supports from steel wire, plastic, or precast concrete according to CRSI's "Manual of Standard Practice," of greater compressive strength than concrete and as follows:
 - 1. For concrete surfaces exposed to view where legs of wire bar supports contact forms, use CRSI Class 1 plastic-protected steel wire or CRSI Class 2 stainless-steel bar supports.

2.5 CONCRETE MATERIALS

A. Source Limitations:

1. Obtain all concrete mixtures from a single ready-mixed concrete manufacturer for entire Project.
2. Obtain each type or class of cementitious material of the same brand from the same manufacturer's plant.
3. Obtain aggregate from single source.
4. Obtain each type of admixture from single source from single manufacturer.

B. Cementitious Material: Use the following cementitious materials, of the same type, brand, and source, throughout Project:

1. Portland Cement: ASTM C 150, Type I/II. Supplement with the following:
 - a. Fly Ash: ASTM C 618, Class C or F.
 - b. Ground Granulated Blast-Furnace Slag: ASTM C 989, Grade 100 or 120.

C. Normal-Weight Aggregates: ASTM C 33, Class 3S coarse aggregate or better, graded. Provide aggregates from a single source.

1. Maximum Coarse-Aggregate Size: 3/4 inch nominal.
2. Fine Aggregate: Free of materials with deleterious reactivity to alkali in cement.

D. Water: ASTM C 94/C 94M and potable.

2.6 ADMIXTURES

A. Air-Entraining Admixture: ASTM C 260.

B. Chemical Admixtures: Provide admixtures certified by manufacturer to be compatible with other admixtures and that will not contribute water-soluble chloride ions exceeding those permitted in hardened concrete. Do not use calcium chloride or admixtures containing calcium chloride.

1. Water-Reducing Admixture: ASTM C 494/C 494M, Type A.
2. Retarding Admixture: ASTM C 494/C 494M, Type B.
3. Water-Reducing and Retarding Admixture: ASTM C 494/C 494M, Type D.
4. High-Range, Water-Reducing Admixture: ASTM C 494/C 494M, Type F.
5. High-Range, Water-Reducing and Retarding Admixture: ASTM C 494/C 494M, Type G.
6. Plasticizing and Retarding Admixture: ASTM C 1017/C 1017M, Type II.

2.7 WATERSTOPS

A. Self-Expanding Butyl Strip Waterstops: Manufactured rectangular or trapezoidal strip, butyl rubber with sodium bentonite or other hydrophilic polymers, for adhesive bonding to concrete, 3/4 by 1 inch.

1. Available Products:
 - a. Colloid Environmental Technologies Company; Volclay Waterstop-RX.
 - b. Concrete Sealants Inc.; Conseal CS-231.
 - c. Greenstreak; Swellstop.
 - d. Henry Company, Sealants Division; Hydro-Flex.
 - e. JP Specialties, Inc.; Earthshield Type 20.

- f. Progress Unlimited, Inc.; Superstop.
- g. TCMiraDRI; Mirastop.

2.8 VAPOR RETARDERS

- A. Plastic Vapor Retarder: ASTM E 1745, Class B. Include manufacturer's recommended adhesive or pressure-sensitive tape.

- 1. Available Products:
 - a. Fortifiber Corporation; Moistop Ultra.
 - b. Raven Industries Inc.; Vapor Block 10.
 - c. Stego Industries, LLC; Stego Wrap, 15 mils.

2.9 CURING MATERIALS

- A. Evaporation Retarder: Waterborne, monomolecular film forming, manufactured for application to fresh concrete.

- 1. Available Products:
 - a. Burke by Edoco; BurkeFilm.
 - b. ChemMasters; Spray-Film.
 - c. Conspec Marketing & Manufacturing Co., Inc., a Dayton Superior Company; Aquafilm.
 - d. Dayton Superior Corporation; Sure Film.
 - e. Euclid Chemical Company (The); Eucobar.
 - f. Kaufman Products, Inc.; Vapor Aid.
 - g. Lambert Corporation; Lambco Skin.
 - h. L&M Construction Chemicals, Inc.; E-Con.
 - i. Meadows, W. R., Inc.; Sealtight Evapre.
 - j. Sika Corporation, Inc.; SikaFilm.
 - k. Symons Corporation, a Dayton Superior Company; Finishing Aid.
- 2. Verify compatibility of evaporation retarder with floor finish system.

- B. Clear, Waterborne, Membrane-Forming Curing and Sealing Compound: ASTM C 1315, Type 1, Class A.

- 1. Subject to requirements, use basis-of-design product HydoWhite as manufactured by Symons Corp. or approved equivalent.
- 2. Verify compatibility of curing and sealing compound with floor finish system.

2.10 RELATED MATERIALS

- A. Expansion- and Isolation-Joint-Filler Strips: ASTM D 1751, asphalt-saturated cellulosic fiber.
- B. Bonding Agent: ASTM C 1059, Type II, non-redispersible, acrylic emulsion or styrene butadiene.
- C. Epoxy Bonding Adhesive: ASTM C 881, two-component epoxy resin, capable of humid curing and bonding to damp surfaces, of class suitable for application temperature and of grade to suit requirements, and as follows:

1. Types IV and V, load bearing, for bonding hardened or freshly mixed concrete to hardened concrete.

2.11 REPAIR MATERIALS

- A. Repair Underlayment: Cement-based, polymer-modified, self-leveling product that can be applied in thicknesses from 1/8 inch and that can be feathered at edges to match adjacent floor elevations, for repair of floor and slab areas beneath floor coverings.
 1. Cement Binder: ASTM C 150, portland cement or hydraulic or blended hydraulic cement as defined in ASTM C 219.
 2. Primer: Product of underlayment manufacturer recommended for substrate, conditions, and application.
 3. Aggregate: Well-graded, washed gravel, 1/8 to 1/4 inch or coarse sand as recommended by underlayment manufacturer.
 4. Compressive Strength: Not less than 4100 psi at 28 days when tested according to ASTM C 109/C 109M.

2.12 CONCRETE MIXTURES, GENERAL

- A. Prepare design mixtures for each type and strength of concrete, proportioned on the basis of laboratory trial mixture or field test data, or both, according to ACI 301.
 1. Use a qualified independent testing agency for preparing and reporting proposed mixture designs based on laboratory trial mixtures.
- B. Cementitious Materials: Limit percentage, by weight, of cementitious materials other than portland cement in concrete as follows:
 1. Fly Ash: 25 percent.
 2. Ground Granulated Blast-Furnace Slag: 50 percent.
 3. Combined Fly Ash or Pozzolan and Ground Granulated Blast-Furnace Slag: 50 percent portland cement minimum, with fly ash or pozzolan not exceeding 25 percent.
- C. Limit water-soluble, chloride-ion content in hardened concrete to 0.06 percent by weight of cement.
- D. Admixtures: Use admixtures according to manufacturer's written instructions.
 1. Use water-reducing, high-range water-reducing, or plasticizing admixture in concrete, as required, for placement and workability.
 2. Use water-reducing and retarding admixture when required by high temperatures, low humidity, or other adverse placement conditions.
 3. Use water-reducing admixture in pumped concrete, concrete for heavy-use industrial slabs and parking structure slabs, concrete required to be watertight, and concrete with a water-cementitious materials ratio below 0.50.

2.13 CONCRETE MIXTURES FOR BUILDING ELEMENTS

- A. Slabs-on-Grade for Interior Work: Proportion normal-weight concrete mixture as follows:

1. Minimum Compressive Strength: 4000 psi at 28 days.
2. Minimum Cementitious Materials Content: 550 lb/cu. yd.
3. Slump Limit: 4 inches, plus or minus 1 inch.

B. Slabs-on-Grade for Exterior Work: Proportion normal-weight concrete mixture as follows:

1. Minimum Compressive Strength: 4000 psi at 28 days.
2. Minimum Cementitious Materials Content: 560 lb/cu. yd.
3. Slump Limit: 4 inches maximum.
4. Air Entrainment: 6%, plus or minus 1%.

2.14 FABRICATING REINFORCEMENT

A. Fabricate steel reinforcement according to CRSI's "Manual of Standard Practice."

2.15 CONCRETE MIXING

A. Ready-Mixed Concrete: Measure, batch, mix, and deliver concrete according to ASTM C 94/C 94M and ASTM C 1116, and furnish batch ticket information.

1. When air temperature is between 85 and 90 deg F, reduce mixing and delivery time from 1-1/2 hours to 75 minutes; when air temperature is above 90 deg F, reduce mixing and delivery time to 60 minutes.

2.16 JOINT SEALANTS, GENERAL

- A. Obtain joint sealants from single manufacturer for each sealant type.
- B. Compatibility: Provide joint sealants, backer materials, and other related materials that are compatible with one another and with joint substrates under conditions of service and application, as demonstrated by joint-sealant manufacturer, based on testing and field experience.

2.17 COLD-APPLIED JOINT SEALANTS

A. Type NS Silicone Sealant for Concrete: Single-component, low-modulus, neutral-curing, nonsag silicone sealant complying with ASTM D 5893 for Type NS.

1. Products:
 - a. Tremco Spectrem 900.
 - b. BASF Sonolastic.
 - c. Other equal product complying with requirements.

2.18 JOINT-SEALANT RELATED MATERIALS

A. Joint-Sealant Backer Materials: Nonstaining; compatible with joint substrates, sealants, primers, and other joint fillers; and approved for applications indicated by joint-sealant manufacturer, based on field experience and laboratory testing.

- B. Round Backer Rods for Cold-Applied Joint Sealants: ASTM D5249, Type 3, of diameter and density required to control joint-sealant depth and prevent bottom-side adhesion of sealant.
- C. Backer Strips for Cold- and Hot-Applied Joint Sealants: ASTM D5249; Type 2; of thickness and width required to control joint-sealant depth, prevent bottom-side adhesion of sealant, and fill remainder of joint opening under sealant.
- D. Primers: Product recommended by joint-sealant manufacturer where required for adhesion of sealant to joint substrates indicated.

PART 3 - EXECUTION

3.1 GENERAL

- A. Uniformly slope surfaces to drains. Slabs and other surfaces that do not drain appropriately will not be accepted.
- B. Coordinate the installation of joint materials, vapor retarder, and other related materials with placement of forms and reinforcing steel.

3.2 SURFACE PREPARATION FOR EXTERIOR WORK

- A. Check for unstable areas and verify need for additional compaction. Proceed with concrete placement only after nonconforming conditions have been corrected.
- B. Remove loose material from surface immediately before placing concrete.
- C. Surface Cleaning of Joints: Before installing joint sealants, clean out joints immediately to comply with joint-sealant manufacturer's written instructions.
 - 1. Remove all foreign material from joint substrates that could interfere with adhesion of joint sealant, including dust, old joint sealants, oil, grease, waterproofing, water repellents, water, surface dirt, and frost.

3.3 FORMWORK

- A. Design, erect, shore, brace, and maintain formwork, according to ACI 301, to support vertical, lateral, static, and dynamic loads, and construction loads that might be applied, until structure can support such loads.
- B. Construct formwork so concrete members and structures are of size, shape, alignment, elevation, and position indicated, within tolerance limits of ACI 117.
- C. Limit concrete surface irregularities, designated by ACI 347R as abrupt or gradual, as follows:
 - 1. Class A, 1/8-inch for smooth-formed finished surfaces.
 - 2. Class C, 1/2 inch for rough-formed finished surfaces.
- D. Construct forms tight enough to prevent loss of concrete mortar.

- E. Fabricate forms for easy removal without hammering or prying against concrete surfaces. Provide crush or wrecking plates where stripping may damage cast concrete surfaces. Provide top forms for inclined surfaces steeper than 1.5 horizontal to 1 vertical.
 - 1. Install keyways, reglets, recesses, and the like, for easy removal.
 - 2. Do not use rust-stained steel form-facing material.
- F. Set edge forms, bulkheads, and intermediate screed strips for slabs to achieve required elevations and slopes in finished concrete surfaces. Provide and secure units to support screed strips; use strike-off templates or compacting-type screeds.
- G. Provide temporary openings for cleanouts and inspection ports where interior area of formwork is inaccessible. Close openings with panels tightly fitted to forms and securely braced to prevent loss of concrete mortar. Locate temporary openings in forms at inconspicuous locations.
- H. Chamfer exterior corners and edges of permanently exposed concrete.
- I. Form openings, chases, offsets, sinkages, keyways, reglets, blocking, screeds, and bulkheads required in the Work. Determine sizes and locations from trades providing such items.
- J. Clean forms and adjacent surfaces to receive concrete. Remove chips, wood, sawdust, dirt, and other debris just before placing concrete.
- K. Retighten forms and bracing before placing concrete, as required, to prevent mortar leaks and maintain proper alignment.
- L. Coat contact surfaces of forms with form-release agent, according to manufacturer's written instructions, before placing reinforcement.

3.4 EMBEDDED ITEMS

- A. Place and secure anchorage devices and other embedded items required for adjoining work that is attached to or supported by cast-in-place concrete. Use setting drawings, templates, diagrams, instructions, and directions furnished with items to be embedded.
 - 1. Install anchor rods, accurately located, to elevations required and complying with tolerances in Section 7.5 of AISC's "Code of Standard Practice for Steel Buildings and Bridges."

3.5 REMOVING AND REUSING FORMS

- A. General: Formwork for sides of beams, walls, columns, and similar parts of the Work that does not support weight of concrete may be removed after cumulatively curing at not less than 50 deg F for 24 hours after placing concrete, if concrete is hard enough to not be damaged by form-removal operations and curing and protection operations are maintained.
- B. Clean and repair surfaces of forms to be reused in the Work. Split, frayed, delaminated, or otherwise damaged form-facing material will not be acceptable for exposed surfaces. Apply new form-release agent.

- C. When forms are reused, clean surfaces, remove fins and laitance, and tighten to close joints. Align and secure joints to avoid offsets. Do not use patched forms for exposed concrete surfaces unless approved by Architect.

3.6 VAPOR RETARDERS

- A. Plastic Vapor Retarders: Place, protect, and repair vapor retarders according to ASTM E 1643 and manufacturer's written instructions.
 - 1. Lap joints 6 inches and seal with manufacturer's recommended tape.
- B. When specified, place vapor retarder sheeting in position with longest dimension parallel with direction of pour.
- C. Avoid cutting or puncturing vapor retarder/barrier (when such is used) during reinforcement placement and concreting operations.

3.7 STEEL REINFORCEMENT

- A. General: Comply with CRSI's "Manual of Standard Practice" for placing reinforcement.
 - 1. Do not cut or puncture vapor retarder. Repair damage and reseal vapor retarder before placing concrete.
- B. Clean reinforcement of loose rust and mill scale, earth, ice, and other foreign materials that would reduce bond to concrete.
- C. Accurately position, support, and secure reinforcement against displacement. Locate and support reinforcement with bar supports to maintain minimum concrete cover. Do not tack weld crossing reinforcing bars.
- D. Set wire ties with ends directed into concrete, not toward exposed concrete surfaces.
- E. Install welded wire reinforcement in longest practicable lengths on bar supports spaced to minimize sagging. Lap edges and ends of adjoining sheets at least one mesh spacing. Offset laps of adjoining sheet widths to prevent continuous laps in either direction. Lace overlaps with wire.
- F. Doweling: Where new concrete is poured, use No. 5 reinforcing bar, pinned (inserted) a minimum of 6 inches into the existing adjacent concrete, 24 inches on center maximum or as required by the drawings.
- G. Repair damages before placing concrete. Accurately position, support, and secure reinforcement against displacement.

3.8 JOINTS

- A. General: Construct joints true to line with faces perpendicular to surface plane of concrete.
- B. Construction Joints: Install so strength and appearance of concrete are not impaired, at locations indicated or as approved by Architect.

1. Place joints perpendicular to main reinforcement. Continue reinforcement across construction joints, unless otherwise indicated. Do not continue reinforcement through sides of strip placements of floors and slabs.
2. All construction joints are to be keyed unless located at an expansion joint. Provide 2-by-4 horizontal keyed joints at construction joints for shear transfer.
3. Locate joints for beams, slabs, joists, and girders in the middle third of spans. Offset joints in girders a minimum distance of twice the beam width from a beam-girder intersection.
4. Locate horizontal joints in walls and columns at underside of floors, slabs, beams, and girders and at the top of footings or floor slabs.
5. Space vertical joints in walls as indicated. Locate joints beside piers integral with walls, near corners, and in concealed locations where possible.
6. Use a bonding agent at locations where fresh concrete is placed against hardened or partially hardened concrete surfaces.
7. Use epoxy-bonding adhesive at locations where fresh concrete is placed against hardened or partially hardened concrete surfaces.

C. Expansion Joints: Form expansion joints of preformed joint-filler strips

1. Locate expansion joints at intervals of 50 feet, unless otherwise indicated.
2. Extend joint fillers full width and depth of joint.
3. Terminate joint filler less than 1/2 inch or more than 1 inch below finished surface if joint sealant is indicated.
4. Place top of joint filler flush with finished concrete surface if joint sealant is not indicated.
5. Furnish joint fillers in one-piece lengths. Where more than one length is required, lace or clip joint-filler sections together.
6. Protect top edge of joint filler during concrete placement with metal, plastic, or other temporary preformed cap. Remove protective cap after concrete has been placed on both sides of joint.
7. Locate expansion joints where indicated on plans and as follows:
 - a. Around existing and proposed utility manholes and castings.
 - b. Against building foundations.

D. Contraction Joints in Slabs-on-Grade: Form weakened-plane contraction joints, sectioning concrete into areas as indicated. Construct contraction joints for a depth equal to at least one-fourth of concrete thickness as follows:

1. Grooved Joints: Form contraction joints after initial floating by grooving and finishing each edge of joint to a radius of 1/8 inch. Repeat grooving of contraction joints after applying surface finishes. Eliminate groover tool marks on concrete surfaces.
2. Sawed Joints: Form contraction joints with power saws equipped with shatterproof abrasive or diamond-rimmed blades. Cut 1/8-inch- wide joints into concrete when cutting action will not tear, abrade, or otherwise damage surface and before concrete develops random contraction cracks.
3. If joint pattern is not shown, provide joints not exceeding 15 feet in either direction and to not more than 225 square feet. Located to conform to bay spacing wherever possible (at column centerlines, half bays, third bays).

E. Isolation Joints in Slabs-on-Grade: After removing formwork, install joint-filler strips at slab junctions with vertical surfaces, such as column pedestals, foundation walls, grade beams, and other locations, as indicated.

1. Terminate full-width joint-filler strips not less than 1/2 inch or more than 1 inch below finished concrete surface where joint sealants, specified in Division 7 Section "Joint Sealants," are indicated.
 2. Install joint-filler strips in lengths as long as practicable. Where more than one length is required, lace or clip sections together.
- F. Doweled Joints: Install dowel bars and support assemblies at joints where indicated. Lubricate one-half of dowel length to prevent concrete bonding to one side of joint.

3.9 WATERSTOPS

- A. Self-Expanding Strip Waterstops: Install in construction joints and at other locations indicated, according to manufacturer's written instructions, adhesive bonding, mechanically fastening, and firmly pressing into place. Install in longest lengths practicable.

3.10 CONCRETE PLACEMENT

- A. Traffic Control: Maintain access for vehicular and pedestrian traffic as required for other construction activities.
- B. Before placing concrete, verify that installation of formwork, reinforcement, and embedded items is complete and that required inspections have been performed.
- C. Do not add water to concrete during delivery, at Project site, or during placement unless approved by Architect.
- D. Before test sampling and placing concrete, water may be added at Project site, subject to limitations of ACI 301.
1. Do not add water to concrete after adding high-range water-reducing admixtures to mixture.
- E. Deposit concrete continuously in one layer or in horizontal layers of such thickness that no new concrete will be placed on concrete that has hardened enough to cause seams or planes of weakness. If a section cannot be placed continuously, provide construction joints as indicated. Deposit concrete to avoid segregation.
1. Deposit concrete in horizontal layers of depth to not exceed formwork design pressures and in a manner to avoid inclined construction joints.
 2. Consolidate placed concrete with mechanical vibrating equipment according to ACI 301.
 3. Do not use vibrators to transport concrete inside forms. Insert and withdraw vibrators vertically at uniformly spaced locations to rapidly penetrate placed layer and at least 6 inches into preceding layer. Do not insert vibrators into lower layers of concrete that have begun to lose plasticity. At each insertion, limit duration of vibration to time necessary to consolidate concrete and complete embedment of reinforcement and other embedded items without causing mixture constituents to segregate.

- F. Deposit and consolidate concrete for floors and slabs in a continuous operation, within limits of construction joints, until placement of a panel or section is complete.

1. Consolidate concrete during placement operations so concrete is thoroughly worked around reinforcement and other embedded items and into corners.
2. Maintain reinforcement in position on chairs during concrete placement.
3. Screed slab surfaces with a straightedge and strike off to correct elevations.
4. Slope surfaces uniformly to drains where required.
5. Begin initial floating using bull floats or darbies to form a uniform and open-textured surface plane, before excess bleedwater appears on the surface. Do not further disturb slab surfaces before starting finishing operations.
6. Maintain reinforcing in proper position on chairs during concrete placement.

- G. Cold-Weather Placement: Comply with ACI 306.1 and as follows. Protect concrete work from physical damage or reduced strength that could be caused by frost, freezing actions, or low temperatures.

1. When average high and low temperature is expected to fall below 40 deg F for three successive days, maintain delivered concrete mixture temperature within the temperature range required by ACI 301.
2. Do not use frozen materials or materials containing ice or snow. Do not place concrete on frozen subgrade or on subgrade containing frozen materials.
3. Do not use calcium chloride, salt, or other materials containing antifreeze agents or chemical accelerators unless otherwise specified and approved in mixture designs.

- H. Hot-Weather Placement: Comply with ACI 301 and as follows:

1. Maintain concrete temperature below 90 deg F at time of placement. Chilled mixing water or chopped ice may be used to control temperature, provided water equivalent of ice is calculated to total amount of mixing water. Using liquid nitrogen to cool concrete is Contractor's option.
2. Fog-spray forms, steel reinforcement, and subgrade just before placing concrete. Keep subgrade uniformly moist without standing water, soft spots, or dry areas.

3.11 FINISHING FORMED SURFACES

- A. Rough-Formed Finish: As-cast concrete texture imparted by form-facing material with tie holes and defects repaired and patched. Remove fins and other projections that exceed specified limits on formed-surface irregularities.

1. Apply to concrete surfaces not exposed to public view.

- B. Smooth-Formed Finish: As-cast concrete texture imparted by form-facing material, arranged in an orderly and symmetrical manner with a minimum of seams. Repair and patch tie holes and defects. Remove fins and other projections that exceed specified limits on formed-surface irregularities.

1. Apply to concrete surfaces exposed to public view, to receive a rubbed finish, or to be covered with a coating or covering material applied directly to concrete.

- C. Rubbed Finish: Apply the following to smooth-formed finished as-cast concrete where indicated:

1. Smooth-Rubbed Finish: Not later than one day after form removal, moisten concrete surfaces and rub with carborundum brick or another abrasive until

producing a uniform color and texture. Do not apply cement grout other than that created by the rubbing process.

- D. Related Unformed Surfaces: At tops of walls, horizontal offsets, and similar unformed surfaces adjacent to formed surfaces, strike off smooth and finish with a texture matching adjacent formed surfaces. Continue final surface treatment of formed surfaces uniformly across adjacent unformed surfaces, unless otherwise indicated.

3.12 FINISHING FLOORS AND SLABS

- A. General: Comply with ACI 302.1R recommendations for screeding, restraighening, and finishing operations for concrete surfaces. Do not wet concrete surfaces.
- B. Float Finish: Consolidate surface with power-driven floats or by hand floating if area is small or inaccessible to power driven floats. Restraighten, cut down high spots, and fill low spots. Repeat float passes and restraighening until surface is left with a uniform, smooth, granular texture.
 - 1. Apply float finish to surfaces indicated to receive trowel finish.
 - 2. Exterior Concrete Finish:
 - a. Medium-to-Fine-Textured Broom Finish: Draw a soft-bristle broom across float-finished concrete surface, perpendicular to line of traffic, to provide a uniform, fine-line texture.
- C. Trowel Finish: After applying float finish, apply first troweling and consolidate concrete by hand or power-driven trowel. Continue troweling passes and restraighten until surface is free of trowel marks and uniform in texture and appearance. Grind smooth any surface defects that would telegraph through applied coatings or floor coverings.
 - 1. Apply a trowel finish to surfaces exposed to view.
 - 2. Finish surfaces to the following tolerances, according to ASTM E 1155, for a randomly trafficked floor surface:

3.13 CONCRETE PROTECTING AND CURING

- A. General: Protect freshly placed concrete from premature drying and excessive cold or hot temperatures. Comply with ACI 306.1 for cold-weather protection and ACI 301 for hot-weather protection during curing.
- B. Evaporation Retarder: Apply evaporation retarder to unformed concrete surfaces if hot, dry, or windy conditions cause moisture loss approaching 0.2 lb/sq. ft. x h before and during finishing operations. Apply according to manufacturer's written instructions after placing, screeding, and bull floating or darbying concrete, but before float finishing.
- C. Formed Surfaces: Cure formed concrete surfaces, including underside of beams, supported slabs, and other similar surfaces. If forms remain during curing period, moist cure after loosening forms. If removing forms before end of curing period, continue curing for the remainder of the curing period.
- D. Unformed Surfaces: Begin curing immediately after finishing concrete. Cure unformed surfaces, including floors and slabs, concrete floor toppings, and other surfaces.
- E. Cure concrete according to ACI 308.1, by one or a combination of the following methods:

1. Curing and Sealing Compound: Apply uniformly to floors and slabs indicated in a continuous operation by power spray or roller according to manufacturer's written instructions. Recoat areas subjected to heavy rainfall within three hours after initial application. Repeat process 24 hours later and apply a second coat. Maintain continuity of coating and repair damage during curing period.

3.14 CONCRETE SURFACE REPAIRS

- A. Defective Concrete: Repair and patch defective areas when approved by Architect. Remove and replace concrete that cannot be repaired and patched to Architect's approval.
- B. Patching Mortar: Mix dry-pack patching mortar, consisting of one part portland cement to two and one-half parts fine aggregate passing a No. 16 sieve, using only enough water for handling and placing.
- C. Repairing Formed Surfaces: Surface defects include color and texture irregularities, cracks, spalls, air bubbles, honeycombs, rock pockets, fins and other projections on the surface, and stains and other discolorations that cannot be removed by cleaning.
 1. Immediately after form removal, cut out honeycombs, rock pockets, and voids more than 1/2 inch in any dimension in solid concrete, but not less than 1 inch in depth. Make edges of cuts perpendicular to concrete surface. Clean, dampen with water, and brush-coat holes and voids with bonding agent. Fill and compact with patching mortar before bonding agent has dried. Fill form-tie voids with patching mortar or cone plugs secured in place with bonding agent.
 2. Repair defects on surfaces exposed to view by blending white portland cement and standard portland cement so that, when dry, patching mortar will match surrounding color. Patch a test area at inconspicuous locations to verify mixture and color match before proceeding with patching. Compact mortar in place and strike off slightly higher than surrounding surface.
 3. Repair defects on concealed formed surfaces that affect concrete's durability and structural performance as determined by Architect.
- D. Repairing Unformed Surfaces: Test unformed surfaces, such as floors and slabs, for finish and verify surface tolerances specified for each surface. Correct low and high areas. Test surfaces sloped to drain for trueness of slope and smoothness; use a sloped template.
 1. Repair finished surfaces containing defects. Surface defects include spalls, popouts, honeycombs, rock pockets, crazing and cracks in excess of 0.01 inch wide or that penetrate to reinforcement or completely through unreinforced sections regardless of width, and other objectionable conditions.
 2. After concrete has cured at least 14 days, correct high areas by grinding.
 3. Correct localized low areas during or immediately after completing surface finishing operations by cutting out low areas and replacing with patching mortar. Finish repaired areas to blend into adjacent concrete.
 4. Correct other low areas scheduled to receive floor coverings with a repair underlayment. Prepare, mix, and apply repair underlayment and primer according to manufacturer's written instructions to produce a smooth, uniform, plane, and level surface. Feather edges to match adjacent floor elevations.
 5. Correct other low areas scheduled to remain exposed with a repair topping. Cut out low areas to ensure a minimum repair topping depth of 1/4 inch to match adjacent floor elevations. Prepare, mix, and apply repair topping and primer according to manufacturer's written instructions to produce a smooth, uniform, plane, and level surface.

6. Repair defective areas, except random cracks and single holes 1 inch or less in diameter, by cutting out and replacing with fresh concrete. Remove defective areas with clean, square cuts and expose steel reinforcement with at least a 3/4-inch clearance all around. Dampen concrete surfaces in contact with patching concrete and apply bonding agent. Mix patching concrete of same materials and mixture as original concrete except without coarse aggregate. Place, compact, and finish to blend with adjacent finished concrete. Cure in same manner as adjacent concrete.
 7. Repair random cracks and single holes 1 inch or less in diameter with patching mortar. Groove top of cracks and cut out holes to sound concrete and clean off dust, dirt, and loose particles. Dampen cleaned concrete surfaces and apply bonding agent. Place patching mortar before bonding agent has dried. Compact patching mortar and finish to match adjacent concrete. Keep patched area continuously moist for at least 72 hours.
- E. Perform structural repairs of concrete, subject to Architect's approval, using epoxy adhesive and patching mortar.
- F. Repair materials and installation not specified above may be used, subject to Architect's approval.

3.15 INSTALLATION OF JOINT SEALANTS

- A. Comply with joint-sealant manufacturer's written installation instructions for products and applications indicated unless more stringent requirements apply.
- B. Joint-Sealant Installation Standard: Comply with recommendations in ASTM C1193 for use of joint sealants as applicable to materials, applications, and conditions.
- C. Install joint-sealant backers to support joint sealants during application and at position required to produce cross-sectional shapes and depths of installed sealants relative to joint widths that allow optimum sealant movement capability.
1. Do not leave gaps between ends of joint-sealant backer materials.
 2. Do not stretch, twist, puncture, or tear joint-sealant backer materials.
 3. Remove absorbent joint-sealant backer materials that have become wet before sealant application and replace them with dry materials.
- D. Install joint sealants immediately following backer material installation, using proven techniques that comply with the following:
1. Place joint sealants so they fully contact joint substrates.
 2. Completely fill recesses in each joint configuration.
 3. Produce uniform, cross-sectional shapes and depths relative to joint widths that allow optimum sealant movement capability.
- E. Tooling of Nonsag Joint Sealants: Immediately after joint-sealant application and before skinning or curing begins, tool sealants in accordance with the following requirements to form smooth, uniform beads of configuration indicated; to eliminate air pockets; and to ensure contact and adhesion of sealant with sides of joint:
1. Remove excess joint sealant from surfaces adjacent to joints.
 2. Use tooling agents that are approved in writing by joint-sealant manufacturer and that do not discolor sealants or adjacent surfaces.

- F. Provide joint configuration to comply with joint-sealant manufacturer's written instructions unless otherwise indicated.
- G. Clean off excess joint sealant as the Work progresses, by methods and with cleaning materials approved in writing by joint-sealant manufacturers.
- H. Protect joint sealants, during and after curing period, from contact with contaminating substances and from damage resulting from construction operations or other causes so sealants are without deterioration or damage at time of Substantial Completion. If, despite such protection, damage or deterioration occurs, cut out and remove damaged or deteriorated joint sealants immediately and replace with joint sealant so installations in repaired areas are indistinguishable from the original work.

3.16 PAVING-JOINT-SEALANT SCHEDULE

- A. Joints within concrete paving:
 - 1. Joint Location:
 - a. Expansion and isolation joints in concrete paving.
 - b. Contraction joints in concrete paving.
 - c. Other joints as indicated.
 - 2. Joint Sealant: Single-component, nonsag, silicone joint sealant.
 - 3. Joint Sealant Color: Manufacturer's standard.

3.17 FIELD QUALITY CONTROL

- A. Testing and Inspecting: Owner will engage a qualified testing and inspecting agency to perform field tests and inspections and prepare test reports.
- B. Inspections:
 - 1. Steel reinforcement placement.
 - 2. Headed bolts and studs.
 - 3. Verification of use of required design mixture.
 - 4. Concrete placement, including conveying and depositing.
 - 5. Curing procedures and maintenance of curing temperature.
- C. Concrete Tests: Testing of composite samples of fresh concrete obtained according to ASTM C 172 shall be performed according to the following requirements:
 - 1. Testing Frequency: Obtain one composite sample for each day's pour of each concrete mixture exceeding 5 cu. yd., but less than 50 cu. yd., plus one set for each additional 50 cu. yd. or fraction thereof.
 - a. When frequency of testing will provide fewer than five compressive-strength tests for each concrete mixture, testing shall be conducted from at least five randomly selected batches or from each batch if fewer than five are used.
 - 2. Slump: ASTM C 143/C 143M; one test at point of placement for each composite sample, but not less than one test for each day's pour of each concrete mixture. Perform additional tests when concrete consistency appears to change.
 - 3. Air Content: ASTM C 231, pressure method, for normal-weight concrete; one test for each composite sample, but not less than one test for each day's pour of each concrete mixture.

4. Concrete Temperature: ASTM C 1064/C 1064M; one test hourly when air temperature is 40 deg F and below and when 80 deg F and above, and one test for each composite sample.
5. Compression Test Specimens: ASTM C 31/C 31M.
 - a. Cast and laboratory cure two sets of two standard cylinder specimens for each composite sample.
6. Compressive-Strength Tests: ASTM C 39/C 39M; test one set of two laboratory-cured specimens at 7 days and one set of two specimens at 28 days.
 - a. A compressive-strength test shall be the average compressive strength from a set of two specimens obtained from same composite sample and tested at age indicated.
7. Strength of each concrete mixture will be satisfactory if every average of any three consecutive compressive-strength tests equals or exceeds specified compressive strength and no compressive-strength test value falls below specified compressive strength by more than 500 psi.
8. Test results shall be reported in writing to Architect, concrete manufacturer, and Contractor within 48 hours of testing. Reports of compressive-strength tests shall contain Project identification name and number, date of concrete placement, name of concrete testing and inspecting agency, location of concrete batch in Work, design compressive strength at 28 days, concrete mixture proportions and materials, compressive breaking strength, and type of break for both 7- and 28-day tests.
9. Nondestructive Testing: Impact hammer, sonoscope, or other nondestructive device may be permitted by Architect but will not be used as sole basis for approval or rejection of concrete.
10. Additional Tests: Testing and inspecting agency shall make additional tests of concrete when test results indicate that slump, air entrainment, compressive strengths, or other requirements have not been met, as directed by Architect. Testing and inspecting agency may conduct tests to determine adequacy of concrete by cored cylinders complying with ASTM C 42/C 42M or by other methods as directed by Architect.
11. Additional testing and inspecting, at Contractor's expense, will be performed to determine compliance of replaced or additional work with specified requirements.
12. Correct deficiencies in the Work that test reports and inspections indicate do not comply with the Contract Documents.

END OF SECTION 033000

SECTION 054000 - COLD-FORMED METAL FRAMING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Floor joist framing.
- B. Related Requirements:
 - 1. Section 092216 "Non-Structural Metal Framing" for standard, interior non-load-bearing, metal-stud framing, with height limitations and ceiling-suspension assemblies.

1.3 ACTION SUBMITTALS

- A. Product Data: For the following:
 - 1. Cold-formed steel framing materials.
 - 2. Floor joist framing.
- B. Shop Drawings:
 - 1. Include layout, spacings, sizes, thicknesses, and types of cold-formed steel framing; fabrication; and fastening and anchorage details, including mechanical fasteners.
 - 2. Indicate reinforcing channels, opening framing, supplemental framing, strapping, bracing, bridging, splices, accessories, connection details, and attachment to adjoining work.

1.4 INFORMATIONAL SUBMITTALS

- A. Product Test Reports: For each listed product, for tests performed by a qualified testing agency.
 - 1. Power-actuated anchors.
 - 2. Mechanical fasteners.

1.5 QUALITY ASSURANCE

- A. Product Tests: Mill certificates or data from a qualified independent testing agency indicating steel sheet complies with requirements, including base-metal thickness, yield strength, tensile strength, total elongation, chemical requirements, and metallic-coating thickness.

1.6 DELIVERY, STORAGE, AND HANDLING

- A. Protect cold-formed steel framing from corrosion, moisture staining, deformation, and other damage during delivery, storage, and handling.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - 1. ClarkDietrich.
 - 2. Marino\WARE.
 - 3. SCAFCO Steel Stud Company; Stone Group of Companies.

2.2 PERFORMANCE REQUIREMENTS

- A. Structural Performance: Provide cold-formed steel framing capable of withstanding design loads within limits and under conditions indicated.
 - 1. Design Loads:
 - a. Floor Live Load: 50psf
 - 2. Deflection Limits: Design framing systems to withstand design loads without deflections greater than the following:
 - a. Floor Joist Framing: Vertical deflection of 1/360 for live loads and 1/240 for total loads of the span.
- B. Cold-Formed Steel Framing Standards: Unless more stringent requirements are indicated, framing shall comply with AISI S100, AISI S200, and the following:
 - 1. Floor and Roof Systems: AISI S210.
 - 2. Wall Studs: AISI S211.

2.3 COLD-FORMED STEEL FRAMING MATERIALS

- A. Steel Sheet: ASTM A1003/A1003M, Structural Grade, Type H, metallic coated, of grade and coating designation as follows:
 - 1. Grade: As required by structural performance.
 - 2. Coating: G60 or equivalent.

2.4 LOAD-BEARING WALL FRAMING

- A. Steel Studs: Manufacturer's standard C-shaped steel studs, of web depths indicated, punched, with stiffened flanges, and as follows:
 - 1. Minimum Base-Metal Thickness: 0.0428 inch (1.09 mm).

2. Flange Width: 1-5/8 inches (41 mm).

- B. Steel Track: Manufacturer's standard U-shaped steel track, of web depths indicated, unpunched, with straight flanges, and as follows:

1. Minimum Base-Metal Thickness: 0.0538 inch (1.37 mm).
2. Flange Width: 1-1/4 inches (32 mm).

2.5 FLOOR JOIST FRAMING

- A. Steel Joists: Manufacturer's standard C-shaped steel joists, of web depths indicated, punched with standard holes, with stiffened flanges, and as follows:

1. Minimum Base-Metal Thickness: 0.0538 inch (1.37 mm).
2. Flange Width: 1-5/8 inches (41 mm) minimum.

2.6 FRAMING ACCESSORIES

- A. Fabricate steel-framing accessories from ASTM A1003/A1003M, Structural Grade, Type H, metallic coated steel sheet, of same grade and coating designation used for framing members.

- B. Provide accessories of manufacturer's standard thickness and configuration, unless otherwise indicated, as follows:

1. Supplementary framing.
2. Bracing, bridging, and solid blocking.
3. Web stiffeners.
4. Anchor clips.
5. End clips.
6. Foundation clips.
7. Gusset plates.
8. Stud kickers and knee braces.
9. Joist hangers and end closures.
10. Hole-reinforcing plates.
11. Backer plates.

2.7 ANCHORS, CLIPS, AND FASTENERS

- A. Steel Shapes and Clips: ASTM A36/A36M, zinc coated by hot-dip process according to ASTM A123/A123M.

- B. Power-Actuated Anchors: Fastener systems with working capacity greater than or equal to the design load, according to an evaluation report acceptable to authorities having jurisdiction, based on ICC-ES AC70.

- C. Mechanical Fasteners: ASTM C1513, corrosion-resistant-coated, self-drilling, self-tapping, steel drill screws.

1. Head Type: Low-profile head beneath sheathing; manufacturer's standard elsewhere.

2.8 MISCELLANEOUS MATERIALS

- A. Galvanizing Repair Paint: ASTM A780/A780M, MIL-P-21035B, or SSPC-Paint 20.
- B. Cement Grout: Portland cement, ASTM C150/C150M, Type I; and clean, natural sand, ASTM C404. Mix at ratio of 1 part cement to 2-1/2 parts sand, by volume, with minimum water required for placement and hydration.
- C. Nonmetallic, Nonshrink Grout: Factory-packaged, nonmetallic, noncorrosive, nonstaining grout, complying with ASTM C1107/C1107M, and with a fluid consistency and 30-minute working time.
- D. Shims: Load-bearing, high-density, multimonomer, nonleaching plastic; or cold-formed steel of same grade and metallic coating as framing members supported by shims.
- E. Sealer Gaskets: Closed-cell neoprene foam, 1/4 inch thick, selected from manufacturer's standard widths to match width of bottom track or rim track members.

2.9 FABRICATION

- A. Fabricate cold-formed steel framing and accessories plumb, square, and true to line, and with connections securely fastened, according to referenced AISI's specifications and standards, manufacturer's written instructions, and requirements in this Section.
 - 1. Fabricate framing assemblies using jigs or templates.
 - 2. Cut framing members by sawing or shearing; do not torch cut.
 - 3. Fasten cold-formed steel framing members by welding, screw fastening, clinch fastening, pneumatic pin fastening, or riveting as standard with fabricator. Wire tying of framing members is not permitted.
 - a. Comply with AWS D1.3/D1.3M requirements and procedures for welding, appearance and quality of welds, and methods used in correcting welding work.
 - b. Locate mechanical fasteners and install according to Shop Drawings, with screws penetrating joined members by no fewer than three exposed screw threads.
 - 4. Fasten other materials to cold-formed steel framing by welding, bolting, pneumatic pin fastening, or screw fastening, according to Shop Drawings.
- B. Reinforce, stiffen, and brace framing assemblies to withstand handling, delivery, and erection stresses. Lift fabricated assemblies by means that prevent damage or permanent distortion.
- C. Tolerances: Fabricate assemblies level, plumb, and true to line to a maximum allowable variation of 1/8 inch in 10 feet (1:960) and as follows:
 - 1. Spacing: Space individual framing members no more than plus or minus 1/8 inch (3 mm) from plan location. Cumulative error shall not exceed minimum fastening requirements of sheathing or other finishing materials.
 - 2. Squareness: Fabricate each cold-formed steel framing assembly to a maximum out-of-square tolerance of 1/8 inch (3 mm).

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates, areas, conditions, and abutting structural framing for compliance with requirements for installation tolerances and other conditions affecting performance of the Work.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

- A. Install load-bearing shims or grout between the underside of load-bearing wall bottom track and the top of foundation wall or slab at locations with a gap larger than 1/4 inch (6 mm) to ensure a uniform bearing surface on supporting concrete or masonry construction.
- B. Install sill sealer gasket at the underside of wall bottom track or rim track and at the top of foundation wall or slab at stud or joist locations.

3.3 INSTALLATION, GENERAL

- A. Cold-formed steel framing may be shop or field fabricated for installation, or it may be field assembled.
- B. Install cold-formed steel framing according to AISI S200, AISI S202, and manufacturer's written instructions unless more stringent requirements are indicated.
- C. Install shop- or field-fabricated, cold-formed framing and securely anchor to supporting structure.
 - 1. Screw, bolt, or weld wall panels at horizontal and vertical junctures to produce flush, even, true-to-line joints with maximum variation in plane and true position between fabricated panels not exceeding 1/16 inch (1.6 mm).
- D. Install cold-formed steel framing and accessories plumb, square, and true to line, and with connections securely fastened.
 - 1. Cut framing members by sawing or shearing; do not torch cut.
 - 2. Fasten cold-formed steel framing members by welding, screw fastening, clinch fastening, or riveting. Wire tying of framing members is not permitted.
 - a. Comply with AWS D1.3/D1.3M requirements and procedures for welding, appearance and quality of welds, and methods used in correcting welding work.
 - b. Locate mechanical fasteners, install according to Shop Drawings, and comply with requirements for spacing, edge distances, and screw penetration.
- E. Install framing members in one-piece lengths unless splice connections are indicated for track or tension members.
- F. Install temporary bracing and supports to secure framing and support loads equal to those for which structure was designed. Maintain braces and supports in place, undisturbed, until entire

integrated supporting structure has been completed and permanent connections to framing are secured.

3.4 INSTALLATION OF LOAD-BEARING WALL FRAMING

- A. Install continuous top and bottom tracks sized to match studs. Align tracks accurately and securely anchor at corners and ends, and at spacings as follows:
 - 1. Anchor Spacing: To match stud spacing.
- B. Squarely seat studs against top and bottom tracks, with gap not exceeding 1/8 inch (3 mm) between the end of wall-framing member and the web of track.
 - 1. Fasten both flanges of studs to top and bottom tracks.
 - 2. Space studs as follows:
 - a. Stud Spacing: As indicated on Drawings.
- C. Set studs plumb, except as needed for diagonal bracing or required for nonplumb walls or warped surfaces and similar configurations.
- D. Align studs vertically where floor framing interrupts wall-framing continuity. Where studs cannot be aligned, continuously reinforce track to transfer loads.
- E. Align floor and roof framing over studs according to AISI S200, Section C1. Where framing cannot be aligned, continuously reinforce track to transfer loads.
- F. Anchor studs abutting structural columns or walls, including masonry walls, to supporting structure.
- G. Install supplementary framing, blocking, and bracing in stud framing indicated to support fixtures, equipment, services, casework, heavy trim, furnishings, and similar work requiring attachment to framing.
 - 1. If type of supplementary support is not indicated, comply with stud manufacturer's written recommendations and industry standards in each case, considering weight or load resulting from item supported.
- H. Install steel sheet diagonal bracing straps to both stud flanges; terminate at and fasten to reinforced top and bottom tracks. Fasten clip-angle connectors to multiple studs at ends of bracing and anchor to structure.
- I. Install miscellaneous framing and connections, including supplementary framing, web stiffeners, clip angles, continuous angles, anchors, and fasteners, to provide a complete and stable wall-framing system.

3.5 INSTALLATION OF JOIST FRAMING

- A. Install perimeter joist track sized to match joists. Align and securely anchor or fasten track to supporting structure at corners, ends, and spacings indicated on Drawings.

- B. Install joists bearing on supporting frame, level, straight, and plumb; adjust to final position, brace, and reinforce. Fasten joists to both flanges of joist track.
 - 1. Install joists over supporting frame with a minimum end bearing of 1-1/2 inches (38 mm).
 - 2. Reinforce ends and bearing points of joists with web stiffeners, end clips, joist hangers, steel clip angles, or steel-stud sections.
- C. Space joists not more than 2 inches (51 mm) from abutting walls, and as follows:
 - 1. Joist Spacing: As indicated on Drawings.
- D. Frame openings with built-up joist headers, consisting of joist and joist track or another combination of connected joists if indicated.
- E. Install bridging at intervals indicated on Shop Drawings. Fasten bridging at each joist intersection as follows:
 - 1. Combination Bridging: Combination of flat, taut, steel sheet straps of width and thickness indicated and joist-track solid blocking of width and thickness indicated. Fasten flat straps to bottom flange of joists and secure solid blocking to joist webs.
- F. Secure joists to load-bearing interior walls to prevent lateral movement of bottom flange.
- G. Install miscellaneous joist framing and connections, including web stiffeners, closure pieces, clip angles, continuous angles, hold-down angles, anchors, and fasteners, to provide a complete and stable joist-framing assembly.

3.6 INSTALLATION TOLERANCES

- A. Install cold-formed steel framing level, plumb, and true to line to a maximum allowable tolerance variation of 1/8 inch in 10 feet (1:960) and as follows:
 - 1. Space individual framing members no more than plus or minus 1/8 inch (3 mm) from plan location. Cumulative error shall not exceed minimum fastening requirements of sheathing or other finishing materials.

3.7 REPAIR

- A. Galvanizing Repairs: Prepare and repair damaged galvanized coatings on fabricated and installed cold-formed steel framing with galvanized repair paint according to ASTM A780/A780M and manufacturer's written instructions.

3.8 FIELD QUALITY CONTROL

- A. Field and shop welds will be subject to testing and inspecting.
- B. Testing agency will report test results promptly and in writing to Contractor and Architect.
- C. Cold-formed steel framing will be considered defective if it does not pass tests and inspections.

- D. Additional testing and inspecting, at Contractor's expense, will be performed to determine compliance of replaced or additional work with specified requirements.

3.9 PROTECTION

- A. Provide final protection and maintain conditions, in a manner acceptable to manufacturer and Installer, that ensure that cold-formed steel framing is without damage or deterioration at time of Substantial Completion.

END OF SECTION 054000

SECTION 055213 - PIPE AND TUBE RAILINGS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Aluminum tube railings.

1.3 COORDINATION

- A. Coordinate installation of anchorages for railings. Furnish setting drawings, templates, and directions for installing anchorages, including sleeves, concrete inserts, anchor bolts, and items with integral anchors, that are to be embedded in concrete or masonry. Deliver such items to Project site in time for installation.

1.4 ACTION SUBMITTALS

- A. Product Data:
 - 1. Manufacturer's product lines of mechanically connected railings.
 - 2. Railing brackets.
- B. Shop Drawings: Include plans, elevations, sections, details, and attachments to other work.

1.5 INFORMATIONAL SUBMITTALS

- A. Product Test Reports: For tests on railings performed by a qualified testing agency, in accordance with ASTM E894 and ASTM E935.

1.6 DELIVERY, STORAGE, AND HANDLING

- A. Protect mechanical finishes on exposed surfaces of railings from damage by applying a strippable, temporary protective covering before shipping.

1.7 FIELD CONDITIONS

- A. Field Measurements: Verify actual locations of walls and other construction contiguous with railings by field measurements before fabrication.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. Structural Performance: Railings, including attachment to building construction, shall withstand the effects of gravity loads and the following loads and stresses within limits and under conditions indicated:
 - 1. Top Rails of Guards:
 - a. Uniform load of 50 lbf/ ft. (0.73 kN/m) applied in any direction.
 - b. Concentrated load of 200 lbf (0.89 kN) applied in any direction.
 - c. Uniform and concentrated loads need not be assumed to act concurrently.
- B. Thermal Movements: Allow for thermal movements from ambient and surface temperature changes.
 - 1. Temperature Change: 120 deg F, ambient; 180 deg F, material surfaces.

2.2 METALS, GENERAL

- A. Metal Surfaces, General: Provide materials with smooth surfaces, without seam marks, roller marks, rolled trade names, stains, discolorations, or blemishes.
- B. Brackets, Flanges, and Anchors: Cast or formed metal of same type of material and finish as supported rails unless otherwise indicated.

2.3 ALUMINUM RAILINGS

- A. Manufacturers: Subject to compliance with requirements, provide basis of design product or comparable products from one of the acceptable manufacturers.
 - 1. Basis-of-Design Product: McNichols; Handrail Components – Slip-On
15341 W. 100th Terrace, Lenexa, KS 66219; (877)-215-0256; www.mcnichols.com
 - 2. Acceptable manufacturers:
 - a. McNichols.
 - b. ULINE.
 - c. Kee Safety.
- B. Source Limitations: Obtain each type of railing from single source from single manufacturer.
- C. Slip-On Pipe Handrail Components:
 - 1. Pipe Material: Aluminum.
 - 2. Pipe Diameter: 1-1/2".
 - 3. Assembly Components: Aluminum crosses, elbows, tees, pipes, and flanges.
- D. Aluminum, General: Provide alloy and temper recommended by aluminum producer and finisher for type of use and finish indicated, and with not less than the strength and durability properties of alloy and temper designated below for each aluminum form required.

E. Extruded Structural Pipe and Round Tubing: ASTM B429/B429M, Alloy 6063-T6.

1. Provide Standard Weight (Schedule 40) pipe unless otherwise indicated.

F. Drawn Seamless Tubing: ASTM B210/B210M, Alloy 6063-T832.

G. Castings: ASTM B26/B26M, Alloy A356.0-T6.

2.4 FASTENERS

A. Fastener Materials:

1. Aluminum Railing Components: Type 316 stainless steel fasteners.
2. Finish exposed fasteners to match appearance, including color and texture, of railings.

B. Fasteners for Anchoring Railings to Other Construction: Select fasteners of type, grade, and class required to produce connections suitable for anchoring railings to other types of construction and capable of withstanding design loads.

C. Fasteners for Interconnecting Railing Components:

1. Provide concealed fasteners for interconnecting railing components and for attaching them to other work, unless otherwise indicated.

2.5 FABRICATION

A. General: Fabricate railings to comply with requirements indicated for design, dimensions, member sizes and spacing, details, finish, and anchorage, but not less than that required to support structural loads.

B. Shop assemble railings to greatest extent possible to minimize field splicing and assembly. Disassemble units only as necessary for shipping and handling limitations.

1. Clearly mark units for reassembly and coordinated installation.
2. Use connections that maintain structural value of joined pieces.

C. Cut, drill, and punch metals cleanly and accurately.

1. Remove burrs and ease edges to a radius of approximately 1/32 inch (1 mm) unless otherwise indicated.
2. Remove sharp or rough areas on exposed surfaces.

D. Form work true to line and level with accurate angles and surfaces.

E. Fabricate connections that are exposed to weather in a manner that excludes water.

1. Provide weep holes where water may accumulate.
2. Locate weep holes in inconspicuous locations.

F. Cut, reinforce, drill, and tap as indicated to receive finish hardware, screws, and similar items.

- G. Connections: Fabricate railings with nonwelded connections unless otherwise indicated.
- H. Nonwelded Connections: Connect members with concealed mechanical fasteners and fittings. Fabricate members and fittings to produce flush, smooth, rigid, hairline joints.
 - 1. Fabricate splice joints for field connection, using an epoxy structural adhesive, if this is manufacturer's standard splicing method.
- I. Close exposed ends of hollow railing members with prefabricated cap and end fittings of same metal and finish as railings.
- J. Brackets, Flanges, Fittings, and Anchors: Provide wall brackets, flanges, miscellaneous fittings, and anchors to interconnect railing members to other work unless otherwise indicated.
- K. Toe Boards: Where indicated, provide toe boards at railings around openings and at edge of open-sided floors and platforms. Fabricate to dimensions and details indicated.

2.6 ALUMINUM FINISHES

- A. Appearance of Finished Work: Variations in appearance of abutting or adjacent pieces are acceptable if they are within one-half of the range of approved Samples. Noticeable variations in the same piece are unacceptable. Variations in appearance of other components are acceptable if they are within the range of approved Samples and are assembled or installed to minimize contrast.
- B. Mill Finish: AA-M12, nonspecular as fabricated.

PART 3 - EXECUTION

3.1 INSTALLATION, GENERAL

- A. Perform cutting, drilling, and fitting required for installing railings.
 - 1. Fit exposed connections together to form tight, hairline joints.
 - 2. Install railings level, plumb, square, true to line; without distortion, warp, or rack.
 - 3. Set railings accurately in location, alignment, and elevation; measured from established lines and levels.
 - 4. Do not weld, cut, or abrade surfaces of railing components that are coated or finished after fabrication and that are intended for field connection by mechanical or other means without further cutting or fitting.
- B. Control of Corrosion: Prevent galvanic action and other forms of corrosion by insulating metals and other materials from direct contact with incompatible materials.
 - 1. Coat concealed surfaces of aluminum that will be in contact with grout, concrete, masonry, wood, or dissimilar metals, with a heavy coat of bituminous paint.
- C. Adjust railings before anchoring to ensure matching alignment at abutting joints.

- D. Fastening to In-Place Construction: Use anchorage devices and fasteners where necessary for securing railings and for properly transferring loads to in-place construction.

3.2 RAILING CONNECTIONS

- A. Nonwelded Connections: Use mechanical or adhesive joints for permanently connecting railing components. Use wood blocks and padding to prevent damage to railing members and fittings. Seal recessed holes of exposed locking screws, using plastic cement filler colored to match finish of railings.

3.3 CLEANING

- A. Clean aluminum by washing thoroughly with clean water and soap and rinsing with clean water.

3.4 PROTECTION

- A. Protect finishes of railings from damage during construction period with temporary protective coverings approved by railing manufacturer. Remove protective coverings at time of Substantial Completion.
- B. Restore finishes damaged during installation and construction period, so no evidence remains of correction work. Return items that cannot be refinished in the field to the shop; make required alterations and refinish entire unit, or provide new units.

END OF SECTION 055213

SECTION 061000 - ROUGH CARPENTRY

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Framing with dimension lumber.
2. Wood blocking and nailers.

B. Related Requirements:

1. Section 064023 "Interior Architectural Woodwork".

1.2 DEFINITIONS

A. Boards or Strips: Lumber of less than 2 inches nominal (38 mm actual) size in least dimension.

B. Dimension Lumber: Lumber of 2 inches nominal (38 mm actual) size or greater but less than 5 inches nominal (114 mm actual) size in least dimension.

1.3 ACTION SUBMITTALS

A. Product Data: For each type of process and factory-fabricated product. Indicate component materials and dimensions and include construction and application details.

1. Include data for wood-preservative treatment from chemical treatment manufacturer and certification by treating plant that treated materials comply with requirements. Indicate type of preservative used and net amount of preservative retained.
2. Include data for fire-retardant treatment from chemical treatment manufacturer and certification by treating plant that treated materials comply with requirements. Include physical properties of treated materials based on testing by a qualified independent testing agency.
3. For fire-retardant treatments, include physical properties of treated lumber both before and after exposure to elevated temperatures, based on testing by a qualified independent testing agency according to ASTM D5664.
4. For products receiving a waterborne treatment, include statement that moisture content of treated materials was reduced to levels specified before shipment to Project site.

1.4 INFORMATIONAL SUBMITTALS

A. Reports: For the following, from ICC-ES:

1. Wood-preservative-treated wood.
2. Fire-retardant-treated wood.

- B. Qualification Statements: For testing agency providing classification marking for fire-retardant treated material, an inspection agency acceptable to authorities having jurisdiction that periodically performs inspections to verify that the material bearing the classification marking is representative of the material tested.

1.5 DELIVERY, STORAGE, AND HANDLING

- A. Stack wood products flat with spacers beneath and between each bundle to provide air circulation. Protect wood products from weather by covering with waterproof sheeting, securely anchored. Provide for air circulation around stacks and under coverings.

PART 2 - PRODUCTS

2.1 WOOD PRODUCTS, GENERAL

- A. Lumber: Comply with DOC PS 20 and applicable rules of grading agencies indicated. If no grading agency is indicated, comply with the applicable rules of any rules-writing agency certified by the ALSC Board of Review. Grade lumber by an agency certified by the ALSC Board of Review to inspect and grade lumber under the rules indicated.
 - 1. Factory mark each piece of lumber with grade stamp of grading agency.
 - 2. Where nominal sizes are indicated, provide actual sizes required by DOC PS 20 for moisture content specified. Where actual sizes are indicated, they are minimum dressed sizes for dry wood products.
- B. Maximum Moisture Content of Lumber:
 - 1. Boards: 19 percent.
 - 2. Dimension Lumber: 15 percent for 2-inch nominal (38-mm actual) thickness or less unless otherwise indicated.

2.2 PRESERVATIVE TREATMENT

- A. Preservative Treatment by Pressure Process: AWP A U1; Use Category UC2 for interior construction not in contact with ground, Use Category UC3b for exterior construction not in contact with ground, and Use Category UC4a for items in contact with ground.
 - 1. Preservative Chemicals: Acceptable to authorities having jurisdiction and containing no arsenic or chromium. Do not use inorganic boron (SBX) for sill plates.
 - 2. After treatment, redry dimension lumber to 19 percent maximum moisture content.
- B. Kiln-dry lumber after treatment to a maximum moisture content of 19 percent. Do not use material that is warped or that does not comply with requirements for untreated material.
- C. Mark lumber with treatment quality mark of an inspection agency approved by the ALSC Board of Review.
- D. Application: Treat items indicated on Drawings, and the following:

1. Wood cants, nailers, curbs, equipment support bases, blocking, stripping, and similar members in connection with roofing, flashing, vapor barriers, and waterproofing.
2. Wood sills, sleepers, blocking, furring, stripping, and similar concealed members in contact with masonry or concrete.
3. Wood framing and furring attached directly to the interior of below-grade exterior masonry or concrete walls.

2.3 FIRE-RETARDANT TREATMENT

- A. General: Where fire-retardant-treated materials are indicated, materials shall comply with requirements in this article, that are acceptable to authorities having jurisdiction, and with fire-test-response characteristics specified as determined by testing identical products per test method indicated by a qualified testing agency.
- B. Fire-Retardant-Treated Lumber and Plywood by Pressure Process: Products with a flame-spread index of 25 or less when tested according to ASTM E84, and with no evidence of significant progressive combustion when the test is extended an additional 20 minutes, and with the flame front not extending more than 10.5 feet (3.2 m) beyond the centerline of the burners at any time during the test.
 1. Treatment shall not promote corrosion of metal fasteners.
 2. Exterior Type: Treated materials shall comply with requirements specified above for fire-retardant-treated lumber and plywood by pressure process after being subjected to accelerated weathering according to ASTM D2898. Use for exterior locations and where indicated.
 3. Interior Type A: Treated materials shall have a moisture content of 28 percent or less when tested according to ASTM D3201/D3201M at 92 percent relative humidity. Use where exterior type is not indicated.
 4. Design Value Adjustment Factors: Treated lumber shall be tested according to ASTM D5664 and design value adjustment factors shall be calculated according to ASTM D6841. For enclosed roof framing, framing in attic spaces, and where high temperature fire-retardant treatment is indicated, provide material with adjustment factors of not less than 0.85 modulus of elasticity and 0.75 for extreme fiber in bending for Project's climatological zone.
- C. Kiln-dry lumber after treatment to maximum moisture content of 19 percent. Kiln-dry plywood after treatment to maximum moisture content of 15 percent.
- D. Identify fire-retardant-treated wood with appropriate classification marking of qualified testing agency.
- E. Application: Treat items indicated on Drawings, and the following:
 1. Concealed blocking.
 2. Roof construction.
 3. Plywood backing panels.

2.4 DIMENSION LUMBER FRAMING

- A. Joists, Rafters, and Other Framing by Grade: No. 2 grade.
 1. Species:

- a. Hem-fir (north); NLGA.
- b. Douglas fir-larch; WCLIB or WWPA.
- c. Southern pine or mixed southern pine; SPIB.
- d. Spruce-pine-fir; NLGA.
- e. Douglas fir-south; WWPA.
- f. Hem-fir; WCLIB or WWPA.
- g. Douglas fir-larch (north); NLGA.
- h. Spruce-pine-fir (south); NeLMA, WCLIB, or WWPA.

2.5 MISCELLANEOUS LUMBER

- A. Provide miscellaneous lumber indicated and lumber for support or attachment of other construction, including the following:
 - 1. Blocking.
 - 2. Nailers.
 - 3. Cants.
- B. Concealed Boards: 19 percent maximum moisture content and any of the following species and grades:
 - 1. Mixed southern pine or southern pine; No. 2; SPIB.
 - 2. Hem-fir or hem-fir (north); Construction or No. 2 Common grade; NLGA, WCLIB, or WWPA.
 - 3. Spruce-pine-fir (south) or spruce-pine-fir; Construction or No. 2 Common grade; NeLMA, NLGA, WCLIB, or WWPA.
- C. For blocking not used for attachment of other construction, Utility, Stud, or No. 3 grade lumber of any species may be used provided that it is cut and selected to eliminate defects that will interfere with its attachment and purpose.
- D. For blocking and nailers used for attachment of other construction, select and cut lumber to eliminate knots and other defects that will interfere with attachment of other work.
- E. For furring strips for installing plywood or hardboard paneling, select boards with no knots capable of producing bent-over nails and damage to paneling.

2.6 FASTENERS

- A. General: Fasteners shall be of size and type indicated and shall comply with requirements specified in this article for material and manufacture. Provide nails or screws, in sufficient length, to penetrate not less than 1-1/2 inches (38 mm) into wood substrate.
 - 1. Where rough carpentry is exposed to weather, in ground contact, or in area of high relative humidity, provide fasteners with hot-dip zinc coating complying with ASTM A153/A153M or ASTM F2329.
 - 2. For pressure-preservative-treated wood, use stainless steel fasteners.
- B. Nails, Brads, and Staples: ASTM F1667.

- C. Power-Driven Fasteners: Fastener systems with an evaluation report acceptable to authorities having jurisdiction, based on ICC-ES AC70.

2.7 METAL FRAMING ANCHORS

- A. Allowable design loads, as published by manufacturer, shall meet or exceed those indicated. Manufacturer's published values shall be determined from empirical data or by rational engineering analysis and demonstrated by comprehensive testing performed by a qualified independent testing agency. Framing anchors shall be punched for fasteners adequate to withstand same loads as framing anchors.
- B. Galvanized-Steel Sheet: Hot-dip, zinc-coated steel sheet complying with ASTM A653/A653M, G60 (Z180) coating designation.
 - 1. Use for interior locations unless otherwise indicated.
- C. Joist Hangers: U-shaped joist hangers with 2-inch- (50-mm-) long seat and 1-1/4-inch- (32-mm-) wide nailing flanges at least 85 percent of joist depth.
 - 1. Thickness: 0.050 inch (1.3 mm).

PART 3 - EXECUTION

3.1 INSTALLATION, GENERAL

- A. Framing Standard: Comply with AF&PA's WCD 1, "Details for Conventional Wood Frame Construction," unless otherwise indicated.
- B. Set work to required levels and lines, with members plumb, true to line, cut, and fitted. Fit rough carpentry accurately to other construction. Locate nailers, blocking, and similar supports to comply with requirements for attaching other construction.
- C. Install metal framing anchors to comply with manufacturer's written instructions. Install fasteners through each fastener hole.
- D. Do not splice structural members between supports unless otherwise indicated.
- E. Provide blocking and framing as indicated and as required to support facing materials, fixtures, specialty items, and trim.
 - 1. Provide metal clips for fastening gypsum board or lath at corners and intersections where framing or blocking does not provide a surface for fastening edges of panels. Space clips not more than 16 inches (406 mm) o.c.
- F. Sort and select lumber so that natural characteristics do not interfere with installation or with fastening other materials to lumber. Do not use materials with defects that interfere with function of member or pieces that are too small to use with minimum number of joints or optimum joint arrangement.
- G. Comply with AWPA M4 for applying field treatment to cut surfaces of preservative-treated lumber.

1. Use inorganic boron for items that are continuously protected from liquid water.
 2. Use copper naphthenate for items not continuously protected from liquid water.
- H. Where wood-preservative-treated lumber is installed adjacent to metal decking, install continuous flexible flashing separator between wood and metal decking.
- I. Securely attach rough carpentry work to substrate by anchoring and fastening as indicated, complying with the following:
1. Table 2304.9.1, "Fastening Schedule," in ICC's International Building Code (IBC).
 2. Table R602.3(1), "Fastener Schedule for Structural Members," and Table R602.3(2), "Alternate Attachments," in ICC's International Residential Code for One- and Two-Family Dwellings.
 3. ICC-ES evaluation report for fastener.
- J. Use steel common nails unless otherwise indicated. Select fasteners of size that will not fully penetrate members where opposite side will be exposed to view or will receive finish materials. Make tight connections between members. Install fasteners without splitting wood. Drive nails snug but do not countersink nail heads unless otherwise indicated.

3.2 INSTALLATION OF WOOD BLOCKING AND NAILERS

- A. Install where indicated and where required for attaching other work. Form to shapes indicated and cut as required for true line and level of attached work. Coordinate locations with other work involved.
- B. Attach items to substrates to support applied loading. Recess bolts and nuts flush with surfaces unless otherwise indicated.

3.3 PROTECTION

- A. Protect wood that has been treated with inorganic boron (SBX) from weather. If, despite protection, inorganic boron-treated wood becomes wet, apply EPA-registered borate treatment. Apply borate solution by spraying to comply with EPA-registered label.
- B. Protect rough carpentry from weather. If, despite protection, rough carpentry becomes wet, apply EPA-registered borate treatment. Apply borate solution by spraying to comply with EPA-registered label.

END OF SECTION 061000

SECTION 064023 – INTERIOR ARCHITECTURAL WOODWORK

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Interior standing and running trim.
2. Plastic-laminate-clad architectural cabinets.
3. Cabinet hardware and accessories.
4. Solid-surfacing material.
5. Wood furring, blocking, shims, and hanging strips for installing plastic-laminate-clad architectural cabinets that are not concealed within other construction.

B. Related Requirements:

1. Section 061000 "Rough Carpentry" for wood furring, blocking, shims, and hanging strips required for installing cabinets that are concealed within other construction before cabinet installation.

1.2 COORDINATION

- A. Coordinate sizes and locations of framing, blocking, furring, reinforcements, and other related units of Work specified in other Sections to support loads imposed by installed and fully loaded cabinets.

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of product.

B. Shop Drawings:

1. Include plans, elevations, sections, and attachment details.
2. Show large-scale details.
3. Show locations and sizes of furring, blocking, and hanging strips, including concealed blocking and reinforcement specified in other Sections.
4. Show locations and sizes of cutouts and holes for items installed in plastic-laminate architectural cabinets.

- C. Samples: For each exposed product and for each color and texture specified, in manufacturer's or manufacturer's standard size.

D. Samples for Verification: For the following:

1. Lumber for Transparent Finish: Not less than 5 inches wide by 12 inches long, for each species and cut, finished on one side and one edge.

1.4 DELIVERY, STORAGE, AND HANDLING

- A. Do not deliver cabinets or interior architectural woodwork until painting and similar finish operations that might damage architectural cabinets have been completed in installation areas.

1.5 FIELD CONDITIONS

- A. Established Dimensions: Where interior architectural woodwork is indicated to fit to other construction, establish dimensions for areas where woodwork is to fit. Provide allowance for trimming at site, and coordinate construction to ensure that actual dimensions correspond to established dimensions.

1.6 COORDINATION

- A. Coordinate sizes and locations of framing, blocking, furring, reinforcements, and other related units of Work specified in other Sections to ensure that architectural woodwork can be supported and installed as indicated.

PART 2 - PRODUCTS

2.1 ARCHITECTURAL WOODWORK, GENERAL

- A. Quality Standard: Unless otherwise indicated, comply with the Architectural Woodwork Standards for grades of cabinets indicated for construction, finishes, installation, and other requirements.
 - 1. The Contract Documents contain requirements that are more stringent than the referenced quality standard. Comply with requirements of Contract Documents in addition to those of the referenced quality standard.

2.2 INTERIOR STANDING AND RUNNING TRIM FOR TRANSPARENT FINISH (STAIN)

- A. Wood Species and Cut: White oak, rift sawn or cut.
- B. Backout or groove backs of flat trim members and kerf backs of other wide, flat members, except for members with ends exposed in finished work.

2.3 PLASTIC-LAMINATE-CLAD ARCHITECTURAL CABINETS

- A. Architectural Woodwork Standards Grade: Custom.
- B. Type of Construction: Frameless.
- C. Door and Drawer-Front Style: Flush overlay.
- D. High-Pressure Decorative Laminate: NEMA LD 3, grades as indicated or if not indicated, as required by quality standard.

-
1. Products: Subject to compliance with requirements, provide high pressure decorative laminates by one of the following:
 - a. Wilsonart LLC.
 - b. Pionite; a Panolam Industries International, Inc. brand.
 - c. Formica Corporation.
 - E. Laminate Cladding for Exposed Surfaces:
 1. Horizontal Surfaces: Grade HGS.
 2. Vertical Surfaces: Grade HGS.
 3. Edges: PVC tape, 0.018-inch minimum thickness, matching laminate in color, pattern, and finish.
 4. Pattern Direction: Vertically for drawer fronts, doors and fixed panels.
 - F. Materials for Semiexposed Surfaces:
 1. Surfaces Other Than Drawer Bodies: Thermally fused laminate panels.
 - a. Edges of Plastic-Laminate Shelves: PVC edge banding, 3.0 mm thick, matching laminate in color, pattern, and finish.
 - b. Edges of Thermally Fused Laminate Panel Shelves: PVC or polyester edge banding.
 - c. For semiexposed backs of panels with exposed plastic-laminate surfaces, provide surface of high-pressure decorative laminate, NEMA LD 3, Grade VGS.
 - G. Colors, Patterns, and Finishes: Provide materials and products that result in colors and textures of exposed laminate surfaces complying with the following requirements:
 1. Match Architect's sample and existing materials in Room 201 Prep Room.
 - a. To be verified: Wilsonart; Cocobala – 7942K-07.
- 2.4 SOLID-SURFACING MATERIAL COUNTERTOPS
- A. Homogenous solid sheets of filled plastic resin complying with material and performance requirements in ANSI SS1.
 1. Basis-of-Design Product: Subject to compliance with requirements product by one of the following:
 - a. Wilsonart LLC.
 - b. Corian; DuPont.
 - c. Avonite; Aristech Surfaces, LLC.
 2. Fabrication:
 - a. Fabricate tops in one piece with shop-applied eased edges unless otherwise indicated.
 - b. Comply with solid-surface-material manufacturer's written instructions for adhesives, sealers, fabrication and finishing.
 3. Countertops: 3/4-inch-thick, solid surface material.
 4. Backsplash: Standard single length solid surface pieces; longest length possible to minimize joints.
 - a. 3/4-inch-thick, solid surface material.
 5. Window Sills: 1/2-inch-thick, solid surface material.
 6. Colors: To match Architect's sample.
 - a. Avonite; Malt – F1-7810

2.5 COUNTERTOP SUPPORT BRACKETS

- A. Wall, flush mounted, heavy duty, welded aluminum bracket for supporting countertops.
 - 1. Manufacturer: Subject to compliance with requirements, provide products by one of the following or similar:
 - a. Rakks/Rangine Corporation.
- B. Material: Fabricate components from extruded aluminum sections complying with ASTM B221, 6063-T5 alloy and temper.
- C. Finish: Clear anodized aluminum.
- D. Inside wall mount brackets: Bracket for countertops and shelves.
 - 1. Construction: Fabricated from horizontal aluminum T section and vertical aluminum L section. Vertical leg designed to attach to side of supporting stud and be concealed by gypsum board.
 - 2. Size (height by depth): As required by depth of counter.
 - 3. Load capacity per bracket: 300 pounds.
 - 4. Maximum spacing —32 inches o.c.

2.6 CABINET HARDWARE AND ACCESSORIES

- A. Frameless Concealed Hinges (European Type): ANSI/BHMA A156.9, B01602, 170 degrees of opening.
- B. Back-Mounted Wire Pulls: ANSI/BHMA A156.9, B02011.
- C. Adjustable Shelf Standards and Supports: ANSI/BHMA A156.9, B04071; with shelf rests, B04081.
- D. Drawer Slides: ANSI/BHMA A156.9.
 - 1. General-purpose drawers more than 3 inches high, but not more than 6 inches high and not more than 24 inches wide, provide 75 lb load capacity.
- E. Door and Drawer Silencers: ANSI/BHMA A156.16, L03011.
- F. Exposed Hardware Finishes: For exposed hardware, provide finish that complies with ANSI/BHMA A156.18 for ANSI/BHMA finish number indicated.
 - 1. Satin Stainless Steel: ANSI/BHMA 630.
- G. For concealed hardware, provide manufacturer's standard finish that complies with product class requirements in ANSI/BHMA A156.9.

2.7 MISCELLANEOUS MATERIALS

- A. Furring, Blocking, Shims, and Hanging Strips: Softwood or hardwood lumber, kiln-dried to less than 15 percent moisture content.

- B. Anchors: Select material, type, size, and finish required for each substrate for secure anchorage. Provide metal expansion sleeves or expansion bolts for post-installed anchors. Use nonferrous-metal or hot-dip galvanized anchors and inserts at inside face of exterior walls and at floors.
- C. Adhesive for Bonding Plastic Laminate: Unpigmented contact cement.
 - 1. Adhesive for Bonding Edges: Hot-melt adhesive or adhesive specified above for faces.

2.8 WOOD MATERIALS

- A. General: Provide materials that comply with requirements of AWI's quality standard for each type of woodwork and quality grade specified, unless otherwise indicated.
- B. Certified Wood: Interior architectural woodwork shall be produced from wood obtained from forests certified by an FSC-accredited certification body to comply with FSC STD-01-001, "FSC Principles and Criteria for Forest Stewardship."
- C. Wood Products: Comply with the following:
 - 1. Medium-Density Fiberboard: ANSI A208.2, Grade MD, made with binder containing no urea formaldehyde.

2.9 FABRICATION

- A. Interior Woodwork Grade: Unless otherwise indicated, provide Premium-grade interior woodwork complying with referenced quality standard.
- B. Wood Moisture Content: Comply with requirements of referenced quality standard for wood moisture content in relation to ambient relative humidity during fabrication and in installation areas.
- C. Fabricate architectural cabinets to dimensions, profiles, and details indicated.
- D. Complete fabrication, including assembly and hardware application, to maximum extent possible before shipment to Project site. Disassemble components only as necessary for shipment and installation. Where necessary for fitting at site, provide ample allowance for scribing, trimming, and fitting.
 - 1. Trial fit assemblies at manufacturer's shop that cannot be shipped completely assembled. Install dowels, screws, bolted connectors, and other fastening devices that can be removed after trial fitting. Verify that various parts fit as intended and check measurements of assemblies against field measurements before disassembling for shipment.
- E. Shop-cut openings to maximum extent possible to receive hardware, appliances, electrical work, and similar items. Locate openings accurately and use templates or roughing-in diagrams to produce accurately sized and shaped openings. Sand edges of cutouts to remove splinters and burrs.

2.10 SHOP FINISHING

- A. Grade: Provide finishes of same grades as items to be finished.

- B. General: Finish architectural woodwork at fabrication shop as specified in this Section. Defer only final touchup, cleaning, and polishing until after installation.
- C. Shop Priming: Shop apply the prime coat including backpriming, if any, for items specified to be field finished. Refer to Division 09 painting Sections for material and application requirements.
- D. Preparation for Finishing: Comply with referenced quality standard for sanding, filling counter-sunk fasteners, sealing concealed surfaces, and similar preparations for finishing architectural woodwork, as applicable to each unit of work.
 - 1. Backpriming: Apply one coat of sealer or primer, compatible with finish coats, to concealed surfaces of woodwork. Apply two coats to back of paneling and to end-grain surfaces. Concealed surfaces of plastic-laminate-clad woodwork do not require backpriming when surfaced with plastic laminate, backing paper, or thermoset decorative panels.
- E. Transparent Finish (Stain) ST-1:
 - 1. Grade: Custom
 - 2. Finish System: Conversion varnish.
 - 3. Staining: To match existing stain finish of adjacent materials, architect shall review and approve a test sample prior to continuing work.
 - 4. Wash Coat for Stained Finish: Apply wash-coat sealer to woodwork made from closed-grain wood before staining and finishing.
 - 5. Filled Finish for Open-Grain Woods: After staining (if any), apply paste wood filler to open-grain woods and wipe off excess. Tint filler to match stained wood.
 - a. Apply wash-coat sealer after staining and before filling.
 - 6. Sheen: Satin, 31-45 gloss units measured on 60-degree gloss meter per ASTM D 523.

PART 3 - EXECUTION

3.1 PREPARATION

- A. Before installation, condition cabinets to humidity conditions in installation areas for not less than 72 hours.
- B. Before installing architectural woodwork, examine shop-fabricated work for completion and complete work as required, including removal of packing and backpriming.

3.2 INSTALLATION

- A. Architectural Woodwork Standards Grade: Install cabinets to comply with quality standard grade of item to be installed.
- B. Assemble cabinets and complete fabrication at Project site to extent that it was not completed in the shop.
- C. Anchor cabinets to anchors or blocking built in or directly attached to substrates. Secure with wafer-head cabinet installation screws.
- D. Install cabinets level, plumb, and true in line to a tolerance of 1/8 inch in 96 inches using concealed shims.

1. Scribe and cut cabinets to fit adjoining work, refinish cut surfaces, and repair damaged finish at cuts.
 2. Install cabinets without distortion so doors and drawers fit openings and are accurately aligned. Adjust hardware to center doors and drawers in openings and to provide unencumbered operation. Complete installation of hardware and accessory items as indicated.
 3. Fasten wall cabinets through back, near top and bottom, and at ends not more than 16 inches o.c. with No. 10 wafer-head screws sized for not less than 1-1/2-inch penetration into wood framing, blocking, or hanging strips.
- E. Countertops: Anchor securely by screwing through corner blocks of base cabinets or other supports into underside of countertop.
1. Align adjacent solid-surfacing-material countertops and form seams to comply with manufacturer's written recommendations using adhesive in color to match countertop. Carefully dress joints smooth, remove surface scratches, and clean entire surface.
 2. Install countertops with no more than 1/8 inch in 96-inch sag, bow, or other variation from a straight line.
 3. Caulk space between backsplash and wall with sealant specified in Division 07 Section "Joint Sealants."
- F. Standing and Running Trim: Install with minimum number of joints possible, using full-length pieces (from maximum length of lumber available) to greatest extent possible. Do not use pieces less than 96 inches long, except where shorter single-length pieces are necessary. Scarf running joints and stagger in adjacent and related members.
1. Fill gaps, if any, between top of base and wall with plastic wood filler, sand smooth, and finish same as wood base if finished.
 2. Install standing and running trim with no more variation from a straight line than 1/8 inch in 96 inches.
- G. Touch up finishing work specified in this Section after installation of woodwork. Fill nail holes with matching filler where exposed.

3.3 ADJUSTING AND CLEANING

- A. Repair damaged and defective cabinets, where possible, to eliminate functional and visual defects. Where not possible to repair, replace architectural cabinets. Adjust joinery for uniform appearance.
- B. Clean, lubricate, and adjust hardware.
- C. Clean cabinets on exposed and semiexposed surfaces.

END OF SECTION 064023

SECTION 06 6400 – PLASTIC PANELING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Plastic sheet paneling.
 - 2. Accessories

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of product.
- B. Samples: For plastic paneling and trim accessories, in manufacturer's standard sizes.

1.4 PROJECT CONDITIONS

- A. Environmental Limitations: Do not deliver or install plastic paneling until spaces are enclosed and weathertight and temporary HVAC system is operating and maintaining ambient temperature and humidity conditions at occupancy levels during the remainder of the construction period.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. Source Limitations: Obtain plastic paneling and trim accessories from single manufacturer.

2.2 PLASTIC SHEET PANELING

- A. Glass-Fiber-Reinforced Plastic Paneling: Gelcoat-finished, glass-fiber-reinforced plastic panels complying with ASTM D5319.
 - 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Crane Composites, Inc.
 - b. Marlite.
 - c. Parkland Plastics, Inc.

2. Surface-Burning Characteristics: As follows when tested by a qualified testing agency according to ASTM E84. Identify products with appropriate markings of applicable testing agency.
 - a. Flame-Spread Index: 25 or less.
 - b. Smoke-Developed Index: 450 or less.
3. Nominal Thickness: Not less than 0.09 inch
4. Surface Finish: Molded pebble texture
5. Color: White

2.3 ACCESSORIES

- A. Trim Accessories: Manufacturer's standard vinyl extrusions designed to retain and cover edges of panels. Provide division bars, inside corners, outside corners, and caps as needed to conceal edges.
 1. Color: White.
- B. Adhesive: As recommended by plastic paneling manufacturer.
 1. Adhesives shall have a VOC content of 50 g/L or less.
- C. Sealant: Mildew-resistant, single-component, neutral-curing silicone sealant recommended by plastic paneling manufacturer and complying with requirements in Section 079200 "Joint Sealants."
 1. Sealant shall have a VOC content of 250 g/L or less.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates and conditions, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting performance of the Work.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

- A. Remove wallpaper, vinyl wall covering, loose or soluble paint, and other materials that might interfere with adhesive bond.
- B. Prepare substrate by sanding high spots and filling low spots as needed to provide flat, even surface for panel installation.
- C. Clean substrates of substances that could impair adhesive bond, including oil, grease, dirt, and dust.

- D. Condition panels by unpacking and placing in installation space before installation according to manufacturer's written recommendations.
- ~~E.~~ Lay out paneling before installing. Locate panel joints to provide equal panels at ends of walls not less than half the width of full panels.
 - 1. Mark plumb lines on substrate at panel joint locations for accurate installation.
 - 2. Locate trim accessories to allow clearance at panel edges according to manufacturer's written instructions.

3.3 INSTALLATION

- A. Install plastic paneling according to manufacturer's written instructions.
- B. Install panels in a full spread of adhesive.
- C. Install trim accessories with adhesive.
- D. Fill grooves in trim accessories with sealant before installing panels, and bed inside corner trim in a bead of sealant.
- E. Maintain uniform space between panels and wall fixtures. Fill space with sealant.
- F. Maintain uniform space between adjacent panels and between panels and floors, ceilings, and fixtures. Fill space with sealant.
- G. Remove excess sealant and smears as paneling is installed. Clean with solvent recommended by sealant manufacturer and then wipe with clean dry cloths until no residue remains.

END OF SECTION 066400

SECTION 075323 - MODIFIED BITUMINOUS MEMBRANE ROOFING

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes:
 - 1. Modified bituminous smooth membrane/granule surface cap sheet (surface) membrane.
 - 2. Cover board.
 - 3. Roof insulation.

1.2 DEFINITIONS

- A. Roofing Terminology: See ASTM D 1079 and glossary of NRCA's "The NRCA Roofing and Waterproofing Manual" for definition of terms related to roofing work in this Section.

1.3 PERFORMANCE REQUIREMENTS

- A. General Performance: Installed membrane roofing and base flashings shall withstand specified uplift pressures, thermally induced movement, and exposure to weather without failure due to defective manufacture, fabrication, installation, or other defects in construction. Membrane roofing and base flashings shall remain watertight.
- B. Material Compatibility: Provide roofing materials that are compatible with one another under conditions of service and application required, as demonstrated by membrane roofing manufacturer based on testing and field experience.
- C. FM Approvals Listing: Provide membrane roofing, base flashings, and component materials that comply with requirements in FM Approvals 4450 and FM Approvals 4470 as part of a membrane roofing system, and that are listed in FM Approvals' "RoofNav" for Class 1 or noncombustible construction, as applicable. Identify materials with FM Approvals markings.
- D. Severe Hail (SH) Resistance Rating FM Listing

1.4 ACTION SUBMITTALS

- A. Product Data: For each type of product indicated.
- B. Shop Drawings: For roofing system. Include plans, elevations, sections, details, and attachments to other work.
 - 1. Base flashings and membrane terminations.
- C. Samples for Verification: For the following products:
 - 1. Sheet roofing materials, including roofing membrane sheet, membrane cap sheet, of color specified (base flashing plies same material as field of roof).

1.5 INFORMATIONAL SUBMITTALS

- A. Qualification Data (membrane manufacturer): Provide primary products including each type of roofing membrane, having successfully produced those products for not less than five years. Provide secondary products such as roof insulation, fasteners, and base flashing materials. Provide materials that are compatible with existing conditions and are asbestos free.
- B. Manufacturer Certificates: Signed by roofing manufacturer certifying that roofing system complies with requirements specified in "Performance Requirements" Article.
 - 1. Submit evidence of complying with performance requirements.
- C. Warranties: Sample of special warranties.

1.6 QUALITY ASSURANCE

- A. Manufacturer Qualifications: A qualified manufacturer that is UL listed for roofing system identical to that used for this Project.
- B. Installer Qualifications: A qualified firm that is approved, authorized, or licensed by roofing system manufacturer to install manufacturer's product and that is eligible to receive manufacturer's special warranty.
 - 1. The roofing applicator shall be thoroughly experienced and upon request be able to provide evidence of having at least five (5) years successful experience installing warranted roofing systems and having installed at least one (1) roofing application or several similar systems of equal or greater size within one year.
 - 2. Provide adequate number of experienced workmen, 50% of installing crew minimum, regularly engaged in this type of work who are skilled in the application techniques of the materials specified and certified by the roofing system manufacturer. Provide at least one thoroughly trained and experienced superintendent on the job at all times roofing work is in progress.
 - a. Contractor shall submit work history data sheets for each worker on the project showing evidence of successful experience installing the specific type of warranted roofing system proposed for use.
 - b. Contractor shall have an experienced, pre-qualified, thoroughly trained superintendent with five (5) years experience with roof systems specified who is familiar with the requirements of this project, on the job at all times when roofing system work is in progress. Training for Superintendent shall include certification of completion of manufacturer's in-house training course or on-site training. On-site training shall consist of at least eighty (80) hours of on-site application monitored by a manufacturer's representative.
- C. Upon completion of the roof, the Owner's roofing inspector will review the installation to verify that the roofing standards have been met.
- D. There shall be no deviations made from this specification or the approved shop drawings without the prior written approval of the specifier. Any deviation from the manufacturer's installation procedures must be supported by a written certification on the manufacturer's letterhead and presented for the specifier's consideration.

1.7 DELIVERY, STORAGE, AND HANDLING

- A. Deliver roofing materials to Project site in original containers with seals unbroken and labeled with manufacturer's name, product brand name and type, date of manufacture, approval or listing agency markings, and directions for storing and mixing with other components.
- B. Store liquid materials in their original undamaged containers in a clean, dry, protected location and within the temperature range required by roofing system manufacturer. Protect stored liquid material from direct sunlight.
 - 1. Discard and legally dispose of liquid material that cannot be applied within its stated shelf life.
- C. Protect roof insulation materials from physical damage and from deterioration by sunlight, moisture, soiling, and other sources. Store in a dry location.
- D. Handle and store roofing materials and place equipment in a manner to avoid permanent deflection of deck.

1.8 PROJECT CONDITIONS

- A. Weather Limitations: Proceed with installation only when existing and forecasted weather conditions permit roofing system to be installed according to manufacturer's written instructions and warranty requirements.

1.9 WARRANTY

- A. Installer's Warranty: Submit roofing Installer's warranty, on warranty form at end of this Section, signed by Installer, covering labor and materials of this Section, including all components of roofing system such as membrane roofing, base flashing, fasteners, cover boards, and other components of membrane roofing system required to make the system watertight and complete, for the following warranty period:
 - 1. Warranty Period: Three (3) years from date of Substantial Completion.
 - 2. The roofing Contractor and roofing Manufacturer accompanied by a designated owner's representative shall perform, at no additional cost to the owner, an annual inspection of the complete roofing system installation through the three (3) year Contractor's Warranty period. This inspection shall include a written detailed evaluation of the roofing system including system failures and maintenance recommendations. All roofing system failures and defects shall be repaired/corrected by the Contractor at no additional cost to the Owner within thirty (30) days from date of annual inspection. These repairs/corrections shall include replacing any and all wet insulation. All repairs shall be approved by, and made to the satisfaction of the owner's representative.
 - 3. The Owner will promptly notify the roofing Contractor and Manufacturer, in writing, of the defects in the roofing system. Within eight (8) hours after receipt of written notice from the Owner, the roofing Contractor shall make emergency repairs, at its own expense, as required to render the facility watertight. Within five (5) days after receipt of such notice, the roofing Contractor shall, at its own expense, correct any faults or defects in material or workmanship. Should the roofing Contractor or roof Manufacturer fail or refuse to make the necessary repairs or replacements, when requested by the Owner, the Owner may perform, or cause the necessary work to be performed at the roofing Contractor's and Manufacturer's expense.

PART 2 - PRODUCTS

2.1 APP-MODIFIED ASPHALT-SHEET MATERIALS

- A. APP-Modified Bituminous Membrane Roofing:
 - 1. Manufacturer: Subject to compliance with requirements, provide the following or equal:
 - a. Derbigum of America.
 - 2. Other Acceptable Manufacturers:
 - a. Holcim Elevate
- B. Roofing Membrane Sheet: ASTM D 6509, Grade S, 120 mil APP-modified asphalt base sheet (reinforced with a glass fiber mat); smooth surfaced; suitable for application method specified (Derbibase Ultra).
- C. Granule-Surfaced Roofing Membrane Cap Sheet: ASTM D 6223, Grade G, Type II, APP-modified asphalt sheet (reinforced with a combination of polyester fabric and glass fibers); granular surfaced; fire-rated (FR), suitable for application method specified (Derbicolor GP FR).
- D. Granule Material and Colors:
 - 1. Granule Material: Mineral.
 - 2. Granule Color: Match existing.

2.2 BASE FLASHING SHEET MATERIALS

- A. Backer Sheet: ASTM D 6509, Grade S, 120 mil APP-modified asphalt base sheet (reinforced with a glass fiber mat); smooth surfaced; suitable for application method specified (Derbibase Ultra).
- B. Granule-Surfaced Flashing Cap Sheet: ASTM D 6223, Grade G, Type II, APP-modified asphalt sheet (reinforced with a combination of polyester fabric and glass fibers); granular surfaced; suitable for application method specified (Derbicolor GP FR).
- C. Granule Material and Color:
 - 1. Granule Material: Mineral.
 - 2. Granule Color: Match existing.
- D. Fiber Fabric: Woven glass-fiber cloth treated with asphalt, complying with ASTM D 1668, Type I.

2.3 AUXILIARY ROOFING MEMBRANE MATERIALS

- A. General: Auxiliary materials recommended by roofing system manufacturer for intended use and compatible with roofing membrane.
 - 1. Liquid-type auxiliary materials shall comply with VOC limits of authorities having jurisdiction.
- B. Asphalt Primer: ASTM D 41 (PRS Primer).

- C. Cold-Applied Adhesive: Roofing system manufacturer's standard asphalt-based, one-part, asbestos free, cold-applied adhesive specially formulated for compatibility and use with roofing membrane (Permastic).
- D. Cold-Applied Adhesive: Roofing system manufacturer's standard asphalt-based, one-part, asbestos free, cold-applied adhesive specially formulated for compatibility and use with base flashings (Perflash).
- E. Asphalt Roofing Cement: ASTM D 4586, asbestos free, of consistency required by roofing system manufacturer for application.
- F. Fasteners: Factory-coated steel fasteners and metal or plastic plates complying with corrosion-resistance provisions in FM Approvals 4470, designed for fastening roofing membrane components to substrate; tested by manufacturer for required pullout strength, and acceptable to roofing system manufacturer.
- G. Lead Flashing Sheet (drains): 30" by 30" square, 4 pound per square foot.
- H. Roofing Granules: Ceramic-coated roofing granules, No. 11 screen size with 100 percent passing No. 8 sieve and 98 percent of mass retained on No. 40 sieve, color to match roofing membrane.
- I. Miscellaneous Accessories: Provide those recommended by roofing system manufacturer.

2.4 COVER BOARD

- A. Cover Board: ASTM C 1177, glass-mat, water-resistant gypsum substrate.
- B. Products: Subject to compliance with requirements, provide product by one of the following:
 - 1. CertainTeed Corporation; GlasRock Sheathing.
 - 2. Georgia-Pacific Building Products; Dens Deck Prime.
 - 3. National Gypsum Company; Gold Bond eXP Extended Exposure Sheathing.
 - 4. USG Corporation; Securock Glass Mat Roof Board.
- C. Thickness: As indicted on Drawings.

2.5 COVERBOARD ACCESSORIES

- A. Bead-Applied Cover Board Adhesive: Manufacturer's recommended bead-applied, low-rise, two-component urethane adhesive formulated to attach coverboard to substrate.
- B. Modified cant strips: 1-3/4 inch x 1-3/4 inch x 2 inch.

2.6 ROOF INSULATION

- A. Polyisocyanurate Board Insulation: Closed cell polyisocyanurate foam core with laminated inorganic coated glass reinforced mat facer, Type II, Class 2, complying with ASTM C 1289.
 - 1. Density: 2.0 pcf per ASTM D1522
 - 2. Compressive Strength: 20 psi minimum per ASTM D1621 Procedure A
 - 3. Meets FM 4450 and UL 1256

4. Moisture Vapor Transmission: 1.0 perms maximum.
 5. Thickness: Provide thickness and slope as indicated.
 6. Size: 48 by 48 inches.
- B. Tapered Insulation: ASTM C1289, Type II, Class 2, Grade 2 20 psi), provide factory-tapered insulation boards.
1. Slope: ¼ inch per foot unless otherwise indicated on Drawings.
- C. Insulation – General
1. Factory taper insulation to provide smooth incline of slopes as shown on drawings.
 - a. Factory miter valleys and corners.
 2. Multiple Layers: Furnish in not less than 2 layers.

2.7 INSULATION ACCESSORIES

- A. General: Roof insulation accessories recommended by insulation manufacturer for intended use and compatibility with other roofing system components.
- B. Fasteners: Factory-coated steel fasteners and metal or plastic plates complying with corrosion-resistance provisions in FM Approvals 4470, designed for fastening roof insulation to substrate, and acceptable to roofing system manufacturer.
- C. Insulation Adhesive: Insulation manufacturer's recommended adhesive formulated to attach roof insulation to substrate or to another insulation layer as follows:
1. Bead-applied, low-rise, one-component or multicomponent urethane adhesive.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates, areas, and conditions, with Installer present, for compliance with the following requirements and other conditions affecting performance of roofing system:
- B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

- A. Clean substrate of dust, debris, moisture, and other substances detrimental to roofing installation according to roofing system manufacturer's written instructions. Remove sharp projections.
- B. Prevent materials from entering and clogging roof drains and conductors and from spilling or migrating onto surfaces of other construction. Remove roof-drain plugs when no work is taking place or when rain is forecast.

3.3 ROOFING MEMBRANE INSTALLATION, GENERAL

- A. Install roofing membrane system according to roofing system manufacturer's written instructions and applicable recommendations in ARMA/NRCA's "Quality Control Guidelines for the Application of Polymer Modified Bitumen Roofing."
- B. Start installation of roofing membrane in presence of roofing system manufacturer's technical personnel.
- C. Cooperate with testing agencies engaged or required to perform services for installing roofing system.
- D. Coordinate installation of roofing system so insulation and other components of the roofing membrane system not permanently exposed are not subjected to precipitation or left uncovered at the end of the workday or when rain is forecast.
 - 1. At end of each day's work, provide tie-offs to cover exposed roofing membrane sheets and insulation with a course of coated felt set in roofing cement or hot roofing asphalt, with joints and edges sealed.
 - 2. Complete terminations and base flashings and provide temporary seals to prevent water from entering completed sections of roofing system.
 - 3. Remove and discard temporary seals before beginning work on adjoining roofing.

3.4 APP-MODIFIED BITUMINOUS MEMBRANE INSTALLATION

- A. Install smooth surfaced field ply modified bituminous roofing membrane according to roofing manufacturer's written instructions, starting at low point of roofing system. Adhere field ply to substrate and up wall to just above cant then mechanically attach the field ply to the top of the designated base flashing to allow for vapor to escape. Unroll roofing membrane sheets and allow them to relax for a minimum time period required by manufacturer. Heat-weld all laps.
- B. Install cap sheet modified bituminous roofing membrane according to roofing manufacturer's written instructions, starting at low point of roofing system. Extend roofing membrane sheets over and terminate beyond cants. Adhere to substrate in cold adhesive. Unroll roofing membrane sheets and allow them to relax for a minimum time period required by manufacturer. Heat-weld all laps.
- C. Laps: Accurately align roofing membrane sheets, without stretching, and maintain uniform side and end laps. Stagger end laps. Completely bond and seal laps, leaving no voids.
 - 1. Repair tears and voids in laps and lapped seams not completely sealed.
 - 2. Apply roofing granules to cover exuded bead at laps while bead is hot (granule surface only).
- D. Install roofing membrane sheets so side and end laps shed water.

3.5 BASE FLASHING INSTALLATION

- A. Install base flashing over cant strips and other sloped and vertical surfaces, at roof edges, and at penetrations through roof; secure to substrates according to roofing system manufacturer's written instructions, prime substrates with asphalt primer if required by roofing system manufacturer, and as follows:

1. Backer Sheet Application: Adhere backer sheet to substrate in cold-applied adhesive at rate required by roofing system manufacturer.
2. Flashing Cap Sheet Application: Adhere flashing sheet to substrate in cold-applied adhesive at rate required by roofing system manufacturer.
- B. Extend base flashing up walls or parapets a minimum of 8 inches above roofing membrane or to designated height and 4 inches onto field of roofing membrane for the backer sheet and 8" onto the field of roofing membrane for the cap sheet.
- C. Mechanically fasten top of base flashing securely at terminations and perimeter of roofing.
 1. Seal top termination of base flashing with three-course of roofing cement and glass fiber fabric.

3.6 FIELD QUALITY CONTROL

- A. Testing Agency: Owner may engage a qualified testing agency to perform tests and inspections and to prepare test reports.
- B. Field Audits: As part of the warranty, the membrane manufacturer shall perform in progress site audits and prepare submit reports to owner's representative. A minimum of two in progress audits should be performed.
- C. Quality Control Form:
 1. Contractor to complete daily quality control form which is included in the documents. Contractor is to note on provided roof plan areas of daily construction. Completed forms are to be submitted with warranty completion notice.
- D. Roofing system will be considered defective if it does not pass tests and inspections.
 1. Additional testing and inspecting, at Contractor's expense, will be performed to determine if replaced or additional work complies with specified requirements.

3.7 PROTECTING AND CLEANING

- A. Protect roofing system from damage and wear during remainder of construction period. When remaining construction will not affect or endanger roofing, inspect roofing for deterioration and damage, describing its nature and extent in a written report, with copies to Architect and Owner.
- B. Correct deficiencies in or remove roofing system that does not comply with requirements, repair substrates, and repair or reinstall roofing system to a condition free of damage and deterioration at time of Substantial Completion and according to warranty requirements.
- C. Clean overspray and spillage from adjacent construction using cleaning agents and procedures recommended by manufacturer of affected construction.

3.8 ROOFING INSTALLER'S WARRANTY

- A. WHEREAS <Insert name> of <Insert address>, herein called the "Roofing Installer," has performed roofing and associated work ("work") on the following project:
 1. Owner: <Insert name of Owner>.
 2. Address: <Insert address>.

-
3. Building Name/Type: <Insert information>.
 4. Address: <Insert address>.
 5. Area of Work: <Insert information>.
 6. Acceptance Date: <Insert date>.
 7. Warranty Period: <Insert time>.
 8. Expiration Date: <Insert date>.
- B. AND WHEREAS Roofing Installer has contracted (either directly with Owner or indirectly as a subcontractor) to warrant said work against leaks and faulty or defective materials and workmanship for designated Warranty Period,
- C. NOW THEREFORE Roofing Installer hereby warrants, subject to terms and conditions herein set forth, that during Warranty Period he will, at his own cost and expense, make or cause to be made such repairs to or replacements of said work as are necessary to correct faulty and defective work and as are necessary to maintain said work in a watertight condition.
- D. This Warranty is made subject to the following terms and conditions:
1. Specifically excluded from this Warranty are damages to work and other parts of the building, and to building contents, caused by:
 - a. lightning;
 - b. peak gust wind speed exceeding 115 mph;
 - c. fire;
 - d. failure of roofing system substrate, including cracking, settlement, excessive deflection, deterioration, and decomposition;
 - e. faulty construction of parapet walls, copings, chimneys, skylights, vents, equipment supports, and other edge conditions and penetrations of the work;
 - f. vapor condensation on bottom of roofing; and
 - g. activity on roofing by others, including construction contractors, maintenance personnel, other persons, and animals, whether authorized or unauthorized by Owner.
 2. When work has been damaged by any of foregoing causes, Warranty shall be null and void until such damage has been repaired by Roofing Installer and until cost and expense thereof have been paid by Owner or by another responsible party so designated.
 3. Roofing Installer is responsible for damage to work covered by this Warranty but is not liable for consequential damages to building or building contents resulting from leaks or faults or defects of work.
 4. During Warranty Period, if Owner allows alteration of work by anyone other than Roofing Installer, including cutting, patching, and maintenance in connection with penetrations, attachment of other work, and positioning of anything on roof, this Warranty shall become null and void on date of said alterations, but only to the extent said alterations affect work covered by this Warranty. If Owner engages Roofing Installer to perform said alterations, Warranty shall not become null and void unless Roofing Installer, before starting said work, shall have notified Owner in writing, showing reasonable cause for claim, that said alterations would likely damage or deteriorate work, thereby reasonably justifying a limitation or termination of this Warranty.
 5. During Warranty Period, if original use of roof is changed and it becomes used for, but was not originally specified for, a promenade, work deck, spray-cooled surface, flooded basin, or other use or service more severe than originally specified, this Warranty shall become null and void on date of said change, but only to the extent said change affects work covered by this Warranty.
 6. Owner shall promptly notify Roofing Installer of observed, known, or suspected leaks, defects, or deterioration and shall afford reasonable opportunity for Roofing Installer to inspect work and to examine evidence of such leaks, defects, or deterioration.

7. This Warranty is recognized to be the only warranty of Roofing Installer on said work and shall not operate to restrict or cut off Owner from other remedies and resources lawfully available to Owner in cases of roofing failure. Specifically, this Warranty shall not operate to relieve Roofing Installer of responsibility for performance of original work according to requirements of the Contract Documents, regardless of whether Contract was a contract directly with Owner or a subcontract with Owner's General Contractor.
- E. IN WITNESS THEREOF, this instrument has been duly executed this <Insert day> day of <Insert month>, <Insert year>.
 1. Authorized Signature: <Insert signature>.
 2. Name: <Insert name>.
 3. Title: <Insert title>.

END OF SECTION 075323

SECTION 076200 - SHEET METAL FLASHING AND TRIM

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Formed low-slope roof sheet metal fabrications.
 - 2. Insulated roof equipment curbs.
 - 3. Bird Screen
- B. Related Requirements:
 - 1. Section 061000 "Rough Carpentry" for wood nailers, curbs, and blocking.
 - 2. Section 079200 "Joint Sealants"

1.3 COORDINATION

- A. Coordinate sheet metal flashing and trim layout and seams with sizes and locations of penetrations to be flashed, and joints and seams in adjacent materials.
- B. Coordinate sheet metal flashing and trim installation with adjoining roofing and wall materials, joints, and seams to provide leakproof, secure, and noncorrosive installation.

1.4 ACTION SUBMITTALS

- A. Product Data: For each type of product.
 - 1. Include construction details, material descriptions, dimensions of individual components and profiles, and finishes for each manufactured product and accessory.
- B. Shop Drawings: For sheet metal flashing, trim and framed insect screen.
 - 1. Include plans, elevations, sections, and attachment details.
 - 2. Detail fabrication and installation layouts, expansion-joint locations, and keyed details. Distinguish between shop- and field-assembled work.
 - 3. Include identification of material, thickness, weight, and finish for each item and location in Project.
 - 4. Include details for forming, including profiles, shapes, seams, and dimensions.
 - 5. Include details for joining, supporting, and securing, including layout and spacing of fasteners, cleats, clips, and other attachments. Include pattern of seams.
 - 6. Include details of termination points and assemblies.
 - 7. Include details of roof-penetration flashing.

8. Include details of edge conditions, including eaves, and counterflashings as applicable.
9. Include details of special conditions.
10. Include details of connections to adjoining work.
11. Detail formed flashing and trim at scale of not less than 3 inches per 12 inches (1:5).

1.5 INFORMATIONAL SUBMITTALS

- A. Qualification Data: For fabricator.
- B. Product Test Reports: For each product, for tests performed by a qualified testing agency.
- C. Sample Warranty: For special warranty.

1.6 QUALITY ASSURANCE

- A. Fabricator Qualifications: Employs skilled workers who custom fabricate sheet metal flashing and trim similar to that required for this Project and whose products have a record of successful in-service performance.

1.7 DELIVERY, STORAGE, AND HANDLING

- A. Do not store sheet metal flashing and trim materials in contact with other materials that might cause staining, denting, or other surface damage. Store sheet metal flashing and trim materials away from uncured concrete and masonry.
- B. Protect strippable protective covering on sheet metal flashing and trim from exposure to sunlight and high humidity, except to extent necessary for period of sheet metal flashing and trim installation.

1.8 WARRANTY

- A. Special Warranty on Finishes: Manufacturer agrees to repair finish or replace sheet metal flashing and trim that shows evidence of deterioration of factory-applied finishes within specified warranty period.
 1. Exposed Panel Finish: Deterioration includes, but is not limited to, the following:
 - a. Color fading more than 5 Hunter units when tested according to ASTM D 2244.
 - b. Chalking in excess of a No. 8 rating when tested according to ASTM D 4214.
 - c. Cracking, checking, peeling, or failure of paint to adhere to bare metal.
 2. Finish Warranty Period: 20 years from date of Substantial Completion.
- B. Installer's Warranty: Submit roofing Installer's warranty, signed by Installer, covering labor and materials of this Section, including all components of roofing system such as membrane roofing, base flashing, roof insulation, fasteners, cover boards, and other components of membrane roofing system required to make the system watertight and complete, for the following warranty period:
 1. Warranty Period: Three (3) years from date of Substantial Completion.

2. The roofing Contractor and roofing Manufacturer accompanied by a designated owner's representative shall perform, at no additional cost to the owner, an annual inspection of the complete roofing system installation through the three (3) year Contractor's Warranty period. This inspection shall include a written detailed evaluation of the roofing system including system failures and maintenance recommendations. All roofing system failures and defects shall be repaired/corrected by the Contractor at no additional cost to the Owner within thirty (30) days from date of annual inspection. These repairs/corrections shall include replacing any and all wet insulation. All repairs shall be approved by, and made to the satisfaction of the owner's representative.
3. The Owner will notify the roofing Contractor and Manufacturer, in writing, of the defects in the roofing system within twenty (20) days of discovery. Within eight (8) hours after receipt of written notice from the Owner, the roofing Contractor shall make emergency repairs, at its own expense, as required to render the facility watertight. Within thirty (30) days after receipt of such notice, the roofing Contractor shall, at its own expense, correct any faults or defects in material or workmanship. Should the roofing Contractor or roof Manufacturer fail or refuse to make the necessary repairs or replacements, when requested by the Owner, the Owner may perform, or cause the necessary work to be performed at the roofing Contractor's and Manufacturer's expense.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. General: Sheet metal flashing and trim assemblies shall withstand wind loads, structural movement, thermally induced movement, and exposure to weather without failure due to defective manufacture, fabrication, installation, or other defects in construction. Completed sheet metal flashing and trim shall not rattle, leak, or loosen, and shall remain watertight.
- B. Sheet Metal Standard for Flashing and Trim: Comply with SMACNA's "Architectural Sheet Metal Manual" requirements for dimensions and profiles shown unless more stringent requirements are indicated.
- C. Thermal Movements: Allow for thermal movements from ambient and surface temperature changes to prevent buckling, opening of joints, overstressing of components, failure of joint sealants, failure of connections, and other detrimental effects. Base calculations on surface temperatures of materials due to both solar heat gain and nighttime-sky heat loss.
 1. Temperature Change: 120 deg F (67 deg C), ambient; 180 deg F (100 deg C), material surfaces.

2.2 SHEET METALS

- A. General: Protect mechanical and other finishes on exposed surfaces from damage by applying strippable, temporary protective film before shipping.
- B. Metallic-Coated Steel Sheet: Provide aluminum-zinc alloy-coated steel sheet according to ASTM A 792/A 792M, Class AZ50 coating designation, Grade 40; prepainted by coil-coating process to comply with ASTM A 755.
 1. Surface: Smooth, flat.

-
2. Exposed Coil-Coated Finish:
 - a. Three-Coat Fluoropolymer: AAMA 621. Fluoropolymer finish containing not less than 70 percent PVDF resin by weight in both color coat and clear topcoat. Prepare, pretreat, and apply coating to exposed metal surfaces to comply with coating and resin manufacturers' written instructions.
 3. Color: To match adjacent metal wall color.
 4. Concealed Finish: Pretreat with manufacturer's standard white or light-colored acrylic or polyester backer finish, consisting of prime coat and wash coat with minimum total dry film thickness of 0.5 mil (0.013 mm).

2.3 UNDERLAYMENT MATERIALS

- A. Self-Adhering, High-Temperature Sheet: Minimum 30 mils (0.76 mm) thick, consisting of a slip-resistant polyethylene- or polypropylene-film top surface laminated to a layer of butyl- or SBS-modified asphalt adhesive, with release-paper backing; specifically designed to withstand high metal temperatures beneath metal roofing. Provide primer according to written recommendations of underlayment manufacturer.
 1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Carlisle Residential, a division of Carlisle Construction Materials; WIP 300HT.
 - b. Grace Construction Products, a unit of W. R. Grace & Co.-Conn.; Ultra.
 - c. Henry Company; Blueskin PE200 HT.
 - d. Metal-Fab Manufacturing, LLC; MetShield.
 - e. Owens Corning; WeatherLock Specialty Tile & Metal Underlayment.
 2. Thermal Stability: ASTM D 1970; stable after testing at 240 deg F (116 deg C) or higher.
 3. Low-Temperature Flexibility: ASTM D 1970; passes after testing at minus 20 deg F (29 deg C) or lower.
- B. Slip Sheet: Rosin-sized building paper, 3 lb/100 sq. ft. (0.16 kg/sq. m) minimum.

2.4 MISCELLANEOUS MATERIALS

- A. General: Provide materials and types of fasteners, [solder], protective coatings, sealants, and other miscellaneous items as required for complete sheet metal flashing and trim installation and as recommended by manufacturer of primary sheet metal or manufactured item unless otherwise indicated.
- B. Fasteners: Wood screws, annular threaded nails, self-tapping screws, self-locking rivets and bolts, and other suitable fasteners designed to withstand design loads and recommended by manufacturer of primary sheet metal or manufactured item.
 1. General: Blind fasteners or self-drilling screws, gasketed, with hex-washer head.
 - a. Exposed Fasteners: Heads matching color of sheet metal using plastic caps or factory-applied coating. Provide metal-backed EPDM or PVC sealing washers under heads of exposed fasteners bearing on weather side of metal.

- b. Blind Fasteners: High-strength aluminum or stainless-steel rivets suitable for metal being fastened.
- C. Sealant Tape: Pressure-sensitive, 100 percent solids, polyisobutylene compound sealant tape with release-paper backing. Provide permanently elastic, nonsag, nontoxic, nonstaining tape 1/2 inch (13 mm) wide and 1/8 inch (3 mm) thick.
- D. Elastomeric Sealant: ASTM C 920, elastomeric [polyurethane] [polysulfide] [silicone] polymer sealant; of type, grade, class, and use classifications required to seal joints in sheet metal flashing and trim and remain watertight.
- E. Butyl Sealant: ASTM C 1311, single-component, solvent-release butyl rubber sealant; polyisobutylene plasticized; heavy bodied for hooked-type expansion joints with limited movement.
- F. Bituminous Coating: Cold-applied asphalt emulsion according to ASTM D 1187.

2.5 FABRICATION, GENERAL

- A. General: Custom fabricate sheet metal flashing and trim to comply with details shown and recommendations in cited sheet metal standard that apply to design, dimensions, geometry, metal thickness, and other characteristics of item required. Fabricate sheet metal flashing and trim in shop to greatest extent possible.
 - 1. Fabricate sheet metal flashing and trim in thickness or weight needed to comply with performance requirements, but not less than that specified for each application and metal.
 - 2. Obtain field measurements for accurate fit before shop fabrication.
 - 3. Form sheet metal flashing and trim to fit substrates without excessive oil canning, buckling, and tool marks; true to line, levels, and slopes; and with exposed edges folded back to form hems.
 - 4. Conceal fasteners and expansion provisions where possible. Do not use exposed fasteners on faces exposed to view.
- B. Fabrication Tolerances: Fabricate sheet metal flashing and trim that is capable of installation to a tolerance of 1/4 inch in 20 feet (6 mm in 6 m) on slope and location lines indicated on Drawings and within 1/8-inch (3-mm) offset of adjoining faces and of alignment of matching profiles.
- C. Fabrication Tolerances: Fabricate sheet metal flashing and trim that is capable of installation to tolerances specified in MCA's "Guide Specification for Residential Metal Roofing."
- D. Expansion Provisions: Form metal for thermal expansion of exposed flashing and trim.
 - 1. Form expansion joints of intermeshing hooked flanges, not less than 1 inch (25 mm) deep, filled with butyl sealant concealed within joints.
- E. Sealant Joints: Where movable, nonexpansion-type joints are required, form metal to provide for proper installation of elastomeric sealant according to cited sheet metal standard.
- F. Fabricate cleats and attachment devices from same material as accessory being anchored or from compatible, noncorrosive metal.

- G. Seams: Fabricate nonmoving seams with flat-lock seams. Form seams and seal with elastomeric sealant unless otherwise recommended by sealant manufacturer for intended use. Rivet joints where necessary for strength.
- H. Do not use graphite pencils to mark metal surfaces.

2.6 LOW-SLOPE ROOF SHEET METAL FABRICATIONS

- A. Cap and Counterflashing: Fabricate from the following materials:
 - 1. Aluminum-Zinc Alloy-Coated Steel: 0.040 inch thick.
- B. Perimeter Flashing and Receivers: Fabricate from the following materials:
 - 1. Aluminum-Zinc Alloy-Coated Steel: 0.022 inch thick.

2.7 ROOF CURBS

- A. Roof Curbs: Internally reinforced roof-curb units capable of supporting superimposed live and dead loads, including equipment loads and other construction indicated on Drawings, bearing continuously on roof structure, and capable of meeting performance requirements; with welded or mechanically fastened and sealed corner joints, straight sides, and integrally formed deck-mounting flange at perimeter bottom.
 - 1. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - a. AES Industries, Inc.
 - b. Curbs Plus, Inc.
 - c. Greenheck Fan Corporation.
 - d. LMCurbs.
 - e. Roof Products and Systems (RPS) ; a division of Hart & Cooley, Inc.
- B. Size: Coordinate dimensions with roughing-in information or Shop Drawings of equipment to be supported.
- C. Supported Load Capacity: Coordinate load capacity with information on Shop Drawings of equipment to be supported.
- D. Material: Zinc-coated (galvanized) steel sheet, 0.079 inch thick.
- E. Construction:
 - 1. Curb Profile: Manufacturer's standard compatible with roofing system.
 - 2. Fabricate curbs to minimum height of 12 inches above roofing surface unless otherwise indicated.
 - 3. Top Surface: Level top of curb, with roof slope accommodated by sloping deck-mounting flange.
 - 4. Sloping Roofs: Where roof slope exceeds 1:48, fabricate curb with perimeter curb height tapered to accommodate roof slope so that top surface of perimeter curb is level. Equip unit with water diverter or cricket on side that obstructs water flow.
 - 5. Insulation: Factory insulated with 2-inch-thick glass-fiber board insulation.
 - 6. Liner: Same material as curb, of manufacturer's standard thickness and finish.

7. Nailer: Factory-installed wood nailer along top flange of curb, continuous around curb perimeter.
8. Wind Restraint Straps and Base Flange Attachment: Provide wind restraint straps, welded strap connectors, and base flange attachment to roof structure at perimeter of curb, of size and spacing required to meet wind uplift requirements.
9. Metal Counterflashing: Manufacturer's standard, removable, fabricated of same metal and finish as curb.

2.8 FRAMED BIRD SCREEN

- A. Stainless Steel Angle: Bird screen frame welded at mitered corners.
 1. Finish: 304 Stainless Steel, ASTM A276
 2. Size: 1" x 1" x 1/8" x required length (refer to drawings)
- B. Stainless Steel Bar: Intermediate Support welded to stainless steel angle frame.
 1. Finish: 304 Stainless Steel, ASTM A276
 2. Size: 1" x 1/8" x required length (refer to drawings)
- C. Stainless Steel Wire Mesh: Welded to stainless steel angle frame and intermediate support.
 1. Wire type: Plain Weave
 2. Wire Centers or opening 0.213
 3. Wire Diameter: 0.032
- D. Stainless Steel Fasteners
- E. Welding Qualifications: Qualify procedures and personnel according to the following.
 1. AWS D1.6M, "Structural Welding Code – Stainless Steel."

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates, areas, and conditions, with Installer present, for compliance with requirements for installation tolerances, substrate, and other conditions affecting performance of the Work.
 1. Verify compliance with requirements for installation tolerances of substrates.
 2. Verify that substrate is sound, dry, smooth, clean, sloped for drainage, and securely anchored.
 3. Verify that air- or water-resistant barriers have been installed over sheathing or backing substrate to prevent air infiltration or water penetration.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 UNDERLAYMENT INSTALLATION

- A. Self-Adhering Sheet Underlayment: Install self-adhering sheet underlayment, wrinkle free. Prime substrate if recommended by underlayment manufacturer. Comply with temperature restrictions of underlayment manufacturer for installation; use primer for installing underlayment at low

temperatures. Apply in shingle fashion to shed water, with end laps of not less than 6 inches (150 mm) staggered 24 inches (600 mm) between courses. Overlap side edges not less than 3-1/2 inches (90 mm). Roll laps and edges with roller. Cover underlayment within 14 days.

3.3 INSTALLATION, GENERAL

- A. General: Anchor sheet metal flashing and trim and other components of the Work securely in place, with provisions for thermal and structural movement. Use fasteners, protective coatings, separators, sealants, and other miscellaneous items as required to complete sheet metal flashing and trim system.
 - 1. Install sheet metal flashing and trim true to line, levels, and slopes. Provide uniform, neat seams with minimum exposure of solder, welds, and sealant.
 - 2. Install sheet metal flashing and trim to fit substrates and to result in watertight performance. Verify shapes and dimensions of surfaces to be covered before fabricating sheet metal.
 - 3. Provide continuous cleats at all flashing locations.
 - 4. Install exposed sheet metal flashing and trim with limited oil canning, and free of buckling and tool marks.
 - 5. Torch cutting of sheet metal flashing and trim is not permitted.
 - 6. Do not use graphite pencils to mark metal surfaces.
- B. Metal Protection: Where dissimilar metals contact each other, or where metal contacts pressure-treated wood or other corrosive substrates, protect against galvanic action or corrosion by painting contact surfaces with bituminous coating or by other permanent separation as recommended by sheet metal manufacturer or cited sheet metal standard.
 - 1. Underlayment: Where installing sheet metal flashing and trim directly on cementitious or wood substrates, install underlayment and cover with slip sheet.
- C. Expansion Provisions: Provide for thermal expansion of exposed flashing and trim. Space movement joints at maximum of 10 feet (3 m) with no joints within 24 inches (600 mm) of corner or intersection.
 - 1. Form expansion joints of intermeshing hooked flanges, not less than 1 inch (25 mm) deep, filled with sealant concealed within joints.
- D. Fasteners: Use fastener sizes that penetrate substrate not less than recommended by fastener manufacturer to achieve maximum pull-out resistance.
- E. Conceal fasteners and expansion provisions where possible in exposed work and locate to minimize possibility of leakage. Cover and seal fasteners and anchors as required for a tight installation.
- F. Seal joints as required for watertight construction.
 - 1. Use sealant-filled joints unless otherwise indicated. Embed hooked flanges of joint members not less than 1 inch (25 mm) into sealant. Form joints to completely conceal sealant. When ambient temperature at time of installation is between 40 and 70 deg F (4 and 21 deg C), set joint members for 50 percent movement each way. Adjust setting proportionately for installation at higher ambient temperatures. Do not install sealant-type joints at temperatures below 40 deg F (4 deg C).
 - 2. Prepare joints and apply sealants to comply with requirements in Section 07920 "Joint Sealants."

3.4 ROOF FLASHING INSTALLATION

- A. General: Install sheet metal flashing and trim to comply with performance requirements, sheet metal manufacturer's written installation instructions, and cited sheet metal standard. Provide concealed fasteners where possible, and set units true to line, levels, and slopes. Install work with laps, joints, and seams that are permanently watertight and weather resistant.
- B. Roof Edge Flashing: Anchor to resist uplift and outward forces according to recommendations in cited sheet metal standard unless otherwise indicated. Interlock bottom edge of roof edge flashing with continuous cleat anchored to substrate at staggered 3-inch (75-mm) centers.
- C. Copings: Anchor to resist uplift and outward forces according to recommendations in cited sheet metal standard unless otherwise indicated.
 - 1. Interlock exterior bottom edge of coping with continuous cleat anchored to substrate at 16-inch (400-mm) centers.
- D. Copings: Anchor to resist uplift and outward forces according to recommendations in FM Global Property Loss Prevention Data Sheet 1-49 for specified FM Approvals' listing for required windstorm classification.
- E. Counterflashing: Coordinate installation of counterflashing with installation of base flashing. Insert counterflashing in reglets or receivers and fit tightly to base flashing. Extend counterflashing 4 inches (100 mm) over base flashing. Lap counterflashing joints minimum of 4 inches (100 mm). Secure in waterproof manner by means of interlocking folded seam or blind rivets and sealant unless otherwise indicated.

3.5 ROOF CURB INSTALLATION

- A. Install roof curb according to manufacturer's written instructions.
 - 1. Install roof curb level; plumb; true to line and elevation; and without warping, jogs in alignment, buckling, or tool marks.
 - 2. Anchor roof accessories securely in place so they are capable of resisting indicated loads.
 - 3. Use fasteners, separators, sealants, and other miscellaneous items as required to complete installation of roof accessories and fit them to substrates.
 - 4. Install roof accessories to resist exposure to weather without failing, rattling, leaking, or loosening of fasteners and seals.
- B. Metal Protection: Protect metals against galvanic action by separating dissimilar metals from contact with each other or with corrosive substrates by painting contact surfaces with bituminous coating or by other permanent separation as recommended by manufacturer.
 - 1. Coat concealed side of uncoated aluminum roof accessories with bituminous coating where in contact with wood, ferrous metal, or cementitious construction.
 - 2. Underlayment: Where installing roof accessories directly on cementitious or wood substrates, install a course of underlayment and cover with manufacturer's recommended slip sheet.
 - 3. Bed flanges in thick coat of asphalt roofing cement where required by manufacturers of roof accessories for waterproof performance.

3.6 ERECTION TOLERANCES

- A. Installation Tolerances: Shim and align sheet metal flashing and trim within installed tolerance of 1/4 inch in 20 feet (6 mm in 6 m) on slope and location lines indicated on Drawings and within 1/8-inch (3-mm) offset of adjoining faces and of alignment of matching profiles.

3.7 CLEANING AND PROTECTION

- A. Clean exposed metal surfaces of substances that interfere with uniform oxidation and weathering.
- B. Clean off excess sealants.
- C. Remove temporary protective coverings and strippable films as sheet metal flashing and trim are installed unless otherwise indicated in manufacturer's written installation instructions. On completion of sheet metal flashing and trim installation, remove unused materials and clean finished surfaces as recommended by sheet metal flashing and trim manufacturer. Maintain sheet metal flashing and trim in clean condition during construction.
- D. Replace sheet metal flashing and trim that have been damaged or that have deteriorated beyond successful repair by finish touchup or similar minor repair procedures.

END OF SECTION 076200

SECTION 078413 - PENETRATION FIRESTOPPING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:

- 1. Penetration firestopping systems for the following applications:

- a. Penetrations in fire-resistance-rated walls.
 - b. Penetrations in horizontal assemblies.

- B. Related Requirements:

- 1. Section 078443 "Joint Firestopping" for joints in or between fire-resistance-rated construction.

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of product.
- B. Product Schedule: For each penetration firestopping system. Include location, illustration of firestopping system, and design designation of qualified testing and inspecting agency.

1.4 INFORMATIONAL SUBMITTALS

- A. Qualification Data: For Installer.
- B. Product Test Reports: For each penetration firestopping system, for tests performed by a qualified testing agency.

1.5 CLOSEOUT SUBMITTALS

- A. Installer Certificates: From Installer indicating that penetration firestopping systems have been installed in compliance with requirements and manufacturer's written instructions.

1.6 QUALITY ASSURANCE

- A. Installer Qualifications: A firm that has been approved by FM Approval according to FM Approval 4991, "Approval Standard for Firestop Contractors," or been evaluated by UL and found to comply with its "Qualified Firestop Contractor Program Requirements."

1.7 PROJECT CONDITIONS

- A. Install and cure penetration firestopping materials per manufacturer's written instructions using natural means of ventilations or, where this is inadequate, forced-air circulation.

1.8 COORDINATION

- A. Coordinate construction of openings and penetrating items to ensure that penetration firestopping systems can be installed according to specified firestopping system design.
- B. Coordinate sizing of sleeves, openings, core-drilled holes, or cut openings to accommodate penetration firestopping systems.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. Fire-Test-Response Characteristics:
 - 1. Perform penetration firestopping system tests by a qualified testing agency acceptable to authorities having jurisdiction.
 - 2. Test per testing standards referenced in "Penetration Firestopping Systems" Article. Provide rated systems complying with the following requirements:
 - a. Penetration firestopping systems shall bear classification marking of a qualified testing agency.
 - 1) UL in its "Fire Resistance Directory."

2.2 PENETRATION FIRESTOPPING SYSTEMS

- A. Penetration Firestopping Systems: Systems that resist spread of fire, passage of smoke and other gases, and maintain original fire-resistance rating of construction penetrated. Penetration firestopping systems shall be compatible with one another, with the substrates forming openings, and with penetrating items if any.
 - 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. 3M Fire Protection Products.
 - b. Grabber Construction Products, Inc.
 - c. Hilti, Inc.
- B. Penetrations in Fire-Resistance-Rated Walls: Penetration firestopping systems with ratings determined per ASTM E814 or UL 1479, based on testing at a positive pressure differential of 0.01-inch wg.

1. F-Rating: Not less than the fire-resistance rating of constructions penetrated.
- C. Penetrations in Horizontal Assemblies: Penetration firestopping systems with ratings determined per ASTM E814 or UL 1479, based on testing at a positive pressure differential of 0.01-inch wg.
 1. F-Rating: At least one hour, but not less than the fire-resistance rating of constructions penetrated.
- D. Exposed Penetration Firestopping Systems: Flame-spread and smoke-developed indexes of less than 25 and 450, respectively, per ASTM E84.
- A. Manufactured Piping Penetration Firestopping System: Penetration firestopping systems with ratings determined per ASTM E814 or UL 1479, based on testing at a positive pressure differential of 0.01-inch wg.
 1. F-Rating: At least one hour, but not less than the fire-resistance rating of constructions penetrated.
 2. T-Rating: At least one hour, but not less than the fire-resistance rating of constructions penetrated except for floor penetrations within the cavity of a wall.
 3. Sleeve: Molded-PVC plastic, of length to match slab thickness and with integral nailing flange on one end for installation in cast-in-place concrete slabs.
 4. Stack Fitting: ASTM A48/A48M, gray-iron, hubless-pattern wye branch with neoprene O-ring at base and gray-iron plug in thermal-release harness. Include PVC protective cap for plug.
 5. Special Coating: Corrosion resistant on interior of fittings.
- E. Accessories: Provide components for each penetration firestopping system that are needed to install fill materials and to maintain ratings required. Use only those components specified by penetration firestopping system manufacturer and approved by qualified testing and inspecting agency for conditions indicated.
 1. Permanent forming/damming/backing materials.
 2. Substrate primers.
 3. Collars.
 4. Steel sleeves.

2.3 FILL MATERIALS

- A. Latex Sealants: Single-component latex formulations that do not re-emulsify after cure during exposure to moisture.
- B. Firestop Devices: Factory-assembled collars formed from galvanized steel and lined with intumescent material sized to fit specific diameter of penetrant.
- C. Intumescent Putties: Nonhardening, water-resistant, intumescent putties containing no solvents or inorganic fibers.
- D. Intumescent Wrap Strips: Single-component intumescent elastomeric sheets with aluminum foil on one side.

- E. Mortars: Prepackaged dry mixes consisting of a blend of inorganic binders, hydraulic cement, fillers and lightweight aggregate formulated for mixing with water at Project site to form a nonshrinking, homogeneous mortar.
- F. Silicone Foams: Multicomponent, silicone-based liquid elastomers that, when mixed, expand and cure in place to produce a flexible, nonshrinking foam.
- G. Silicone Sealants: Single-component, silicone-based, neutral-curing elastomeric sealants.

2.4 MIXING

- A. Penetration Firestopping Materials: For those products requiring mixing before application, comply with penetration firestopping system manufacturer's written instructions for accurate proportioning of materials, water (if required), type of mixing equipment, selection of mixer speeds, mixing containers, mixing time, and other items or procedures needed to produce products of uniform quality with optimum performance characteristics for application indicated.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates and conditions, with Installer present, for compliance with requirements for opening configurations, penetrating items, substrates, and other conditions affecting performance of the Work.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

- A. Surface Cleaning: Before installing penetration firestopping systems, clean out openings immediately to comply with manufacturer's written instructions and with the following requirements:
 - 1. Remove from surfaces of opening substrates and from penetrating items foreign materials that could interfere with adhesion of penetration firestopping materials.
 - 2. Clean opening substrates and penetrating items to produce clean, sound surfaces capable of developing optimum bond with penetration firestopping materials. Remove loose particles remaining from cleaning operation.
 - 3. Remove laitance and form-release agents from concrete.
- B. Prime substrates where recommended in writing by manufacturer using that manufacturer's recommended products and methods. Confine primers to areas of bond; do not allow spillage and migration onto exposed surfaces.

3.3 INSTALLATION

- A. General: Install penetration firestopping systems to comply with manufacturer's written installation instructions and published drawings for products and applications.

- B. Install forming materials and other accessories of types required to support fill materials during their application and in the position needed to produce cross-sectional shapes and depths required to achieve fire ratings.
 - 1. After installing fill materials and allowing them to fully cure, remove combustible forming materials and other accessories not forming permanent components of firestopping.
- C. Install fill materials by proven techniques to produce the following results:
 - 1. Fill voids and cavities formed by openings, forming materials, accessories and penetrating items to achieve required fire-resistance ratings.
 - 2. Apply materials so they contact and adhere to substrates formed by openings and penetrating items.
 - 3. For fill materials that will remain exposed after completing the Work, finish to produce smooth, uniform surfaces that are flush with adjoining finishes.

3.4 IDENTIFICATION

- A. Wall Identification: Permanently label walls containing penetration firestopping systems with the words "FIRE AND/OR SMOKE BARRIER - PROTECT ALL OPENINGS," using lettering not less than 3 inches high and with minimum 0.375-inch strokes.
 - 1. Locate in accessible concealed floor, floor-ceiling, or attic space at 15 feet from end of wall and at intervals not exceeding 30 feet.
- B. Penetration Identification: Identify each penetration firestopping system with legible metal or plastic labels. Attach labels permanently to surfaces adjacent to and within 6 inches of penetration firestopping system edge so labels are visible to anyone seeking to remove penetrating items or firestopping systems. Use mechanical fasteners or self-adhering-type labels with adhesives capable of permanently bonding labels to surfaces on which labels are placed. Include the following information on labels:
 - 1. The words "Warning - Penetration Firestopping - Do Not Disturb. Notify Building Management of Any Damage."
 - 2. Contractor's name, address, and phone number.
 - 3. Designation of applicable testing and inspecting agency.
 - 4. Date of installation.
 - 5. Manufacturer's name.
 - 6. Installer's name.

3.5 PENETRATION FIRESTOPPING SYSTEM SCHEDULE

- A. Where UL-classified systems are indicated, they refer to system numbers in UL's "Fire Resistance Directory" under product Category XHEZ.
- B. Where Intertek Group-listed systems are indicated, they refer to design numbers in Intertek Group's "Directory of Listed Building Products" under "Firestop Systems."
- C. Penetration Firestopping Systems for Metallic Pipes, Conduit, or Tubing:
 - 1. F-Rating: 1 hour.
 - 2. T-Rating at Horizontal Assemblies: 1 hour.

3. Type of Fill Materials: As required to achieve rating.
 4. UL Assembly: As indicated on Drawings.
- D. Penetration Firestopping Systems for Nonmetallic Pipe, Conduit, or Tubing:
1. F-Rating: 1 hour.
 2. T-Rating at Horizontal Assemblies: 1 hour.
 3. Type of Fill Materials: As required to achieve rating.
 4. UL Assembly: As indicated on Drawings.
- E. Penetration Firestopping Systems for Electrical Cables:
1. F-Rating: 1 hour.
 2. T-Rating at Horizontal Assemblies: 1 hour.
 3. Type of Fill Materials: As required to achieve rating.
 4. UL Assembly: As indicated on Drawings.
- F. Penetration Firestopping Systems for Groupings of Penetrants:
1. F-Rating: 1 hour.
 2. T-Rating at Horizontal Assemblies: 1 hour.
 3. Type of Fill Materials: As required to achieve rating.
 4. UL Assembly: As indicated on Drawings.
- G. Penetration Firestopping Systems for Metal Duct Penetrations:
1. F-Rating: 1 hour.
 2. Type of Fill Materials: As required to achieve rating.
 3. UL Assembly: As indicated on Drawings.

END OF SECTION 078413

SECTION 078443 - JOINT FIRESTOPPING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Joints in or between fire-resistance-rated constructions.

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of product indicated.

1.4 INFORMATIONAL SUBMITTALS

- A. Qualification Data: For qualified Installer.
- B. Installer Certificates: From Installer indicating fire-resistive joint systems have been installed in compliance with requirements and manufacturer's written recommendations.
- C. Product Test Reports: Based on evaluation of comprehensive tests performed by a qualified testing agency, for fire-resistive joint systems.

1.5 QUALITY ASSURANCE

- A. Installer Qualifications: A firm experienced in installing fire-resistive joint systems similar in material, design, and extent to that indicated for this Project, whose work has resulted in construction with a record of successful performance. Qualifications include having the necessary experience, staff, and training to install manufacturer's products per specified requirements. Manufacturer's willingness to sell its fire-resistive joint system products to Contractor or to Installer engaged by Contractor does not in itself confer qualification on buyer.
- B. Fire-Test-Response Characteristics: Fire-resistive joint systems shall comply with the following requirements:
 - 1. Fire-resistive joint system tests are performed by a qualified testing agency acceptable to authorities having jurisdiction.
 - 2. Fire-resistive joint systems are identical to those tested per testing standard referenced in "Fire-Resistive Joint Systems" Article. Provide rated systems complying with the following requirements:
 - a. Fire-resistive joint system products bear classification marking of qualified testing agency.

- b. Fire-resistive joint systems correspond to those indicated by reference to designations listed by the following:
 - 1) UL in its "Fire Resistance Directory."

1.6 PROJECT CONDITIONS

- A. Environmental Limitations: Do not install fire-resistive joint systems when ambient or substrate temperatures are outside limits permitted by fire-resistive joint system manufacturers or when substrates are wet due to rain, frost, condensation, or other causes.
- B. Install and cure fire-resistive joint systems per manufacturer's written instructions using natural means of ventilation or, where this is inadequate, forced-air circulation.

1.7 COORDINATION

- A. Coordinate construction of joints to ensure that fire-resistive joint systems are installed according to specified requirements.
- B. Coordinate sizing of joints to accommodate fire-resistive joint systems.
- C. Notify Owner at least seven days in advance of fire-resistive joint system installations; confirm dates and times on day preceding each series of installations.

PART 2 - PRODUCTS

2.1 FIRE-RESISTIVE JOINT SYSTEMS

- A. Where required, provide fire-resistive joint systems that are produced and installed to resist spread of fire according to requirements indicated, resist passage of smoke and other gases, and maintain original fire-resistance rating of assemblies in or between which fire-resistive joint systems are installed. Fire-resistive joint systems shall accommodate building movements without impairing their ability to resist the passage of fire and hot gases.
- B. Joints in or between Fire-Resistance-Rated Construction: Provide fire-resistive joint systems with ratings determined per ASTM E 1966 or UL 2079:
 - 1. Joints include those installed in or between fire-resistance-rated walls, floor or floor/ceiling assemblies and roofs or roof/ceiling assemblies.
 - 2. Fire-Resistance Rating: Equal to or exceeding the fire-resistance rating of construction they will join.
 - 3. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Grace Construction Products.
 - b. Hilti, Inc.
 - c. Johns Manville.
 - d. RectorSeal Corporation.
 - e. 3M Fire Protection Products.
 - f. Tremco, Inc.; Tremco Fire Protection Systems Group.
 - g. USG Corporation.

- C. Exposed Fire-Resistive Joint Systems: Provide products with flame-spread and smoke-developed indexes of less than 25 and 450, respectively, as determined per ASTM E 84.
- D. Accessories: Provide components of fire-resistive joint systems, including primers and forming materials, that are needed to install fill materials and to maintain ratings required. Use only components specified by fire-resistive joint system manufacturer and approved by the qualified testing agency for systems indicated.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates and conditions, with Installer present, for compliance with requirements for joint configurations, substrates, and other conditions affecting performance of the Work.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

- A. Surface Cleaning: Clean joints immediately before installing fire-resistive joint systems to comply with fire-resistive joint system manufacturer's written instructions and the following requirements:
 - 1. Remove from surfaces of joint substrates foreign materials that could interfere with adhesion of fill materials.
 - 2. Clean joint substrates to produce clean, sound surfaces capable of developing optimum bond with fill materials. Remove loose particles remaining from cleaning operation.
 - 3. Remove laitance and form-release agents from concrete.
- B. Priming: Prime substrates where recommended in writing by fire-resistive joint system manufacturer using that manufacturer's recommended products and methods. Confine primers to areas of bond; do not allow spillage and migration onto exposed surfaces.
- C. Masking Tape: Use masking tape to prevent fill materials of fire-resistive joint system from contacting adjoining surfaces that will remain exposed on completion of the Work and that would otherwise be permanently stained or damaged by such contact or by cleaning methods used to remove stains. Remove tape as soon as possible without disturbing fire-resistive joint system's seal with substrates.

3.3 INSTALLATION

- A. General: Install fire-resistive joint systems to comply with manufacturer's written installation instructions and published drawings for products and applications indicated.
- B. Install forming materials and other accessories of types required to support fill materials during their application and in position needed to produce cross-sectional shapes and depths required to achieve fire ratings indicated.
 - 1. After installing fill materials and allowing them to fully cure, remove combustible forming materials and other accessories not indicated as permanent components of fire-resistive joint system.

- C. Install fill materials for fire-resistive joint systems by proven techniques to produce the following results:
 - 1. Fill voids and cavities formed by joints and forming materials as required to achieve fire-resistance ratings indicated.
 - 2. Apply fill materials so they contact and adhere to substrates formed by joints.
 - 3. For fill materials that will remain exposed after completing the Work, finish to produce smooth, uniform surfaces that are flush with adjoining finishes.

3.4 FIELD QUALITY CONTROL

- A. Where deficiencies are found or fire-resistive joint systems are damaged or removed due to testing, repair or replace fire-resistive joint systems so they comply with requirements.
- B. Proceed with enclosing fire-resistive joint systems with other construction only after inspection reports are issued and installations comply with requirements.

3.5 CLEANING AND PROTECTING

- A. Clean off excess fill materials adjacent to joints as the Work progresses by methods and with cleaning materials that are approved in writing by fire-resistive joint system manufacturers and that do not damage materials in which joints occur.
- B. Provide final protection and maintain conditions during and after installation that ensure fire-resistive joint systems are without damage or deterioration at time of Substantial Completion. If damage or deterioration occurs despite such protection, cut out and remove damaged or deteriorated fire-resistive joint systems immediately and install new materials to produce fire-resistive joint systems complying with specified requirements.

END OF SECTION 078443

SECTION 079200 - JOINT SEALANTS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Silicone joint sealants.
2. Mildew resistant joint sealants.
3. Latex joint sealants.

B. Related Sections:

1. Section 078413 "Penetration Firestopping" for sealing penetrations in fire-resistance-rated construction.
2. Section 078443 "Joint Firestopping" for sealing joints in fire-resistance-rated construction.

1.2 ACTION SUBMITTALS

A. Product Data:

1. Joint-sealants.
2. Joint sealant backing materials.

B. Samples for Initial Selection: Manufacturer's standard color charts consisting of strips of cured sealants showing the full range of colors available for each product exposed to view.

1.3 QUALITY ASSURANCE

A. Source Limitations: Obtain each kind of joint sealant from single source from single manufacturer.

1.4 FIELD CONDITIONS

A. Do not proceed with installation of joint sealants under the following conditions:

1. When ambient and substrate temperature conditions are outside limits permitted by joint-sealant manufacturer.
2. When joint substrates are wet.
3. Where joint widths are less than those allowed by joint-sealant manufacturer for applications indicated.
4. Where contaminants capable of interfering with adhesion have not yet been removed from joint substrates.

1.5 WARRANTY

- A. Special Installer's Warranty: Installer agrees to repair or replace joint sealants that do not comply with performance and other requirements specified in this Section within specified warranty period.
 - 1. Warranty Period: Two years from date of Substantial Completion.
- B. Special Manufacturer's Warranty: Manufacturer agrees to furnish joint sealants to repair or replace those joint sealants that do not comply with performance and other requirements specified in this Section within specified warranty period.
 - 1. Warranty Period: Ten years from date of Substantial Completion.
- C. Special warranties specified in this article exclude deterioration or failure of joint sealants from the following:
 - 1. Movement of the structure caused by stresses on sealant exceeding sealant manufacturer's written specifications for sealant elongation and compression.
 - 2. Disintegration of joint substrates from causes exceeding design specifications.
 - 3. Mechanical damage caused by individuals, tools, or other outside agents.
 - 4. Changes in sealant appearance caused by accumulation of dirt or other atmospheric contaminants.

PART 2 - PRODUCTS

2.1 JOINT SEALANTS, GENERAL

- A. Compatibility: Provide joint sealants, backings, and other related materials that are compatible with one another and with joint substrates under conditions of service and application, as demonstrated by joint-sealant manufacturer, based on testing and field experience.
- B. Colors of Exposed Joint Sealants: As selected by Architect from manufacturer's full range.

2.2 NONSTAINING SILICONE JOINT SEALANTS

- A. Nonstaining Joint Sealants: No staining of substrates when tested according to ASTM C 1248.
- B. Silicone, Nonstaining, S, NS, 50, NT: Nonstaining, single-component, nonsag, plus 50 percent and minus 50 percent movement capability, nontraffic-use, neutral-curing silicone joint sealant; ASTM C 920, Type S, Grade NS, Class 50, Use NT.
 - 1. Products: Subject to compliance with requirements, provide one of the following:
 - a. Dow Corning Corporation; 795.
 - b. Master Builders; Master Seal NP100.
 - c. Pecora Corporation; 895NST.
 - d. Tremco Incorporated; Spectrem 3.

2.3 MILDEW-RESISTANT JOINT SEALANTS

- A. Mildew-Resistant Joint Sealants: Formulated for prolonged exposure to humidity with fungicide to prevent mold and mildew growth.
- B. Silicone, Mildew Resistant, Acid Curing, S, NS, 25, NT: Mildew-resistant, single-component, nonsag, plus 25 percent and minus 25 percent movement capability, nontraffic-use, acid-curing silicone joint sealant; ASTM C920, Type S, Grade NS, Class 25, Use NT.
 - 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Dow Corning Corporation.
 - b. Pecora Corporation.
 - c. Tremco Incorporated.

2.4 LATEX JOINT SEALANTS

- A. Acrylic Latex: Acrylic latex or siliconized acrylic latex, ASTM C834, Type OP, Grade NF.
 - 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Pecora Corporation.
 - b. Sherwin-Williams Company (The).
 - c. Tremco Incorporated.

2.5 ACOUSTICAL JOINT SEALANTS

- A. Acoustical Joint Sealant: Manufacturer's standard nonsag, paintable, nonstaining latex sealant complying with ASTM C 834. Product effectively reduces airborne sound transmission through perimeter joints and openings in building construction as demonstrated by testing representative assemblies according to ASTM E 90.
 - 1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:
 - a. Pecora Corporation; AC-20 FTR.
 - b. USG Corporation; SHEETROCK Acoustical Sealant.
 - c. Accumetric LLC; BOSS 824 Acoustical Sound Sealant.
 - d. Grabber Construction Products; Acoustical Sealant GSC.
 - e. Specified Technologies, Inc.; Smoke N Sound Acoustical Sealant.

2.6 JOINT-SEALANT BACKING

- A. Sealant Backing Material, General: Nonstaining; compatible with joint substrates, sealants, primers, and other joint fillers; and approved for applications indicated by sealant manufacturer based on field experience and laboratory testing.
- B. Cylindrical Sealant Backings: ASTM C1330, Type C (closed-cell material with a surface skin), and of size and density to control sealant depth and otherwise contribute to producing optimum sealant performance.

- C. Bond-Breaker Tape: Polyethylene tape or other plastic tape recommended by sealant manufacturer for preventing sealant from adhering to rigid, inflexible joint-filler materials or joint surfaces at back of joint. Provide self-adhesive tape where applicable.

2.7 MISCELLANEOUS MATERIALS

- A. Primer: Material recommended by joint-sealant manufacturer where required for adhesion of sealant to joint substrates indicated, as determined from preconstruction joint-sealant-substrate tests and field tests.
- B. Masking Tape: Nonstaining, nonabsorbent material compatible with joint sealants and surfaces adjacent to joints.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine joints indicated to receive joint sealants, with Installer present, for compliance with requirements for joint configuration, installation tolerances, and other conditions affecting performance of the Work.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

- A. Surface Cleaning of Joints: Clean out joints immediately before installing joint sealants to comply with joint-sealant manufacturer's written instructions and the following requirements:
 - 1. Remove all foreign material from joint substrates that could interfere with adhesion of joint sealant, including dust, paints (except for permanent, protective coatings tested and approved for sealant adhesion and compatibility by sealant manufacturer), old joint sealants, oil, grease, waterproofing, water repellents, water, surface dirt, and frost.
 - 2. Clean porous joint substrate surfaces by brushing, grinding, mechanical abrading, or a combination of these methods to produce a clean, sound substrate capable of developing optimum bond with joint sealants. Remove loose particles remaining after cleaning operations above by vacuuming or blowing out joints with oil-free compressed air. Porous joint substrates include the following:
 - a. Concrete.
 - b. Masonry.
 - 3. Remove laitance and form-release agents from concrete.
 - 4. Clean nonporous joint substrate surfaces with chemical cleaners or other means that do not stain, harm substrates, or leave residues capable of interfering with adhesion of joint sealants. Nonporous joint substrates include the following:
 - a. Metal.
 - b. Glass.
 - c. Porcelain enamel.
- B. Joint Priming: Prime joint substrates where recommended by joint-sealant manufacturer or as indicated by preconstruction joint-sealant-substrate tests or prior experience. Apply primer to

comply with joint-sealant manufacturer's written instructions. Confine primers to areas of joint-sealant bond; do not allow spillage or migration onto adjoining surfaces.

- C. Masking Tape: Use masking tape where required to prevent contact of sealant or primer with adjoining surfaces that otherwise would be permanently stained or damaged by such contact or by cleaning methods required to remove sealant smears. Remove tape immediately after tooling without disturbing joint seal.

3.3 INSTALLATION OF JOINT SEALANTS

- A. General: Comply with joint-sealant manufacturer's written installation instructions for products and applications indicated, unless more stringent requirements apply.
- B. Sealant Installation Standard: Comply with recommendations in ASTM C1193 for use of joint sealants as applicable to materials, applications, and conditions indicated.
- C. Install sealant backings of type indicated to support sealants during application and at position required to produce cross-sectional shapes and depths of installed sealants relative to joint widths that allow optimum sealant movement capability.
 - 1. Do not leave gaps between ends of sealant backings.
 - 2. Do not stretch, twist, puncture, or tear sealant backings.
 - 3. Remove absorbent sealant backings that have become wet before sealant application, and replace them with dry materials.
- D. Install bond-breaker tape behind sealants where sealant backings are not used between sealants and backs of joints.
- E. Install sealants using proven techniques that comply with the following and at the same time backings are installed:
 - 1. Place sealants so they directly contact and fully wet joint substrates.
 - 2. Completely fill recesses in each joint configuration.
 - 3. Produce uniform, cross-sectional shapes and depths relative to joint widths that allow optimum sealant movement capability.
- F. Tooling of Nonsag Sealants: Immediately after sealant application and before skinning or curing begins, tool sealants according to requirements specified in subparagraphs below to form smooth, uniform beads of configuration indicated; to eliminate air pockets; and to ensure contact and adhesion of sealant with sides of joint.
 - 1. Remove excess sealant from surfaces adjacent to joints.
 - 2. Use tooling agents that are approved in writing by sealant manufacturer and that do not discolor sealants or adjacent surfaces.
 - 3. Provide concave joint profile in accordance with Figure 8A in ASTM C1193 unless otherwise indicated.

3.4 CLEANING

- A. Clean off excess sealant or sealant smears adjacent to joints as the Work progresses by methods and with cleaning materials approved in writing by manufacturers of joint sealants and of products in which joints occur.

3.5 PROTECTION

- A. Protect joint sealants during and after curing period from contact with contaminating substances and from damage resulting from construction operations or other causes so sealants are without deterioration or damage at time of Substantial Completion. If, despite such protection, damage or deterioration occurs, cut out, remove, and repair damaged or deteriorated joint sealants immediately so installations with repaired areas are indistinguishable from original work.

3.6 JOINT-SEALANT SCHEDULE

- A. Joint-Sealant Application: Interior joints in vertical surfaces and horizontal nontraffic surfaces not subject to significant movement.
 - 1. Joint Locations:
 - a. Perimeter joints between interior wall surfaces and frames of interior doors and windows.
 - b. Other interior joints as indicated on Drawings.
 - 2. Joint Sealant: Acrylic latex.
 - 3. Joint-Sealant Color: As selected by Architect from manufacturer's full range of colors.
- B. Joint-Sealant Application: Mildew-resistant interior joints in vertical surfaces and horizontal nontraffic surfaces.
 - 1. Joint Locations:
 - a. Joints between plumbing fixtures and adjoining walls, floors, and counters.
 - b. Tile control and expansion joints where indicated.
 - c. Other joints as indicated on Drawings.
 - 2. Joint Sealant: Silicone, mildew resistant, acid curing, S, NS, 25, NT.
 - 3. Joint-Sealant Color: As selected by Architect from manufacturer's full range of colors.
- C. Joint-Sealant Application: Interior acoustical joints in vertical surfaces and horizontal nontraffic surfaces.
 - 1. Joint Location:
 - a. Acoustical joints where indicated.
 - b. Other joints as indicated.
 - 2. Joint Sealant: Acoustical.
 - 3. Joint-Sealant Color: As selected by Architect from manufacturer's full range.
- D. Joint Sealant Application: Exterior joints in vertical surfaces and horizontal nontraffic surfaces.
 - 1. Joint Locations:
 - a. Perimeter joints between materials concrete or exterior masonry and frames of doors, windows and louvers.
 - b. Joints between at metal flashing.

- c. Construction joints in cast-in-place concrete.
- d. Control and expansion joints in unit masonry.
- e. Joints between different materials listed above.
- f. Control and expansion joints in ceilings and other overhead surfaces.
- 2. Joint Sealant: Silicone, nonstaining, S, NS, 50, NT.
- 3. Joint-Sealant Color: As selected by Architect from manufacturer's full range.

END OF SECTION 079200

SECTION 080152 - HISTORIC TREATMENT OF WOOD WINDOWS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Wood window repair.
 - 2. Storm windows.
 - 3. Reglazing.

1.3 DEFINITIONS

- A. Wood Window Component Terminology: As identified in AWI's "Architectural Woodwork Quality Standards." Wood window components for historic treatment work include the following classifications:
 - 1. Frame Components: Head, jamb, and sill.
 - 2. Sash Components: Stile and rails, parting bead, stop, and muntins.
 - 3. Exterior Trim: Exterior casing, brick mould, and drip cap.
 - 4. Interior Trim: Casing, stool, and apron.
- B. Glazing: Includes glass, glazing points, glazing tapes, glazing sealants, and glazing compounds.
- C. Window: Includes window frame, sash, storm window, shutters, and louvered blinds unless otherwise indicated by the context.

1.4 ACTION SUBMITTALS

- A. Product Data: For each type of product indicated. Include recommendations for application and use. Include test data substantiating that products comply with requirements.
- B. Shop Drawings: For repair and replacement of historic wood windows and components. Show location and extent of replacement work, with enlarged details of replacement parts indicating materials, profiles, joinery, reinforcing, method of splicing into or attaching to existing wood window, accessory items, and finishes. Include field-verified dimensions and the following:
 - 1. Full-size shapes and profiles with complete dimensions for new wood window components and their jointing, showing relation of existing to new components.
 - 2. Component numbers and corresponding window locations in the building on annotated plans and elevations.
 - 3. Provisions for sealant joints as required for location.

- C. Samples for Initial Selection: For units with factory-applied color finishes.
- D. Samples for Verification: For the following items of size indicated below, finished as required for use in the Work:
 - 1. New Units: 12-inch long, full-size frame sections with applied finish.
 - 2. Replacement Members: 12 inches long for each replacement member; including parts of frame, sash, exterior trim, and interior trim.
 - a. Architect reserves the right to require additional Samples of replacement members that show fabrication techniques, materials, and finishes.
 - 3. Repaired and Refinished Wood Window Members: Prepare Samples using existing wood window members removed from site, repaired, and refinished.

1.5 QUALITY ASSURANCE

- A. AWI Quality Standard: Comply with applicable requirements in AWI's "Architectural Woodwork Quality Standards" for construction, finishes, grades of wood windows, and other requirements.
- B. WI Quality Standard: Comply with WI's "Manual of Millwork" for construction, finishes, grades of wood windows, and other requirements.

1.6 PROJECT CONDITIONS

- A. Weather Limitations: Proceed with historic treatment of wood windows only when existing and forecasted weather conditions are within the environmental limits set by each manufacturer's written instructions and specified requirements.
- B. Concealed and undocumented historic items, relics, and similar objects encountered during historic treatment remain Owner's property. Carefully dismantle and salvage each item or object.
 - 1. Coordinate with Owner, who will establish special procedures for dismantling and salvaging.

1.7 SEQUENCING AND SCHEDULING

- 1. Clean surfaces.
- 2. General Wood-Repair Sequence:
 - a. Remove paint to bare wood according to Section 099113.
 - b. If thicker than original glass is required, rout muntins to required rebate size.
 - c. Repair wood by consolidation, member replacement, partial member replacement, and patching.
 - d. Sand, prime, fill, sand again, and prime surfaces again for refinishing according to Section 099113.
- 3. Repair, refinish, and replace hardware if required. Reinstall essential operating hardware.
- 4. Install glazing as indicated on drawings.
- 5. Apply finish coats according to Division 09 Section 099113.

PART 2 - PRODUCTS

2.1 REPLACEMENT WOOD MATERIALS

- A. Wood: Clear fine-grained lumber; kiln dried to a moisture content of 6 to 12 percent at time of fabrication; free of visible finger joints, blue stain, knots, pitch pockets, and surface checks larger than 1/32 inch deep by 2 inches wide.
 - 1. Species: Western Red Cedar.
- B. Exterior Trim: Western Red Cedar.

2.2 WOOD REPAIR MATERIALS

- A. Wood Consolidant: Ready-to-use product designed to penetrate, consolidate, and strengthen soft fibers of wood materials that have deteriorated due to weathering and decay and designed specifically to enhance the bond of wood-patching compound to existing wood.
 - 1. Products: Subject to compliance with requirements, provide one of the following:
 - a. Abatron, Inc.; LiquidWood.
 - b. ConServ Epoxy LLC; Flexible Epoxy Consolidant 100.
 - c. Wood Care Systems; ROTFIX.
- B. Wood-Patching Compound: Two-part epoxy-resin wood-patching compound; knife-grade formulation as recommended by manufacturer for type of wood repair indicated, tooling time required for the detail of work, and site conditions. Compound shall be designed for filling voids in damaged wood materials that have deteriorated due to weathering and decay. Compound shall be capable of filling deep holes and spreading to feather edge.
 - 1. Products: Subject to compliance with requirements, provide one of the following:
 - a. Abatron, Inc.; LiquidWood with WoodEpoxy.
 - b. Advanced Repair Technology, Inc.; Primatrate with Flex-Tec HV.
 - c. ConServ Epoxy LLC; Flexible Epoxy Consolidant 100 with Flexible Epoxy Patch 200.
 - d. Polymeric Systems, Inc.; QuickWood.
 - e. West System Inc.; West System.
 - f. Wood Care Systems; ROTFIX with SCULPWOOD.

2.3 GLAZING MATERIALS

- A. Glass and Glazing Materials: See Division 08 Section "Glazing."
- B. Glazing Systems:
 - 1. Single Glass Units: Primer as recommended by glazing material manufacturer, with oil-based glazing putty according to Division 08 Section "Glazing."

2.4 STORM WINDOWS

- A. General: Custom fabricated, tight fitting, replicating appearance of existing storm windows.
 - 1. Fabricate storm windows for installation on outside of primary window matching existing location.
- B. Aluminum Storm Windows: Fabricated from extruded aluminum to fit existing opening; finish to match existing storm windows.
 - 1. Aluminum Finish: Manufacturer's standard anodized color matching adjacent existing storm windows.
 - 2. Hardware: As required to secure storm window to window frames.
 - 3. Glazing Material: Uncoated clear float glass.

2.5 MISCELLANEOUS MATERIALS

- A. Cleaning Materials:
 - 1. Detergent Solution: Solution prepared by mixing 2 cups (0.5 L) of tetrasodium polyphosphate, 1/2 cup (125 mL) of laundry detergent that contains no ammonia, 5 quarts (5 L) of 5 percent sodium hypochlorite bleach, and 15 quarts (15 L) of warm water for each 5 gal. (20 L) of solution required.
 - 2. Mildewcide: Provide commercial proprietary mildewcide or a solution prepared by mixing 1/3 cup (80 mL) of household detergent that contains no ammonia, 1 quart (1 L) of 5 percent sodium hypochlorite bleach, and 3 quarts (3 L) of warm water.
- B. Adhesives: Wood adhesives for exterior exposure, with minimum 15- to 45-minute cure at 70 deg F (21 deg C), in gunnable and liquid formulations as recommended by adhesive manufacturer for each type of repair.
- C. Fasteners: Fasteners of same basic metal as fastened metal unless otherwise indicated. Use metals that are noncorrosive and compatible with each material joined.
 - 1. Match existing fasteners in material and type of fastener unless otherwise indicated.
 - 2. Use concealed fasteners for interconnecting wood components.
 - 3. Use concealed fasteners for attaching items to other work unless exposed fasteners are unavoidable.
 - 4. For exposed fasteners, use Phillips-type machine screws of head profile flush with metal surface unless otherwise indicated.
 - 5. Finish exposed fasteners to match finish of metal fastened unless otherwise indicated.
- D. Anchors, Clips, and Accessories: Fabricate anchors, clips, and window accessories of aluminum, nonmagnetic stainless steel, or hot-dip zinc-coated steel complying with requirements in ASTM B 633 for SC 3 (Severe) service condition.

PART 3 - EXECUTION

3.1 PREPARATION

- A. Protect adjacent materials from damage by historic treatment of wood windows.
- B. Clean existing wood windows of mildew, algae, moss, plant material, loose paint, grease, dirt, and other debris by scrubbing with bristle brush or sponge and detergent solution. Scrub mildewed areas with mildewcide. After cleaning, rinse thoroughly with fresh water. Allow to dry before repairing or painting.
- C. Condition replacement wood members and replacement storm windows to prevailing conditions at installation areas before installing.

3.2 HISTORIC TREATMENT PROCEDURES, GENERAL

- A. Mechanical Abrasion: Where mechanical abrasion is needed for the work, use only the gentlest mechanical methods, such as scraping and natural-fiber bristle brushing, that will not abrade wood substrate, reducing clarity of detail. Do not use abrasive methods such as sanding, wire brushing, or power tools except as indicated as part of the historic treatment program and as approved by Architect.
- B. Repair Wood Windows: Match existing materials and features, retaining as much original material as possible to perform repairs.
 - 1. Unless otherwise indicated, repair wood windows by consolidating, patching, splicing, or otherwise reinforcing wood with new wood matching existing wood or with salvaged, sound, original wood.
 - 2. Where indicated, repair wood windows by limited replacement matching existing material.
- C. Protection of Openings: Where sash or windows are indicated for removal, **cover resultant openings with fastened plywood so that openings are weathertight during repair period. A tarp is insufficient due to security reasons.**

3.3 GLAZING

- A. Remove cracked and damaged glass and glazing materials from openings and prepare surfaces for reglazing.
- B. Install new glass with indicated glazing system and according to Division 08 Section "Glazing."
- C. Disposal of Removed Glass: Remove from Owner's property and legally dispose of it.

3.4 WOOD WINDOW & STORM WINDOW PATCH-TYPE REPAIR

- A. General: Patch wood members that are damaged and exhibit depressions, holes, or similar voids, and that have limited rotted or decayed wood.
 - 1. Verify that surfaces are sufficiently clean and free of paint residue prior to patching.

-
2. Treat wood members with wood consolidant prior to application of patching compound. Coat wood surfaces by brushing, applying multiple coats until wood is saturated and refuses to absorb more. Allow treatment to harden before filling void with patching compound.
 3. Remove rotted or decayed wood down to sound wood.
- B. Apply wood-patching compound to fill depressions, nicks, cracks, and other voids created by removed or missing wood.
1. Prime patch area with application of wood consolidant or manufacturer's recommended primer.
 2. Mix only as much patching compound as can be applied according to manufacturer's written instructions.
 3. Apply patching compound in layers as recommended by manufacturer until the void is completely filled.
 4. Finish patch surface to match contour of adjacent wood member. Sand patching compound smooth and flush, matching contour of existing wood member.
 5. Clean spilled compound from adjacent materials immediately.
- C. Condition finish carpentry to average prevailing humidity conditions in installation areas before installation for a minimum of 24 hours unless longer conditioning recommended by manufacturer.
- D. Backprime lumber for painted finish exposed on the exterior. Comply with requirements for surface preparation and application in Section "Painting."

3.5 EPOXY PATCHING

- A. Mix and apply epoxy resin and hardeners in accordance with the manufacturer's written instructions.
- B. Apply liquid consolidant to all damaged areas of wood to fully impregnate and harden the wood.
- C. Apply paste to fill all cracks and voids back to the original surface.
- D. Shape and sand the hardened paste to the original profile of the wood member.

3.6 WOOD WINDOW & STORM WINDOW MEMBER-REPLACEMENT REPAIR

- A. General: Replace parts of or entire wood window members at locations indicated on Drawings and where damage is too extensive to patch.
1. Verify that surfaces are sufficiently clean and free of paint residue prior to repair.
 2. Remove broken, rotted, and decayed wood down to sound wood.
 3. Custom fabricate new wood to replace missing wood; either replace entire wood member or splice new wood part into existing member. Fabricate replacement members according to AWI Section 1000 requirements for Custom Grade.
 4. Secure new wood using finger joints or multiple dowels with adhesive and nailing to ensure maximum structural integrity at each splice. Use only concealed fasteners. Fill nail holes and patch surface to match surrounding wood.
- B. Repair remaining depressions, holes, or similar voids with patch-type repairs.

- C. Clean spilled materials from adjacent surfaces immediately.

3.7 CLEANING AND PROTECTION

- A. Protect window surfaces from contact with contaminating substances resulting from construction operations. Monitor window surfaces adjacent to and below exterior concrete and masonry during construction for presence of dirt, scum, alkaline deposits, stains, or other contaminants. If contaminating substances contact window surfaces, remove contaminants immediately according to glass manufacturer's written recommendations.
- B. Clean exposed surfaces immediately after historic treatment of wood windows. Avoid damage to coatings and finishes. Remove excess sealants, glazing and patching materials, dirt, and other substances.
- C. Remove and replace glass that has been broken, chipped, cracked, abraded, or damaged during construction period.

END OF SECTION 080152

SECTION 081113 - HOLLOW METAL DOORS AND FRAMES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes hollow-metal work.
- B. Related Requirements:
 - 1. Section 087100 "Door Hardware" for door hardware for hollow-metal doors.

1.3 DEFINITIONS

- A. Minimum Thickness: Minimum thickness of base metal without coatings according to NAAMM-HMMA 803 or SDI A250.8.

1.4 COORDINATION

- A. Coordinate anchorage installation for hollow-metal frames. Furnish setting drawings, templates, and directions for installing anchorages, including sleeves, concrete inserts, anchor bolts, and items with integral anchors. Deliver such items to Project site in time for installation.

1.5 ACTION SUBMITTALS

- A. Product Data: For each type of product.
 - 1. Include construction details, material descriptions, core descriptions, fire-resistance ratings and finishes.
- B. Shop Drawings: Include the following:
 - 1. Frame details for each frame type, including dimensioned profiles and metal thicknesses.
 - 2. Locations of reinforcement and preparations for hardware.
 - 3. Details of each different wall opening condition.
 - 4. Details of anchorages, joints, field splices, and connections.
 - 5. Details of accessories.
 - 6. Details of moldings, removable stops, and glazing.
 - 7. Details of conduit and preparations for power, signal, and control systems.
- C. Samples for Verification:

1. For each type of exposed finish required, prepared on Samples of not less than 3 by 5 inches.

- D. Schedule: Provide a schedule of hollow-metal work prepared by or under the supervision of supplier, using same reference numbers for details and openings as those on Drawings. Coordinate with final Door Hardware Schedule.

1.6 INFORMATIONAL SUBMITTALS

- A. Product Test Reports: For each type of hollow-metal door and frame assembly, for tests performed by a qualified testing agency.

1.7 DELIVERY, STORAGE, AND HANDLING

- A. Deliver hollow-metal work palletized, packaged, or crated to provide protection during transit and Project-site storage. Do not use nonvented plastic.
 1. Provide additional protection to prevent damage to factory-finished units.
- B. Deliver welded frames with two removable spreader bars across bottom of frames, tack welded to jambs and mullions.
- C. Store hollow-metal work vertically under cover at Project site with head up. Place on minimum 4-inch- high wood blocking. Provide minimum 1/4-inch space between each stacked door to permit air circulation.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 1. Ceco Door; ASSA ABLOY.
 2. Curries Company; ASSA ABLOY.
 3. Steelcraft; an Ingersoll-Rand brand.
 4. Stiles Custom Metal, Inc.
 5. Republic Doors & Frames.
- B. Source Limitations: Obtain hollow-metal work from single source from single manufacturer.

2.2 INTERIOR STANDARD DOORS AND FRAMES

- A. Construct interior hollow-metal doors and frames to comply with the standards indicated for materials, fabrication, hardware locations, hardware reinforcement, tolerances, and clearances, and as specified.
- B. Extra-Heavy-Duty Doors and Frames: ANSI/SDI A250.8, Level 3; ANSI/SDI A250.4, Level A.

1. Doors:
 - a. Type: As indicated in the Door and Frame Schedule.
 - b. Thickness: 1-3/4 inches.
 - c. Face: Uncoated steel sheet, minimum thickness of 0.053 inch.
 - d. Edge Construction: Model 1, Full Flush.
 - e. Edge Bevel: Provide manufacturer's standard beveled or square edges.
 - f. Core: Kraft-paper honeycomb.
2. Frames:
 - a. Materials: Uncoated steel sheet, minimum thickness of 0.053 inch.
 - b. Construction: Face welded.
3. Exposed Finish: Prime.

2.3 FRAME ANCHORS

- A. Jamb Anchors:
 1. Stud-Wall Type: Designed to engage stud, welded to back of frames; not less than 0.042 inch thick.
- B. Floor Anchors: Formed from same material as frames, minimum thickness of 0.042 inch, and as follows:
 1. Monolithic Concrete Slabs: Clip-type anchors, with two holes to receive fasteners.

2.4 MATERIALS

- A. Recycled Content of Steel Products: Postconsumer recycled content plus one-half of preconsumer recycled content not less than 25 percent.
- B. Cold-Rolled Steel Sheet: ASTM A 1008, Commercial Steel (CS), Type B; suitable for exposed applications.
- C. Hot-Rolled Steel Sheet: ASTM A 1011, Commercial Steel (CS), Type B; free of scale, pitting, or surface defects; pickled and oiled.
- D. Metallic-Coated Steel Sheet: ASTM A 653, Commercial Steel (CS), Type B.
- E. Frame Anchors: ASTM A 879/A 879M, Commercial Steel (CS), 04Z coating designation; mill phosphatized.
- F. Inserts, Bolts, and Fasteners: Hot-dip galvanized according to ASTM A 153.
- G. Power-Actuated Fasteners in Concrete: Fastener system of type suitable for application indicated, fabricated from corrosion-resistant materials, with clips or other accessory devices for attaching hollow-metal frames of type indicated.
- H. Grout: ASTM C 476, except with a maximum slump of 4 inches, as measured according to ASTM C 143.
- I. Glazing: Comply with requirements in Section 088000 "Glazing."

2.5 FABRICATION

- A. Fabricate hollow-metal work to be rigid and free of defects, warp, or buckle. Accurately form metal to required sizes and profiles, with minimum radius for metal thickness. Where practical, fit and assemble units in manufacturer's plant. To ensure proper assembly at Project site, clearly identify work that cannot be permanently factory assembled before shipment.
- B. Hollow-Metal Frames: Where frames are fabricated in sections due to shipping or handling limitations, provide alignment plates or angles at each joint, fabricated of same thickness metal as frames.
 - 1. Provide countersunk, flat- or oval-head exposed screws and bolts for exposed fasteners unless otherwise indicated.
 - 2. Floor Anchors: Weld anchors to bottoms of jambs with at least four spot welds per anchor; however, for slip-on drywall frames, provide anchor clips or countersunk holes at bottoms of jambs.
 - 3. Jamb Anchors: Provide number and spacing of anchors as follows:
 - a. Stud-Wall Type: Locate anchors not more than 18 inches from top and bottom of frame. Space anchors not more than 32 inches o.c. and as follows:
 - 1) Three anchors per jamb up to 60 inches high.
 - 2) Four anchors per jamb from 60 to 90 inches high.
 - 3) Five anchors per jamb from 90 to 96 inches high.
 - 4) Five anchors per jamb plus one additional anchor per jamb for each 24 inches or fraction thereof above 96 inches high.
 - 4. Door Silencers: Except on weather-stripped frames, drill stops to receive door silencers as follows. Keep holes clear during construction.
 - a. Single-Door Frames: Drill stop in strike jamb to receive three door silencers.
 - b. Double-Door Frames: Drill stop in head jamb to receive two door silencers.
- C. Fabricate concealed stiffeners and edge channels from either cold- or hot-rolled steel sheet.
- D. Hardware Preparation: Factory prepare hollow-metal work to receive templated mortised hardware; include cutouts, reinforcement, mortising, drilling, and tapping according to SDI A250.6, the Door Hardware Schedule, and templates.
 - 1. Reinforce doors and frames to receive nontemplated, mortised, and surface-mounted door hardware.
 - 2. Comply with applicable requirements in SDI A250.6 and BHMA A156.115 for preparation of hollow-metal work for hardware.
- E. Glazed Lites: Provide stops and moldings around glazed lites where indicated. Form corners of stops and moldings with butted or mitered hairline joints.
 - 1. Provide stops and moldings flush with face of door, and with beveled stops unless otherwise indicated.
 - 2. Provide fixed frame moldings on outside of exterior and on secure side of interior doors and frames. Provide loose stops and moldings on inside of hollow-metal doors and frames.
 - 3. Coordinate rabbet width between fixed and removable stops with glazing and installation types indicated.
 - 4. Provide stops for installation with countersunk flat- or oval-head machine screws spaced uniformly not more than 9 inches o.c. and not more than 2 inches o.c. from each corner.

2.6 STEEL FINISHES

- A. Prime Finish: Clean, pretreat, and apply manufacturer's standard primer.
 - 1. Shop Primer: Manufacturer's standard, fast-curing, lead- and chromate-free primer complying with SDI A250.10; recommended by primer manufacturer for substrate; compatible with substrate and field-applied coatings despite prolonged exposure.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates, areas, and conditions, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting performance of the Work.
- B. Examine roughing-in for embedded and built-in anchors to verify actual locations before frame installation.
- C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

- A. Remove welded-in shipping spreaders installed at factory. Restore exposed finish by grinding, filling, and dressing, as required to make repaired area smooth, flush, and invisible on exposed faces.
- B. Drill and tap doors and frames to receive nontemplated, mortised, and surface-mounted door hardware.

3.3 INSTALLATION

- A. General: Install hollow-metal work plumb, rigid, properly aligned, and securely fastened in place. Comply with Drawings and manufacturer's written instructions.
- B. Hollow-Metal Frames: Install hollow-metal frames for doors, transoms, sidelites, borrowed lites, and other openings, of size and profile indicated. Comply with SDI A250.11 or NAAMM-HMMA 840 as required by standards specified.
 - 1. Set frames accurately in position; plumbed, aligned, and braced securely until permanent anchors are set. After wall construction is complete, remove temporary braces, leaving surfaces smooth and undamaged.
 - a. Install door silencers in frames before grouting.
 - b. Remove temporary braces necessary for installation only after frames have been properly set and secured.
 - c. Check plumb, square, and twist of frames as walls are constructed. Shim as necessary to comply with installation tolerances.
 - d. Field apply bituminous coating to backs of frames that will be filled with grout containing antifreezing agents.

2. Floor Anchors: Provide floor anchors for each jamb and mullion that extends to floor, and secure with postinstalled expansion anchors.
 - a. Floor anchors may be set with power-actuated fasteners instead of postinstalled expansion anchors if so indicated and approved on Shop Drawings.
 3. Metal-Stud Partitions: Solidly pack mineral-fiber insulation inside frames.
 4. Installation Tolerances: Adjust hollow-metal door frames for squareness, alignment, twist, and plumb to the following tolerances:
 - a. Squareness: Plus or minus 1/16 inch, measured at door rabbet on a line 90 degrees from jamb perpendicular to frame head.
 - b. Alignment: Plus or minus 1/16 inch, measured at jambs on a horizontal line parallel to plane of wall.
 - c. Twist: Plus or minus 1/16 inch, measured at opposite face corners of jambs on parallel lines, and perpendicular to plane of wall.
 - d. Plumbness: Plus or minus 1/16 inch, measured at jambs at floor.
- C. Glazing: Comply with installation requirements in Section 088000 "Glazing" and with hollow-metal manufacturer's written instructions.
1. Secure stops with countersunk flat- or oval-head machine screws spaced uniformly not more than 9 inches o.c. and not more than 2 inches o.c. from each corner.

3.4 ADJUSTING AND CLEANING

- A. Final Adjustments: Check and readjust operating hardware items immediately before final inspection. Leave work in complete and proper operating condition. Remove and replace defective work, including hollow-metal work that is warped, bowed, or otherwise unacceptable.
- B. Remove grout and other bonding material from hollow-metal work immediately after installation.
- C. Prime-Coat Touchup: Immediately after erection, sand smooth rusted or damaged areas of prime coat and apply touchup of compatible air-drying, rust-inhibitive primer.
- D. Metallic-Coated Surface Touchup: Clean abraded areas and repair with galvanizing repair paint according to manufacturer's written instructions.
- E. Touchup Painting: Cleaning and touchup painting of abraded areas of paint are specified in painting Sections.

END OF SECTION 081113

SECTION 081119 – STAINLESS-STEEL DOORS AND FRAMES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Stainless steel doors and frames.
- B. Related Requirements:
 - 1. Section 087100 "Door Hardware" for door hardware for stainless steel doors.

1.3 COORDINATION

- A. Coordinate anchorage installation for stainless steel frames. Furnish setting drawings, templates, and directions for installing anchorages, including sleeves, concrete inserts, anchor bolts, and items with integral anchors. Deliver such items to Project site in time for installation.
- B. Coordinate requirements for installation of door hardware, electrified door hardware, and access control and security systems.

1.4 ACTION SUBMITTALS

- A. Product Data: For each type of product.
 - 1. Include construction details, material descriptions, core descriptions, and finishes.
- B. Shop Drawings: Include the following:
 - 1. Elevations of each door type.
 - 2. Details of doors, including vertical and horizontal edge details and metal thicknesses.
 - 3. Frame details for each frame type, including dimensioned profiles and metal thicknesses.
 - 4. Locations of reinforcement and preparations for hardware.
 - 5. Details of each different wall opening condition.
 - 6. Details of electrical raceway and preparation for electrified hardware, access control systems, and security systems.
 - 7. Details of anchorages, joints, field splices, and connections.
 - 8. Details of accessories.
 - 9. Details of moldings, removable stops, and glazing.

- C. Product Schedule: For stainless steel doors and frames, prepared by or under the supervision of supplier, using same reference numbers for details and openings as those on Drawings. Coordinate with final door hardware schedule.

1.5 DELIVERY, STORAGE, AND HANDLING

- A. Deliver stainless steel doors and frames palletized, packaged, or crated to provide protection during transit and Project-site storage. Do not use nonvented plastic.
- B. Deliver welded frames with two removable spreader bars across bottom of frames, tack welded to jambs and mullions.
- C. Store stainless steel doors and frames under cover at Project site with head up. Place units on minimum 4-inch- (100-mm-) high wood blocking.
- D. Provide minimum 1/4-inch (6-mm) space between each stacked door to permit air circulation.

PART 2 - PRODUCTS

2.1 STAINLESS STEEL DOORS AND FRAMES

- A. Construct stainless steel door and frame assemblies to comply with NAAMM-HMMA 866 for the application indicated, including materials, fabrication methods, hardware reinforcement, tolerances, and clearances, and as specified. Comply with SDI ANSI/A250.4, for Physical Performance Level A.
- B. Stainless Steel Doors:
 - 1. Manufacturers: Subject to compliance with requirements, provide basis of design product or comparable product that meets requirements.
 - a. Basis-of-Design Product: SCG-3 Stainless Steel Traffic Door by Eliason Corporation; P.O. Box 2128, Kalamazoo, MI 49003. ASD. Tel: (800) 828-3655. Fax: (800) 828-3577. Email: doors@eliasoncorp.com www.eliasoncorp.com
 - 2. Type: As indicated in the Door and Frame Schedule.
 - 3. Thickness: 1-1/2 inches.
 - 4. Facing: Reinforcing metal plates.
 - a. Full Length Panels: 18 gauge stainless steel, both sides
 - 5. Edge Construction: Continuously welded with no visible seam
 - 6. Hardware:
 - a. Refer to Section 087100 "Door Hardware" for requirements and Hardware Schedule.
 - b. Stainless steel hardware covers.
 - c. Hinges: Double action easy swing proprietary stainless steel hinges at door locations indicated in Hardware Schedule.
 - 7. Gasket: Full perimeter seal.
 - 8. Windows: 9 inches (229 mm) wide by 14 inches (356 mm) high.
 - 9. Window Molding: Black rubber molding.
 - 10. Glazing: Clear acrylic.

C. Stainless Steel Frames:

- a. Materials: Type 304 stainless steel sheet.
- b. Door Frames for Openings 48 Inches (1219 mm) Wide or Less: Fabricate from stainless steel sheet, minimum thickness [0.062 inch (1.59 mm)].
- c. Construction: Face welded.

2. Hardware Reinforcement: Stainless steel sheet.

2.2 FRAME ANCHORS

A. Provide anchors of minimum size and type required by applicable door and frame standard, and suitable for performance level indicated.

B. Postinstalled Expansion Anchor: Minimum 3/8-inch- (9.5-mm-) diameter bolts with expansion shields or inserts, with manufacturer's standard pipe spacer.

C. Number and Spacing:

1. Masonry Type: Locate anchors not more than 18 inches (457 mm) from top and bottom of frame. Space anchors not more than 32 inches (813 mm) o.c.
2. Stud-Wall Type: Locate anchors not more than 18 inches (457 mm) from top and bottom of frame. Space anchors not more than 32 inches (813 mm) o.c. Two anchors per head for frames more than 42 inches (1066 mm) wide and mounted in metal-stud partitions.
3. Compression Type: Not less than two anchors in each jamb.
4. Postinstalled Expansion Type: Locate anchors not more than 6 inches (152 mm) from top and bottom of frame. Space anchors not more than 26 inches (660 mm) o.c.

D. Floor Anchors: Provide floor anchors for each jamb and mullion that extends to floor.

1. Floor Anchors for Concrete Slabs with Underlayment: Adjustable-type anchors with extension clips, allowing not less than 2-inch (51-mm) height adjustment. Terminate bottom of frames at top of underlayment.

E. Material:

1. Stainless steel sheet. Same type as door face.

2.3 FABRICATION

A. Stainless Steel Door Fabrication: Provide doors rigid and free of defects, warp, or buckle. Accurately form metal to required sizes and profiles, with minimum radius for thickness of metal.

1. Tolerances: Fabricate doors to tolerances indicated in NAAMM-HMMA 866.
2. Stops and Moldings: Factory cut openings in doors. Provide minimum 0.038-inch- (0.95-mm-) thick, stainless steel stops and moldings around glazed lites. Form corners of stops and moldings with butted or mitered hairline joints.
 - a. Glazed Lites: Provide fixed stops and moldings welded on secure side of door.
 - b. Coordinate rabbet width between fixed and removable stops with type of glazing and type of installation indicated.

- B. Stainless Steel Frame Fabrication: Provide stainless steel frames rigid and free of defects, warp, or buckle. Accurately form metal to required sizes and profiles, with minimum radius for thickness of metal.
1. Tolerances: Fabricate frames to tolerances indicated in NAAMM-HMMA 866.
 2. Fabricate in one piece except where handling and shipping limitations require multiple sections. Where frames are fabricated in sections, provide alignment plates or angles at each joint, fabricated of metal of same or greater thickness as frames. To ensure proper assembly at Project site, clearly identify work that cannot be permanently factory assembled before shipment.
 3. Provide countersunk, flat-, or oval-head exposed screws and bolts for exposed fasteners unless otherwise indicated.
 4. Door Silencers: Except on weather-stripped and gasketed frames, drill stops to receive door silencers as follows. Provide plastic plugs to keep holes clear during construction.
 - a. Single-Door Frames: Drill stop in strike jamb to receive three door silencers.
 - b. Double-Door Frames: Drill stop in head jamb to receive two door silencers.
 5. Stops and Moldings: Provide stops and moldings formed integrally with stainless steel frames around glazed lites minimum 5/8 inch (16 mm) high unless otherwise indicated. Form corners of stops and moldings with butted or mitered hairline joints.
 - a. Single Glazed Lites: Provide fixed stops and moldings welded on secure side of door or frame.
 - b. Coordinate rabbet width between fixed and removable stops with type of glazing and type of installation.
 - c. Provide stops for installation with countersunk flat- or oval-head machine screws spaced uniformly not more than 9 inches (230 mm) o.c. and not more than 2 inches (51 mm) o.c. from each corner.
- C. Hardware Preparation: Factory prepare stainless steel doors and frames to receive templated mortised hardware, and electrical wiring; include cutouts, reinforcement, mortising, drilling, and tapping, according to the Door Hardware Schedule, and templates.
1. Reinforce doors to receive nontemplated mortised and surface-mounted door hardware.
 2. Comply with ANSI/BHMA A156.115 for preparing hollow-metal doors and frames for hardware.

2.4 FINISHES

- A. Stainless Steel Finishes: Remove tool and die marks and stretch lines, or blend into finish. Grind and polish surfaces to produce uniform finish, free of cross scratches. When polishing is completed, passivate and rinse surfaces. Remove embedded foreign matter and leave surfaces chemically clean.
- B. Grain Direction: For finishes exhibiting grain, run grain vertically on door faces and frame jambs.

2.5 ACCESSORIES

- A. Glazing: Comply with requirements in Section 088000 "Glazing."

PART 3 - EXECUTION

3.1 PREPARATION

- A. Remove welded-in shipping spreaders installed at factory. Restore exposed finish by grinding, filling, and dressing, as required to make repaired area smooth, flush, and invisible on exposed faces.
- B. Prior to installation and with installation spreaders in place, adjust and securely brace stainless steel door frames for squareness, alignment, twist, and plumb to the following tolerances:
 - 1. Squareness: Plus or minus 1/16 inch (1.6 mm), measured at door rabbet on a line 90 degrees from jamb, and perpendicular to frame head.
 - 2. Alignment: Plus or minus 1/16 inch (1.6 mm), measured at jambs on a horizontal line parallel to plane of wall.
 - 3. Twist: Plus or minus 1/16 inch (1.6 mm), measured at opposite face corners of jambs on parallel lines, and perpendicular to plane of wall.
 - 4. Plumbness: Plus or minus 1/16 inch (1.6 mm), measured at jambs on a perpendicular line from head to floor.
- C. Drill and tap doors and frames to receive nontemplated mortised and surface-mounted door hardware.

3.2 INSTALLATION

- A. Install stainless steel doors and frames plumb, rigid, properly aligned, and securely fastened in place; comply with approved Shop Drawings and with manufacturer's written instructions.
- B. Stainless Steel Frames:
 - 1. Set frames accurately in position; plumbed, aligned, and braced securely until permanent anchors are set. After wall construction is complete, remove temporary braces, without damage to completed Work.
 - a. Where frames are fabricated in sections, field splice at approved locations by welding face joint continuously; grind, fill, dress, and make splice smooth, flush, and invisible on exposed faces.
 - b. Install frames with removable glazing stops located on secure side of opening.
 - 2. Floor Anchors: Secure with postinstalled expansion anchors.
 - 3. In-Place Concrete or Masonry Construction: Secure frames in place with postinstalled expansion anchors.
 - 4. Installation Tolerances: Adjust stainless steel frames for squareness, alignment, twist, and plumb to the following tolerances:
 - a. Squareness: Plus or minus 1/16 inch (1.6 mm), measured at door rabbet on a line 90 degrees from jamb, and perpendicular to frame head.
 - b. Alignment: Plus or minus 1/16 inch (1.6 mm), measured at jambs on a horizontal line parallel to plane of wall.
 - c. Twist: Plus or minus 1/16 inch (1.6 mm), measured at opposite face corners of jambs on parallel lines, and perpendicular to plane of wall.
 - d. Plumbness: Plus or minus 1/16 inch (1.6 mm), measured at jambs at floor.

- C. Glazing: Install glazing in sidelites, transoms, and borrowed lites to comply with installation requirements in Section 088000 "Glazing."

3.3 FIELD QUALITY CONTROL

- A. Repair or remove and replace installations where inspections indicate that they do not comply with specified requirements.
- B. Reinspect repaired or replaced installations to determine if replaced or repaired door assembly installations comply with specified requirements.

3.4 ADJUSTING AND CLEANING

- A. Stainless Steel Touchup: Immediately after erection, smooth any scratched or damaged areas of stainless steel; polish to match undamaged finish.

END OF SECTION 081119

SECTION 081416 - FLUSH WOOD DOORS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Five-ply flush wood veneer-faced doors for transparent finish.

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of door. Include details of core and edge construction and trim for openings. Include factory-finishing specifications.
- B. Shop Drawings: Indicate location, size, and hand of each door; elevation of each type of door; construction details not covered in Product Data; and the following:
 - 1. Dimensions and locations of blocking.
 - 2. Dimensions and locations of mortises and holes for hardware.
 - 3. Undercuts.
- C. Samples for Verification:
 - 1. Factory finishes applied to actual door face materials, approximately 8 by 10 inches, for each material and finish. For each wood species and transparent finish, provide set of three Samples showing typical range of color and grain to be expected in finished Work.

1.4 INFORMATIONAL SUBMITTALS

- A. Sample Warranty: For special warranty.

1.5 DELIVERY, STORAGE, AND HANDLING

- A. Comply with requirements of referenced standard and manufacturer's written instructions.
- B. Package doors individually in plastic bags or cardboard cartons.
- C. Mark each door on bottom rail with opening number used on Shop Drawings.

1.6 FIELD CONDITIONS

- A. Environmental Limitations: Do not deliver or install doors until spaces are enclosed and weathertight, wet-work in spaces is complete and dry, and HVAC system is operating and maintaining ambient temperature and humidity conditions at occupancy levels during remainder of construction period.

1.7 WARRANTY

- A. Special Warranty: Manufacturer agrees to repair or replace doors that fail in materials or workmanship within specified warranty period.
 - 1. Failures include, but are not limited to, the following:
 - a. Warping (bow, cup, or twist) more than 1/4 inch in a 42-by-84-inch section.
 - b. Telegraphing of core construction in face veneers exceeding 0.01 inch in a 3-inch span.
 - 2. Warranty Period for Solid-Core Interior Doors: Life of installation.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1. Eggers Industries
 - 2. Graham Wood Doors; ASSA-ABLOY Group company.
 - 3. Mohawk Flush Doors, Inc.
 - 4. VT Industries Inc.
 - 5. Marshfield Door Systems
 - 6. Oshkosh Door Company
- B. Source Limitations: Obtain wood doors from single manufacturer.

2.2 FLUSH WOOD DOORS, GENERAL

- A. Quality Standard: In addition to requirements specified, comply with WDMA I.S.1-A, "Architectural Wood Flush Doors."
- B. Low-Emitting Materials: Fabricate doors with adhesives and composite wood products that do not contain urea formaldehyde.
- C. WDMA I.S.1-A Performance Grade: Extra Heavy Duty.
 - 1. Construction: Five plies. Stiles and rails are bonded to core, then entire unit is abrasive planed before veneering.
- D. Particleboard-Core Doors:

1. Particleboard: ANSI A208.1, Grade LD-2, made with binder containing no ureaformaldehyde.
2. Blocking: Provide wood blocking in particleboard-core doors as needed to eliminate through bolting hardware.
3. Provide doors with glued-wood-stave or structural-composite-lumber cores instead of particleboard cores for doors indicated to receive exit devices.

E. Structural-Composite-Lumber-Core Doors:

1. Structural Composite Lumber: WDMA I.S.10.
 - a. Screw Withdrawal Face: 700 lbf.
 - b. Screw Withdrawal Edge: 400 lbf.

2.3 SOLID-CORE FIVE-PLY FLUSH WOOD VENEER-FACED DOORS FOR TRANSPARENT FINISH

A. Interior Doors:

1. Performance Grade: ANSI/WDMA I.S 1A Extra Heavy Duty.
2. Faces: Single-ply wood veneer not less than 1/50 inch thick.
 - a. Species: Red oak.
 - b. Cut: Plain sliced (flat sliced).
 - c. Match between Veneer Leaves: Book match.
 - d. Assembly of Veneer Leaves on Door Faces: Balance match.
3. Exposed Vertical Edges: Same species as faces - Architectural Woodwork Standards edge Type A.

2.4 FLUSH WOOD DOOR FABRICATION

A. Factory fit doors to suit frame-opening sizes indicated.

1. Comply with clearance requirements of referenced quality standard for fitting unless otherwise indicated.

B. Factory machine doors for hardware that is not surface applied.

1. Locate hardware to comply with DHI-WDHS-3.
2. Comply with final hardware schedules, door frame Shop Drawings, ANSI/BHMA-156.115-W, and hardware templates.
3. Coordinate with hardware mortises in metal frames, to verify dimensions and alignment before factory machining.

2.5 FACTORY FINISHING

A. Comply with referenced quality standard for factory finishing.

1. Complete fabrication, including fitting doors for openings and machining for hardware that is not surface applied, before finishing.
2. Finish faces, all four edges, edges of cutouts, and mortises.
3. Stains and fillers may be omitted on top and bottom edges, edges of cutouts, and mortises.

- B. Factory finish doors.
- C. Transparent Finish:
 - 1. ANSI/WDMA I.S. 1A Grade: Custom.
 - 2. Finish: ANSI/WDMA I.S. 1A TR-8 UV Cured Acrylated Polyester/Urethane
 - 3. Stain: To match existing door stain color.
 - 4. Effect: Open-grain finish.
 - 5. Sheen: Satin.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine doors and installed door frames, with Installer present, before hanging doors.
 - 1. Verify that installed frames comply with indicated requirements for type, size, location, and swing characteristics and have been installed with level heads and plumb jambs.
 - 2. Reject doors with defects.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION OF SOLID-COOR DOORS

- A. Hardware: For installation, see Section 087100 "Door Hardware."
- B. Install doors to comply with manufacturer's written instructions and referenced quality standard, and as indicated.
- C. Factory-Fitted Doors: Align in frames for uniform clearance at each edge.
- D. Factory-Finished Doors: Restore finish before installation if fitting or machining is required at Project site.

3.3 ADJUSTING

- A. Operation: Rehang or replace doors that do not swing or operate freely.
- B. Finished Doors: Replace doors that are damaged or that do not comply with requirements. Doors may be repaired or refinished if Work complies with requirements and shows no evidence of repair or refinishing.

END OF SECTION 081416

SECTION 087100 - DOOR HARDWARE

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes:
 - 1. Mechanical door hardware for the following:
 - a. Swinging doors.

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of product indicated. Include construction and installation details, material descriptions, dimensions of individual components and profiles, and finishes.
- B. Hardware Schedule: Submit a hardware schedule organized into sets, including the information below. Designations for door numbers and hardware sets shall match those used in the construction documents.
 - 1. Opening Number
 - 2. Door Type and Size
 - 3. Frame Type and Size
 - 4. Frame Anchoring Method
 - 5. Hardware Set
 - 6. Assembly Rating
- C. Hardware Schedule shall be coordinated with the doors, frames and related work to ensure proper size, thickness, hand function and finish of door hardware

1.4 INFORMATIONAL SUBMITTALS

- A. Warranty: Special warranty specified in this Section.

1.5 CLOSEOUT SUBMITTALS

- A. Maintenance Data: For each type of door hardware to include in maintenance manuals. Include final hardware and keying schedule.

1.6 QUALITY ASSURANCE

- A. Means of Egress Doors: Latches do not require more than 15 lbf to release the latch. Locks do not require use of a key, tool, or special knowledge for operation.
- B. Accessibility Requirements: For door hardware on doors in an accessible route, comply with the U.S. Architectural & Transportation Barriers Compliance Board's ADA-ABA Accessibility Guidelines and ICC/ANSI A117.1.
 - 1. Provide operating devices that do not require tight grasping, pinching, or twisting of the wrist and that operate with a force of not more than 5 lbf .
 - 2. Bevel raised thresholds with a slope of not more than 1:2. Provide thresholds not more than 1/2 inch high.
 - 3. Adjust door closer sweep periods so that, from an open position of 70 degrees, the door will take at least 3 seconds to move to a point 3 inches from the latch, measured to the leading edge of the door.

1.7 DELIVERY, STORAGE, AND HANDLING

- A. Package each hardware item in separate containers with all screws, wrenches, installation instructions and installation templates. Mark each box with hardware heading and door number according to approved hardware schedule.
- B. Deliver individually packaged hardware items at the proper times to the proper locations (shop or project site) for installation: Provide a complete packing list showing items, door numbers and hardware headings with each shipment.
- C. Store hardware in shipping cartons above ground and under cover to prevent damage. Provide secure lockup for door hardware delivered to the Project, but not yet installed. Control handling and installation of hardware items that are not immediately replaceable -so that completion of the Work will not be delayed by hardware losses both before and after installation.

1.8 COORDINATION

- A. Installation Templates: Distribute for doors, frames, and other work specified to be factory prepared. Check Shop Drawings of other work to confirm that adequate provisions are made for locating and installing door hardware to comply with indicated requirements.
- B. Security: Coordinate installation of door hardware, keying, and access control with Owner's security consultant.
- C. Existing Openings: Where hardware components are scheduled for application to existing construction or where modifications to existing door hardware are required, field verify existing conditions and coordinate installation of door hardware to suit opening conditions and to provide proper door operation.

1.9 WARRANTY

- A. Special Warranty: Manufacturer's standard form in which manufacturer agrees to repair or replace components of door hardware that fail in materials or workmanship within specified warranty period.
 - 1. Failures include, but are not limited to, the following:
 - a. Structural failures including excessive deflection, cracking, or breakage.
 - b. Faulty operation of doors and door hardware.
 - c. Deterioration of metals, metal finishes, and other materials beyond normal weathering and use.
 - 2. Warranty Period: Three years from date of Substantial Completion, unless otherwise indicated.
 - a. Manual Closers: 10 years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 HARDWARE GENERAL

- A. Provide the materials of products indicated by trade names, manufacturer's name, or catalog number. Substitutions will not be permitted except as described in Division 1.
- B. Provide manufacturer's standard products meeting the design intent of this Specification, free of imperfections affecting appearance or serviceability.
 - 1. Provide hardware complete with all fasteners, anchors, instructions, layout templates, and any specialized tools as required for satisfactory installation and adjustment.
 - 2. Hand of Door: Drawings show direction of slide, swing or hand of each door leaf. Furnish each item of hardware for proper installation and operation of door movement as shown.
 - 3. Furnish screws for installation with each hardware item. Provide Phillips flat head screws except as otherwise indicated or approved. Finish screws exposed under any condition to match hardware finish, or, if exposed in surface of other work, to match finish of such other work as closely as possible. Use machine screws for metal connections and wood screws for connections to wood. Use manufacturer's screws to secure hardware.
 - 4. Provide concealed fasteners for hardware unit with care exposed when door is closed, except to extent no standard units of type specified are available with concealed fasteners. Do not use thru-bolts for installation where bolt, head or nut on opposite face is exposed in other work, except where indicated otherwise or where it is not feasible to adequately reinforce the work. In such cases, provide sleeves for each thru-bolt or use sex screw fasteners.
 - 5. Special Tools: Furnish a complete set of specialized tools and maintenance instructions as needed for Owner's continued adjustment, maintenance and removal and replacement of finish hardware.
- C. Hardware is specified in the hardware schedule by set, type and functions, which have been selected as best meeting the application requirements. Acceptable products for each category are specified in Paragraph 2.5 "Hardware Products".

2.2 SCHEDULED DOOR HARDWARE

- A. Provide door hardware for each door as scheduled in Part 3 "Door Hardware Schedule" Article to comply with requirements in this Section.
 - 1. Door Hardware Sets: Provide quantity, item, size, finish or color indicated, and named manufacturers' products
- B. Designations: Requirements for design, grade, function, finish, size, and other distinctive qualities of each type of door hardware are indicated in Part 3 "Door Hardware Schedule" Article. Products are identified by using door hardware designations, as follows:
 - 1. Named Manufacturers' Products: Manufacturer and product designation are listed for each door hardware type required for the purpose of establishing minimum requirements. Manufacturers' names are abbreviated in Part 3 "Door Hardware Schedule" Article.

2.3 SPECIAL REQUIREMENTS

- A. General:
 - 1. Where new doors and hardware are scheduled to be installed in existing frames, contractor to coordinate hinge sizes and locations, lockset backsets, strikes, hardware mounting heights, etc with existing frames to ensure new door and hardware fits and functions properly in existing frame.
- B. Hinges:
 - 1. BHMA A156.1. Provide template-produced hinges for hinges installed on hollow-metal doors and hollow-metal frames.
 - 2. Provide non-removable pins for doors.
 - 3. Provide not less than three butt hinges per door.
- C. Locksets:
 - 1. All locksets to be grade 1 heavy duty cylindrical or as specified.
- D. Closers:
 - 1. Comply with manufacturer's recommendations for unit size based on door size and usage.
 - 2. Provide parallel arms for all overhead closers, except as otherwise indicated.
 - 3. All closers UL Listed Certified to be in compliance with UBC 7.2 and UL 10C.
 - 4. Closers with Pressure Relief Valves will not be acceptable.
 - 5. Supplier to provide any brackets or plates required for proper installation of door closers.

2.4 KEYING

- A. Contractor to turn all cylinders over to Owner key shop for keying.

2.5 FINISHES

- A. Standard: Comply with BHMA A156.18
 - 1. Door hardware for all stainless steel doors:
 - a. 630 – Satin Stainless Steel
 - 2. Door hardware for all wood doors or hollow metal doors be one of the following:
 - a. 613 – Dark Satin Bronze.
 - b. 640 – Dark Satin Bronze.
 - c. 695 – Dark Bronze.
- B. Provide quality of finish, including thickness of plating or coating (if any), composition, hardness and other qualities complying with manufacturer's standards, but in no case less than specified by referenced standards for the application units of hardware.
- C. Protect finishes on exposed surfaces from any damage by applying a strippable temporary protective covering before shipping.
- D. BHMA Designations: Comply with base material and finish requirements indicated by BHMA standards.

2.6 SURFACE CLOSERS

- A. Surface Closers: BHMA A156.4; rack-and-pinion hydraulic type with adjustable sweep and latch speeds controlled by key-operated valves and forged-steel main arm. Comply with manufacturer's written recommendations for size of door closers depending on size of door, exposure to weather, and anticipated frequency of use. Provide factory-sized closers, adjustable to meet field conditions and requirements for opening force.
 - 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. LCN Closers; an Ingersoll-Rand company.
 - b. Falcon Hardware
 - c. Norton Door Controls; an Assa-Abloy Company

2.7 FABRICATION

- A. Manufacturer's Nameplate: Do not provide products that have manufacturer's name or trade name displayed in a visible location except in conjunction with required fire-rated labels and as otherwise approved by Architect.
 - 1. Manufacturer's identification is permitted on rim of lock cylinders only.
- B. Base Metals: Produce door hardware units of base metal indicated, fabricated by forming method indicated, using manufacturer's standard metal alloy, composition, temper, and hardness. Furnish metals of a quality equal to or greater than that of specified door hardware units and BHMA A156.18.
- C. Fasteners: Provide door hardware manufactured to comply with published templates prepared for machine, wood, and sheet metal screws. Provide screws that comply with commercially recognized industry standards for application intended, except aluminum fasteners are not permitted. Provide Phillips flat-head screws with finished heads to match surface of door hardware, unless otherwise indicated.

1. Concealed Fasteners: For door hardware units that are exposed when door is closed, except for units already specified with concealed fasteners. Do not use through bolts for installation where bolt head or nut on opposite face is exposed unless it is the only means of securely attaching the door hardware. Where through bolts are used on hollow door and frame construction, provide sleeves for each through bolt.
2. Spacers or Sex Bolts: For through bolting of hollow-metal doors.

2.8 HARDWARE PRODUCTS

ITEM	SPECIFIED	APPROVED EQUAL
Hinges	Hager	Bommer, Ives, Stanley, McKinney
Locksets	Schlage ND Series	Best 93K, Corbin Russwin CL3300, Sargent 10 Line, Yale 5400LN
Cylinders	Schlage	No Substitutions
Closers	LCN 4040XP Series	Norton 9500, Sargent 281, Stanley D-4550, Corbin Russwin DC8200
Flatgoods	Ives	Trimco, Rockwood, Hager, McKinney
Stops	Ives	Trimco, Rockwood, Hager, McKinney
Overhead Stops	Glynn Johnson	Rixson, Rockwood, Sargent
Gasket	Zero	NGP, Pemko, Hager

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine doors and frames, with Installer present, for compliance with requirements for installation tolerances, labeled fire-rated door assembly construction, wall and floor construction, and other conditions affecting performance.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION

- A. Mounting Heights: Mount door hardware units at heights to comply with the following unless otherwise indicated or required to comply with governing regulations.
 1. Standard Steel Doors and Frames: ANSI/SDI A250.8.
- B. Install each door hardware item to comply with manufacturer's written instructions. Where cutting and fitting are required to install door hardware onto or into surfaces that are later to be painted or finished in another way, coordinate removal, storage, and reinstallation of surface protective trim units with finishing. Do not install surface-mounted items until finishes have been completed on substrates involved.
 1. Set units level, plumb, and true to line and location. Adjust and reinforce attachment substrates as necessary for proper installation and operation.
 2. Drill and countersink units that are not factory prepared for anchorage fasteners. Space fasteners and anchors according to industry standards.

- C. Hinges: Install types and in quantities indicated in door hardware schedule but not fewer than the number recommended by manufacturer for application indicated or one hinge for every 30 inches of door height, whichever is more stringent, unless other equivalent means of support for door, such as spring hinges or pivots, are provided.
- D. Thresholds: Set thresholds for exterior doors and other doors indicated in full bed of sealant complying with requirements specified in Section 079200 "Joint Sealants."
- E. Perimeter Gasketing: Apply to head and jamb, forming seal between door and frame.

3.3 ADJUSTING

- A. Initial Adjustment: Adjust and check each operating item of door hardware and each door to ensure proper operation or function of every unit. Replace units that cannot be adjusted to operate as intended. Adjust door control devices to compensate for final operation of heating and ventilating equipment and to comply with referenced accessibility requirements.
 - 1. Door Closers: Adjust sweep period to comply with accessibility requirements and requirements of authorities having jurisdiction.

3.4 CLEANING AND PROTECTION

- A. Clean adjacent surfaces soiled by door hardware installation.
- B. Clean operating items as necessary to restore proper function and finish.
- C. Provide final protection and maintain conditions that ensure that door hardware is without damage or deterioration at time of Substantial Completion.

Unified Government Memorial Hall Kitchen & Audio/Visual Renovations**Unified Government of Wyandotte County & Kansas City, KS****ISSUED FOR BID****3.5 DOOR HARDWARE SCHEDULE****Hardware Group No. 1**

For use on SGL mark/door #(s):
004, 005

Each To Have:

Qty		Description	Catalog Number	Finish	Mfr
1	EA	HINGE	BASIS-OF-DESIGN: ELIASON EASY SWING HINGE SYSTEM BY DOOR MANUFACTURER	630	
1	EA	CLASSROOM LOCK	ND70LD RHO	630	SCH
1	EA	K-I-L CYLINDER	MATCH EXISTING KEY SYSTEM	630	SCH
1	EA	WALL STOP	WS406/407CCV	630	IVE

Hardware Group No. 2

For use on SGL mark/door #(s):
003

Each To Have:

Qty		Description	Catalog Number	Finish	Mfr
1	EA	HINGE	BASIS-OF-DESIGN: ELIASON EASY SWING HINGE SYSTEM BY DOOR MANUFACTURER	630	
1	EA	DEADBOLT LOCK	B661P	630	SCH
1	EA	K-I-L CYLINDER	MATCH EXISTING KEY SYSTEM	630	SCH
2	EA	PUSH PLATE	MANUFACTURER STANDARD	630	

NOTE: DOOR TO HAVE DOUBLE ACTING SWING

Hardware Group No. 3

For use on DBL mark/door #(s):
002

Each To Have:

Qty		Description	Catalog Number	Finish	Mfr

Unified Government Memorial Hall Kitchen & Audio/Visual Renovations**Unified Government of Wyandotte County & Kansas City, KS****ISSUED FOR BID**

2	EA	HINGE	BASIS-OF-DESIGN: ELIASON EASY SWING HINGE SYSTEM BY DOOR MANUFACTURER	630	
1	EA	AUTO FLUSH BOLT	FB31T	630	IVE
1	EA	CLASSROOM LOCK	ND70LD RHO	630	SCH
1	EA	K-I-L CYLINDER	MATCH EXISTING KEY SYSTEM	630	SCH
1	EA	COORDINATOR	COR X FL	315AN	IVE
2	EA	MOUNTING BRACKET	MB	630	IVE
1	EA	SURFACE CLOSER	4111 HCUSH	689	LCN
1	EA	SURFACE CLOSER	4111 HEDA	689	LCN

NOTE: DOOR TO HAVE HOLD OPEN FEATURE BY MANUFACTURER.

Hardware Group No. 4For use on SGL mark/door #(s):
208

Each To Have:

Qty		Description	Catalog Number	Finish	Mfr
3	EA	HINGE	BB1168 BT X SIZE REQ'D	630	HAG
1	EA	CLASSROOM LOCK	ND70LD RHO	630	SCH
1	EA	K-I-L CYLINDER	MATCH EXISTING KEY SYSTEM	630	SCH

END OF SECTION 087100

SECTION 088000 - GLAZING

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes:
 - 1. Glass products.
 - 2. Specialty projection glass.
 - 3. Miscellaneous glazing materials.

1.2 DEFINITIONS

- A. Glass Manufacturers: Firms that produce primary glass, fabricated glass, or both, as defined in referenced glazing publications.
- B. Glass Thicknesses: Indicated by thickness designations in millimeters in accordance with ASTM C1036.
- C. IBC: International Building Code.

1.3 COORDINATION

- A. Coordinate glazing channel dimensions to provide necessary bite on glass, minimum edge and face clearances, and adequate sealant thicknesses, with reasonable tolerances to achieve proper safety margins for glazing retention under each design load case, load case combination, and service condition.

1.4 ACTION SUBMITTALS

- A. Product Data: For each type of product.
- B. Glass Samples: For each type of glass product other than clear monolithic vision glass; 12 inches square.
- C. Glazing Schedule: List glass types and thicknesses for each size opening and location. Use same designations indicated on Drawings.

1.5 INFORMATIONAL SUBMITTALS

- A. Qualification Data: For manufacturers of fabricated glass units .
- B. Product Test Reports: For fabricated glass , for tests performed by a qualified testing agency.

1. For glazing sealants, provide test reports based on testing current sealant formulations within previous 36-month period.

1.6 QUALITY ASSURANCE

- A. Fabricated-Glass Manufacturer Qualifications: A qualified manufacturer of fabricated glass units who is approved and certified by primary glass manufacturer.

1.7 DELIVERY, STORAGE, AND HANDLING

- A. Protect glazing materials in accordance with manufacturer's written instructions. Prevent damage to glass and glazing materials from condensation, temperature changes, direct exposure to sun, or other causes.
- B. Comply with insulating-glass manufacturer's written instructions for venting and sealing units to avoid hermetic seal ruptures due to altitude change.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. Source Limitations for Glazing Accessories: For each product and installation method, obtain from single source from single manufacturer.
- B. Fully Tempered Glazing Basis-of-Design Manufacturer: Subject to compliance with requirements, provide fully glass by Vitro Architectural Glass or comparable product by one of the following:
 1. Guardian Glass.
 2. Viracon.
- C. Specialty Projection Port Glazing Basis-of-Design Manufacturer: Subject to compliance with requirements, provide ClearView Theater Project Port Glass by Abrisa Technologies or alternate product that meets the project requirements and approved by Architect.

2.2 PERFORMANCE REQUIREMENTS

- A. General: Installed glazing systems shall withstand normal thermal movement and wind and impact loads (where applicable) without failure, including loss or glass breakage attributable to defective manufacture, fabrication, or installation; failure of sealants or gaskets to remain watertight and airtight; deterioration of glazing materials; or other defects in construction.
- B. Safety Glazing: Where safety glazing is indicated, provide glazing that complies with 16 CFR 1201, Category II.

2.3 GLASS PRODUCTS, GENERAL

- A. Glazing Publications: Comply with published recommendations of glass product manufacturers and organizations below unless more stringent requirements are indicated. See these publications for glazing terms not otherwise defined in this Section or in referenced standards.
 - 1. NGA Publications: "Glazing Manual."
 - 2. AAMA Publications: AAMA GDSG-1, "Glass Design for Sloped Glazing," and AAMA TIR A7, "Sloped Glazing Guidelines."
 - 3. IGMA Publication for Sloped Glazing: IGMA TB-3001, "Guidelines for Sloped Glazing."
- B. Safety Glazing Labeling: Where safety glazing is indicated, permanently mark glazing with certification label of the SGCC . Label shall indicate manufacturer's name, type of glass, thickness, and safety glazing standard with which glass complies.
- C. Thickness: Where glass thickness is indicated, it is a minimum. Provide glass that complies with performance requirements and is not less than thickness indicated.
- D. Strength: Where annealed float glass is indicated, provide annealed float glass, heat-strengthened float glass, or fully tempered float glass as needed to comply with "Performance Requirements" Article. Where heat-strengthened float glass is indicated, provide heat-strengthened float glass or fully tempered float glass as needed to comply with "Performance Requirements" Article. Where fully tempered float glass is indicated, provide fully tempered float glass.

2.4 GLASS PRODUCTS

- A. Fully Tempered Float Glass: ASTM C1048, Kind FT (fully tempered), Condition A (uncoated) unless otherwise indicated, Type I, Class 1 (clear), Quality-Q3.
 - 1. Fabrication Process: By horizontal (roller-hearth) process with roll-wave distortion parallel to bottom edge of glass as installed unless otherwise indicated.
- B. Specialty Project Port Glazing: Low-iron, optically clear, colorless glass.
 - 1. Two-sided, multi-layer broadband anti-reflective coating.
 - 2. Transmission Rate: 98% minimum.
 - 3. Tilt: Glass shall be installed at an angle that is perpendicular to the angle of the projection of the theater project equipment. Coordinate with AV equipment.

2.5 GLAZING TAPES

- A. Back-Bedding Mastic Glazing Tapes: Preformed, butyl-based, 100 percent solids elastomeric tape; nonstaining and nonmigrating in contact with nonporous surfaces; with or without spacer rod as recommended in writing by tape and glass manufacturers for application indicated; and complying with ASTM C1281 and AAMA 800 for products indicated below:
 - 1. AAMA 804.3 tape, where indicated.
 - 2. AAMA 806.3 tape, for glazing applications in which tape is subject to continuous pressure.

3. AAMA 807.3 tape, for glazing applications in which tape is not subject to continuous pressure.
- B. Expanded Cellular Glazing Tapes: Closed-cell, PVC foam tapes; factory coated with adhesive on both surfaces; and complying with AAMA 800 for the following types:
 1. AAMA 810.1, Type 1, for glazing applications in which tape acts as primary sealant.
 2. AAMA 810.1, Type 2, for glazing applications in which tape is used in combination with a full bead of liquid sealant.

2.6 MISCELLANEOUS GLAZING MATERIALS

- A. General: Provide products of material, size, and shape complying with referenced glazing standard, recommended in writing by manufacturers of glass and other glazing materials for application indicated, and with a proven record of compatibility with surfaces contacted in installation.
- B. Cleaners, Primers, and Sealers: Types recommended by sealant or gasket manufacturer.
- C. Setting Blocks:
 1. EPDM with Shore A durometer hardness of 85, plus or minus 5.
 2. Type recommended in writing by sealant or glass manufacturer.
- D. Spacers:
 1. Neoprene blocks or continuous extrusions of hardness required by glass manufacturer to maintain glass lites in place for installation indicated.
 2. Type recommended in writing by sealant or glass manufacturer.
- E. Edge Blocks:
 1. EPDM with Shore A durometer hardness per manufacturer's written instructions.
 2. Type recommended in writing by sealant or glass manufacturer.
- F. Cylindrical Glazing Sealant Backing: ASTM C1330, Type O (open-cell material), of size and density to control glazing sealant depth and otherwise produce optimum glazing sealant performance.

2.7 FABRICATION OF GLAZING UNITS

- A. Fabricate glazing units in sizes required to fit openings indicated for Project, with edge and face clearances, edge and surface conditions, and bite complying with written instructions of product manufacturer and referenced glazing publications, to comply with system performance requirements.
 1. Allow for thermal movements from ambient and surface temperature changes acting on glass framing members and glazing components.
 - a. Temperature Change: 120 deg F, ambient; 180 deg F, material surfaces.
- B. Clean-cut or flat-grind vertical edges of butt-glazed monolithic lites to produce square edges with slight chamfers at junctions of edges and faces.

- C. Grind smooth and polish exposed glass edges and corners.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine framing, glazing channels, and stops, with Installer present, for compliance with the following:
 - 1. Manufacturing and installation tolerances, including those for size, squareness, and offsets at corners.
 - 2. Presence and functioning of weep systems.
 - 3. Minimum required face and edge clearances.
 - 4. Effective sealing between joints of glass-framing members.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

- A. Clean glazing channels and other framing members receiving glass immediately before glazing. Remove coatings not firmly bonded to substrates.
- B. Examine glazing units to locate exterior and interior surfaces. Label or mark units as needed so that exterior and interior surfaces are readily identifiable. Do not use materials that leave visible marks in the completed Work.

3.3 GLAZING, GENERAL

- A. Comply with combined written instructions of manufacturers of glass, sealants, gaskets, and other glazing materials, unless more stringent requirements are indicated, including those in referenced glazing publications.
- B. Protect glass edges from damage during handling and installation. Remove damaged glass from Project site and legally dispose of off Project site. Damaged glass includes glass with edge damage or other imperfections that, when installed, could weaken glass, impair performance, or impair appearance.
- C. Apply primers to joint surfaces where required for adhesion of sealants, as determined by preconstruction testing.
- D. Install setting blocks in sill rabbets, sized and located to comply with referenced glazing publications, unless otherwise required by glass manufacturer. Set blocks in thin course of compatible sealant suitable for heel bead.
- E. Do not exceed edge pressures stipulated by glass manufacturers for installing glass lites.
- F. Provide spacers for glass lites where length plus width is larger than 50 inches.
 - 1. Locate spacers directly opposite each other on both inside and outside faces of glass. Install correct size and spacing to preserve required face clearances, unless gaskets and

- glazing tapes are used that have demonstrated ability to maintain required face clearances and to comply with system performance requirements.
2. Provide 1/8-inch- minimum bite of spacers on glass and use thickness equal to sealant width. With glazing tape, use thickness slightly less than final compressed thickness of tape.
- G. Provide edge blocking where indicated or needed to prevent glass lites from moving sideways in glazing channel, as recommended in writing by glass manufacturer and in accordance with requirements in referenced glazing publications.
 - H. Set glass lites in each series with uniform pattern, draw, bow, and similar characteristics.
 - I. Set glass lites with proper orientation so that coatings face exterior or interior as specified.
 - J. Where wedge-shaped gaskets are driven into one side of channel to pressurize sealant or gasket on opposite side, provide adequate anchorage so gasket cannot walk out when installation is subjected to movement.
 - K. Square cut wedge-shaped gaskets at corners and install gaskets in a manner recommended by gasket manufacturer to prevent corners from pulling away; seal corner joints and butt joints with sealant recommended in writing by gasket manufacturer.

3.4 TAPE GLAZING

- A. Position tapes on fixed stops so that, when compressed by glass, their exposed edges are flush with or protrude slightly above sightline of stops.
- B. Install tapes continuously, but not necessarily in one continuous length. Do not stretch tapes to make them fit opening.
- C. Cover vertical framing joints by applying tapes to heads and sills first, then to jambs. Cover horizontal framing joints by applying tapes to jambs, then to heads and sills.
- D. Place joints in tapes at corners of opening with adjoining lengths butted together, not lapped. Seal joints in tapes with compatible sealant approved by tape manufacturer.
- E. Do not remove release paper from tape until right before each glazing unit is installed.
- F. Apply heel bead of elastomeric sealant.
- G. Center glass lites in openings on setting blocks, and press firmly against tape by inserting dense compression gaskets formed and installed to lock in place against faces of removable stops. Start gasket applications at corners and work toward centers of openings.
- H. Apply cap bead of elastomeric sealant over exposed edge of tape.

3.5 GASKET GLAZING (DRY)

- A. Cut compression gaskets to lengths recommended by gasket manufacturer to fit openings exactly, with allowance for stretch during installation.

- B. Insert soft compression gasket between glass and frame or fixed stop so it is securely in place with joints miter cut and bonded together at corners.
- C. Installation with Drive-in Wedge Gaskets: Center glass lites in openings on setting blocks, and press firmly against soft compression gasket by inserting dense compression gaskets formed and installed to lock in place against faces of removable stops. Start gasket applications at corners and work toward centers of openings. Compress gaskets to produce a weathertight seal without developing bending stresses in glass. Seal gasket joints with sealant recommended in writing by gasket manufacturer.
- D. Installation with Pressure-Glazing Stops: Center glass lites in openings on setting blocks, and press firmly against soft compression gasket. Install dense compression gaskets and pressure-glazing stops, applying pressure uniformly to compression gaskets. Compress gaskets to produce a weathertight seal without developing bending stresses in glass. Seal gasket joints with sealant recommended in writing by gasket manufacturer.
- E. Install gaskets so they protrude past face of glazing stops.

3.6 CLEANING AND PROTECTION

- A. Immediately after installation, remove nonpermanent labels and clean surfaces.
- B. Protect glass from contact with contaminating substances resulting from construction operations. Examine glass surfaces adjacent to or below exterior concrete and other masonry surfaces at frequent intervals during construction, but not less than once a month, for buildup of dirt, scum, alkaline deposits, or stains.
 - 1. If, despite such protection, contaminating substances do contact with glass, remove substances immediately as recommended in writing by glass manufacturer. Remove and replace glass that cannot be cleaned without damage to coatings.
- C. Remove and replace glass that is damaged during construction period.
- D. Wash glass on both exposed surfaces not more than four days before date scheduled for inspections that establish date of Substantial Completion. Wash glass as recommended in writing by glass manufacturer.

3.7 MONOLITHIC GLASS SCHEDULE

- A. Clear Glass Type <GLZ-1> : Annealed Heat-strengthened Fully tempered float glass.
 - 1. Minimum Thickness: 6 mm .
 - 2. Safety glazing required.
- B. Specialty Project Port Glazing <GLZ-2>: Low-iron, optically clear, colorless glass.
 - 1. Minimum Thickness: 6 mm.

END OF SECTION 088000

SECTION 092216 - NON-STRUCTURAL METAL FRAMING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Non-load-bearing steel framing systems for interior gypsum board assemblies.
 - 2. Suspension systems for interior gypsum ceilings, soffits, and grid systems.

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of product.

1.4 INFORMATIONAL SUBMITTALS

- A. Evaluation Reports: For embossed, high-strength steel studs and tracks firestop tracks , from ICC-ES or other qualified testing agency acceptable to authorities having jurisdiction.

1.5 DELIVERY, STORAGE, AND HANDLING

- A. Notify manufacturer of damaged materials received prior to installation.
- B. Deliver materials in manufacturer's original, unopened, undamaged containers with identification labels intact.
- C. Protect cold-formed metal framing from corrosion, deformation, and other damage during delivery, storage, and handling as required by AISI S202, "Code of Standard Practice for Cold-Formed Steel Structural Framing."

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. Design framing systems in accordance with AISI S220, "North American Specification for the Design of Cold-Formed Steel Framing - Nonstructural Members," unless otherwise indicated.

- B. Design Loads: As indicated on architectural Drawings or 5 lbf/sq. ft. minimum as required by the IBC.
- C. Fire-Test-Response Characteristics: For fire-resistance-rated assemblies that incorporate non-load-bearing steel framing, provide materials and construction identical to those tested in assembly indicated, according to ASTM E 119 by an independent testing agency.

2.2 FRAMING SYSTEMS

- A. Framing Members, General: Comply with ASTM C 754 for conditions indicated.
 - 1. Steel Sheet Components: Comply with ASTM C 645 requirements for metal unless otherwise indicated.
 - 2. Protective Coating: ASTM A 653/A 653M, G40, hot-dip galvanized unless otherwise indicated.
- B. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1. ClarkDietrich.
 - 2. MarinoWARE.
 - 3. SCAFCO Steel Stud Company.
- C. Studs and Runners: ASTM C 645. Use either steel studs and runners or dimpled steel studs and runners.
 - 1. Steel Studs and Runners:
 - a. Minimum Base-Metal Thickness: 0.033 inch.
 - b. Shapes: As indicated on Drawings.
 - c. Depth: As indicated on Drawings.
 - 2. Dimpled Steel Studs and Runners:
 - a. Minimum Base-Metal Thickness: 0.030 inch.
 - b. Depth: As indicated on Drawings.
- D. Slip-Type Head Joints: At all locations where studs span from floor to floor, provide the following:
 - 1. Deflection Track: Steel sheet top runner manufactured to prevent cracking of finishes applied to interior partition framing resulting from deflection of structure above; in thickness not less than indicated for studs and in width to accommodate depth of studs.
- E. Cold-Rolled Channel Bridging: Steel, 0.053-inch minimum base-metal thickness, with minimum 1/2-inch- wide flanges.
 - 1. Depth: 1-1/2 inches.
 - 2. Clip Angle: Not less than 1-1/2 by 1-1/2 inches, 0.068-inch- thick, galvanized steel.
- F. Hat-Shaped, Rigid Furring Channels: ASTM C 645.
 - 1. Minimum Base-Metal Thickness: 0.030 inch.
 - 2. Depth: As indicated on Drawings.

- G. Runner Tracks: Manufacturer's standard J-profile track with manufacturer's standard long-leg length, but at least 2 inches long and matching studs in depth.

- 1. Minimum Base-Metal Thickness: Matching steel studs.

- H. Firestop Tracks: Provide firestop track at head of shaft wall on each floor level.

2.3 SUSPENSION SYSTEMS

- A. Tie Wire: ASTM A 641, Class 1 zinc coating, soft temper, 0.062-inch- diameter wire, or double strand of 0.048-inch- diameter wire.

- B. Hanger Attachments to Concrete:

- 1. Powder-Actuated Fasteners: Suitable for application indicated, fabricated from corrosion-resistant materials with clips or other devices for attaching hangers of type indicated, and capable of sustaining, without failure, a load equal to 10 times that imposed by construction as determined by testing according to ASTM E 1190 by an independent testing agency.

- C. Wire Hangers: ASTM A 641, Class 1 zinc coating, soft temper, 0.16 inch in diameter.

- D. Grid Suspension System for Gypsum Board Ceilings: ASTM C645, direct-hung system composed of main beams and cross-furring members that interlock.

- E. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

- 1. Armstrong Ceiling & Wall Solutions.
 - 2. Certainteed; SAINT-GOBAIN.
 - 3. USG Corporation.

2.4 AUXILIARY MATERIALS

- A. General: Provide auxiliary materials that comply with referenced installation standards.

- 1. Fasteners for Metal Framing: Of type, material, size, corrosion resistance, holding power, and other properties required to fasten steel members to substrates.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine areas and substrates, with Installer present, and including welded hollow-metal frames, cast-in anchors, and structural framing, for compliance with requirements and other conditions affecting performance of the Work.

- B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION, GENERAL

- A. Installation Standard: ASTM C 754.
 - 1. Gypsum Board Assemblies: Also comply with requirements in ASTM C 840 that apply to framing installation.
- B. Install framing and accessories plumb, square, and true to line, with connections securely fastened.
- C. Install supplementary framing, and blocking to support fixtures, equipment services, heavy trim, grab bars, toilet accessories, furnishings, or similar construction.
- D. Install bracing at terminations in assemblies.
- E. Do not bridge building control and expansion joints with non-load-bearing steel framing members. Frame both sides of joints independently.

3.3 INSTALLING FRAMED ASSEMBLIES

- A. Install framing system components according to spacings indicated, but not greater than spacings required by referenced installation standards for assembly types.
 - 1. Single-Layer Application: 16 inches o.c. unless otherwise indicated.
 - 2. Multilayer Application: 16 inches o.c. unless otherwise indicated.
 - 3. Tile Backing Panels: 16 inches o.c. unless otherwise indicated.
- B. Install studs so flanges within framing system point in same direction.
- C. Install tracks (runners) at floors and overhead supports. Extend framing full height to structural supports or substrates above suspended ceilings except where partitions are indicated to terminate at suspended ceilings. Continue framing around ducts penetrating partitions above ceiling.
 - 1. Slip-Type Head Joints: Where framing extends to overhead structural supports, install to produce joints at tops of framing systems that prevent axial loading of finished assemblies.
 - 2. Door Openings: Screw vertical studs at jambs to jamb anchor clips on door frames; install runner track section (for cripple studs) at head and secure to jamb studs.
 - a. Install two studs at each jamb unless otherwise indicated.
 - b. Install cripple studs at head adjacent to each jamb stud, with a minimum 1/2-inch clearance from jamb stud to allow for installation of control joint in finished assembly.
 - c. Extend jamb studs through suspended ceilings and attach to underside of overhead structure.
 - 3. Other Framed Openings: Frame openings other than door openings the same as required for door openings unless otherwise indicated. Install framing below sills of openings to match framing required above door heads.
 - 4. Fire-Resistance-Rated Partitions: Install framing to comply with fire-resistance-rated assembly indicated and support closures and to make partitions continuous from floor to underside of solid structure.
- D. Installation Tolerance: Install each framing member so fastening surfaces vary not more than 1/8 inch from the plane formed by faces of adjacent framing.

3.4 INSTALLING SUSPENSION SYSTEMS

- A. Install suspension system components according to spacings indicated, but not greater than spacings required by referenced installation standards for assembly types.
 - 1. Hangers: 48 inches o.c.
- B. Isolate suspension systems from building structure where they abut or are penetrated by building structure to prevent transfer of loading imposed by structural movement.
- C. Suspend hangers from building structure as follows:
 - 1. Install hangers plumb and free from contact with insulation or other objects within ceiling plenum that are not part of supporting structural or suspension system.
 - a. Splay hangers only where required to miss obstructions and offset resulting horizontal forces by bracing, countersplaying, or other equally effective means.
 - 2. Where width of ducts and other construction within ceiling plenum produces hanger spacings that interfere with locations of hangers required to support standard suspension system members, install supplemental suspension members and hangers in the form of trapezes or equivalent devices.
 - a. Size supplemental suspension members and hangers to support ceiling loads within performance limits established by referenced installation standards.
 - 3. Wire Hangers: Secure by looping and wire tying, either directly to structures or to inserts, eye screws, or other devices and fasteners that are secure and appropriate for substrate, and in a manner that will not cause hangers to deteriorate or otherwise fail.
 - 4. Do not connect or suspend steel framing from ducts, pipes, or conduit.
- D. Grid Suspension Systems: Attach perimeter wall track or angle where grid suspension systems meet vertical surfaces. Mechanically join main beam and cross-furring members to each other and butt-cut to fit into wall track.
- E. Installation Tolerances: Install suspension systems that are level to within 1/8 inch in 12 feet measured lengthwise on each member that will receive finishes and transversely between parallel members that will receive finishes.

END OF SECTION 092216

SECTION 092900 - GYPSUM BOARD

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Interior gypsum board.
- B. Related Requirements:
 - 1. Section 092216 "Non-Structural Metal Framing" for non-structural framing and suspension systems that support gypsum board panels.

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of product.

1.4 DELIVERY, STORAGE AND HANDLING

- A. Store materials inside under cover and keep them dry and protected against weather, condensation, direct sunlight, construction traffic, and other potential causes of damage. Stack panels flat and supported on risers on a flat platform to prevent sagging.

1.5 FIELD CONDITIONS

- A. Environmental Limitations: Comply with ASTM C 840 requirements or gypsum board manufacturer's written recommendations, whichever are more stringent.
- B. Do not install paper-faced gypsum panels until installation areas are enclosed and conditioned.
- C. Do not install panels that are wet, those that are moisture damaged, and those that are mold damaged.
 - 1. Indications that panels are wet or moisture damaged include, but are not limited to, discoloration, sagging, or irregular shape.
 - 2. Indications that panels are mold damaged include, but are not limited to, fuzzy or splotchy surface contamination and discoloration.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. Fire-Resistance-Rated Assemblies: For fire-resistance-rated assemblies, provide materials and construction identical to those tested in assembly indicated according to ASTM E 119 by an independent testing agency.

2.2 GYPSUM BOARD, GENERAL

- A. Size: Provide maximum lengths and widths available that will minimize joints in each area and that correspond with support system indicated.

2.3 INTERIOR GYPSUM BOARD

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1. Georgia-Pacific Building Products.
 - 2. National Gypsum Company.
 - 3. USG Corporation.
- B. Gypsum Board, Type X to comply with UL details: ASTM C 1396.
 - 1. Thickness: 5/8 inch, as indicated on Drawings.
 - 2. Long Edges: Tapered.
- C. Moisture- and Mold-Resistant Gypsum Board: ASTM C 1396. With moisture- and mold-resistant core and paper surfaces.
 - 1. Core: 5/8 inch, Type X.
 - 2. Long Edges: Tapered.
 - 3. Mold Resistance: ASTM D 3273, score of 10 as rated according to ASTM D 3274.
- D. Gypsum Shaftliner Board, Type X: ASTM C 1396; manufacturer's proprietary fire-resistive liner panels with paper faces.
 - 1. Thickness: 1 inch.
 - 2. Long Edges: Double bevel.

2.4 TILE BACKING PANELS

- A. Cementitious Backer Units: ANSI A118.9 and ASTM C 1288 or 1325, with manufacturer's standard edges.
 - 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. CertainTeed Corporation.
 - b. National Gypsum Company.

- c. USG Corporation.
2. Thickness: 1/2 inch.
3. Mold Resistance: ASTM D 3273, score of 10 as rated according to ASTM D 3274.

2.5 TRIM ACCESSORIES

A. Interior Trim: ASTM C 1047.

1. Material: Galvanized or aluminum-coated steel sheet or rolled zinc or paper faced metal.
2. Shapes:
 - a. Cornerbead.
 - b. LC-Bead: J-shaped; exposed long flange receives joint compound.
 - c. L-Bead: L-shaped; exposed long flange receives joint compound.
 - d. Expansion (control) joint.

B. Aluminum Trim: Extruded accessories of profiles and dimensions indicated.

1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Fry Reglet Corporation.
 - b. Gordon Inc.
 - c. Pittcon Industries.
2. Aluminum: Alloy and temper with not less than the strength and durability properties of ASTM B 221, Alloy 6063-T5.
3. Finish: Corrosion-resistant primer compatible with joint compound and finish materials specified.
4. Color: Clear Anodized

2.6 JOINT TREATMENT MATERIALS

A. General: Comply with ASTM C 475/C 475M.

B. Joint Tape:

1. Interior Gypsum Board: Paper.

C. Joint Compound for Interior Gypsum Board: For each coat use formulation that is compatible with other compounds applied on previous or for successive coats.

1. Prefilling: At open joints, rounded or beveled panel edges, and damaged surface areas, use setting-type taping compound.
2. Embedding and First Coat: For embedding tape and first coat on joints, fasteners, and trim flanges, use drying-type, all-purpose compound.
 - a. Use setting-type compound for installing paper-faced metal trim accessories.
3. Fill Coat: For second coat, use drying-type, all-purpose compound.
4. Finish Coat: For third coat, use drying-type, all-purpose compound.
5. Skim Coat: For final coat of Level 5 finish, use high-build interior coating product designed for application by airless sprayer and to be used instead of skim coat to produce Level 5 finish.

D. Joint Compound for Tile Backing Panels:

1. Cementitious Backer Units: As recommended by backer unit manufacturer.

2.7 AUXILIARY MATERIALS

- A. General: Provide auxiliary materials that comply with referenced installation standards and manufacturer's written recommendations.
- B. Steel Drill Screws: ASTM C 1002, unless otherwise indicated.
 - 1. Use screws complying with ASTM C 954 for fastening panels to steel members from 0.033 to 0.112 inch thick.
 - 2. For fastening cementitious backer units, use screws of type and size recommended by panel manufacturer.
- C. Sound Attenuation Blankets: ASTM C 665, Type I (blankets without membrane facing) produced by combining thermosetting resins with mineral fibers manufactured from glass, slag wool, or rock wool.
- D. Acoustical Joint Sealant: Manufacturer's standard nonsag, paintable, nonstaining latex sealant complying with ASTM C 834. Product effectively reduces airborne sound transmission through perimeter joints and openings in building construction as demonstrated by testing representative assemblies according to ASTM E 90.
 - 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Grabber Construction Products.
 - b. Pecora Corporation.
 - 2. USG Corporation. Acoustical joint sealant shall have a VOC content of 250 g/L or less when calculated according to 40 CFR 59, Subpart D (EPA Method 24).

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine areas and substrates including welded hollow-metal frames and framing, with Installer present, for compliance with requirements and other conditions affecting performance.
- B. Examine panels before installation. Reject panels that are wet, moisture damaged, and mold damaged.
- C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 APPLYING AND FINISHING PANELS, GENERAL

- A. Comply with ASTM C 840.
- B. Install ceiling panels across framing to minimize the number of abutting end joints and to avoid abutting end joints in central area of each ceiling. Stagger abutting end joints of adjacent panels not less than one framing member.
- C. Install panels with face side out. Butt panels together for a light contact at edges and ends with not more than 1/16 inch of open space between panels. Do not force into place.

- D. Locate edge and end joints over supports, except in ceiling applications where intermediate supports or gypsum board back-blocking is provided behind end joints. Do not place tapered edges against cut edges or ends. Stagger vertical joints on opposite sides of partitions. Do not make joints other than control joints at corners of framed openings.
- E. Form control and expansion joints with space between edges of adjoining gypsum panels.
- F. Cover both faces of support framing with gypsum panels in concealed spaces (above ceilings, etc.), except in chases braced internally.
 - 1. Unless concealed application is indicated or required for sound, fire, air, or smoke ratings, coverage may be accomplished with scraps of not less than 8 sq. ft. in area.
 - 2. Fit gypsum panels around ducts, pipes, and conduits.
 - 3. Where partitions intersect structural members projecting below underside of floor/roof slabs and decks, cut gypsum panels to fit profile formed by structural members; allow 1/4- to 3/8-inch- wide joints to install sealant.
- G. Isolate perimeter of gypsum board applied to non-load-bearing partitions at structural abutments, except floors. Provide 1/4- to 1/2-inch- wide spaces at these locations and trim edges with edge trim where edges of panels are exposed. Seal joints between edges and abutting structural surfaces with acoustical sealant.
- H. Attachment to Steel Framing: Attach panels so leading edge or end of each panel is attached to open (unsupported) edges of stud flanges first.
- I. Install sound attenuation blankets before installing gypsum panels unless blankets are readily installed after panels have been installed on one side.
- J. Shaft Wall Penetrations: At penetrations in shaft wall, maintain fire-resistance rating of shaft wall assembly by installing supplementary steel framing around perimeter of penetration and fire protection behind boxes containing wiring devices, elevator call buttons, elevator floor indicators, and similar items.

3.3 APPLYING INTERIOR GYPSUM BOARD

- A. Install interior gypsum board in the following locations:
 - 1. Type X: All surfaces unless otherwise indicated.
- B. Single-Layer Application:
 - 1. On ceilings, apply gypsum panels before wall/partition board application to greatest extent possible and at right angles to framing unless otherwise indicated.
 - 2. On partitions/walls, apply gypsum panels horizontally (perpendicular to framing) unless otherwise indicated or required by fire-resistance-rated assembly, and minimize end joints.
 - a. Stagger abutting end joints not less than one framing member in alternate courses of panels.
 - 3. Fastening Methods: Apply gypsum panels to supports with steel drill screws.
- C. Multilayer Application:

1. On ceilings, apply gypsum board indicated for base layers before applying base layers on walls/partitions; apply face layers in same sequence. Apply base layers at right angles to framing members and offset face-layer joints one framing member, 16 inches minimum, from parallel base-layer joints, unless otherwise indicated or required by fire-resistance-rated assembly.
2. On partitions/walls, apply gypsum board indicated for base layers and face layers vertically (parallel to framing) with joints of base layers located over stud or furring member and face-layer joints offset at least one stud or furring member with base-layer joints, unless otherwise indicated or required by fire-resistance-rated assembly. Stagger joints on opposite sides of partitions.
3. Fastening Methods: Fasten base layers and face layers separately to supports with screws

3.4 APPLYING TILE BACKING PANELS

- A. Cementitious Backer Units: ANSI A108.11, at locations indicated to receive tile.

3.5 INSTALLING TRIM ACCESSORIES

- A. General: For trim with back flanges intended for fasteners, attach to framing with same fasteners used for panels. Otherwise, attach trim according to manufacturer's written instructions.
- B. Control Joints: Install control joints ASTM C 840 and in specific locations approved by Architect for visual effect.
- C. Interior Trim: Install in the following locations:
 1. Cornerbead: Use at outside corners.
 2. LC-Bead: Use at exposed panel edges.
 3. L-Bead: Use where indicated.
- D. Aluminum Trim: Install in locations indicated on Drawings.

3.6 FINISHING GYPSUM BOARD

- A. General: Treat gypsum board joints, interior angles, edge trim, control joints, penetrations, fastener heads, surface defects, and elsewhere as required to prepare gypsum board surfaces for decoration. Promptly remove residual joint compound from adjacent surfaces.
- B. Prefill open joints, rounded or beveled edges, and damaged surface areas.
- C. Apply joint tape over gypsum board joints, except for trim products specifically indicated as not intended to receive tape.
- D. Gypsum Board Finish Levels: Finish panels to levels indicated below and according to ASTM C 840:
 1. Level 1: Ceiling plenum areas, concealed areas, and where indicated.
 2. Level 5: At panel surfaces that will be exposed to view unless otherwise indicated.
 - a. Primer and its application to surfaces are specified in Section 099123 "Interior Painting."

3.7 PROTECTION

- A. Protect adjacent surfaces from drywall compound and promptly remove from floors and other non-drywall surfaces. Repair surfaces stained, marred, or otherwise damaged during drywall application.
- B. Protect installed products from damage from weather, condensation, direct sunlight, construction, and other causes during remainder of the construction period.
- C. Remove and replace panels that are wet, moisture damaged, and mold damaged.
 - 1. Indications that panels are wet or moisture damaged include, but are not limited to, discoloration, sagging, or irregular shape.
 - 2. Indications that panels are mold damaged include, but are not limited to, fuzzy or splotchy surface contamination and discoloration.

END OF SECTION 092900

SECTION 093013 - CERAMIC TILING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Porcelain tile.
 - 2. Crack isolation membrane.
 - 3. Metal edge strips.
- B. Related Requirements:
 - 1. Section 079200 "Joint Sealants" for sealing of expansion, contraction, control, and isolation joints in tile surfaces.

1.3 DEFINITIONS

- A. General: Definitions in the ANSI A108 series of tile installation standards and in ANSI A137.1 apply to Work of this Section unless otherwise specified.
- B. ANSI A108 Series: ANSI A108.01, ANSI A108.02, ANSI A108.1A, ANSI A108.1B, ANSI A108.1C, ANSI A108.4, ANSI A108.5, ANSI A108.6, ANSI A108.8, ANSI A108.9, ANSI A108.10, ANSI A108.11, ANSI A108.12, ANSI A108.13, ANSI A108.14, ANSI A108.15, ANSI A108.16, and ANSI A108.17, which are contained in its "Specifications for Installation of Ceramic Tile."
- C. Face Size: Actual tile size, excluding spacer lugs.

1.4 ACTION SUBMITTALS

- A. Product Data: For each type of product.
- B. Samples for Verification:
 - 1. Full-size units of each type and composition of tile and for each color and finish required.
 - 2. Metal edge strips in 6-inch lengths.

1.5 MAINTENANCE MATERIAL SUBMITTALS

- A. Furnish extra materials that match and are from same production runs as products installed and that are packaged with protective covering for storage and identified with labels describing contents.
 - 1. Tile and Trim Units: Furnish quantity of full-size units equal to 3 percent of amount installed for each type, composition, color, pattern, and size indicated.
 - 2. Grout: Furnish quantity of grout equal to 3 percent of amount installed for each type, composition, and color indicated.

1.6 DELIVERY, STORAGE, AND HANDLING

- A. Deliver and store packaged materials in original containers with seals unbroken and labels intact until time of use. Comply with requirements in ANSI A137.1 for labeling tile packages.
- B. Store tile and cementitious materials on elevated platforms, under cover, and in a dry location.
- C. Store aggregates where grading and other required characteristics can be maintained and contamination can be avoided.
- D. Store liquid materials in unopened containers and protected from freezing.

1.7 FIELD CONDITIONS

- A. Environmental Limitations: Do not install tile until construction in spaces is complete and ambient temperature and humidity conditions are maintained at the levels indicated in referenced standards and manufacturer's written instructions.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. Source Limitations for Tile: Obtain tile of each type from single source or producer.
 - 1. Obtain tile of each type and color or finish from same production run and of consistent quality in appearance and physical properties for each contiguous area.
- B. Source Limitations for Setting and Grouting Materials: Obtain ingredients of a uniform quality for each mortar, adhesive, and grout component from single manufacturer and each aggregate from single source or producer.
 - 1. Obtain setting and grouting materials, except for unmodified Portland cement and aggregate, from single manufacturer.
- C. Source Limitations for Other Products: Obtain each of the following products specified in this Section from a single manufacturer:
 - 1. Waterproof membrane.

2. Crack isolation membrane.
3. Cementitious backer units.
4. Metal edge strips.

2.2 PRODUCTS, GENERAL

- A. ANSI Ceramic Tile Standard: Provide tile that complies with ANSI A137.1 for types, compositions, and other characteristics indicated.
 1. Provide tile complying with Standard grade requirements.
- B. ANSI Standards for Tile Installation Materials: Provide materials complying with ANSI A108.02, ANSI standards referenced in other Part 2 articles, ANSI standards referenced by TCNA installation methods specified in tile installation schedules, and other requirements specified.
- C. Factory Blending: For tile exhibiting color variations within ranges, blend tile in factory and package so tile units taken from one package show same range in colors as those taken from other packages and match approved Samples.
- D. Mounting: For factory-mounted tile, provide back- or edge-mounted tile assemblies as standard with manufacturer unless otherwise indicated.

2.3 TILE PRODUCTS

- A. Ceramic Tile Type CFT-1: Glazed porcelain floor tile.
 1. Basis-of-Design Product: Subject to compliance with requirements, provide Crossville, Virtue Series or equal product as approved by Architect.
 2. Face Size: 12 inch by 24 inch nominal.
 3. Thickness: 3/8 inch.
 4. Grout Color: As selected by Architect from manufacturer's full range.
- B. Ceramic Tile Type CFT-2: Glazed porcelain floor tile.
 1. Basis-of-Design Product: Subject to compliance with requirements, provide Crossville, Virtue Series or equal product as approved by Architect.
 2. Face Size: 12 inch by 24 inch nominal.
 3. Thickness: 3/8 inch.
 4. Grout Color: As selected by Architect from manufacturer's full range.

2.4 CRACK ISOLATION MEMBRANE

- A. General: Manufacturer's standard product that complies with ANSI A118.12 for high performance and is recommended by the manufacturer for the application indicated. Include reinforcement and accessories recommended by manufacturer.
- B. Fluid-Applied Membrane: Liquid-latex rubber or elastomeric polymer.
 1. Products: Subject to compliance with requirements, provide one of the following:
 - a. Bostik, Inc; GoldPlus.
 - b. MAPEI Corporation; Mapelastic CI.

- c. TEC; H.B. Fuller Construction Products Inc.; Triple Flex.
- 2. Locations: All floor areas to receive tile.

2.5 SETTING MATERIALS

- A. Latex-Portland Cement Mortar (Thinset): ANSI A118.4.
 - 1. Products: Subject to compliance with requirements, provide one of the following:
 - a. Bostik, Inc; Hydroment SingleFlex.
 - b. MAPEI Corporation; Ultraflex 2.
 - c. TEC; H.B. Fuller Construction Products Inc.; Full Flex.
 - 2. For wall applications, provide mortar that complies with requirements for nonsagging mortar in addition to the other requirements in ANSI A118.4.

2.6 GROUT MATERIALS

- A. Water-Cleanable Epoxy Grout: ANSI A118.3, with a VOC content of 65 g/L or less.
 - 1. Products: Subject to compliance with requirements, provide one of the following:
 - a. Bostik, Inc; EzPoxy.
 - b. MAPEI Corporation; Kerapoxy.
 - c. TEC; H.B. Fuller Construction Products Inc.; AccuColor EFX.
 - 2. Provide product capable of withstanding continuous and intermittent exposure to temperatures of up to 140 and 212 deg F, respectively, and certified by manufacturer for intended use.
- B. High-Performance Tile Grout: ANSI A118.7.
 - 1. Products: Subject to compliance with requirements, provide one of the following:
 - a. Bostik, Inc; Dry Tile Grout.
 - b. MAPEI Corporation; Ultracolor Plus.
 - c. TEC; H.B. Fuller Construction Products Inc.; AccuColor XT.

2.7 MISCELLANEOUS MATERIALS

- A. Trowelable Underlayments and Patching Compounds: Latex-modified, portland cement-based formulation provided or approved by manufacturer of tile-setting materials for installations indicated.
- B. Metal Flooring Edge Strips: Schluter Schiene or Reno-U as required to transition between materials, height to match tile and setting-bed thickness, metallic, designed specifically for flooring applications; stainless-steel, ASTM A 666, 300 Series exposed-edge material.
- C. Metal Wall Edge Strips: Schluter Jolly, height to match tile and setting-bed thickness, metallic; stainless-steel, ASTM A 666, 300 Series exposed-edge material.
- D. Tile Cleaner: A neutral cleaner capable of removing soil and residue without harming tile and grout surfaces, specifically approved for materials and installations indicated by tile and grout manufacturers.

2.8 MIXING MORTARS AND GROUT

- A. Mix mortars and grouts to comply with referenced standards and mortar and grout manufacturers' written instructions.
- B. Add materials, water, and additives in accurate proportions.
- C. Obtain and use type of mixing equipment, mixer speeds, mixing containers, mixing time, and other procedures to produce mortars and grouts of uniform quality with optimum performance characteristics for installations indicated.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates, areas, and conditions where tile will be installed, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting performance of the Work.
 - 1. Verify that substrates for setting tile are firm; dry; clean; free of coatings that are incompatible with tile-setting materials, including curing compounds and other substances that contain soap, wax, oil, or silicone; and comply with flatness tolerances required by ANSI A108.01 for installations indicated.
 - 2. Verify that concrete substrates for tile floors installed with thinset mortar comply with surface finish requirements in ANSI A108.01 for installations indicated.
 - a. Verify that surfaces that received a steel trowel finish have been mechanically scarified.
 - b. Verify that protrusions, bumps, and ridges have been removed by sanding or grinding.
 - 3. Verify that installation of grounds, anchors, recessed frames, electrical and mechanical units of work, and similar items located in or behind tile has been completed.
 - 4. Verify that joints and cracks in tile substrates are coordinated with tile joint locations; if not coordinated, adjust joint locations in consultation with Architect.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

- A. Fill cracks, holes, and depressions in concrete substrates for tile floors installed with thinset mortar with trowelable leveling and patching compound specifically recommended by tile-setting material manufacturer.
- B. Blending: For tile exhibiting color variations, verify that tile has been factory blended and packaged so tile units taken from one package show same range of colors as those taken from other packages and match approved Samples. If not factory blended, either return to manufacturer or blend tiles at Project site before installing.

3.3 CERAMIC TILE INSTALLATION

- A. Comply with TCNA's "Handbook for Ceramic, Glass, and Stone Tile Installation" for TCNA installation methods specified in tile installation schedules. Comply with parts of the ANSI A108 series "Specifications for Installation of Ceramic Tile" that are referenced in TCNA installation methods, specified in tile installation schedules, and apply to types of setting and grouting materials used.
 - 1. For the following installations, follow procedures in the ANSI A108 series of tile installation standards for providing 95 percent mortar coverage:
 - a. Tile floors consisting of tiles 8 by 8 inches or larger.
 - b. Tile floors consisting of rib-backed tiles.
- B. Extend tile work into recesses and under or behind equipment and fixtures to form complete covering without interruptions unless otherwise indicated. Terminate work neatly at obstructions, edges, and corners without disrupting pattern or joint alignments.
- C. Accurately form intersections and returns. Perform cutting and drilling of tile without marring visible surfaces. Carefully grind cut edges of tile abutting trim, finish, or built-in items for straight aligned joints. Fit tile closely to electrical outlets, piping, fixtures, and other penetrations so plates, collars, or covers overlap tile.
- D. Provide manufacturer's standard trim shapes where necessary to eliminate exposed tile edges.
- E. Jointing Pattern: Lay tile in grid pattern unless otherwise indicated. Lay out tile work and center tile fields in both directions in each space or on each wall area. Lay out tile work to minimize the use of pieces that are less than half of a tile. Provide uniform joint widths unless otherwise indicated.
 - 1. Where adjoining tiles on floor, base, walls, or trim are specified or indicated to be same size, align joints.
 - 2. Where tiles are specified or indicated to be whole integer multiples of adjoining tiles on floor, base, walls, or trim, align joints unless otherwise indicated.
- F. Joint Widths: Unless otherwise indicated, install tile with the following joint widths:
 - 1. Porcelain Tile: 1/8 inch.
- G. Lay out tile wainscots to dimensions indicated or to next full tile beyond dimensions indicated.
- H. Expansion Joints: Provide expansion joints and other sealant-filled joints, including control, contraction, and isolation joints, where indicated. Form joints during installation of setting materials, mortar beds, and tile. Do not saw-cut joints after installing tiles.
 - 1. Where joints occur in concrete substrates, locate joints in tile surfaces directly above them.
- I. Metal Flooring Edge Strips: Install where exposed edge of tile flooring meets carpet, wood, or other flooring that finishes flush with or below top of tile and no threshold is indicated.

3.4 TILE BACKING PANEL INSTALLATION

- A. Install panels and treat joints according to ANSI A108.11 and manufacturer's written instructions for type of application indicated. Use latex-portland cement mortar for bonding material unless otherwise directed in manufacturer's written instructions.

3.5 CRACK ISOLATION MEMBRANE INSTALLATION

- A. Install crack isolation membrane to comply with ANSI A108.17 and manufacturer's written instructions to produce membrane of uniform thickness that is bonded securely to substrate.
- B. Allow crack isolation membrane to cure before installing tile or setting materials over it.

3.6 ADJUSTING AND CLEANING

- A. Remove and replace tile that is damaged or that does not match adjoining tile. Provide new matching units, installed as specified and in a manner to eliminate evidence of replacement.
- B. Cleaning: On completion of placement and grouting, clean all ceramic tile surfaces so they are free of foreign matter.
 - 1. Remove grout residue from tile as soon as possible.
 - 2. Clean grout smears and haze from tile according to tile and grout manufacturer's written instructions but no sooner than 10 days after installation. Use only cleaners recommended by tile and grout manufacturers and only after determining that cleaners are safe to use by testing on samples of tile and other surfaces to be cleaned. Protect metal surfaces and plumbing fixtures from effects of cleaning. Flush surfaces with clean water before and after cleaning.

3.7 PROTECTION

- A. Protect installed tile work with kraft paper or other heavy covering during construction period to prevent staining, damage, and wear. If recommended by tile manufacturer, apply coat of neutral protective cleaner to completed tile walls and floors.
- B. Prohibit foot and wheel traffic from tiled floors for at least seven days after grouting is completed.
- C. Before final inspection, remove protective coverings and rinse neutral protective cleaner from tile surfaces.

3.8 INTERIOR CERAMIC TILE INSTALLATION SCHEDULE

- A. Interior Floor Installations, Concrete Subfloor:
 - 1. Ceramic Tile Installation: TCNA F125A; thinset mortar on crack isolation membrane.
 - a. Thinset Mortar: Latex- portland cement mortar.
 - b. Grout: Water-cleanable epoxy grout.
- B. Interior Wall Installations, Wood or Metal Studs or Furring:
 - 1. Ceramic Tile Installation: TCNA W244C or TCNA W244F; thinset mortar on cementitious backer units or fiber-cement backer board.
 - a. Thinset Mortar: Latex- portland cement mortar.
 - b. Grout: High-performance unsanded grout.

END OF SECTION 093013

SECTION 095113 - ACOUSTICAL PANEL CEILINGS

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes acoustical panels and exposed suspension systems for ceilings.

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of product.
- B. Samples: For each exposed product and for each color and texture specified, 6 inches in size.

1.4 INFORMATIONAL SUBMITTALS

- A. Evaluation Reports: For each acoustical panel ceiling suspension system and anchor and fastener type, from ICC-ES if using an alternate method of compliance from IBC requirements.

1.5 CLOSEOUT SUBMITTALS

- A. Maintenance Data: For finishes to include in maintenance manuals.

1.6 MAINTENANCE MATERIAL SUBMITTALS

- A. Furnish extra materials that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.
 - 1. Acoustical Ceiling Panels: Full-size panels equal to 2 percent of quantity installed.
 - 2. Suspension-System Components: Quantity of each exposed component equal to 2 percent of quantity installed.

1.7 DELIVERY, STORAGE, AND HANDLING

- A. Deliver acoustical panels, suspension-system components, and accessories to Project site in original, unopened packages and store them in a fully enclosed, conditioned space where they will be protected against damage from moisture, humidity, temperature extremes, direct sunlight, surface contamination, and other causes.

- B. Before installing acoustical panels, permit them to reach room temperature and a stabilized moisture content.
- C. Handle acoustical panels carefully to avoid chipping edges or damaging units in any way.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. Seismic Performance: Acoustical ceiling shall withstand the effects of earthquake motions determined according to ASCE/SEI 7 for Design Class C.
- B. Surface-Burning Characteristics: Comply with ASTM E 84; testing by a qualified testing agency. Identify products with appropriate markings of applicable testing agency.
 - 1. Flame-Spread Index: Comply with ASTM E 1264 for Class B materials.
 - 2. Smoke-Developed Index: 450 or less.

2.2 ACOUSTICAL PANELS, GENERAL

- A. Source Limitations: Obtain each type of acoustical ceiling panel and its supporting suspension system from single source from single manufacturer.
- B. Glass-Fiber-Based Panels: Made with binder containing no urea formaldehyde.
- C. Acoustical Panel Colors and Patterns: Match appearance characteristics indicated for each product type.

2.3 ACOUSTICAL PANELS **[ACT-1]**

- A. Basis-of-Design Product: Subject to compliance with requirements, provide Armstrong World Industries, Inc; Optima - 3152 or a comparable product by one of the following:
 - 1. CertainTeed Corporation.
 - 2. Chicago Metallic Corporation.
 - 3. United States Gypsum Company.
- B. Classification: Provide panels complying with ASTM E 1264 for type, form, and pattern as follows:
 - 1. Type and Form: Type XII, glass-fiber base with membrane-faced overlay; Form 2, cloth.
 - 2. Pattern: E (lightly textured).
- C. Color: White.
- D. LR: Not less than 0.90.
- E. NRC: Not less than 0.95.
- F. Edge/Joint Detail: Square tegular.

- G. Thickness: 1 inch.
- H. Modular Size: 24 by 24 inches.
- I. Broad Spectrum Antimicrobial Fungicide and Bactericide Treatment: Provide acoustical panels treated with manufacturer's standard antimicrobial formulation that inhibits fungus, mold, mildew, and gram-positive and gram-negative bacteria and showing no mold, mildew, or bacterial growth when tested according to ASTM D 3273 and evaluated according to ASTM D 3274 or ASTM G 21.

2.4 ACOUSTICAL PANELS [ACT-2]

- A. Basis-of-Design Product: Subject to compliance with requirements, provide Armstrong World Industries, Inc; Clean Room FL or a comparable product by one of the following:
 - 1. CertainTeed Corporation.
 - 2. Chicago Metallic Corporation.
 - 3. United States Gypsum Company.
- B. Classification: Provide panels as follows:
 - 1. Type and Form: Type IV, mineral base with membrane-faced overlay; Form 2, water felted; with soil resistant polyester film.
 - 2. Pattern: GH (smooth and printed).
- C. Color: White.
- D. Light Reflectance (LR): Not less than 0.79.
- E. Ceiling Attenuation Class (CAC): Not less than 35.
- F. Noise Reduction Coefficient (NRC): Not less than 0.55.
- G. Edge/Joint Detail: Square.
- H. Thickness: 3/4 inch.
- I. Modular Size: 24 by 24 inches.
- J. Antimicrobial Treatment: Manufacturer's standard broad spectrum, antimicrobial formulation that inhibits fungus, mold, mildew, and gram-positive and gram-negative bacteria and showing no mold, mildew, or bacterial growth when tested according to ASTM D3273, ASTM D3274, or ASTM G21 and evaluated according to ASTM D3274 or ASTM G21.

2.5 METAL SUSPENSION SYSTEMS, GENERAL

- A. Metal Suspension-System Standard: Provide manufacturer's standard direct-hung metal suspension systems of types, structural classifications, and finishes indicated that comply with applicable requirements in ASTM C 635.

- B. Attachment Devices: Size for five times the design load indicated in ASTM C 635, Table 1, "Direct Hung," unless otherwise indicated. Comply with seismic design requirements.
1. Anchors in Concrete: Anchors of type and material indicated below, with holes or loops for attaching hangers of type indicated and with capability to sustain, without failure, a load equal to five times that imposed by ceiling construction, as determined by testing according to ASTM E 488 or ASTM E 1512 as applicable, conducted by a qualified testing and inspecting agency.
 - a. Type: Postinstalled expansion anchors.
 - b. Corrosion Protection: Carbon-steel components zinc plated to comply with ASTM B 633, Class Fe/Zn 5 for Class SC 1 service condition.
 2. Power-Actuated Fasteners in Concrete: Fastener system of type suitable for application indicated, fabricated from corrosion-resistant materials, with clips or other accessory devices for attaching hangers of type indicated and with capability to sustain, without failure, a load equal to 10 times that imposed by ceiling construction, as determined by testing according to ASTM E 1190, conducted by a qualified testing and inspecting agency.
- C. Wire Hangers, Braces, and Ties: Provide wires complying with the following requirements:
1. Zinc-Coated, Carbon-Steel Wire: ASTM A 641/A 641M, Class 1 zinc coating, soft temper.
 2. Size: Select wire diameter so its stress at three times hanger design load (ASTM C 635, Table 1, "Direct Hung") will be less than yield stress of wire, but provide not less than 0.106-inch- diameter wire.
- D. Seismic Clips: Manufacturer's standard seismic clips designed and spaced to secure acoustical panels in place.

2.6 METAL SUSPENSION SYSTEM **[ACT-1]**

- A. Basis-of-Design Product: Subject to compliance with requirements, provide Armstrong World Industries, Inc; Suprafine XL 9/16" or a comparable product by one of the following:
1. CertainTeed Corporation.
 2. Chicago Metallic Corporation.
 3. United States Gypsum Company.
- B. Narrow-Face, Capped, Double-Web, Steel Suspension System: Main and cross runners roll formed from cold-rolled steel sheet; prepainted, electrolytically zinc coated, or hot-dip galvanized according to ASTM A 653, not less than G30 coating designation; with prefinished 9/16-inch- wide metal caps on flanges.
1. Structural Classification: Intermediate-duty system.
 2. End Condition of Cross Runners: Override (stepped) type.
 3. Face Design: Flat, flush.
 4. Cap Material: Steel or aluminum cold-rolled sheet.
 5. Cap Finish: Painted white.
 6. Stabilizer Clips: Provide on tiles of greater than 60 inches in any dimension in spacing as recommended by manufacturer.

2.7 METAL SUSPENSION SYSTEM [ACT-2]

- A. Basis-of-Design Product: Subject to compliance with requirements, provide Armstrong World Industries, Inc; Clean Room Suspension System or a comparable product by one of the following:
 - 1. CertainTeed Corporation.
 - 2. Chicago Metallic Corporation.
 - 3. USG Corporation.
- B. Metal Suspension-System Standard: Provide manufacturer's standard, direct-hung, metal suspension system and accessories according to ASTM C635/C635M and designated by type, structural classification, and finish indicated.
 - 1. High-Humidity Finish: Where indicated, provide coating tested and classified for "severe environment performance" according to ASTM C635/C635M.
- C. Wide-Face, Capped, Double-Web, Steel Suspension System: Main and cross runners roll formed from cold-rolled steel sheet; prepainted, electrolytically zinc coated, or hot-dip galvanized, G30 coating designation; with prefinished 15/16-inch-wide metal caps on flanges.
 - 1. Face Design: Flat, flush.
 - 2. Cap Finish: Painted white.

2.8 METAL EDGE MOLDINGS AND TRIM

- A. Roll-Formed, Sheet-Metal Edge Moldings and Trim: Type and profile indicated or, if not indicated, manufacturer's standard moldings for edges and penetrations that comply with seismic design requirements; formed from sheet metal of same material, finish, and color as that used for exposed flanges of suspension-system runners.
 - 1. Provide manufacturer's standard edge moldings that fit acoustical panel edge details and suspension systems indicated and that match width and configuration of exposed runners unless otherwise indicated.
 - 2. For lay-in panels with reveal edge details, provide stepped edge molding that forms reveal of same depth and width as that formed between edge of panel and flange at exposed suspension member.
 - 3. For circular penetrations of ceiling, provide edge moldings fabricated to diameter required to fit penetration exactly.

2.9 ACOUSTICAL SEALANT

- A. Acoustical Sealant: Manufacturer's standard sealant complying with ASTM C 834 and effective in reducing airborne sound transmission through perimeter joints and openings in building construction as demonstrated by testing representative assemblies according to ASTM E 90.
 - 1. Exposed and Concealed Joints: Nonsag, paintable, nonstaining latex sealant.
 - 2. Concealed Joints: Nondrying, nonhardening, nonskinning, nonstaining, gunnable, synthetic-rubber sealant.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates, areas, and conditions, including structural framing to which acoustical panel ceilings attach or abut, with Installer present, for compliance with requirements specified in this and other Sections that affect ceiling installation and anchorage and with requirements for installation tolerances and other conditions affecting performance of acoustical panel ceilings.
- B. Examine acoustical panels before installation. Reject acoustical panels that are wet, moisture damaged, or mold damaged.
- C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

- A. Measure each ceiling area and establish layout of acoustical panels to balance border widths at opposite edges of each ceiling. Avoid using less-than-half-width panels at borders, and comply with layout shown on reflected ceiling plans.

3.3 INSTALLATION

- A. General: Install acoustical panel ceilings to comply with ASTM C 636 and seismic design requirements indicated, according to manufacturer's written instructions and CISCA's "Ceiling Systems Handbook."
- B. Suspend ceiling hangers from building's structural members and as follows:
 - 1. Install hangers plumb and free from contact with insulation or other objects within ceiling plenum that are not part of supporting structure or of ceiling suspension system.
 - 2. Splay hangers only where required to miss obstructions; offset resulting horizontal forces by bracing, countersplaying, or other equally effective means.
 - 3. Where width of ducts and other construction within ceiling plenum produces hanger spacings that interfere with location of hangers at spacings required to support standard suspension-system members, install supplemental suspension members and hangers in form of trapezes or equivalent devices.
 - 4. Secure wire hangers to ceiling-suspension members and to supports above with a minimum of three tight turns. Connect hangers directly either to structures or to inserts, eye screws, or other devices that are secure and appropriate for substrate and that will not deteriorate or otherwise fail due to age, corrosion, or elevated temperatures.
 - 5. Do not support ceilings directly from permanent metal forms or floor deck. Fasten hangers to cast-in-place hanger inserts, postinstalled mechanical or adhesive anchors, or power-actuated fasteners that extend through forms into concrete.
 - 6. When steel framing does not permit installation of hanger wires at spacing required, install carrying channels or other supplemental support for attachment of hanger wires.
 - 7. Space hangers not more than 48 inches o.c. along each member supported directly from hangers unless otherwise indicated; provide hangers not more than 8 inches from ends of each member.
 - 8. Size supplemental suspension members and hangers to support ceiling loads within performance limits established by referenced standards and publications.

- C. Install edge moldings and trim of type indicated at perimeter of acoustical ceiling area and where necessary to conceal edges of acoustical panels.
 - 1. Apply acoustical sealant in a continuous ribbon concealed on back of vertical legs of moldings before they are installed.
 - 2. Screw attach moldings to substrate at intervals not more than 16 inches o.c. and not more than 3 inches from ends, leveling with ceiling suspension system to a tolerance of 1/8 inch in 12 feet. Miter corners accurately and connect securely.
 - 3. Do not use exposed fasteners, including pop rivets, on moldings and trim.
- D. Install suspension-system runners so they are square and securely interlocked with one another. Remove and replace dented, bent, or kinked members.
- E. Install acoustical panels with undamaged edges and fit accurately into suspension-system runners and edge moldings. Scribe and cut panels at borders and penetrations to provide a neat, precise fit.
 - 1. For reveal-edged panels on suspension-system runners, install panels with bottom of reveal in firm contact with top surface of runner flanges.
 - 2. Paint cut edges of panel remaining exposed after installation; match color of exposed panel surfaces using coating recommended in writing for this purpose by acoustical panel manufacturer.

3.4 CLEANING

- A. Clean exposed surfaces of acoustical panel ceilings, including trim, edge moldings, and suspension-system members. Comply with manufacturer's written instructions for cleaning and touchup of minor finish damage. Remove and replace ceiling components that cannot be successfully cleaned and repaired to permanently eliminate evidence of damage.

END OF SECTION 095113

SECTION 096513 - RESILIENT BASE AND ACCESSORIES

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Thermoset-rubber base.
 - 2. Rubber molding accessories.

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of product.
- B. Samples for Verification: For each type of product indicated and for each color, texture, and pattern required in manufacturer's standard-size Samples, but not less than 12 inches long.

1.4 MAINTENANCE MATERIAL SUBMITTALS

- A. Furnish extra materials, from the same product run, that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.
 - 1. Furnish not less than 10 linear feet for every 500 linear feet or fraction thereof, of each type, color, pattern, and size of resilient product installed.

1.5 DELIVERY, STORAGE, AND HANDLING

- A. Store resilient products and installation materials in dry spaces protected from the weather, with ambient temperatures maintained within range recommended by manufacturer, but not less than 50 deg F or more than 90 deg F.

1.6 FIELD CONDITIONS

- A. Maintain ambient temperatures within range recommended by manufacturer, but not less than 70 deg F or more than 95 deg F, in spaces to receive resilient products during the following periods:
 - 1. 48 hours before installation.
 - 2. During installation.
 - 3. 48 hours after installation.

- B. Install resilient products after other finishing operations, including painting, have been completed.

PART 2 - PRODUCTS

2.1 THERMOSET-RUBBER BASE [RB-1]

- A. Basis-of-Design Product: Subject to compliance with requirements, provide Tarkett; Baseworks Rubber Wall Base or comparable product by one of the following:
 - 1. Flexco; Roppe Holding Company.
 - 2. Roppe Corporation; Roppe Holding Company.
- B. Product Standard: ASTM F 1861, Type TS (rubber, vulcanized thermoset), Group I (solid, homogeneous).
 - 1. Style and Location:
 - a. Style B, Cove:.
- C. Thickness: 0.125 inch.
- D. Height: 4 inches.
- E. Lengths: Coils in manufacturer's standard length.
- F. Outside Corners: Job formed.
- G. Inside Corners: Job formed.
- H. Colors: To be selected by Architect from manufacturer's standard colors.

2.2 INSTALLATION MATERIALS

- A. Trowelable Leveling and Patching Compounds: Latex-modified, portland-cement-based or blended hydraulic-cement-based formulation provided or approved by resilient-product manufacturer for applications indicated.
- B. Adhesives: Water-resistant type recommended by resilient-product manufacturer for resilient products and substrate conditions indicated.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates, with Installer present, for compliance with requirements for maximum moisture content and other conditions affecting performance of the Work.

1. Verify that finishes of substrates comply with tolerances and other requirements specified in other Sections and that substrates are free of cracks, ridges, depressions, scale, and foreign deposits that might interfere with adhesion of resilient products.
 - B. Proceed with installation only after unsatisfactory conditions have been corrected.
 1. Installation of resilient products indicates acceptance of surfaces and conditions.
- 3.2 PREPARATION
- A. Prepare substrates according to manufacturer's written instructions to ensure adhesion of resilient products.
 - B. Fill cracks, holes, and depressions in substrates with trowelable leveling and patching compound; remove bumps and ridges to produce a uniform and smooth substrate.
 - C. Do not install resilient products until materials are the same temperature as space where they are to be installed.
 1. At least 48 hours in advance of installation, move resilient products and installation materials into spaces where they will be installed.
 - D. Immediately before installation, sweep and vacuum clean substrates to be covered by resilient products.
- 3.3 RESILIENT BASE INSTALLATION
- A. Comply with manufacturer's written instructions for installing resilient base.
 - B. Apply resilient base to walls, columns, pilasters, casework and cabinets in toe spaces, and other permanent fixtures in rooms and areas where base is required.
 - C. Install resilient base in lengths as long as practical without gaps at seams and with tops of adjacent pieces aligned.
 - D. Tightly adhere resilient base to substrate throughout length of each piece, with base in continuous contact with horizontal and vertical substrates.
 - E. Do not stretch resilient base during installation.
 - F. On masonry surfaces or other similar irregular substrates, fill voids along top edge of resilient base with manufacturer's recommended adhesive filler material.
 - G. Job-Formed Corners:
 1. Outside Corners: Use straight pieces of maximum lengths possible and form with returns not less than 3 inches in length.
 - a. Form without producing discoloration (whitening) at bends.
 2. Inside Corners: Use straight pieces of maximum lengths possible and form with returns not less than 3 inches in length.
 - a. Cope corners to minimize open joints.

3.4 RESILIENT ACCESSORY INSTALLATION

- A. Comply with manufacturer's written instructions for installing resilient accessories.
- B. Resilient Molding Accessories: Butt to adjacent materials and tightly adhere to substrates throughout length of each piece. Install reducer strips at edges of floor covering that would otherwise be exposed.

3.5 CLEANING AND PROTECTION

- A. Comply with manufacturer's written instructions for cleaning and protecting resilient products.
- B. Perform the following operations immediately after completing resilient-product installation:
 - 1. Remove adhesive and other blemishes from surfaces.
- C. Protect resilient products from mars, marks, indentations, and other damage from construction operations and placement of equipment and fixtures during remainder of construction period.
- D. Cover resilient products subject to wear and foot traffic until Substantial Completion.

END OF SECTION 096513

SECTION 096723 - RESINOUS FLOORING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section Includes:
 - 1. Resinous flooring.
 - 2. Integral cove base accessories.

1.3 ACTION SUBMITTALS

- A. Product Data: For each type of product indicated. Include manufacturer's technical data, application instructions, and recommendations for each resinous flooring component required.
- B. Samples for Verification: For each resinous flooring system required, 6 inches square, applied to a rigid backing by Installer for this Project.

1.4 INFORMATIONAL SUBMITTALS

- A. Installer Certificates: Signed by manufacturer certifying that installers comply with specified requirements.
- B. Material Certificates: For each resinous flooring component, from manufacturer.
- C. Material Test Reports: For each resinous flooring system.

1.5 CLOSEOUT SUBMITTALS

- A. Maintenance Data: For resinous flooring to include in maintenance manuals.

1.6 QUALITY ASSURANCE

- A. Installer Qualifications: Manufacturer's authorized representative who is trained and approved for installation of flooring systems required for this Project.
 - 1. Engage an installer who is certified in writing by resinous flooring manufacturer as qualified to apply resinous flooring systems indicated.

- a. Installer shall provide evidence of at least 5 years of experience in applying the special coating and submit a list of regional installations that have been in service for a period of 3 years.
 - b. The Contractor shall submit the following, demonstrating the resinous flooring installer's qualifications and experience for approval by the Architect and Owner. Contractor's not submitting the required information or failing to meet the minimum requirements will be disqualified and will not be allowed to perform the work of this Section.
 - c. Provide a written description of a minimum of three projects completed within the past five years for which the resinous flooring installer has performed the resinous flooring installation. Projects must have been performed on similar construction types. Provide the name and address of the project, name and telephone number of the Owner and Architect, dates work was performed, and a description of the materials and methods used to perform the work for each project.
 - d. Submit a resume for each of the persons who will be supervising and performing the work of this Section demonstrating a minimum of 3 years experience working in their trades, list of three example projects describing the work the person has performed. Example projects can be the same or different than the example projects described by the said resinous flooring Contractor described above. Only individuals whose resumes have been submitted, reviewed and accepted will be allowed to perform the work of this Section.
2. The resinous flooring Contractor's qualifications submittals shall be completed by the resinous flooring Contractor and shall be signed by an authorized official of the firm and dated.

- B. Source Limitations: Obtain primary resinous flooring materials, including primers, resins, hardening agents, grouting coats, and topcoats, from single source from single manufacturer. Provide secondary materials, including patching and fill material, joint sealant, and repair materials, of type and from source recommended by manufacturer of primary materials.

1.7 DELIVERY, STORAGE, AND HANDLING

- A. Deliver materials in original packages and containers, with seals unbroken, bearing manufacturer's labels indicating brand name and directions for storage and mixing with other components.

1.8 PROJECT CONDITIONS

- A. Environmental Limitations: Comply with resinous flooring manufacturer's written instructions for substrate temperature, ambient temperature, moisture, ventilation, and other conditions affecting resinous flooring application.
- B. Lighting: Provide permanent lighting or, if permanent lighting is not in place, simulate permanent lighting conditions during resinous flooring application.
- C. Close spaces to traffic during resinous flooring application and for not less than 24 hours after application unless manufacturer recommends a longer period.

1.9 GUARANTEE

- A. The coating applicator and manufacturer shall jointly guarantee the performance of the material and workmanship for a period of 3 years from the date of substantial completion.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. Manufacturers: Subject to compliance with requirements, available manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
1. Desco.
 2. Dudick, Inc.
 3. Tnemec Company, Inc.

2.2 MATERIALS

- A. VOC Content of Liquid-Applied Flooring Components: Not more than 100 g/L when calculated according to 40 CFR 59, Subpart D (EPA Method 24):

2.3 RESINOUS FLOORING [**EPOXY**]

- A. Resinous Flooring: Abrasion-, impact- and chemical-resistant, decorative-aggregate-filled, epoxy-resin-based, monolithic floor surfacing designed to produce a seamless floor and integral cove base.
- B. System Characteristics:
1. Color and Pattern: Tnemec; Deco-Fleck 224.
 2. Wearing Surface: Textured for slip resistance.
 3. Overall System Thickness: 30 mils.
- C. Base Coat:
1. Product: Tnemec Series 284.
 2. Resin: Epoxy.
 3. Type: Clear.
 4. Finish: Glossy.
 5. Number of Coats: One.
- D. Body Coats:
1. Resin: Epoxy.
 2. Formulation Description: 100 percent solids.
 3. Application Method: Broadcast to refusal.
 4. Aggregates: Decorative Flake.
- E. Topcoat:
1. Product: Tnemec Series 284.
 2. Resin: Epoxy.
 3. Type: Clear.

4. Finish: Glossy.
5. Number of Coats: One.

F. Finish Coat:

1. Product: Tnemec Series 248.
2. Resin: Epoxy.
3. Type: Clear.
4. Finish: Satin.
5. Number of Coats: One.
6. Texture: Include 211-Glass Beads for slip resistance. Provide samples for various degrees of slip resistance for approval.

G. Integral Cove Base:

1. Height: 6-inch at walls. Full height of risers in Lecture Hall 101.
2. Cove Radius: 3/4-inch.
3. Trowel apply vertical cove base.
4. Hand sand cove base.
5. Apply three coats of resin to assure a smooth surface and cove.
6. Do not allow resin to puddle in cove.

2.4 ACCESSORIES

- A. Patching and Fill Material: Resinous product of or approved by resinous flooring manufacturer and recommended by manufacturer for application indicated.
- B. Metal Edge Termination: 1/8 inch profile.
 1. Locations: continuous, top of resinous cove base and edges where resinous flooring abuts another flooring material.

PART 3 - EXECUTION

3.1 PREPARATION

- A. General: Prepare and clean substrates according to resinous flooring manufacturer's written instructions for substrate indicated. Provide clean, dry substrate for resinous flooring application.
 1. Remove hardware, hardware accessories, machined surfaces, plates, and similar items which are not to be coated, or provide surface-applied protection prior to surface preparation and coating operations. Following coating completion in each space or area, reinstall removed items, using workman skilled in trades involved.
- B. Concrete Substrates: Provide sound concrete surfaces free of laitance, glaze, efflorescence, curing compounds, form-release agents, dust, dirt, grease, oil, and other contaminants incompatible with resinous flooring.
 1. Prepare concrete surfaces in accordance in accordance with NACE No. 6/SSPC-SP13 Joint Surface Preparation Standards and ICRI Technical Guidelines.
 - a. Roughen concrete substrates as follows: Shot-blast surfaces with an apparatus that abrades the concrete surface, contains the dispensed shot within the apparatus, and

- recirculates the shot by vacuum pickup to provide a minimum ICRO-CSP 3 or greater surface profile.
 - b. Comply with ASTM C 811 requirements unless manufacturer's written instructions are more stringent.
 - 2. Repair damaged and deteriorated concrete according to resinous flooring manufacturer's written instructions.
 - 3. Verify that concrete substrates are dry and moisture-vapor emissions are within acceptable levels according to manufacturer's written instructions.
 - a. Perform tests so that each test area does not exceed 200 sq. ft. , and perform no fewer than three tests in each installation area and with test areas evenly spaced in installation areas.
 - b. Anhydrous Calcium Chloride Test: ASTM F1869. Proceed with installation only after substrates have maximum moisture-vapor-emission rate of 5 lb of water/1000 sq. ft. in 24 hours.
 - c. Relative Humidity Test: Using in-situ probes, ASTM F2170. Proceed with installation only after substrates have a maximum 75 percent relative humidity level measurement.
 - 4. Alkalinity and Adhesion Testing: Verify that concrete substrates have pH within acceptable range. Perform tests recommended by manufacturer. Proceed with application only after substrates pass testing.
- C. Resinous Materials: Mix components and prepare materials according to resinous flooring manufacturer's written instructions.
- D. Use patching and fill material to fill holes and depressions in substrates according to manufacturer's written instructions.
- E. Treat control joints and other nonmoving substrate cracks to prevent cracks from reflecting through resinous flooring according to manufacturer's written instructions.

3.2 APPLICATION

- A. General: Apply components of resinous flooring system according to manufacturer's written instructions to produce a uniform, monolithic wearing surface of thickness indicated.
- 1. Coordinate application of components to provide optimum adhesion of resinous flooring system to substrate, and optimum intercoat adhesion.
 - 2. Cure resinous flooring components according to manufacturer's written instructions. Prevent contamination during application and curing processes.
 - 3. At substrate expansion and isolation joints, comply with resinous flooring manufacturer's written instructions.
- B. Primer: Apply primer over prepared substrate at spreading rate recommended in writing by manufacturer.
- C. Integral Cove Base: Apply cove base mix to wall surfaces before applying flooring. Apply according to manufacturer's written instructions and details including those for taping, mixing, priming, troweling, sanding, and topcoating of cove base. Round internal and external corners.
- 1. Integral Cove Base: 6 inches high.
 - 2. Surface to receive cove base shall be strong, durable and dry. Suitable backings include concrete, cement board, standard light-weight block, clay, and cement bricks. Masonry

surfaces to be free of voids, irregularities and recessed joints (if present, fill with recommended epoxy plaster).

- D. Integral Cove Base Accessories: Adhesively install precast accessories before applying flooring coats and in accordance with manufacturer's written instructions.
- E. Self-Leveling Body Coats: Apply self-leveling slurry body coats in thickness specified for flooring system.
 - 1. Aggregates: Broadcast aggregates at rate recommended in writing by manufacturer. After resin is cured, remove excess aggregates to provide surface texture indicated.
- F. Troweled or Screeded Body Coats: Apply troweled or screeded body coats in thickness specified for flooring system. Hand or power trowel and grout to fill voids. When body coats are cured, remove trowel marks and roughness using method recommended in writing by manufacturer.
- G. Topcoats: Apply topcoats in number indicated for flooring system specified, at spreading rates recommended in writing by manufacturer, and to produce wearing surface specified.

3.3 PROTECTION AND CLEANING

- A. Protect resinous flooring from damage and wear during the remainder of construction period. Use protective methods and materials, including temporary covering, recommended in writing by resinous flooring manufacturer.
- B. Protect work of other trades, whether to be coated or not, against damage. Correct damage by cleaning, repairing or replacing, and recoating, as directed by Architect. Leave work in undamaged condition.
- C. After coating application, remove temporary protective wrappings provided by others for protection of their work during coatings operation.

END OF SECTION 096723

SECTION 099123 - INTERIOR PAINTING

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. Section includes surface preparation and the application of paint systems on interior substrates.

1.3 DEFINITIONS

- A. Gloss Level 1: Not more than 5 units at 60 degrees and 10 units at 85 degrees, according to ASTM D 523.
- B. Gloss Level 3: 10 to 25 units at 60 degrees and 10 to 35 units at 85 degrees, according to ASTM D 523.
- C. Gloss Level 5: 35 to 70 units at 60 degrees, according to ASTM D 523.

1.4 ACTION SUBMITTALS

- A. Product Data: For each type of product. Include preparation requirements and application instructions.
 - 1. Include preparation requirements and application instructions.
 - 2. Indicate VOC content.
- B. Samples for Verification: For each type of paint system and in each color and gloss of topcoat.
 - 1. Submit Samples on rigid backing, 8 inches square.
 - 2. Step coats on Samples to show each coat required for system.
 - 3. Label each coat of each Sample.
 - 4. Label each Sample for location and application area.
- C. Sample Plaster Repair Panel for Verification
 - 1. Execute (1) sample panel demonstrating replacement plaster techniques to be used as a standard for patching material. Panel can be incorporated into the Project if standard of quality is reviewed to be in conformance.

1.5 INFORMATIONAL SUBMITTALS

- A. Qualification Data: For Installer.
- B. Plaster Repair Procedures: Detailed description of methods, materials and equipment to be used to meet requirements of plaster repair.

1.6 MAINTENANCE MATERIAL SUBMITTALS

- A. Furnish extra materials, from the same product run, that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.
 - 1. Paint: 5 percent, but not less than 1 gal. of each material and color applied. Extra materials shall consist of unopened, gallon containers.

1.7 QUALITY ASSURANCE

- A. Installer Qualifications: A firm or individual experience in all phases of historic plaster repair, similar in material, design and extent to that indicated for this Project, whose work has a record of successful in-service performance. Entity shall have been trained at a nationally recognized hands-on training program in historic plaster repair that stresses the stabilization of historic plaster with conservation adhesives.

1.8 DELIVERY, STORAGE, AND HANDLING

- A. Store materials not in use in tightly covered containers in well-ventilated areas with ambient temperatures continuously maintained at not less than 45 deg F.
 - 1. Maintain containers in clean condition, free of foreign materials and residue.
 - 2. Remove rags and waste from storage areas daily.

1.9 FIELD CONDITIONS

- A. Apply paints only when temperature of surfaces to be painted and ambient air temperatures are between 50 and 95 deg F.
- B. Do not apply paints when relative humidity exceeds 85 percent; at temperatures less than 5 deg F above the dew point; or to damp or wet surfaces.
- C. Protect and cover all adjacent architectural features and work completed by other trades.
- D. Insure that a minimum temperature of 65 degrees F is maintained for an adequate period prior to, during and after application of plaster and that heating and/or ventilation is properly regulated to insure correct curing of the lime plaster.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1. Benjamin Moore & Co.
 - 2. PPG Architectural Finishes, Inc.
 - 3. Sherwin-Williams; Paint Stores Group.

2.2 PAINT, GENERAL

- A. MPI Standards: Provide products that comply with MPI standards indicated and that are listed in its "MPI Approved Products List."
- B. Material Compatibility:
 - 1. Provide materials for use within each paint system that are compatible with one another and substrates indicated, under conditions of service and application as demonstrated by manufacturer, based on testing and field experience.
 - 2. For each coat in a paint system, provide products recommended in writing by manufacturers of topcoat for use in paint system and on substrate indicated.
- C. Colors: As indicated in a color schedule in the Finish Floor Plans.

2.3 PRIMERS/SEALERS

- A. Primer Sealer, Latex, Interior: MPI #50.
 - 1. PPG: Speedhide Int. Latex Primer Sealer.
 - 2. Benjamin Moore: Super Spec Latex Enamel Undercoater & Primer Sealer.
 - 3. Sherwin-Williams: ProMar 200 Int. Latex Primer Primer.
- B. Metal Primer, Rust-Inhibitive, Water Based: MPI #107.
 - 1. PPG: Pitt-Tech Int/Ext DTM Industrial Primer Gray.
 - 2. Akzo Nobel Paints: Devoe DEVFLEX 4020 Direct to Metal Primer & Flat Finish.
 - 3. Benjamin Moore: IRONCLAD Latex Low Lustre Metal & Wood Enamel.
 - 4. Sherwin-Williams: Pro -Cryl Universal Primer.

2.4 WATER-BASED PAINTS

- A. Latex, Interior, Flat, (Gloss Level 1): MPI #53.
 - 1. PPG: Speedhide Interior Flat Latex.
 - 2. Benjamin Moore: Super Spec Premium Latex Interior Flat Finish.
 - 3. Sherwin-Williams: ProMar 200 Interior Latex Flat.

- B. Latex, Interior, (Gloss Level 2): MPI #44.
 - 1. PPG: Speedhide Interior Eggshell Latex.
 - 2. Benjamin Moore: Super Spec Premium Latex Interior Eggshell Enamel.
 - 3. Sherwin-Williams: ProMar 200 Interior Latex Eg-Shel.
- C. Latex, Interior, Semi-Gloss, (Gloss Level 5): MPI #54.
 - 1. PPG: Speedhide Interior Semi-Gloss Latex.
 - 2. Benjamin Moore: Eco Spec Premium Interior Latex Semi-Gloss Finish.
 - 3. Sherwin-Williams: ProMar 200 Interior Latex Gloss.
- D. Light Industrial Coating, Interior, Water Based, Semi-Gloss (Gloss Level 5): MPI #153.
 - 1. PPG: Devoe Devflex 4216 High Performance WB Acrylic.
 - 2. Benjamin Moore: Super Spec D.T.M. Acrylic Semi-Gloss Enamel.
 - 3. Sherwin-Williams: Pro Industrial Acrylic Semigloss Coating.

2.5 PLASTER REPAIR, GENERAL

- A. Basecoat Plasters: for application on wood lath.
 - 1. Mix lime putty, 1:3, with sand, for the scratch coat, well haired.
 - 2. Mix lime putty, 1:2.0-2.5, with sand, for the float coat, haired.
- B. Finish Coat Plaster: for application of small area, crack repairs.
 - 1. Mix lime putty, 1:1, with graded sand for the finish coat.
- C. Gauging Plaster
 - 1. USG: Champion Quality Gauging Plaster or approved equal.
- D. Lime
 - 1. Lime putty that has emley plasticity greater than 400, 98% or better calcium and a high surface are of 30m2/gram or better.
- E. Sand
 - 1. Sand shall be well graded, masons and shall be clean and free of dirt and organic substances.
- F. Adhesive: for reattachment and stabilization of loose plasters.
- G. Metal Lath
 - 1. Galvanized steel expanded (diamond) mesh lath if needed.
 - 2. The tie wire shall be 18 ga. Galvanized soft annealed wire.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates and conditions, with Applicator present, for compliance with requirements for maximum moisture content and other conditions affecting performance of the Work.
- B. Maximum Moisture Content of Substrates: When measured with an electronic moisture meter as follows:
 - 1. Gypsum Board: 12 percent.
- C. Gypsum Board Substrates: Verify that finishing compound is sanded smooth.
- D. Verify suitability of substrates, including surface conditions and compatibility with existing finishes and primers.
- E. Proceed with coating application only after unsatisfactory conditions have been corrected.
 - 1. Application of coating indicates acceptance of surfaces and conditions.

3.2 PREPARATION

- A. Comply with manufacturer's written instructions and recommendations in "MPI Manual" applicable to substrates indicated.
- B. Remove hardware, covers, plates, and similar items already in place that are removable and are not to be painted. If removal is impractical or impossible because of size or weight of item, provide surface-applied protection before surface preparation and painting.
 - 1. After completing painting operations, use workers skilled in the trades involved to reinstall items that were removed. Remove surface-applied protection if any.
- C. Clean substrates of substances that could impair bond of paints, including dust, dirt, oil, grease, and incompatible paints and encapsulants.
 - 1. Remove incompatible primers and reprime substrate with compatible primers or apply tie coat as required to produce paint systems indicated.
- D. Wood Substrates:
 - 1. Scrape and clean knots, and apply coat of knot sealer before applying primer.
 - 2. Sand surfaces that will be exposed to view, and dust off.
 - 3. Prime edges, ends, faces, undersides, and backsides of wood.
 - 4. After priming, fill holes and imperfections in the finish surfaces with putty or plastic wood filler. Sand smooth when dried.

3.3 APPLICATION

- A. Apply paints according to manufacturer's written instructions and to recommendations in "MPI Manual."
 - 1. Use applicators and techniques suited for paint and substrate indicated.
 - 2. Paint surfaces behind movable equipment and furniture same as similar exposed surfaces. Before final installation, paint surfaces behind permanently fixed equipment or furniture with prime coat only.
 - 3. Paint front and backsides of access panels, removable or hinged covers, and similar hinged items to match exposed surfaces.
 - 4. Do not paint over labels of independent testing agencies or equipment name, identification, performance rating, or nomenclature plates.
 - 5. Primers specified in painting schedules may be omitted on items that are factory primed or factory finished if acceptable to topcoat manufacturers.
- B. If undercoats or other conditions show through topcoat, apply additional coats until cured film has a uniform paint finish, color, and appearance.
- C. Apply paints to produce surface films without cloudiness, spotting, holidays, laps, brush marks, roller tracking, runs, sags, ropiness, or other surface imperfections. Cut in sharp lines and color breaks.
- D. Painting Fire Suppression, Plumbing, HVAC, Electrical, Communication, and Electronic Safety and Security Work:
 - 1. Paint the following work where exposed in occupied spaces:
 - a. Uninsulated metal piping.
 - b. Uninsulated plastic piping.
 - c. Pipe hangers and supports.
 - d. Metal conduit.
 - e. Plastic conduit.
 - f. Duct, equipment, and pipe insulation having cotton or canvas insulation covering or other paintable jacket material.
 - g. Other items as directed by Architect.
 - 2. Paint portions of internal surfaces of metal ducts, without liner, behind air inlets and outlets that are visible from occupied spaces.

3.4 PLASTER REPAIR

- A. General: Repair substrate surface defects that are inconsistent with the surface appearance of adjacent materials and finishes.
- B. Preparation; for plaster repair.
 - 1. At modern patches, evaluate their soundness and remove if necessary.
 - 2. At exposed wood lath, re-secure to existing framing with stainless steel nails or pre-drill holes for deck screw attachment. Clean out keys and vacuum clean. Attach perimeter of sound plaster with an approved conservation adhesive, allow to coalesce as necessary. Rake perimeter of hole, to cut it back, for replacement plaster to tuck in behind the existing plaster.
 - 3. Dampen wood lath until the surface is damp.
 - 4. Replace missing wood lath with similar materials. It is not appropriate to mix wood and metal lath.

5. At existing sound plaster bases/delaminating top coats, reattach with conservation adhesive.
6. Cracks are not to be raked out. This cuts the fiber binder that is still bridging the crack. This raking would weaken the plaster stability. If the fibrous binder is rendered by the width of the crack it is permissible to rake out the crack after stabilization with adhesives.

C. Application of plaster.

1. Large area repairs: adhere the perimeter of the opening and fill with two to three layers of the lime/sand/hair basecoat plaster, no more than 5/16" per coat, and a finish coat, flush with the surrounding surfaces.
2. Small area repairs (two inches or larger): fill with large area material, smaller, fill with crack fill material, flush with the surrounding surfaces.
3. Crack fill: If fibrous binder is rendered, rake out crack to approximately 1/2" depth and fill with non-sanded finish coat material, flush with surrounding surfaces. If crack is not open then topping with a thin layer of ready mix joint compound after stabilization is appropriate.
4. Surface delamination: Remove as necessary and replace with non-sanded finish coat material, flush with the surrounding surfaces.
5. Skim surface for cosmetic effect with joint compound.
6. Moldings: remove old repairs, patch and repair to follow crack repair specifications keeping true to profile.

3.5 CLEANING AND PROTECTION

- A. At end of each workday, remove rubbish, empty cans, rags, and other discarded materials from Project site.
 1. Do not clean equipment with free-draining water and prevent solvents, thinners, cleaners, and other contaminants from entering into waterways, sanitary and storm drain systems, and ground.
 2. Dispose of contaminants in accordance with requirements of authorities having jurisdiction.
 3. Allow empty paint cans to dry before disposal.
- B. After completing paint application, clean spattered surfaces. Remove spattered paints by washing, scraping, or other methods. Do not scratch or damage adjacent finished surfaces.
- C. Protect work of other trades against damage from paint application. Correct damage to work of other trades by cleaning, repairing, replacing, and refinishing, as approved by Architect, and leave in an undamaged condition.
- D. At completion of construction activities of other trades, touch up and restore damaged or defaced painted surfaces.

3.6 INTERIOR PAINTING SCHEDULE

- A. Substrates Specified in Divisions 21 through 28:
 1. Latex System:
 - a. Prime Coat: Primer sealer, latex, interior, MPI #50.
 - b. Intermediate Coat: Latex, interior, matching topcoat.
 - c. Topcoat: Latex, interior, semi-gloss, (Gloss Level 5), MPI #54.

- B. Wood Substrates: Including wood windows.
 - 1. Latex System:
 - a. Prime Coat: Factory applied.
 - b. Intermediate Coat: Latex, interior, matching topcoat.
 - c. Topcoat: Latex, interior, semi-gloss, (Gloss Level 5), MPI #54.
- C. Gypsum Board and Plaster Substrates:
 - 1. Latex System:
 - a. Prime Coat: Primer sealer, latex, interior, MPI #50.
 - b. Intermediate Coat: Latex, interior, matching topcoat.
 - c. Topcoat: Latex, interior, flat, (Gloss Level 1), MPI #53.
 - 1) Locations: Ceilings and soffits.
 - d. Topcoat: Latex, interior, (Gloss Level 2), MPI #44.
 - 1) Locations: All walls and other locations not indicated for Gloss Level 5.
- D. Steel Substrates:
 - 1. Water-Based Light Industrial Coating System:
 - a. Prime Coat: Primer, rust-inhibitive, water based MPI #107.
 - b. Intermediate Coat: Light industrial coating, interior, water based, matching topcoat.
 - c. Topcoat: Light industrial coating, interior, water based, semi-gloss (Gloss Level 2), MPI #153.

END OF SECTION 099123

SECTION 114000 - FOODSERVICE EQUIPMENT

PART 1 – GENERAL

1.1 SECTION INCLUDES:

- A. Foodservice equipment.

1.2 SCOPE OF WORK:

- A. Furnish all labor, materials and services necessary for the procurement and installation of the equipment included in this section.
- B. Supervise and provide required instructions for work to be performed by other contractors in connection with requirements for all equipment included this section.
- C. Specifications and drawings have been prepared to form the basis for coordination with the other trades on this Project, procurement, erection, start-up, and adjustment of all equipment in this section. Plans and specifications are to be considered as mutually explanatory and work required by one, but not by the other, is to be performed as though required by both. Items required by one, but not by the other are to be provided as though required by both. Work to be accomplished as called for in specifications and shown on drawings, so that all items of equipment are completely functional for purpose for which they were designed. When/if there is any discrepancy between drawings and specifications, bidders should seek clarification of any discrepancies from the Consultant prior to bidding.
- D. Should the drawings disagree between themselves or the specifications with the drawings, the better quality more stringent, and/or greater quantity of the work or materials to be completed without additional costs to the Owner.
- E. Secure and pay fees for all permits and licenses as required by all authorities having jurisdiction. Give all notices and comply with all laws, ordinances, rules, regulations, and contract requirements bearing on the work.

1.3 RELATED DIVISIONS / SECTIONS:

- A. Refer to General Conditions, Supplementary Conditions, and applicable provisions of Division 1 for additional instructions.
- B. Refer to Interior Design Divisions for applicable provisions and sections regarding décor finishes, applications, details, and special instructions relating to items specified in this Section. Applicable to Projects with items specified in this Section, with décor finishes and/or construction.
- C. Refer to Mechanical/Plumbing Divisions for applicable provisions and sections regarding mechanical services, including, but not limited to exhaust ductwork and fans, floor sinks and floor drains, water gas and steam rough-ins, grease traps, steam traps, drain traps, atmospheric vents, valves, pipes and pipe fittings, ductwork, and other materials necessary to complete final connections to individual items as specified in this Section. Not work of this Section. Also includes:
 - 1. Piping and insulation for fryer oil systems.
 - 2. Piping for remote pulping systems.

-
3. All exhaust hood or ventilator duct work and fans upstream from the connection position.
- D. Refer to Electrical Divisions for applicable provisions and sections regarding electrical services, including, but not limited to, rough-ins, standard voltage and low-voltage wiring, conduit, drop-cords, ceiling-mounted cord reel assemblies, disconnects and other materials necessary to complete final connections to individual items as specified in this Section. Not work of this Section. Also includes:
1. Installation of light fixtures furnished loose at cold storage rooms.
 2. Connection of cold storage room temperature alarm system to the building security system.
 3. Connection of hood fire suppression system to the building security system.
- E. Work included in other Divisions - Provision of all walls, floor, and/or ceiling/roof openings, and sealing thereof, as necessary for installation of items included in this section. Not work of this Section. Also includes:
1. Slab depressions reinforced concrete wearing bed and interior finished floor with coved base at prefabricated cold storage assemblies.
 2. Concrete or masonry platforms with finished top and coved base at perimeter, for raised setting of foodservice equipment: Divisions 03/09.
 3. Slab depressions to receive stainless-steel drain trench liner/grate assemblies provided under this Section.
 4. Wall backing to support all wall-mounted equipment.
 5. Conduit and piping sleeves for soda, beer/liquor, refrigeration, CO₂ and drain lines through building ceilings and floors.
- F. Work included in other Divisions - Disconnection of existing equipment to be relocated and/or reused; and removal of existing equipment which will not be reused, as determined and designated by the Architect in other Divisions. Not work of this Section. **(Applicable to Projects with existing equipment.)**
- 1.4 DEFINITIONS:
- A. Furnish - Supply and deliver to Project Site, ready for unloading, unpacking, assembly, installation, and similar operations.
- B. Install (set in place) - Operations at Project Site including actual unloading, unpacking, assembly, erecting, placing, anchoring, applying, finishing, curing, protecting, cleaning and similar operations, ready for final utility connections by other Divisions as appropriate.
- C. Provide - Furnish and install complete, ready for intended use, including any necessary initial training.
- D. Contractor - Refers to the Kitchen Equipment (Sub) Contractor in this Section. References to any other Contractor or Division will be specific, such as General Contractor, Plumbing (Sub) Contractor / Division, Electrical (Sub) Contractor / Division, Architect designated, etc.
- 1.5 LAWS, ORDINANCES, REGULATIONS AND STANDARDS:
- A. Comply with the following in their current published form:
1. Air Conditioning and Refrigeration Institute (A.R.I): applicable regulations and references of the latest edition of standards for remote refrigeration system(s), components and installation.

2. American Gas Association (A.G.A.): standards for gas heated equipment and provide equipment with the A.G.A. seal. Automatic safety pilots to be provided on all equipment, where available. (Canadian Gas Association or alternate testing lab's seals accepted if acceptable to local code jurisdictions.)
3. American National Standards Institute (A.N.S.I.): Z21-Series for gas-burning equipment. Provide labels indicating name of testing agency.
4. American National Standards Institute (A.N.S.I.): B57.1 for compressed gas cylinder connections, and with applicable standards of the Compressed Gas Association for compressed gas piping.
5. American National Standards Institute (A.N.S.I.): A40.4 and A40.6 for water connection air gaps and vacuum breakers.
6. American Society of Heating, Refrigeration and Air Conditioning Engineers (A.S.H.R.A.E.): applicable regulations and references of the latest edition of standards for exhaust system planning including A.S.H.R.A.E. 90.1 Section 5,6,7, and remote refrigeration system(s), components, and installation.
7. American Society of Mechanical Engineers (A.S.M.E.): Boiler Code requirements for steam generating and steam heated equipment and provide A.S.M.E. inspection stamp and registration with National Board.
8. American Society for Testing and Materials (A.S.T.M.): C1036 for flat glass.
9. American Society for Testing and Materials (A.S.T.M.): C1048 for heat-treated flat glass - Kind HS, Kind FT coated and uncoated glass.
10. American Society for Testing and Materials (A.S.T.M.): F232-03 for pre-rinse spray units, and in compliance with Energy Policy Act of 2005 (EPAct).
11. American Welding Society (A.W.S.): D1.1 structural welding code.
12. Energy Policy Act of 2005 (EPAct 2005): water savings pre-rinse spray valves.
13. National Electric Code (N.E.C.): N.F.P.A. Volume 5 for electrical wiring and devices included with foodservice equipment, A.N.S.I. C2 and C73, and applicable N.E.M.A. and N.E.C.A. standards.
14. National Electrical Manufacturers Association (N.E.M.A.): LD3 for high-pressure decorative laminates.
15. National Fire Protection Association (N.F.P.A.): applicable sections for exhaust hoods, ventilators, duct and fan materials, hoods fire suppression systems, wheel placement systems, construction and installation; in addition to local codes and standards.
16. National Sanitation Foundation (NSF): latest Standards and Revisions, and as accredited by ANSI, IAS, NELAC, ISO, OSHA and SCC. Provide NSF Seal of Approval on all standard manufactured items included in this Project and listed in any NSF Certified Food Equipment Products Category, and on all items of custom fabricated work included in this Project. (UL Sanitation approval and seal accepted if acceptable to local code jurisdictions.)
17. Sheet Metal and Air Conditioning Contractor's National Association (S.M.A.C.N.A.): latest edition of guidelines for seismic restraint of kitchen equipment, as applicable to project location. All seismic requirements shall be shown on all submittals. Submit requested information to the agencies and authorities having jurisdiction.
18. Underwriters Laboratories (U.L.): as applicable for electrical components and assemblies. Provide either U.L. labeled products or, where no labeling service is available, "recognized markings" to indicate listing in the U.L. "Recognized Component Index". (Canadian Standards Association or alternate testing lab's seals accepted if acceptable to local code jurisdictions.)
19. UL 300 Standard: for wet chemical fire suppression systems for exhaust hoods/ventilators.
20. American with Disabilities Act (ADA): as applicable to this Project.
21. Refrigeration Service Engineers Society (R.S.E.S.): applicable regulations and references of the latest edition of standards for remote refrigeration system(s), components and installation.

-
22. All refrigerants used for any purpose is to comply with the 1995 and 2010 requirements of the Montreal Protocol Agreement, and subsequent revisions and amendments. No CFC or HCFC refrigerants will be permitted on this Project.
 23. All refrigeration components installation, repairs, and/or associated work on any refrigeration system, is to be performed by a Certified Refrigeration Mechanic thoroughly familiar with this type of commercial foodservice installation. ETL and other national and international recognized Testing and Listing Agency labels and certifications are acceptable in lieu of Listing Agencies indicated in these documents, if acceptable to the local code jurisdictions.
 24. All applicable local codes, standards, and regulations.
 25. All special local codes, standard, and regulations such as (examples only) California Energy Commissions Regulations, Dade County requirements for walk-in cooler(s) and/or freezer(s).
 26. For detention facilities projects (as applicable): applicable Correctional Standards. Verify the level of security and construction required with the Architect and provide all items in compliance.
- B. The Contract Documents shall prevail whenever they require larger sizes or higher standards than are required by regulations.
- C. The above regulations shall govern whenever the Contract Documents require something that is deemed to violate the above regulations.
- D. No extra charge will be paid by Owner for furnishing items required by the regulations, but not specified and/or shown on the drawings.
- E. Rulings and interpretations of the enforcing agencies shall be considered part of the regulations.
- 1.6 CONTRACTOR'S QUALIFICATIONS:
- A. In addition to requirements of Related Sections 1.3.A:
1. Five (5) years minimum continuous operation under the same company name and ownership.
 2. Financial stability and ability to complete this Project.
 3. Comparable size and scope projects completed in the last five (5) years.
 4. Contractor to provide letter that states they are able to purchase, distribute, and install all items specified.
- B. Any sub-contractor or fabricator employed by Contractor:
1. Is to comply with the same qualifications.
 2. Their name, address, and a brief-summary of their experience and qualifications is to be submitted with the bid proposal.
 3. Fabrication sub-contractor shall be NSF, NEC, and UL-approved at a minimum for fabrication of all items detailed within this specification and attending drawing set. Moreover, fabrication shop shall have the means and expertise to fully engineer and fabricate any-and-all counters, tables, natural and man-made stone counter tops, food shields, etc. all in one manufacturing facility where specified as part of this document set.
 4. Approved fabricators include the following:
Nationwide Fabrication
Florida Stainless

1.7 BIDDING AND SUBSTITUTIONS:

- A. The Bidder shall provide pricing on primary manufacturer and model specified. These Contract Documents were designed and engineered using the primary manufacturer and model and are intended to be the Basis of Bid. Provide itemized prices for each item, along with cited accessories with separate total prices for delivery and installation. Any-and-all city, state, occupational and government taxes which are applicable to this project, shall be included and added as a separate charge. All figures shall be included in a grand total package bid proposal. Bids shall be valid for thirty (30) days after bid deadline date and shall indicate same. Failure to comply with the above may be cause for rejection of the bid.
- B. Unless otherwise noted, substitutions may be submitted for consideration, but must be itemized at the end of the bid proposal.
- C. Substitutions must be approved in writing by the Architect and/or Owner, prior to utilization in this Contract. A copy of the approval must be included with any submittals by Contractor.
- D. Contractor shall provide all design/engineering services required to make-adjustments in space, systems, utilities, etc. and pay all additional costs of utilities, construction or professional services that may be incurred due to the acceptance of any substitution.
- E. Application for Substitution of Specified Foodservice Equipment. This form shall be submitted in support of each suggestion of request to substitute an alternate manufacturer and/or model of equipment that is not included in the Division 114000 (Foodservice Equipment) specifications.

APPLICATION FOR SUBSTITUTION OF SPECIFIED FOODSERVICE EQUIPMENT

The decision to accept an unnamed alternate will be based exclusively on the information provided hereon and the Owner's or their designee's research and verifications of claims, which shall include sharing the information with manufacturer(s) of the originally specified equipment. Accordingly, any proprietary information regarding the proposed substitution should be so identified and submitted as an addendum to this form.

By submitting this application, the Contractor guarantees the information is correct and accepts total responsibility for all additional costs that may directly or indirectly result from acceptance of the proposed substitution. It is the interest of the Contractor to declare in this form all benefits that they may accrue to the Owner. Include the proposed manufacturer's data sheets, drawings and any other supporting information.

The original specifications describe the minimum standards of the equipment – proposed substitutions that do not meet or exceed this minimum standard or otherwise benefit the Owner will not be considered except in the case of an originally specified item that is no longer available. The Owner or their designee will be the sole authority regarding identifying specific features, capacities, etc. that are operationally critical. Acceptance of a proposed substitution does not relieve the Contractor of responsibility for all direct or indirect costs associated with the substitution.

1. Date Submitted: _____
2. Item Number: _____ Description: _____ Quantity: _____
3. Specified Manufacturer: _____ Specified Model Number: _____
4. Proposed Manufacturer: _____ Proposed Model Number: _____
5. Does the proposed equipment incorporate all features and options expressed or implied by the specifications, including features and option that are provided as standard by the specified item?
☐ Yes ☐ No – describe (attach additional sheets as required): _____

6. Compare Utilities (attach additional sheets as required):
 Specified: HW _____ CW _____ Gas (BTU) _____ Steam (BHP) _____ Electrical _____
 Exhaust (cfm) _____ Duct size _____ Supply (cfm) _____ Duct size _____

 Proposed: HW _____ CW _____ Gas (BTU) _____ Steam (BHP) _____ Electrical _____
 Exhaust (cfm) _____ Duct Size _____ Supply (cfm) _____ Duct Size _____
7. Compare Dimension:
 Specified: Left to Right _____ Front to Rear _____ Height _____
 Proposed: Left to Right _____ Front to Rear _____ Height _____

8. Does the proposed substitution require changes to the work to be provided by other trades?

☐ No ☐ Yes – describe (attach additional sheets as required): _____

9. Does the proposed substitution require changes or create any issues regarding adjacent or associated equipment (for instance: door swing interference; service access; air circulation)?

☐ No ☐ Yes – describe (attach additional sheets as required): _____

What benefits will the Owner realize as a result-of this substitution (for instance: capital expense; energy savings, flexibility)? Provide specific information.

☐ There are no benefits to the Owner.

☐ The following will benefit the Owner – (attach additional sheets as required): _____

10. Are there any other considerations that should be evaluated? _____

11. Signature of Contractor's Representative: _____

1.8 APPROVED SUBSTITUTIONS AND/OR LISTED ALTERNATES:

- A. Substitutions approved as noted in Article 1.7, and/or any Listed Alternate manufacturers included in the Itemized Specifications Article 3.12, or added by Addendum, may be utilized, in lieu of the primary specified manufacturer with the following conditions:
 - 1. These Contract Documents are designed and engineered using the primary specified manufacturer and model and are intended to be the Basis of Design and Bid. Contractor assumes complete responsibility for any deviations required due to utilization of a substitution/alternate manufacturer or model; including, but not limited to, fitting alternates into available space, providing directions for required changes, and assuming any associated cost for utility, building, architectural, or engineering changes.
 - 2. Contractor is responsible for supplying the model, which is as close as possible to the primary specified model in regard to general function, features, options, sizes, accessories, utility requirements, finish, operation, internal system engineering and listing approvals. If it is determined by the owner or their appointed representative at any time during the construction and installation process, and prior to the final acceptance of the Project, that the substitution/alternate model submitted is not equivalent to the primary specified model, the Contractor will assume all associated cost and implications required to replace the model submitted, with the correct model.
 - 3. The bid proposal is to clearly state any proposed substitutions/alternates, that are being offered for review by including the manufacturer and model number. Along with a current data sheet for each substitution/alternate, with any-and-all deviations between the primary specified manufacturer and the substitution/alternate manufacturer clearly defined. Technical brochures from manufacturers may not be acceptable as adequate information required for comparison. Complex alternates such as utility distribution systems, exhaust hoods, ventilators, refrigeration systems, etc., shall include a shop drawing specific to this Project.
 - 4. Inclusion of an alternate manufacturer in Itemized Specifications Article 3.12 is not intended to indicate that there is an equal alternate unit to match every primary specified unit. It is the responsibility of the Contractor to ensure that the alternate unit submitted matches or exceeds the primary specified unit; and meets the conditions as stated above.
 - 5. Manufacturers not approved as substitutions or included as a Listed Alternates will not be permitted.

1.9 DISCREPANCIES:

- A. Where discrepancies are discovered between the drawings and the specifications, regarding quality or quantity, the higher quality or the greater quantity is to be included in the Bid Proposal.
- B. Contractor to notify the Architect, in writing, of any discrepancies discovered; and await written clarification prior to proceeding with the items or areas in question.
- C. Contractor is responsible for verifying and coordinating all items provided in this Section, with the drawings, specifications, manufacturer's requirements, submittals, actual site conditions, adjacent items, and associated (Sub-) Contractors; to assure that there are no discrepancies or conflicts. This is to include, but not be limited to, quantities, dimensions, clearances required, direction of operation, door swings, utilities, fabrication details and methods, installation requirements, etc.

1.10 SUBMITTALS:

- A. Provide one (1) digital set (PDF) of all Submittals for review by the Design Team. After review process this set will be returned for any updating necessary and subsequent distribution.
- B. Substitutions must be approved in writing by the Architect and/or Owner prior to utilization in this contract. A copy of the approval must be included with any submittals.
- C. Contractor to review all submittals for compliance with the Contract Documents, prior to submitting to the Design Team for review and is responsible for the accuracy of the information within their submittals.
- D. Contractor's use of any Design Team's digital contract drawings for basis of producing their submittal drawings, is limited to the following conditions, and understanding:
 - 1. Contractor shall perform a thorough project review of all foodservice and allied discipline (MEPS) documents within the Contract Document set and provide independent engineering for all equipment to be provided. Contractor shall assume complete liability and responsibility for accuracy, and for conformance and verification with the latest Architectural and Engineering drawings, actual field conditions and equipment to be provided as part of contract.
 - 2. The copy and simple re-use of the foodservice consultant's equipment plans, connection plans, building conditions plans, manufacturer's drawings, elevations/sections are prohibited.
 - 3. Contractor further assumes responsibility for coordination of their submittals with those of other allied Contractors and Sub-Contractors, such as electrical, plumbing, and mechanical contractors as required.
 - 4. Submittals shall contain Contractor's notes, symbols, details, title block and information.
- E. Equipment Plan and Rough-In Drawings:
 - 1. Submit 1/4" (1:50) scale drawings in pdf format. These drawings are to include complete information on the work included in this Contract, with references to equipment as provided by others; and are to provide sufficient information for associated trades, contractors, and/or sub-contractors to complete their division of work associated with foodservice equipment included in this Contract. Include any additional information pertinent to the installation of this equipment.
 - 2. Special Conditions Drawings, dimensioned, sizing and locating the following conditions:
 - a. Slab depressions, cores, sleeves, or block-outs (cold storage assemblies drain trenches, piping, etc.).
 - b. Concrete or masonry platforms.
 - c. Pipe sleeves or roof jacks.
 - d. Wall-openings or block-outs for pass-through equipment, recessed control panels, in-wall fire-protection system components, etc.
 - e. Blocking grounds or anchor plates required in walls for equipment support/attachment.
 - f. Above-ceiling hanger assemblies for support of exhaust hoods, utensil-racks, etc.
 - g. Access panels in walls or ceiling for service of equipment.
 - h. Ceiling pockets or recesses for unusually high equipment.
 - i. In-wall carriers for wall-hung or cantilevered equipment.
 - j. Ventilation for exhaust hoods, condensate hoods, ice machines, compressors, compressor racks and all other equipment requiring heat removal.
 - k. Support systems such as beverage conduit and refrigeration line-run sleeves.
 - l. Any other additional information pertinent to the installation of this equipment.

-
3. Electrical Rough-in Drawings field-coordinated and dimensioned providing the following information, but not limited to:
 - a. Electrical utility schedule.
 - b. Locations of rough-ins.
 - c. Locations of control panels.
 - d. Inter-wiring of walk-in freezer compressors to compressor rack control panel for defrost cycle.
 - e. Inter-wiring of controls panels to equipment.
 4. Plumbing Rough-In Drawings field-coordinated and dimensioned providing the following information, but not limited to:
 - a. Plumbing utility schedule.
 - b. Locations of rough-ins.
 - c. Interconnection water filters assemblies to ice machine, beverage equipment, combi-ovens, steamers, etc.
 5. Field-coordinated, dimensioned refrigeration line-run drawings providing the following information, but not limited to:
 - a. Sleeve locations & sizes for walls, floors, ceilings.
 - b. Detailed and field-coordinated route of refrigeration line-runs from remote refrigeration system to unit served.
 - c. Location and inter-wiring detail required for any temperature monitoring and/or control system specified.
 6. Drawings to also include equipment plan(s) with detailed equipment list, similar-to Foodservice Equipment Plans included in the Contract Drawings. Item numbers are to be the same as shown in the Contract Documents and are to include Spare Numbers and associated items provided by others.
 7. In the event rough-ins have been accomplished before award of this contract, Contractor is to examine the existing facility and identify adjustment needs related to their equipment to suit building conditions and utilities, where possible. Contractor to seek approval for the same prior to further construction. If not possible, state so in a letter, with reasons and an alternate method and pricing for their equipment, to the Architect and Foodservice Consultant.
- F. Shop Drawings:
1. Submit shop drawings for items of custom fabrication included in this contract in pdf format. Shop drawings are to be submitted at 3/4" (1:20) and/or 1-1/2" (1:10) scale and are to show dimensions, materials, finishes, details of construction, installation and relation of adjoining work requiring cutting or close fitting as well as any specified fabrication shop fit-out work such as electrical load circuit breaker panels, inter-wiring or interpiping. Shop drawings are to also indicate reinforcements, anchorage and related work required for the complete installation of fixtures. Fabricator's shop drawings shall be prepared as a coordinated single submittal, separate-from, and not part of a single collated foodservice submittal.
 2. Submit shop drawings for any equipment requiring field assembly, including but not limited to, Suite-style cooking assemblies, pulper/extractor assemblies, remote refrigeration systems, walk-in coolers and/or freezers, exhaust hoods/ventilators, fire suppression system, utility distribution systems, pot/utility/cart/tray/ware washing assemblies/machines, conveyors, floor troughs, seismic anchoring details (as required) and fresh oil supply/waste oil recovery systems in pdf format. Manufacturer's shop drawings shall be separated per system submitted in single form, and not part of a collated foodservice submittal.

3. When applicable, prepare and submit section, elevation, axonometric drawings in PDF format for all food shields within counters in a coordinated single submittal. Food shields to be compliant with current NSF code requirements and ergonomic reach requirements. Contractor to provide physical mock-up of same for Owner/Operator review and sign-off prior to fabrication.
 4. Before proceeding with the fabrication or manufacture of any item, Contractor is responsible for verifying and coordinating all dimensions and details with site dimensions, conditions, and adjacent equipment.
 5. The Contractor to clearly identify on drawings any-and-all differences between the Bid and/or Contract Documents and what is being provided. If any structural, electrical, plumbing, gas or steam requirements are different than what the Bid and/or Contract Documents show the Contractor will notify and record on the drawings identifying what is different and discuss same with General Contractor, Owner and Foodservice Consultant prior to commencing work.
- G. Product Data Submittal Manuals:
1. Submit product data brochure(s) with a cover sheet complete with detailed information on every item included in this section in pdf format. Detailed information is to include, but not be limited to, item number, description, quantity, model numbers, options and accessories provided, N.E.M.A. plug and receptacle configuration for applicable items, exact utility requirements, manufacturer's cut-sheets, reference to specific shop drawings, etc. Distribute one additional copy of installation and start-up instructions to the Installer. Every cover sheet and associated detailed submittal is to provide sufficient and complete information for the Design Team to verify that the Contractor understands the Contract requirements and is providing each item in compliance with the Contract Documents. Cover sheets to also include associated items as listed on the Equipment Plan but provided by others; and are to be noted as "Not in Section 114000 Contract Division".
 2. Reproduction of any part of the Contract Specifications will not be acceptable as part or total of Contractor's Product Data Submittal Manuals. These Manuals are to be produced and assembled entirely by the Contractor, in numerical order according to Item numbers.
 3. The cover sheet shall clearly identify all differences between the bid documents and what is being provided. If any electrical, plumbing, gas or steam requirements are different than what the bid documents show the Contractor will make a note on the coversheet identifying what is different and why. If a model has been discontinued, the Contractor will make a note on the cover sheet and offer a replacement model.
 4. The cover sheet shall clearly identify all differences between the Bid/Contract Documents and what is being provided. If any electrical, plumbing, gas or steam requirements are different than what the bid documents show the Contractor will make a note on the coversheet identifying what is different and why. If a model has been discontinued, the Contractor will make a note on the cover sheet and offer a replacement model.
- H. The Design Team's review of submittal drawings, shop details, product data brochures, and operation and maintenance manuals are for general conformance with the design concept and Contract Documents. Review markings or comments are not to be construed as relieving Contractor from compliance with the Contract Documents, or departures there from. Contractor remains responsible for details and accuracy, confirming and correlating all quantities and dimensions, selecting fabrication processes, techniques of assembly, and performing their work in a safe, satisfactory, code-compliant and professional manner.

- I. Commencement of purchasing or fabrication by the Contractor, of any item(s) included in this Contract, prior to receipt of reviewed Submittals from the Design Team, shall be at the Contractor's own risk; unless specifically instructed to do so in writing by the Owner, including the specific item numbers requested.
 - J. Contractor shall verify requirements and equipment sizes, critical clearances, or other characteristics necessary to represent Owner/ Purveyor items completely on the shop drawing submittals even though they may be listed as "NIC/Not in Contract" in the Equipment Schedule/Item Specification sections of this document.
- 1.11 OPERATION AND MAINTENANCE DATA MANUALS:
- A. Two (2) bound sets of manuals are to be furnished for items of standard manufacturer on/or before the date of the first event to occur of the following: demo/start-up, start-up for intended use by the Owner/Operator, completion of installation of kitchen equipment contract package, or final acceptance of installation by Owner. Manuals are to be in alphabetical order according to manufacturer. Manufacturer's info is to include Tech Services telephone number, email, and web site address, where available.
 - B. Provide a complete list of all equipment, with make, model and serial numbers. Provide list of local service agencies for included manufacturers, complete with addresses, email addresses and telephone numbers. Also provide email and web site addresses, where available.
 - C. Provide electronic/digital media for maintenance, training, operation, etc. where available from the manufacturer.
 - D. Manual shall also include a leak testing report for each-and-every remote refrigerated system included under this Foodservice Equipment Section, as required in article 2.7.A.6 Refrigeration Equipment of this Section.
- 1.12 AS - BUILT/ RECORD DOCUMENTS:
- A. Maintain one record set of Foodservice Equipment Plans with any related corrections, revisions, additions, deletions, changes, etc. noted during construction and installation. Provide an "as-built" set on a computer disk or electronically in PDF format.
 - B. Provide one (1) final set of Product Data Submittal Manual with any related corrections, revisions, additions, deletions, changes, etc. noted during construction and installation as a specifications' record set electronically in PDF format.
 - C. These documents are to be provided at the same time as the O & M Data Manuals. Submit the O & M Data Manuals electronically in PDF format.
- 1.13 SCHEDULE:
- A. Time is of the essence and acceptance constitutes assurance that the Contractor can and will obtain materials, equipment, and manpower, to permit installation of the items included in this Section, on schedule. Contractor is to coordinate their work with the progress schedule, as prepared and updated periodically by the General Contractor or Construction Manager.

- B. Anticipated delays, not within the control of the Contractor, are to be noted in a written notification to the Architect, immediately upon the Contractor's realization that delays are imminent.
- C. Failure of manufacturers to meet promised delivery dates will not grant relief to the Contractor for failure to meet schedules; unless the Contractor can establish, in writing, that orders were received by the manufacturer, with reasonable lead times.
- D. Extra charges resulting from special handling or air shipment in-order-to meet the schedule will be paid by the Contractor if insufficient time was allowed in placing factory orders.

1.14 WARRANTY:

- A. Unless otherwise noted in Related Divisions / Sections 1.3.A, items furnished are to be fully guaranteed against defects in workmanship, materials, and functionality for one full year from the date of the first event to occur of the following: date of issue of Certificate of Occupancy (or the equivalent), start-up for intended use by the Owner/Operator, completion of installation of kitchen equipment contract package, or final acceptance of installation by Owner. Should a Temporary Certificate of Occupancy be issued for partial completion of work, the items furnished within that designated area are to be under warranty from the date of issue of that Certificate. Contractor or their service agent will make necessary repairs and replacements without charge to the Owner, and within a reasonable time.
- B. Additional Refrigeration Warranty: in addition to the one-year warranty requirements as stated above, provide start-up and parts and labor for the first year, plus additional four-year extended warranty on compressors. Extended warranty is for provision of replacement compressor, determined to be defective by a certified refrigeration mechanic. However, verification of defective compressor, installation of replacement compressor, recharging and repairs of system will be the responsibility of the Owner. This includes all items with built-in or remote refrigeration system.
- C. Periodic routine maintenance, servicing, adjustments, cleaning, etc., as required by the manufacturers included in this Project, are the responsibility of the Owner.
- D. Any-and-all parts or requirements for manufacturer's warranties to be in effect, whether, or not noted in the itemized specifications, are to be provided or complied with by the Contractor. This is to include, but not be limited to, particular-parts, accessories, or installation; installation supervision, start-up, and/or follow-up inspections required by factory trained, Certified, and/or authorized personnel. Factory training, Certification, and/or authorization is to be in effect at the time of bidding, installation, start-up, and warranty period of this Project.
- E. Unless otherwise noted in Related Divisions manufacturer's warranties which comply with the requirements of this Warranty Article 1.14, are to be provided in lieu of Contractor's own warranties, where available. Copies of the written warranties are to be included in the O & M Manuals.

PART 2 – PRODUCTS

2.1 EQUIPMENT:

- A. Refer to schedule on Foodservice Drawings and Section 3.12 Itemized Specifications for equipment included in this Section.

2.2 MATERIALS:

A. Metals:

1. Stainless-Steel: AISI Type 201 or 302/304, hardest workable temper, and No.4 directional polish. Unless otherwise noted or specified, or required by the manufacturer, 201 may be used wherever 302/304 is listed.
2. Galvanized Steel Sheet: ASTM A526, except ASTM A527 for extensive forming; ASTM A525, G90 zinc coating, chemical treatment.
 - a. Where painted finish is indicated, provide mill phosphatized treatment in lieu of chemical treatment.
3. Steel Sheet: ASTM A569 hot-rolled carbon steel.
4. Galvanized Steel Pipe: ASTM A53 or ASTM A120, welded or seamless, schedule 40, galvanized.
5. Steel-Structural Members: Hot rolled or cold formed, carbon steel unless stainless-steel is indicated.
 - a. Galvanized Finish (G.I.): ASTM A123 hot-dipped zinc coating, applied after fabrication.
6. Aluminum: ASTM B209/B221 sheet, plate, and extrusions (as indicated); alloy, temper and finish as determined by manufacturer/fabricator, except 0.40-mil natural anodized finish on exposed work unless another finish is indicated.

- B. Plastic Laminate: NEMA LD3, Type 2, 0.050" (1.27 mm) thick, except Type 3, 0.042" (1.07 mm) for post-forming smooth (non-textured). Color and texture as selected by Architect/ Interior Designer.

1. Comply with NSF Standard No. 35.
2. Veneered with approved waterproof and heat proof cement. Rubber base adhesives are not acceptable.
3. Applied directly over close grained plywood, such as solid Mahogany or solid Birch, of selected, smooth, sanded stock to ensure a smooth ripple-free laminated surface; or commercial grade furniture particle board, Cortron or equal.
4. Exposed faces and edges are to be faced with 1/16" (1.6 mm) thick material. Corresponding backs are to be covered with approved backing and balancing sheet material.

- C. Millwork: No unfinished millwork, plywood/particle board or wood framing (including backs, undersides, and all surfaces concealed from view) will be permitted. All unfinished surfaces or openings cut through finished surfaces are to be sealed to be water resistant; with excess plastic laminate material, Cortron (Melamine) material, backing materials, sealers, primers, finish paint, etc., to blend with specified finish materials.

- D. Hardwood Work Surfaces: Laminated edge grained hard maple (*Acer saccharum*), NHLA First Grade with knots, holes and other blemishes culled out, kiln dried at 8 percent or less moisture, waterproof glue, machined, sanded, and finished with NSF approved oil-sealer.

- E. Solid Surface Material and Simulated/Engineered Stone:
1. Single-Source Responsibility for Solid Surface Material and Simulated/Engineered Stone: Obtain each color, grade, finish, type, and variety of material or stone from a supplier with resources to provide materials of consistent quality in appearance and physical properties, including the capacity to cut and finish material without delaying the progress of the work.
 2. Single-Source Responsibility for Other Materials: Obtain each type of solid surface material and simulated/engineered stone accessory, sealant, and other materials from one manufacturer for each product.
 3. Installer Qualifications: Trained and approved by countertop manufacturer who has completed countertops similar in material, design, and extent to that indicated for project that has resulted in construction with a record of successful in-service performance.
 4. The Contractor is responsible for verification of delivered stone materials for quantities, defects, or damage within [ten (10) days] after delivery. No compensation will be allowed to the contractor for materials and labor that may be required to replace materials after this time-period.
 5. Allowable Tolerances:
 - a. Variation in component size: +/- 1/8 inch (3 mm) in 8 feet (2.4 m).
 - b. Maximum height of abrupt irregularities: 1/32 inch (.8 mm).
 - c. Location of openings: +/- 1/8 inch (3 mm) from indicated location.
 6. Do not deliver countertop materials until painting and similar operations that could damage engineered stone materials have been completed in installation areas. If engineered stone materials must be stored in other than installation areas, store only in areas where environmental conditions comply with requirements specified in "Project Conditions" Article.
 7. Handle materials to prevent damage to finished surfaces. Provide protective coverings to prevent physical damage or staining following installation for duration of project.
 8. Environmental Limitations: Do not deliver or install simulated stone materials until building is enclosed, wet work is complete, and HVAC system is operating and maintaining temperature and relative humidity at occupancy levels during the remainder of the construction period.
 - a. Maintain ambient temperature between 50 and 95 degrees F. for 48 hours before, during and for minimum 7 days after installation.
 9. Field Measurements: Where simulated stone materials are indicated to fit to other construction, verify dimensions of other construction by field measurements before fabrication and indicate measurements on Shop Drawings. Coordinate fabrication schedule with construction progress to avoid delaying the Work.
 - a. Locate concealed framing, blocking, and reinforcements that support simulated stonework by field measurements before being enclosed and indicate measurements on Shop Drawings.
 10. Anchors: Select material, type, size, and finish required for each substrate for secure anchorage. Provide nonferrous-metal or hot-dip galvanized anchors and inserts on inside face of exterior walls and elsewhere as required for corrosion resistance. Provide toothed-steel or lead expansion sleeves for drilled-in-place anchors.
 11. Adhesive and Sealant as recommended by engineered stone manufacturer.
 12. Sink/bowl mounting hardware:
 - a. Manufacturer's approved bowl clips, brass inserts and fasteners for attachment of under-mount sinks/bowls.
 13. Fabrication:
 - a. Fabricate components to greatest extent practical to sizes and shapes indicated, in accordance with approved shop drawings and manufacturer's printed instructions. Clean surfaces to remove loose and foreign matter that could impair adhesion.
 - b. Remove ridges and projections. Fill voids and depressions with patching compound compatible with setting materials.

- c. Shop cut openings, to maximum extent possible, to receive hardware, appliances, plumbing fixtures, electrical work, and similar items. Locate openings accurately and use templates or roughing-in diagrams to produce accurately sized and shaped openings.
 - d. Rout and finish component edges with clean, sharp returns. Rout cutouts, radii and contours to template. Smooth edges. Repair or reject defective and inaccurate work.
 - e. Provide materials with ample allowance for cutting, when required to cut and fit on site. Provide trip for scribing and site cutting.
 - f. Thickness: Provide thickness indicated, but not less than the following:
 - i. Countertop: [3/4] (19 mm) [1-1/4] inch[es] (32 mm)
 - ii. Back and End Splashes: 3/4 inch (19 mm), unless shown otherwise.
 - iii. Substrate: [3/4] (19 mm)
- F. Stone:
 1. Single-Source Responsibility for Stone: Obtain each color, grade, finish, type, and variety of stone from a supplier with resources to provide materials of consistent quality in appearance and physical properties, including the capacity to cut and finish material without delaying the progress of the work.
 2. Single-Source Responsibility for Other Materials: Obtain each type of stone accessory, sealant, and other materials from one manufacturer for each product.
 3. Installer Qualifications: Engage an experienced installer who have completed stone countertops similar in material, design, and extent to that indicated for project that has resulted in construction with a record of successful in-service performance.
 4. The Contractor is responsible for verification of delivered stone materials for quantities, defects, or damage within ten (10) days after delivery. No compensation will be allowed to the contractor for materials and labor that may be required to replace materials after this time-period.
 5. Allowable Tolerances:
 - a. Variation in component size: +/- 1/8 inch (3 mm) in 8 feet (2.4 m).
 - b. Maximum height of abrupt irregularities: 1/32 inch (.8 mm).
 - c. Location of openings: +/- 1/8 inch (3 mm) from indicated location.
 6. Granite materials shall not contain unsafe levels of radioactive materials.
 7. Do not deliver countertop materials until painting and similar operations that could damage stone materials have been completed in installation areas. If stone materials must be stored in other than installation areas, store only in areas where environmental conditions comply with requirements specified in "Project Conditions" Article.
 8. Deliver materials to project site in undamaged condition.
 9. Store and handle stone and related materials to prevent their deterioration or damage due to moisture, temperature changes, contaminants, corrosion, breakage, chipping, or other causes.
 - a. Do not use pinch or wrecking bars.
 - b. Lift with wide-belt-type slings where possible. Do not use wire rope or ropes containing tar or other substances that might cause staining. If required to move stone, use wood rollers with cushions at end of wood slides.
 - c. Store stone on wood skids or pallets covered with non-staining, waterproof membrane.
 - d. Place and stack skids and stones to distribute weight evenly and to prevent breakage or cracking of stones.
 - e. Protect stored stone from weather with waterproof, non-staining covers or enclosures, but allow air to circulate around stones.
 - f. Store cementitious materials off the ground, under cover, and in dry location.

-
10. Environmental Limitations: Do not deliver or install stone materials until building is enclosed, wet work is complete, and HVAC system is operating and maintaining temperature and relative humidity at occupancy levels during the remainder of the construction period.
 - a. Maintain ambient temperature between 50 and 95 degrees F. for 48 hours before, during and for minimum 7 days after installation.
 11. Field Measurements: Verify dimensions of construction to receive stone countertops by field measurements before fabrication and indicate measurements on Shop Drawings. Coordinate fabrication schedule with construction progress to avoid delaying the work.
 - a. Established Dimensions: Where field measurements cannot be made without delaying the work, establish dimensions and proceed with fabricating countertops without field measurements. Provide allowance for trimming at site and coordinate construction to ensure actual dimensions correspond to established dimensions.
 12. Comply with referenced standards and other requirements indicated applicable to each type of material required.
 13. Provide matched slabs, coordinated for each type, variety, color, and quality of stone required.
 14. The use of colored tints, dyes, or waxes applied to stone shall NOT be permitted.
 15. Granite:
 - a. Granite Building Stone Standard: ASTM C615, free from cracks, chips, stains, or other defects, uniform in tone and coloring.
 16. Marble:
 - a. Marble Building Stone Standard: ASTM C503, free from cracks, chips, stains, or other defects, uniform in tone and coloring.
 17. Adhesives:
 - a. Stone Seam Adhesive: 2-part, epoxy or polyester stone adhesive formulated specifically for bonding stone to stone, with an initial set time of not more than 2 hours at 70 deg F.
 - b. Water-cleanable Epoxy Adhesive: ANSI A118.3, water-cleanable, tile-setting epoxy adhesive.
 - c. Color: Clear
 - d. Use installation adhesives that have a VOC content 65 g/L or less when calculated according to 40 CFR 59, Subpart D (EPA Method 24), or as listed in VOC limit tables in Section 01 81 19 "Indoor Air Quality Requirements". Products furnished shall comply with whichever VOC content requirement is more stringent.
 18. Stone Sealants:
 - a. Sealant for Countertops: Clear silicone sealant complying with requirements of Section 07 92 00 "Joint Sealants".
 - b. For sealants used inside of the vapor barrier, provide sealants that have a VOC content of 250 g/L or less when calculated according to 40 CFR 59, Subpart D (EPA Method 24), or as listed in VOC limit tables in Section 01 81 19 "Indoor Air Quality Requirements". Products furnished shall comply with whichever VOC content requirement is more stringent.
 19. Stone Sealers:
 - a. Penetrating Sealer: Penetrating sealer that protects the exposed faces of stone and grout from staining. Sealer shall be UV transparent; non-yellowing; VOC compliant; mold and mildew resistant; and USDA approved as safe on food handling surfaces. Material shall exceed ADA standards for slip resistance at traffic areas.
 - b. For sealers used inside of the vapor barrier, provide sealers that have a VOC content of 250 g/L or less when calculated according to 40 CFR 59, Subpart D (EPA Method 24), or as listed in VOC limit tables in Section 01 81 19 "Indoor Air Quality Requirements". Products furnished shall comply with whichever VOC content requirement is more stringent.

-
- 20. Cutouts and Holes for Lavatories, Sinks, and Fittings:
 - a. Undercounter Lavatories: Make cutouts for undercounter lavatories in shop using template or pattern furnished by lavatory manufacturer. Form cutouts to smooth, even curves with edges at right angles to top. Ease juncture of cutout edges with tops, and finish edges to match tops.
 - 21. Fittings: Drill countertops in shop for plumbing fittings, undercounter soap dispensers, and similar items.
- G. Insulation:
- 1. For low temperature applications, such as ice bins, cold pans, or fabricated under counter freezers, use urethane, rigid board foam or foamed-in-place; not less than 2" (50 mm) thick, except that vertical surfaces of cold pans and ice bins may be 1" (25 mm) thick. Insulation to be bonded at joints, to prevent condensation on exterior.
 - 2. For refrigerated applications such as fabricated under counter refrigerators, use urethane rigid board foam or foamed-in-place, or Styrofoam rigid board foam 2" (50 mm) thick, bonded at joints. No fiberglass insulation will be permitted.
 - 3. For heated type applications, such as plate warmers, use block type rock wool, minimum 1" (25 mm) thick; or Marinite I as noted in #4 below.
 - 4. At counters with tops subject to direct or indirect heat from heating or cooking-equipment, provide heat-resistant, food-safe caulking, three (3) layers of Nomex insulation held-in-place with aluminum tape. Provide a 1/8" (3 mm) minimum space between the heat source and the insulation. Coordinate drop-in equipment flange support and provide a 16-gauge stainless-steel 90-degree angle collar.
 - 5. All insulation is to be fully encased or enclosed in 16-gauge (1.6 mm) stainless-steel.
- H. Joint Materials:
- 1. Sealants: waterproof and mildew resistant silicone sealant, with Shore A hardness of 30, except 45 if subject to traffic, and minimum service temperature range of -60° to +400° F. Sealant to be NSF Standard #51 Listed, and FDA and USDA Approved for use in food zones. Surfaces, cleaning, and sealants installation to comply with applicable requirements of FDA, USDA, and NSF Standards, and accepted foodservice installation practices.
 - 2. Backer Rod: For 3/8" (9.5 mm) or larger joints, to be polyurethane rod stock, larger than joint width.
 - 3. Gaskets: Solid or hollow (but not cellular) neoprene or polyvinyl chloride; light grey, minimum of 40 Shore A hardness, self-adhesive or prepared for either adhesive application or mechanical anchorage.
- I. Paint and Coatings:
- 1. Provide the types of painting and coating materials which, after drying or curing, are suitable for use in conjunction with foodservice, and which are durable, non-toxic, non-dusting, non-flaking, mildew resistant, and comply with NSF Standards and governing regulations for foodservice.
 - 2. Galvanize Repair Paint: MIL-P-21035.
 - 3. Sound Deadener: NSF-listed sound deadening material such as latex sound deadener, for internal surfaces of metal work, and underside of metal counters and tables between work top and underbracing. Verify sound deadening requirements or restrictions with local health authorities.
 - 4. Pretreatment: SSPC-PT2 or PT3, of FS TT-C490.
 - 5. Primer Coating for Metal: FS TT-P-86, type suitable for baking, where indicated.
 - 6. Enamel for Metal: Synthetic type, FA TT-P-491, type suitable for baking, where indicated.

2.3 FABRICATED PRODUCTS:

- A. Hardware (also refer to article 2.4 Fabrication of Metal Work in general, and paragraphs O. Doors 1-3 and P. Drawer Assemblies 1-6 specifically, for additional requirements):
 - 1. General: Manufacturer's standard, but not less than ANSI 156.9 Type 2 (Institutional), satin finish stainless-steel or dull chrome finish on brass, bronze, or steel.
 - 2. Hinged Door Hardware: Stainless-steel hinged doors to be mounted with heavy duty NSF-approved hinges with Component Hardware Group, Model No. P62-1010 pulls, or equal; or full length pulls as per individual itemized specifications and shown on Standard Detail FSD1-24. Catches to be heavy-duty magnetic type, except as otherwise indicated. Millwork cabinet hinged doors to be mounted with Blum 95° CLIP top thick door all metal hinges, nickel plated, with 3-dimensional adjustment, or equal, or as per individual itemized specifications.
 - 3. Drawer Hardware: Slides to be 200 pounds (90 kilograms) minimum capacity per pair, 201 or 300 series stainless-steel, full extension, side-mounting, self-closing type, with stainless-steel ball-bearings, and positive stops; Component Hardware Group Series S52, or equal. Pulls to be Component Hardware Group, Model No. P62-1012, or equal; or full length pulls as per individual itemized specifications and shown on Standard Detail FSD1-24.
 - 4. Sliding Door Hardware: Sliding doors to be mounted on large, quiet ball bearing rollers in 14-gauge (2 mm) stainless-steel overhead tracks and be removable without the use of tools. Bottom of cabinet to have stainless-steel guide-pins and not channel tracks for doors.
 - 5. All hardware to be identified with manufacturer's name and number, so that broken or worn parts may be replaced.
- B. Casters:
 - 1. Type and size as recommended by caster manufacturer, NSF- approved for the type and weight of equipment supported; normally 5" (127 mm) diameter heavy-duty, ball-bearing, solid or disc wheel with non-marking grease proof rubber, neoprene or polyurethane tire; unless otherwise specified. Minimum width of tread to be 1-3/16" (30 mm). Minimum capacity per caster to be 250-pound (113.4kg), unless otherwise noted in itemized specifications.
 - 2. Solid material wheels to be provided with stainless-steel rotating wheel guard.
 - 3. Wheel and swivel bearings shall be sealed and show a polished plated finish per NSF.
 - 4. Unless otherwise indicated, equip each item with two (2) swivel type casters and two (2) fixed casters, with foot brakes on two (2) casters.
 - 5. Unless item is equipped with another form of all-around protective bumper, provide circular rotating bumper above each caster, 5" (127 mm) diameter tire of light grey synthetic rubber (hollow or closed-cell) on cadmium-plated disc.
- C. Plumbing Fittings, Trim and Accessories:
 - 1. General: Where exposed or semi-exposed, provide bright chrome plated brass or polished stainless-steel units. Provide copper or brass where not exposed.
 - 2. Vacuum Breakers: Provide with foodservice equipment as listed in the itemized specifications.
 - 3. Water Outlets: At sinks and at other locations where water is supplied (by manual, automatic or remote control), furnish commercial quality faucets, valves, dispensers or fill devices, of the type and size indicated, and as required to operate as indicated.
 - 4. Waste Fittings: Except as otherwise indicated, furnish 2" (50 mm) remote-lever ball valve type waste valve, and 3-1/2" (89 mm) flat strainer.
 - 5. Also refer to article 2.4.K for additional information.

D. Electrical Materials:

1. General: Provide standard materials, devices and components as recommended by the manufacturer or fabricator, selected, and installed in accordance with N.E.M.A. standards and recommendations; and as required for safe and efficient use and operation of the foodservice equipment, without sanitation concerns.
2. Components to bear the U.L. label or be approved by the prevailing authority.
3. Custom fabricated refrigerated/freezer units to be provided with vapor tight light receptacles, shatterproof lamps and automatic switches. Wiring to be concealed.
4. Where light fixtures are specified or detailed as part of counters, cases or fixtures; light fixtures with lamps to be furnished and installed. Warm white lamps to be provided, unless otherwise specified. If fluorescent light fixtures are specified, ballasts and tubes to be provided. Shields to be provided for all light fixtures.
5. Convenience and Power Receptacles: Make cutouts and install appropriate boxes or receptacles in fabricated fixtures, complete with wiring, conduit, receptacle, and stainless-steel cover plate. Receptacles and plugs to conform to N.E.M.A. standards. Electrical receptacles and devices to be first quality "Specification Grade". GFCI receptacles to be furnished as per the National Electrical Code.
6. Plugs and Cords: Where cords and plugs are provided, they are to comply with National Electrical Manufacturer's Association (N.E.M.A.) requirements. Indicate N.E.M.A. configuration for each applicable item.
7. Power Characteristics: Refer to Electrical Divisions specifications for project power characteristics. Also, refer to individual equipment requirements, for loads and ratings.
8. All electrical components (J-boxes, conduit, receptacles, switches, cover plates, light fixtures, panels, etc.) built into or on any equipment provided by Contractor, other than standard buy-out factory manufactured equipment, are to be vapor or water-tight type. Provide buy-out equipment with vapor or water-tight electrical components wherever available.

2.4 FABRICATION OF METALWORK:

A. General Fabrication Requirements:

1. Remove burrs from sheared edges of metalwork, ease the corners and smooth to eliminate cutting hazard. Bend sheets of metal, at not less than the minimum radius required to avoid grain separation in the metal. Maintain flat, smooth surfaces, without damage to finish.
2. Reinforce metal at locations of hardware, anchorages, and accessory attachments wherever metal is less than 14-gauge (2 mm) or requires mortised application. Conceal reinforcements to the greatest extent possible. Weld in place, on concealed faces.
3. Exposed screws or bolt heads, rivets and butt joints made by riveting straps under seams and then filled with solder, will not be accepted. Where fasteners are permitted, provide Phillips-head, flat or oval head machine screws. Cap threads with acorn nuts and lock washers, unless fully concealed in inaccessible construction; and provide nuts and lockwashers unless metal for tapping is at least 12-gauge (2.5 mm). Match fastener head finish with finish of metal fastened.
4. Where components of fabricated metal work are indicated to be galvanized and involve welding or machining of metal heavier than 16-gauge (1.6 mm), complete the fabrication and provide hot-dip galvanizing of each component, after fabrication, to the greatest extent possible (depending upon available dip-tank sizes). Comply with ASTM A123.

5. Welding and Soldering:
 - a. Materials 18-gauge (1.3 mm), or heavier, to be welded.
 - b. Seams and joints to be shop welded or soldered as the nature of the material may require.
 - c. Welds to be ground smooth and polished to match original finish.
 - d. Where galvanizing has been burned off, the weld is to be cleaned and touched up with high grade aluminum paint.
 6. Provide removable panels for access to mechanical and electrical service connections, which are concealed behind or within foodservice equipment, but only where access is not possible and not indicated through other work.
 7. Where ends of fixtures, splashbacks, shelves, etc., are open, fill by forming the metal or welding sections, if necessary, to close entire opening flush to walls or adjoining fixtures.
 8. Rolled edges are to be as detailed, with corners bullnosed, ground and polished.
 9. Equipment to have 1/2" (12.7 mm) or larger radius coves in horizontal and vertical corners, and intersections, per NSF standards.
- B. Metal and Gauges:
1. Except as otherwise indicated, fabricate exposed metalwork of stainless-steel; and fabricate the following components from the gauge of metal indicated, and other components from not less than 20-gauge (1 mm) metal:

a. Table and counter tops:	14-gauge (2 mm)
b. Sinks and drainboards:	14-gauge (2 mm)
c. Shelves:	16-gauge (1.6 mm)
d. Front drawer and door panels:	18-gauge (1.3 mm) (double pan type)
e. Single pan doors and drawer fronts:	16-gauge (1.6 mm)
f. Enclosed base cabinets:	18-gauge (1.3 mm)
g. Enclosed wall cabinets:	16-gauge (1.3 mm)
h. Exhaust hoods and ventilators:	18-gauge (1.3 mm)
i. Pan-type insets and trays:	16-gauge (1.6 mm)
j. Removable covers and panels:	18-gauge (1.3 mm)
k. Skirts and enclosure panels:	18-gauge (1.3 mm)
l. Closure/trim strips over 4" (102 mm) wide:	18-gauge (1.3 mm)
m. Hardware reinforcement:	12-gauge (2.5 mm)
n. Gusset plates:	10-gauge (3.4 mm)
o. Removable toe kicks:	14-gauge (3.4 mm)
p. Wall flashing	20-gauge (.95 mm)
- C. Work-Surface Fabrication:
1. Fabricate metal work surfaces by forming and welding, to provide seamless construction using welding rods matching sheet metal, grinding and polishing. Where necessary for disassembly, provide waterproof gasketed draw-type joints with concealed bolting.
 2. Reinforce work surfaces 30" (762 mm) on center both ways, with galvanized or stainless-steel concealed structural members. Reinforce edges, which are not self-reinforced, by formed edges.
- D. Metal Top Construction:
1. Metal tops to be one-piece welded construction, including field joints. Secure to a full perimeter galvanized steel channel frame cross-braced not farther than 30" (762 mm) on center. Fasten top with stud bolts or tack welds. If hat sections are used in lieu of channels, close ends.
 2. Properly designed draw fastening, trim strip, or commercial joint material to suit requirement is to be used, only if specified.

-
- E. Structural Framing:
1. Except as otherwise indicated, provide framing of minimum 1" (25 mm) pipe-size round pipe or tube members, with mitered and welded joints and gusset plates, ground smooth. Provide 14-gauge (2 mm) stainless-steel tube for exposed framing, and galvanized steel pipe for concealed framing.
 2. Where indicated, flange rear and end edges up to form splashes integrally with top, with vertical and horizontal corners coved of not less than 1/4" (6 mm) radius, die formed. Turn back splashes 1" (25 mm) to wall across top and ends with rounded edge on break, unless otherwise specified.
 3. For die-crimped edges, use inverted "V" 1/2" (13 mm) deep inside and 2" (50 mm) deep on outside, unless otherwise shown. For straight down flanges, make 1-3/4" (45 mm) deep on outside. For bullnose edges, roll down 1-3/4" (45 mm).
 4. Edges: die-formed, integral with top. For rounded corners, form to 1" (25 mm) radius, weld, and polish to original finish.
- F. Field Joints: For any field joint required because of size of fixture; butt-joint, reinforce on underside with angles of same material, bolt together with non-corrosive bolts and nuts, field-weld, grind, and polish to a seam not visible to the naked eye.
- G. Pipe Bases: Construct pipe bases of 1-5/8" (41 mm) diameter 18-gauge (1.3 mm) stainless-steel tubing. Fit legs with polished stainless-steel sanitary adjustable bullet feet to provide for not less than 2" (50 mm) of vertical adjustment without exposing threads. Space legs to provide ample support for tops, precluding any possibility of buckling or sagging and in no case more than 6' -0" (1829 mm) centers.
- H. Legs and Cross rails
1. Equipment legs and cross rails to be 1-5/8" (41 mm), 16-gauge (1.6 mm) stainless-steel tubing.
 2. Welds at cross rails to be continuous and ground smooth. Tack welds will not be acceptable.
 3. Bottom of legs to be hugged inward and fitted with a stainless-steel bullet-type foot with not less than 2" (50 mm) vertical adjustment without exposing threads.
 4. Free standing legs or legs on island tables/counters with electrical/plumbing connections to be anchored to floor with bolt-down type flanged feet with stainless-steel fasteners.
 5. Components:
 - a. Steel Gusset: Stainless-steel exterior to fit 1-5/8" (41 mm) tubing, with Allen screw for fastening and adjustment. Not less than 3" (76 mm) diameter at top and 3-3/4" (95mm) long. Outer shell 16-gauge (1.6 mm) stainless-steel, reinforced with 12-gauge (2.5 mm) mild steel insert welded interior shell, or approved equal.
 - b. Stainless-Steel Low Counter Legs: Stainless-steel exterior 5-3/4" (146 mm) minimum, 7" (178 mm) maximum length with stainless-steel 3-1/2" (89 mm) square plate with four countersunk holes, welded to top for fastening.
 - c. Stainless-Steel Adjustable Foot: Stainless-steel 1-1/2" (37 mm) diameter tapered at bottom to 1" (25 mm) diameter, fitted with threaded cold rolled rod for minimum 1-1/2" (37 mm) diameter x 3/4" (19 mm) threaded bushing plug welded to legs, or approved equal. Push-in foot not acceptable.
 6. Legs to be fastened to equipment with gussets, as follows:
 - a. Sinks: Reinforced with bushings and set screw.
 - b. Metal Top Tables and Dish Tables: Welded to galvanized steel channels, 14-gauge (2 mm) or heavier, anchored to top with screws through slotted holes.
 - c. Wood Top Tables: Welded to stainless-steel channels, 14-gauge (2 mm) or heavier, anchored to top with screws through slotted holes.

-
- I. Shelves:
1. Construct solid shelves under pipe base tables of 16-gauge (1.6 mm) stainless-steel, with 1-1/2" (37 mm) turned down and under edges on exposed sides, and 2" (50 mm) turn up against walls or equipment. Fully weld to pipe legs.
 2. In fixtures with enclosed bases, turn up shelves on back and sides with 1/4" (6 mm) (minimum) radius and feather slightly to ensure a tight fit to enclosure panels.
- J. Sinks:
1. Construct sinks of 14-gauge (2 mm) stainless-steel with No.4 finish inside and outside.
 2. Form back, bottom and front of one piece, with ends and partitions welded into place. Partitions: double thickness, 2" (51 mm) minimum space between walls. Multiple compartments to be continuous on the exterior, without applied facing strips or panels.
 3. Cove interior vertical and horizontal corners of each tub not less than 1/4" (6 mm) radius, die formed. Outer ends of drainboards to have roll rim risers not less than 3" (76 mm) high.
 4. Drill faucet holes in splashes 2-1/2" (63.5 mm) below top edge. Verify center spacing with faucet specified. Grind and polish.
 5. Sink insets to be deep drawn of 16-gauge (1.6 mm), or heavier, polished stainless-steel. Weld into sink drainboards with 1-1/2" (37 mm) x 1-1/2" (37 mm) x 14-gauge (2 mm) stainless-steel angle brackets; securely welded to sinks and galvanized cross angles spot welded to underside of drainboards to form an integral part of the installation.
 6. The bottom of each compartment is to be creased such as to ensure complete drainage to waste opening. Slope bottom of sink bowls toward drain outlet.
- K. Drains and Wastes and Faucets:
1. Furnish and install Fisher model 28940, or equal, ball valve type rotary drain assembly with flat strainer and connected overflow assembly, with chrome finish, in die-drawn inset type sinks and Bain Marie sinks.
 2. Other custom fabricated sinks to be furnished with Fisher model 28932, or equal, ball valve-type rotary drain assembly, with flat strainer and chrome finish. Waste connection to have 2" (50 mm) external thread size, with 1-1/2" (37 mm) internal thread size.
 3. Rotary Handle: Of sufficient length to extend to front edge of sink. No riveting, screws or soldering permitted to fit drains to sinks, with all parts of drains easily removable for servicing and replacement.
 4. All faucets furnished with equipment included in this Section to be lead-free and comply with NSF Standard #61, Section #9; such as manufactured by Fisher, Chicago, or T&S.
 5. Faucets and pre-rinse spray assemblies furnished with equipment included in this Section, are to have a maximum GPM flow rate in compliance with the Energy Policy Act of 2005 (EPAAct) and later updates; or local requirements, whichever is lower. EPAAct / local requirements are to be applicable to all faucets and pre-rinses; except for pre-rinse type assemblies used at glass icing / fill stations, fill hose / faucet assemblies at high water usage cooking equipment such as kettles, tilt fry pans, etc., and fill faucets at high volume / usage sinks, such as pot wash, mop sink and preparation sinks, etc. are to have flow rates of approximately 5 gpm flow minimum.
 6. All flex hose type faucet assemblies, such as pre-rinses, kettle fill hoses, etc., to have an inline pressure type back-flow preventer in the hose assembly, as required by local codes.
 7. All equipment provided by this Contractor, which discharges liquid waste exceeding 140° F (60° C), is to be provided with a cold-water drain tempering assembly per local codes.
- L. Workmanship:
1. Best quality in the trade. Field-verify dimensions before fabricating; conform all items to dimensions of building; neatly fit around pipes, offsets and other obstructions.

2. Fabricate only in accordance with approved shop drawings, showing pipes, obstructions to be built around, and location of utilities and services.

M. Casework:

1. Enclosure: except as otherwise indicated, provide each unit of casework (base, wall, overhead and free-standing) with a complete-enclosure metal cabinet, including fronts, backs, tops, bottoms, and sides.
2. Bases to be made of 18-gauge (1.3 mm) stainless-steel sheets reinforced by forming the metal and the inclusion of hat-channels.
3. Ends, partitions and shelves to be stainless-steel.
4. Unexposed backs and structural members may be galvanized, unless otherwise noted.
5. Vertical ends and partitions to be single wall, with a 2" (50 mm) face.
6. Sides and through partitions are flush with bottom rail, welded at intersections.
7. Shelves: Provide adjustable standards for positioning and support of shelves in casework; except bottom shelf of cabinet mounted on legs or as specified. Turn back of shelf units up 2" (50 mm) and hem. Turn other edges down to form open channel. Reinforce shelf units and pilasters to support 40 pounds per square foot (195 kgs/sq meter) loading, plus 100 percent impact loading.
8. Bottom front rail of bases set on masonry platform to be continuously closed and sealed to platform.
9. Provide removable access hatchways to all concealed floor sinks under casework directly over floor sinks. Sink locations to conform to local Health Department code requirements.

N. Doors:

1. Metal doors to be double-cased stainless-steel. Outer pans to be 18-gauge (1.3 mm) stainless-steel with corners welded, ground smooth and polished. Inner pan to be 20-gauge (1 mm) stainless-steel fitted tightly into outer pan with a sound deadening material such as Celotex or Styrofoam used as a core. The two pans to be tack welded together and joints solder filled. Doors to finish approximately 3/4" (19 mm) thick and be fitted with flush recessed type stainless-steel door pulls; or full-length continuous pulls as per individual itemized specifications and shown on applicable Standard Detail sheet.
2. Wood doors to be fabricated as detailed.
3. Hinged doors to be mounted on heavy-duty NSF-approved hinges, or as noted on plans or specifications.

O. Drawer Assemblies:

1. Assemblies to consist of removable drawer body mounted in a ball bearing slide assembly with fully enclosed housing.
2. Slide assembly consists of one pair of 200-pound (90 kilograms) capacity stainless-steel roller bearing full extension slides, with side and back enclosure panels, front spacer angle, two drawer carrier angles, secured to slides and stainless-steel front.
3. Drawers intended for tools and general non-food products storage are to have 20" x 20" x 6" deep (508 mm x 508 mm x 152 mm), 18-gauge (1.3 mm) minimum stainless-steel drawer pans.
4. Drawers intended to hold food products are to have 12" x 20" x 6" deep (305 mm x 508 mm x 152 mm) stainless-steel food pans.
5. All drawer pans to be easily removable without tools or disassembly of any drawer assembly components.
6. Drawer fronts are double-cased, 3/4" (19 mm) thick, with 18-gauge (1.3 mm) stainless-steel welded and polished front pan. Steel back pan shall be tightly fitted, and tack welded. Sound-deaden with rigid insulation material.
7. Provide drawers with replaceable soft neoprene bumpers or for refrigerated drawers - a full perimeter replaceable refrigerator gasket.

P. Closed Base: Where casework is indicated to be located on a raised-floor base, prepare casework for support without legs, and for anchorage and sealant application, as required for a completely enclosed and concealed base.

Q. Support from Floor: Equip floor supported mobile units with casters, and equip items indicated as roll-out units, with manufacturer's standard one-directional rollers. Otherwise, and except for closed-base units, provide pipe or tube legs, with adjustable bullet-design feet for floor supported items of fabricated metalwork. Provide 2" (50 mm) vertical adjustment of feet (concealed threading).

R. Shop Painting:

1. Clean and prepare metal surfaces to be painted; remove rust and dirt. Apply treatment to zinc coated surfaces, which have not been mill phosphatized. Coat welded and abraded areas of zinc coated surfaces, with galvanize repair paint.
2. Apply 1.5 mil (dry film thickness) metal primer coating, followed by 2, 1.0 mil (dry film thickness) metal enamel finish coatings.
3. Bake primer and finish coatings in accordance with paint manufacturer's instructions for a baked enamel finish.

S. Sound Deadening:

1. Sound-deaden underside of metal tops, drainboards, undershelves, cabinet interior shelves, etc., above the underbracing/reinforcing/framing only.

2.5 ARCHITECTURAL MILLWORK EQUIPMENT:

- A. The following general requirements shall govern the construction of millwork-built fixtures, except where otherwise noted. Work shall be performed by skilled mechanics of the trade and shall be of the highest quality throughout, in such a manner as to fulfill the intent of the Contract Documents. Perform architectural woodwork in accordance with "Architectural Woodwork Quality Standards" published by the Architectural Woodwork Institute (AWI). Fabricator shall have a demonstrated ability in fabricating woodwork items similar in type and quality to those required for this project.

1. All fixtures shall be made by one manufacturer and assembled in single and complete units as the dimensions will permit shipment to and installation of at the building. Large pieces requiring sectional construction shall have their parts accurately fitted and aligned with all others, and provided with ample screws, glue and bolt blocks, tongues, grooves and splines, dowels, mortises and tenons, screws bolts or suitable means of concealed fastening, as required to render the work substantial, rigid and permanently secured in proper position to each related section.
 2. Sufficient additional material shall be allowed to permit accurate scribing to walls, floor and related work, and due allowance made whenever possible for such shrinkage as may develop after installation. Single and sectional units shall be provided with adequate cleating, blocking, crating and other forms of protection as required precluding damage during shipping and handling.
 3. Framing and blocking members shall be assembled with bolted and screwed connections and should be secured to the structural backing with cinch, expansion screws or toggle bolts, as required; spaced and installed to insure ample strength and rigidity. Rails and stiles shall be mortised and tenoned, work neatly mitered and membered, all butt joints made flush and smooth, and all permanent joints made up with water resistant glue. All fixtures shall be assembled without face screws or nails, except where it may be necessary to attach items. All face screws or nails which are necessary shall be counter sunk and plastic wood or wood plugs used to cover head, and the plug neatly touched up. The heads of all screws used in any assembly shall be counter sunk below the surface.
 4. The core material shall be marine-grade, 7 ply-substrate or MEDEX exterior resin medium density fiberboard substrate; conform to ANSI A208.2.3.3.4. All substrate materials shall be LEED certified and meet the LEED requirements for the project.
 5. Back sheet shall be NEMA LD .020" (0.5 mm) thick, Type V, Grade 91 plastic laminate; apply on all surfaces not covered with plastic laminate; coordinate color with exposed surface color; comply with NSF Standard 35.
- B. Construction / Joints:
1. Follow AWI Premium Grade Standards; factory assembled parts and prefinished; flush type fronts and overlapping ends; $\frac{3}{4}$ " (19 mm) core material base cabinet, end and dividers with corner joints between framed members fully lock-jointed, glued and screwed; dado and glue cabinet backs into sides and bottom; scribe countertop and backsplashes; secure countertops to base cabinet from underside; fully cure surfaces prior to installation. Mortise and tenon, spline, dowel and/or pin lock and glue work to avoid use of nails wherever practical. Make butt joints with an approved device for prevention of separation of members. Blind nail and conceal.
- C. Plastic Laminate:
1. Plastic laminate shall be bonded to all exposed surfaces with Urac 185 adhesive or equal, to minimum $\frac{3}{4}$ " (19 mm) fir-faced, close grain marine-grade plywood applied under high pressure. In accordance with AWI 1600A-G-1, use horizontal grade on all exposed surfaces, vertical grad on semi- exposed surfaces and sealed paint on all concealed surfaces. Reject plastic laminate or plastic backing shall be used to prevent warping, unless otherwise specified. All edges shall be carefully sanded to smooth finish, removing burns, nicks, and cur marks. Plastic laminate joints shall be finished without wavy and unsightly joints. Joints need not be mitered except as specified. Hand sand edges to a slight chamfer.
 2. Top sheet shall be placed on and over finished edge. Ease exposed edge to overlap sheet. Use largest sheet possible in order- to minimize seams.
 3. Coved backsplashes shall be a minimum of $\frac{1}{4}$ " (6 mm). End splashes may have a square intersection with tabletops unless specified otherwise.

-
4. Plastic laminated shelves shall be laminated with horizontal grade laminate on the side and vertical grade at all edges.
- D. Doors, Hinged:
1. Hinged doors shall be fabricated of $\frac{3}{4}$ " (19 mm) thick marine-grade plywood with hardwood full perimeter edge with plastic laminate on face and self-edges on exposed sides unless indicated otherwise in drawings and details. Door hinges, pulls and catches shall be supplied and detailed. Provide Grass 1200, 176 degree opening concealed casework hinges or equal by Blum or Amerock. Door catches shall be Component Hardware Model M22-2420 for non-magnetic and Model M30-2400, heavy duty, self-aligning for magnetic.
 2. Utilize EPCO Model MC 4023.5 or as specified in the Item Specifications.
 3. Door locks shall be Component Hardware Model P30 Series; stainless-steel faced; master keyed as specified.
- E. Doors, Sliding:
1. Sliding doors shall be fabricated of solid core marine-grade plywood with hardwood edges and constructed similar- to hinged doors. Doors shall be mounted on E-Z Glides track. Doors shall be removable without the use of tools. Rubber stops shall be provided concealed in end stile or mullion.
- F. Access Panels: Access panels shall be fabricated of $\frac{3}{4}$ " (19 mm) nominal thick hardwood and shall be fabricated as a door. Each access panel shall be provided with 2 (two) magnetic catches at top and 2 (two) $\frac{3}{16}$ " (5 mm) positioning pins at bottom.
- G. Drawers:
1. Drawers shall have dovetail construction, well glued and blocked. Fronts shall be not less than $\frac{3}{4}$ " (19 mm) thick hardwood. Sides and back shall be $\frac{1}{2}$ " (13 mm) thick fabricated of Birch, Maple, or Sycamore except where extension slides are used, in which the side shall be $\frac{5}{8}$ " (10 mm) thick. Bottom shall be milled into fronts and sides.
 2. Drawers shall be provided with suitable stops. Provide pulls as detailed or specified. The inside surfaces of all drawers shall receive one coat of penetrating primer and one coat of glass lacquer.
- H. Painted Finishes:
1. Painted finishes shall have exposed surfaces free from defects and blemishes that would show after being finished, regardless of grade specified. All surfaces specified to receive paint or enamel finish shall receive one cross coat of lacquer type undercoat. The undercoat shall be of appreciably different color from that of the finish coat, and of proper ground color with relation to the finish coat. After the undercoat has been thoroughly dried, surfaces shall be sanded smooth, and two coats of enamel shall be applied. Back painting shall be provided for all cabinet and woodwork prior to installation.
- I. Interior & Wall Shelves:
1. Interior shelves shall be adjustable with flush routed-in shelf standards. Wall shelves to be fabricated as specified and as per "Standard Detail".
- J. Fire Retarding:
1. Where required by code, all required materials are to be treated with fire retardant chemicals to achieve the required flame spreading performance rating. Retardant chemicals must be a type approved by local authorities.

2.6 FILTER EXHAUST HOODS AND/OR WATER WASH VENTILATOR FABRICATION:

- A. 18-gauge (1.3 mm) type 201 or 304 stainless-steel external welded construction, in accordance with the latest edition of N.F.P.A. No.96 and International Mechanical Code, including all applicable appendices. Exposed welds to be ground and polished. Exhaust hoods to be U.L. Listed as available for length specified.
- B. Furnish type of fixture specified. Fixtures to be U.L. listed for cooking equipment exhaust hoods, NSF-approved, and with sealed safety lenses.
- C. Furnish welded stainless-steel formed duct collars at ceiling or wall duct connections. Verify size and location of duct connections required in this contract before fabrication.
- D. Pre-piped liquid chemical or water fire suppressant system, as specified; complying with applicable local and N.F.P.A. regulations. Wet chemical fire suppression systems to comply with UL 300 Standards. Water fire suppression systems to comply with U.L. Category Subject 199E. Each pull station is to be clearly identified with a permanent type label, as to which exhaust hood(s) it is for. Each exhaust hood is to have a matching permanent-type label, identifying which pull station activates its fire system.
- E. All cooking equipment below exhaust hoods/ventilators, on casters, are to be provided with positive wheel placement systems for the rear casters, similar-to Posi-Set units, in compliance with NFPA-17A 5.6.4 and NFPA-96 12.1.2.3.
- F. Water wash or ultra-violet control panel to be by the same manufacturer as the ventilator, with time clock control for automatic operation. Provide stainless-steel trim strips for recessed control cabinet applications. Provide stainless-steel chase for surface mounted control panel, from top of panel to ceiling, full width and depth of panel.

2.7 REFRIGERATION EQUIPMENT:

- A. General:
 - 1. Furnish either single or multiple compressor units, as specified or recommended by the manufacturer for the sizes and variations between connected evaporator loads as indicated.
 - 2. Furnish units of the capacities indicated, arranged to respond to multiple- evaporator thermostats and defrosting timers. Include coils, receivers, compressors, motors, and motor starters, mounting bases, vibration isolation units, fans, dryers, valves, piping, insulation, gauges, winter control equipment and complete automatic control system.
 - 3. Refrigerant: Pre-charge units with type or types recommended by manufacturer for services indicated, with quick-disconnect type connections only where specified, ready to receive refrigerant piping runs to evaporators and (where remote) to condensers. All refrigerant and associated components to comply with the requirements of the Montreal Protocol Agreement. No CFC or HCFC refrigerants or associated components will be permitted on this Project. HFC refrigerants and components are to be used. Contractor is responsible for coordinating these requirements with manufacturers.
 - 4. Foodservice equipment items included in this Section, with remote refrigerated systems, are to include interconnecting refrigeration lines, sizing, and insulation between components, as per manufacturer's installation instructions, and as determined by this Contractor's Certified Refrigeration Sub-Contractor; and only after a thorough examination of actual site conditions and obstacles which might affect the routing. Routing should be as direct and short as possible and practical. Refer to additional requirements listed in this Section 114000, 1.5 Laws, Ordinances and Standards.

-
5. The minimum outdoor operating ambient temperature for design of units is -10 degrees Fahrenheit (-23 Centigrade), or lower as applicable for extreme low local conditions. The maximum indoor design temperature for operation of compressor units is 95 degrees Fahrenheit (35 Centigrade). The maximum outdoor ambient design temperature is to be determined by Contractor with prevailing conditions at mounting location of compressor, such as sun exposure, limited ventilation, high fences/walls, roof color and materials, local climatic extremes, etc.; but in no case is it to be less than 100 degrees Fahrenheit (37.8 Centigrade).
 6. All refrigeration systems with remote condensing units and jobsite installed interconnecting refrigeration lines shall be tested to verify that there are no leaks. Leak testing shall be equal to or better than a professionally recognized 48-hour minimum, pressure holding test. If any leaks are detected, they shall be repaired and another leak test preformed; until there are zero leaks detected. A written report of the type test preformed, and a step-by-step record of the procedure and readings shall be submitted to Contractor for inclusion in the Operations and Maintenance Data Manuals.
- B. Components:
1. Coils for fabricated refrigerators to have vinyl plastic coatings, stainless-steel housings; and be installed in such a manner as to be replaceable.
 2. Provide guards for all refrigeration/freezer fans, with maximum 1/2" (13 mm) mesh.
 3. Remote refrigeration system to be complete with thermostatic expansion valves at the evaporator.
 4. Fabricated refrigerated compartments to be fitted with flush dial thermometers, with chrome plated bezels. Thermometers to be adjustable and shall be calibrated after installation. Thermometers to have an accuracy of ± 2 degrees Fahrenheit (1 degree Centigrade).
 5. Hardware:
 - a. Refrigerator hardware for fabricated refrigerator compartments to be heavy-duty components.
 - b. Self-closing hinges.
 - c. Latches to be magnetic edge mount type, unless specified or detailed otherwise.
 6. Doors and drawers for walk-in coolers/freezers, and reach-in refrigerated compartments, both fabricated and standard, to be fitted with cylinder locking type latches, and provided with master keys.
 7. Provide and install shut-off valves and service port for each compressor, manifold or header, and refrigerated fixture for multiplex and parallel installations to enable service personnel to service one (1) fixture while other fixture(s) connected to the same compressor can continue to operate. Isolation valves for individual fixtures based upon the sizes of the individual pieces.
 8. Drawers for refrigerated fabricated compartments shall be complete with heated surround at closing perimeter.
- C. Cold Pans: Ice pans, refrigerated pans and cabinets to be provided with breaker strips, where adjoining top or cabinet face materials, to prevent transfer of cold.
- D. All mechanically cooled custom fabricated or standard buy-out refrigerators with openings in the top for cooling pans, and/or all built-in or drop-in mechanically cooled cold pans are to comply with and be listed by NSF Standard #7. Contractor is to verify that the specified unit complies with this requirement.

- E. Ventilation of Refrigerated Equipment:
1. Adequate ventilation to be provided for custom fabricated equipment with integral refrigeration condensing units, both built-in and drop-in. If flow-through ventilation cannot be provided, provide flow direction partitions and an additional squirrel fan(s) capable of cooling the condensing unit.
 2. If, in the opinion of the Contractor, additional room ventilation is required to ensure correct operating temperatures of standard buy-out, custom fabricated, or remote refrigeration condensing units, or compressor rack assemblies, they are to so state in a letter to the Architect, for evaluation and decision.

2.8 REMOTE REFRIGERATION SYSTEMS

- A. All remote refrigeration systems shall be furnished and installed by one contractor, unless otherwise specified. Provide all components necessary for a complete and operable system. System to be fully capable of satisfying the refrigeration requirements for each fixture as defined by the manufacturer of each fixture.
- B. Compressor and Condensing Units:
1. Units shall be factory assemblies complete with hermetic units below 1 HP, semi-hermetic units 1 HP and larger, air or water-cooled condenser, depending upon building conditions and specifications, high-low pressure controls, suction accumulator on low temperature system, sight glass, liquid line dryer, suction and discharge service valves, liquid receiver, and electric control panel. The electrical control panel shall be furnished with magnetic motor starter, defrost timer clock, and contractors in accordance with "Refrigeration Schedule". Compressor capacities shall be based on Air Conditioning and Refrigeration Institute (A.R.I) Standards. The refrigerant for medium and low temperature fixtures to be CFC free and conform to the Montreal Protocol Agreement.
 2. Capacities shall be based on the following:
 - a. Compartment temperature and evaporating temperature greater than 32°F (0°C) 18 to 20 hours operations.
 - b. Compartment temperature greater than 32°F (0°C) and evaporating temperature less than 32°F (0°C) 16 hours operation.
 - c. Compartment temperature and evaporating temperature less than 32°F (0°C) 18 hours operation.
 3. Condensing units shall be mounted on a steel base to affect a quiet operation. All rotating parts to be carefully balanced for minimum vibration and lubricated with forced or splash oil system. Receiver shall be sized for a complete pump down of the system and shall be shell type with fusible plug.
 4. Compressor units to be provided with suction and discharge back setting type service valves and standard machinery finish.
 5. Motors shall be single speed, maximum 1750 R.P.M. compound wound ball bearings or sleeve bearing. Double squirrel cage motors with high starting torque set and low starting current to be used in a 3-phase application.
 6. All machines to be equipped with quick acting type high-low pressure control switches having adjustable range and differential and high-pressure cut-out. Cut-out to be automatic reset type.
 7. For air-cooled units the condenser shall be a standard manufactured part of the equipment. Condensing temperatures shall be based upon (100°F 38°C) ambient air.

-
8. Other components and accessories, such as suction filter and crank case heater shall be furnished when specified in the itemized specifications.
- C. Motor Starters-Contactors:
1. All single-phase motors shall be provided with mounted and internally wired contactors, except where pre-wired units are furnished without contactors. Single phase compressors shall be provided with built-in thermal and electrical overload protection.
 2. All three-phase motors shall be provided with magnetic type starters with quick trip overload elements matched for motor amperage except where overload protection is built into the compressor motor and the manufacturer supplies a contactor instead of a starter. Overload heater element shall be sized according to manufacturer's recommendations. Compressor motor starters shall be definite purpose starters with manual reset.
 3. Starters shall be installed upon surfaces free from excessive vibrations.
 4. Where starters are required for installation in a motor control center, make and model of control center shall be verified, and starters provided to match.
- D. Oil Separator
1. Provide oil separators, except when Compressor Manufacturer requires otherwise, 34°F, (1°C) and below and install as near as possible to the compressor. The return line shall be connected to the top of the crankcase above the oil level. Where compressor does not have connection for oil return line from separator, connect to a tee in the suction line adjacent to the compressor. Exposed oil return line to be provided with shut-off valve of the packless stem type.
- E. Compressor Rack Systems:
1. Racks shall be of the number of tiers and quantity to accommodate the number of condensing units specified for each rack assembly and allow for service clearance and ventilation. Review and confirm access into building or housing requirements to roof top locations.
 2. Racks shall be fabricated with structural steel of size and quantity to properly support the equipment to be installed on the rack. In special applications where building access is limited, construct rack framing with Dexion of Unistrut material.
 3. Racks shall be all welded construction with welds ground smooth.
 4. After completion of fabrication the complete rack shall be cleaned, primed and painted with top quality oil-base enamel.
 5. Each rack shall be equipped with a pre-wired receptacle.
 6. Racks shall be pre-wired to a circuit breaker panel and pre-plumbed to a header (when specified water cooled) requiring a single point electrical and plumbing connection.
 7. Racks shall have UL or equivalent approval.
 8. Special Conditions: For custom built racks for individual condensing units provide Dixon Angle Iron.
- F. Coils and Cooling Units:
1. Units shall be direct expansion type of size and design to effect required temperature, humidity and to suit application intent.
 2. Units shall be hung from the ceiling with 1/2" (13 mm) nylon rods with plated steel nuts and lock washers. Rods shall extend through ceiling to bracing adequate for the suspended weight. Bracing shall be furnished as required; penetrations shall be sealed and trimmed with escutcheon plates.

-
3. Units shall be installed tight to ceiling. All installations adjacent to walls shall be set out a minimum distance conforming to manufacturer's directions, to ensure proper air circulation and performance.
 4. Units with fan or blower and motor shall have thermal overload protection and be wired as indicated in "Refrigeration Schedule".
 5. Defrost cycle shall be based on the following:
 - a. Coils for 32°F (0°C) and lower shall have an electric defrost controlled by a time clock mounted on the compressor rack or at evaporators locations inter-wired by Division 26 - Electrical.
 - b. Coils for 33°F (0.6°C) and 34°F (1°C) shall have an air defrost controlled by a time clock mounted on the compressor rack or at evaporators locations inter-wired by Division 26 - Electrical.
 - c. Coils for temperature above 34°F (1°C) shall have an air defrost in the off cycle controlled by proper sizing of the coil and the compressor.
 6. Location of coils shall be coordinated with shelving and floor sink locations.
 7. All coils for fabricated refrigerators and/or freezers shall be installed for accessibility and replacement.
- G. Penetration Sleeves and Plates:
1. Service line penetrations of insulation to accommodate electrical conduit, refrigerant and drain lines shall be limited to a minimum with service stubbed through insulation or locations predetermined by respective divisions.
 2. Where service lines penetrate insulated walls, the opening shall be packed with caulking, before trimming with escutcheon plate.
 3. Where service lines penetrate building walls outside of foodservice areas, the opening shall be packed with "Perma-Gum" and foam caulking.
 4. All exposed ends of sleeves, both inside and outside of compartments, are to be trimmed with 24-gauge stainless-steel escutcheon plates, furnished as blanks in which respective work divisions shall cut required line holes and install.
- H. Refrigerant Piping:
1. Copper tubing for refrigerant piping shall conform to ASTM standard specifications, serial designation B-88. All piping shall be type "L" ACR hard copper or cleaned and sealed soft type "L" tubing, dry seal or equal as indicated. Forged or wrought copper fitting with sweat or soldered joints shall be used.
 2. Tubing shall be cut only with a tube cutter and sized with a sizing tool.
 3. Piping shall be exposed to view as required by the standard safety code for mechanical refrigeration.
 4. The liquid suction lines from condensing units to coil shall be sized and run as shown on the "Refrigeration Schedule" and Refrigeration Drawings.
 5. Piping run within cold storage rooms shall be finished with aluminum paint.
 6. For exposed areas, accessible furred ceiling spaces and in walls or excavated trench type installations, hard copper tubing shall be used. Exposed tubing shall be run in a manner to preclude damage by activities in the area; or shall be protected by conduit, furnished, and installed as part of this contract. Conduit shall have water evacuated and both ends completely sealed.
 7. For piping run in conduit through inaccessible areas, such as under slab on grade, continuous one-piece soft copper tubing shall be used with no joints. In lieu of large piping in conduit, especially vertical runs, random lines may be used; carefully fabricated and assembled to ensure equal pressure drop.
 8. Ends of lines shall be capped to prevent contamination and opened only at time of final connection.

-
9. Suction lines shall be sized for a maximum pressure drop from evaporator to compressor 2 lbs. (0.9 kg.) for high and medium temperature systems, and of 1 lb. (0.45 kg.) for low temperature systems and shall allow gas velocities of not less than 750 FPM (3.8 M/sec.) in horizontal runs and 1500 FPM (97.6 M/sec.) in vertical risers. Liquid lines shall be sized for a maximum pressure drop of 3 lbs. (1.36 kg.) from receiver to evaporator.
 10. Tubing runs shall be graded or pitched to prevent trapping of oil. Suction lines shall pitch 1/2"/10"-0" (13 mm/2.54 m) minimum.
- I. Joints and Connections:
1. Fittings shall be long radius wrought copper only as manufactured by Mueller Brass Company or equal.
 2. Vertically run suction lines shall have one piece of manufactured oil "P" traps. Line to be sized for proper velocity for oil return to compressor(s).
 3. 1/8" NPT by 1/4 fl. half union for all suction and discharge service valves with 1/4 fl. cap.
 4. Reduction in piping size shall be made with a manufactured reducer coupling.
 5. Flare nuts shall be short forged or frost-proof.
 6. All surfaces to be joined must be prepared and cleaned. When soldering stop or solenoid valves, wrap valves with moist fabric to absorb excessive heat. Stop valves shall be partly open. When soldering expansion valves or pressure regulating valves, remove power assembly, if necessary, to prevent damage by excessive heat.
 7. Copper joints shall be made with Handy & Harmon "Sil-Fos" brazing alloy, "Phoson 15", "Silvaloy 15" or equal; melting point of 1185-1350°F; (640°C. - 732°C.) Silver content not less than 15%.
 8. Copper to brass joints shall be made with Handy & Harmon "Easy Flo 45" brazing alloy "Silvaloy 45", "Mueller 122" or equal; melting point of 1125-1145°F, (607°C. - 618°C.) silver content not less than 45%.
- J. Hangers and Supports:
1. For all piping not run within conduit, provide adjustable hangers, anchors or straps as required. Hanger spacing shall not exceed 8'-0".
 2. Insulated copper piping shall be provided with approved type sleeves at hanger points.
 3. All insulated copper piping shall be isolated from supports by means of felt wrapping or with "Trisolater" by Semco or approved equal.
 4. Vertical piping shall be supported at intervals with spring type hangers or a substantial pipe at case of the pipe. All horizontal pipe runs connected to vertical risers must be adequately supported.
 5. For suspended conduit, support shall be by means of hanger permitting screw adjustments. Sufficient hangers shall be used to provide support, allow expansion, and limit vibration.
- K. Piping Sleeves:
1. Coordinate sleeves provided by the General Contractor through walls which allow for fully insulated lines. Extend sleeves entirely through wall and dress each end with a chromium plated wall plate neatly fitted against the wall, securely fastened and sealed in place. All sleeves through wall shall be of standard weight steel pipe.
 2. Piping lines and sleeves at wall or floor penetrations shall be caulked and made vermin-proof at all locations.

-
- L. Piping Insulation:
1. Suction lines run in conduit shall be insulated according to ambient and humidity conditions to prevent condensation and freezing.
 2. Refrigeration suction lines outside of refrigerated compartments, not run in conduit, shall be insulated back to compressors with Armstrong Armaflex AP foamed plastic insulation or as determined by code. Thickness of material shall suit service, ambient and humidity conditions, to prevent condensation, minimum thickness 1/2" (15 mm.).
 3. Freezer Storage Room drain lines should not be extended through adjacent cooler compartments if at-all possible. All such lines shall be insulated with 1/2" (15 mm) minimum thickness of Armstrong Armaflex AP foamed plastic insulation to prevent condensation. Carefully seal end of insulation tight against freezer wall surface.
 4. Piping for cooling water services or refrigerant piping exposed to freezing ambient temperatures shall be insulated with 1/2" (15 mm) minimum thickness of Armstrong Armaflex AP foamed plastic insulation. Paint exterior installation with Armaflex paint.
 5. Thickness of material shall suit service, ambient and humidity conditions to prevent condensation.
 6. Joints shall be sealed with Armstrong 520 adhesive. Insulation shall be continuous through clamps. Provide additional insulation where suction lines must be run within 12" (304 mm) or less of water or underground waste lines.
 7. Exterior-run piping shall be insulated as per above and covered with stainless-steel channels secured to structure, sealed to be weather-proof.
- M. Heat Interchangers:
- All blower controls, unit coolers, plate type evaporators and other evaporators where specified, are to be provided with heat interchangers, with a capacity to match the condensing unit.
- N. Temperature Control:
1. Temperature control of cold storage rooms shall be by line voltage thermostats operating liquid line solenoids.
 2. Temperature control for remote normal temperature refrigerator shall be by low pressure switch setting.
 3. Temperature in each cold storage room compartment shall be controlled by electric thermostat, Ranco No. 010-1408, located within compartment and sensing element positioned to avoid fan discharge air stream.
 4. Contractor to coordinate any additional specified temperature control/monitoring/alarm system within this document set including assisting with coordination of home-run control wiring, wireless assembly coordination and HACCP requirements in terms of reporting.
- O. Valves and Accessories:
1. All valves and controls shall be standard weight and suitable for service purpose intended, and subject to approval by the Designer.
 2. Provide shut-off valves and service port for each refrigerated fixture for multiplex installations to enable service personnel to service one (1) fixture while other fixture(s) connected to the same compressor can continue to operate.
 3. Each system shall include condensing unit with standard valving, refrigerant piping, refrigerant, evaporator(s), liquid and suction line isolation valves within 5'-0" (1500 mm) of evaporators, thermostatic expansion valve for evaporator, heat exchanger, filter-dryer, liquid line solenoids for Cold Storage Rooms and liquid indicator.
 4. Vibration eliminators on compressor suction and discharge lines, size same as piping, as manufactured by Anaconda.

5. Refrigerant shut-off valves shall be as manufactured by Henry or Superior Valve Company. Valves shall be placed and in liquid line for each condensing unit and in each liquid line to each evaporator.
6. Expansion valves shall be Sporlan, or approved equal, furnished, and installed in the liquid line at the evaporator, unless provided with manufactured equipment. External equalizer expansion valves shall be provided for coils fitted with refrigerant distributor.
7. A Sporlan, or approved equal, drier shall be provided at the compressor. Up to 3HP shall be a Catch-All series; larger than 3HP shall be angle replaceable cartridge series or approved equal.
8. Each liquid line sight glass shall be Sporlan "See All" moisture and liquid indicator and shall be full line size or approved equal.
9. Solenoid valves shall be Sporlan, or approved equal, line voltage, manual lift stem type, to operate at maximum of 2 lbs. (0.9kg.) pressure drop across the valve. Valves shall be full line size, using silver solder connection as applicable. A liquid line solenoid, normally closed, shall be used with temperature controller for each Cold Storage Room compartment coil on a system.
10. Include a suction line filter with access valve adjacent to compressor. Filter shall be a Superior "F" Series or equal.
11. EPR, CTR, and/or CDA valves shall be Alco, or Sporlan, or approved equal.
12. Suction accumulators shall be Refrigeration Research 3700 series or Virginia VA series, or approved equal.
13. Discharge line mufflers shall be Refrigeration Research M-10 and M-15 or AC and RSS- 6300 series or approved equal.
14. Time clocks shall be Paragon or approved equal.

P. Drain Lines:

1. Type "L" copper coil drain lines extended to exterior of refrigerated compartments over floor sinks (drain) with "S" traps at termination ends.
2. Provide clean out "T" and cap at each change of direction in the lines. Provide individual drain lines for each coil unless otherwise specified. Drain lines shall be run tight to refrigeration compartment walls with minimum pitch of 2" per foot.
3. Drain lines inside low temperature compartments shall be equipped with drain-line heaters provided by and wired by electrical division. Freezer Storage Room drain lines should not be extended through adjacent cooler compartments if at all-possible. (Drain line in low temp compartment to be insulated with Armaflex ½" (13 mm) – insulation and wall fastening by the foodservice equipment contractor).
4. Drain lines on the exterior of refrigerated compartment shall be painted with chrome tone paint and shall be trapped to disallow ambient air infiltration into refrigerated cavity.

Q. Refrigerant/Compressor Oil Reclaim:

1. For existing refrigeration systems which may be reused, abandoned or where site conditions warrant, the system(s) refrigerant, oil and/or other components shall be reclaimed and contained by certified personnel in conformance to Refrigerants and Hazardous Waste criterion as specified by the Environmental Protection Agency and/or Montreal Protocol Guidelines & Requirements.

2.9 MISCELLANEOUS MATERIALS AND FABRICATION:

- A. Nameplates: Whenever possible, locate nameplates and labels on manufactured items, in accessible position, but not within customer's normal view. Do not apply name plates or labels on custom fabricated work, except as required for compliance with governing regulations, insurance requirements, or operator performance.

- B. Manufactured Equipment Items: Furnish items as scheduled or herein specified. Verify dimensions, spaces, rough-in and service requirements, and electrical characteristics, before ordering. Provide trim, accessories and miscellaneous items for complete installation.
- C. Insert Pans:
1. General: Cut-outs, openings, drawers, or equipment specified or detailed to hold stainless-steel insert pans to be provided with a full complement of pans as follows:
 - a. One (1) stainless-steel, 20-gauge (1 mm) minimum, solid insert pan – in us pan size or gastronorm configuration as specified for each space, sized per plans, details, or specifications.
 - b. Where pan sizes are not indicated in plans, details, or specifications, provide one full-size pan for each opening.
 - c. Provide maximum depth pan to suit application and space.
 2. Provide 18-gauge (1.3 mm) NSF- approved removable stainless-steel adapter bars where applicable.
 3. All cut-outs and openings, or equipment specified or detailed to hold stainless-steel insert pans, shall be provided with a hinged stainless-steel removable night cover.
- D. Tray Slides: Before fabrication of counters with tray slides, verify:
1. Size and shape of tray with Owner/Operator prior to fabrication. Edge of tray should not overhang outer support/slider by more than 2" (50 mm). If edge of tray exceeds this dimension, notify Architect, in writing, for evaluation and adjustment, if necessary.
 2. Configuration of corners, turns, and shape of tray slides for proper support and safe guidance of trays.
 3. Tray slide to be capable of supporting 200 pounds per linear foot (298 kgs/meter), live load.
- E. Self-leveling dispensers: Verify type, make dimensions and weight of ware with Owner/Operator; and submit to the dispenser manufacturer, for proper sizing and calibration of dispensers.
- F. Carbon dioxide (CO²) equipment: Where equipment requires connection with compressed CO² cylinder for operation, provide 2-cylinder manifold and control system (integral with equipment) with proper connectors for Department of Transportation (DOT) approved type cylinders, complete with cylinder safety devices and supports. Applicable to projects with CO² equipment included in Contractor's specified equipment.
- G. Reasonable quietness of operation of equipment is a requirement, and Contractor will be required to replace or repair any equipment producing out-of-the-ordinary intolerable noise. This also includes providing and installing bumpers and gaskets for doors and drawers on fabricated and standard manufactured items and sound insulation where feasible.
- H. Gas pressure regulator: All gas fired equipment included with this Section is to be provided with a gas pressure regulating valve with a built-in vent limiting device sized per WC pressure rating of this project. Contractor is responsible for coordinating this requirement with their manufacturers and suppliers.

PART 3 – EXECUTION

3.1 SUPERVISION:

- A. A competent supervisor, representing the Contractor, is to be present at-all times during progress of the Contractor's work.

- B. Contractor is responsible for coordinating with all applicable Design Team members, Key Ownership Stakeholders Assigned, General Contractor, other Contractors and/or Sub-Contractors and Trades involved in this Project and associated with any items or work provided under this Section; as required for the successful provision, installation, completion, and functioning of these items and/or work, and the Project in general. This is to include, but not be limited to, exchange of shop drawings, details, and manufacturer's information, supplying templates or actual components to be installed in or on items provided by other Sections, for coordination; and coordinating with and between their own internal staff, sub-contractors, trades, manufacturers, fabricators, and installers, for compliance with the Contract Documents.
- C. Contractor responsible for obtaining any documents referenced in this Section and on any associated drawings, which contain information relative to the performance of this Contract; and disseminating and coordinating the pertinent information contained in them, with the appropriate sub-contractors, manufacturers, fabricators, and/or installers.
- D. Contractor is to take every precaution against injuries to persons or damage to property.
- E. Contractor is to store his apparatus, materials, supplies and equipment in an orderly fashion at the site of the work so it will not unduly interfere with the progress of his work or the work of any other contractors.

3.2 SITE EXAMINATION:

- A. Verify site conditions under the provisions of the General Conditions, Supplementary Conditions, and applicable provisions of Division 1 Sections. Notify the Architect, in writing, of unsatisfactory conditions for proper installation of foodservice equipment.
- B. Verify wall, column, door, window, and ceiling locations and dimensions. Fabrication and installation should not proceed until dimensions and conditions have been verified and coordinated with fabrication details.
- C. Verify that wall reinforcement or backing has been provided and is correct for wall supported equipment. Coordinate placement dimensions with wall construction Section.
- D. Verify that ventilation ducts are of the correct characteristics, and in the required locations.
- E. Verify that utilities are available, of the correct characteristics, and in the required locations.

3.3 DELIVERY AND INSTALLATION:

- A. Delivery:
 - 1. The equipment shall be delivered and installed on schedule. Coordinate all work with the General Contractor and other divisions as required.
 - 2. Deliver materials (except bulk materials) in manufacturer's containers, fully identified with manufacturer's name, trade name, type, class, grade, size, color, item number, area, etc.
 - 3. Contractor is responsible for receiving and warehousing equipment and fixtures, until ready for installation. Store materials, equipment, and fixtures in sealed containers, where possible. Store off the ground and under cover, protected from damage.
 - 4. Contractor to verify and coordinate conditions at the building site, particularly door and/or wall openings, and passages, to assure access for all equipment. Pieces too bulky for existing facilities are to be hoisted or otherwise handled with apparatus as required.

-
5. Extra charges resulting from special handling or shipment to be paid by the Kitchen Equipment Contractor if insufficient time was allowed in placing factory orders to ensure normal shipment.
- B. The work to be accomplished so as not to delay the project construction schedule, interfere, or conflict with the work being performed by other contractors. Work to be coordinated and integrated to prevent conflict of work necessitating changes to work already completed. Sequence installation and erection to ensure correct mechanical and electrical utility connections are achieved.
- C. Verify all field dimensions before fabrication.
- D. Install items in accordance with manufacturer's instructions.
- E. Set each item of non-mobile and non-portable equipment securely in place, leveled and adjusted to correct height. Anchor to supporting substrate where indicated, and where required for sustained operation and use without shifting or dislocation. Conceal anchorages wherever possible. Adjust counter tops and other work surfaces to a level tolerance of 1/16" (1.6 mm) (maximum offset, and plus or minus on dimension, and maximum variation in 24" (610 mm) run from level or indicated slope). Provide anchors, supports, bracing, clips, attachments, etc., as required to comply with the local seismic restraint requirements. The Guidelines for Seismic Restraint of Kitchen Equipment, as prepared for the Sheet Metal Industry Fund of Los Angeles and endorsed by S.M.A.C.N.A., is to be followed.
- F. Complete field assembly joints in the work (joints which cannot be completed in the shop) by welding, bolting-and-gasketing, or similar methods as indicated and specified. Grind welds smooth and restore finish. Set or trim flush, except for "T" gaskets as indicated. Field joints shall not be visible to the untrained eye.
- G. Provide closure plates and strips where required, with joints coordinated with units of equipment.
- H. Provide sealants and gaskets all around equipment to wall, ceiling, floors, masonry pads, and adjoining units not portable and with enclosed bodies to make joints airtight, waterproof, vermin-proof, and sanitary for cleaning purposes. Space between all equipment to wall, ceiling, floors, masonry pads, and adjoining units not portable and with enclosed bodies to be completely sealed against entrance of food particles or vermin by means of trim strips, welding, soldering or mastic. Mastic to be General Electric Silicone Construction Sealant Series SE1200 or equal in appropriate color.
- I. Joints up to 3/8" (9.5 mm) wide, to be stuffed with backer rod, to shape sealant bead properly, at 1/4" (6 mm) depth.
- J. At internal corner joints, apply sealant or gaskets to form a sanitary cove, of not less than 3/8" (9.5 mm) radius.
- K. Shape exposed surfaces of sealant slightly concave, with edges flush with faces of materials at joint.
- L. Provide sealant filled or gasketed joints up to 3/8" (9.5 mm) joint width. Wider than 3/8" (9.5 mm), provide matching metal closure strips, with sealant application each side of strips. Anchor gaskets mechanically, or with adhesives to prevent displacement.

-
- M. Treat enclosed spaces, inaccessible after equipment installation, by covering horizontal surfaces with powdered borax at a rate of 4 ounces per square foot (1.2 kg/m²).
- N. Insulate to prevent electrolysis between dissimilar metals.
- O. Cut and drill components for service receptacles, fixtures, piping, conduit, fittings, etc. as required. Grind and polish penetrations to safe tolerance. Work to include welded sleeves, collars, ferrules or escutcheons.
- P. Verify and coordinate the mounting heights of all wall shelves and equipment, with equipment located below them, for proper clearances.
- Q. Walk-In Refrigerator/Freezers:
1. The cold storage rooms shall be delivered and installed on schedule by factory supervised and approved installers. Coordinate the work with the General Contractor and other trades as necessary.
 2. Provide the necessary job site coordination with the various trades to ensure job site conditions will meet the requirements of the cold storage rooms.
 3. During curing and cleaning of the wearing floors inside the cold storage rooms, the cold storage room doors shall be left open and the rooms well ventilated to prevent damage to the interior. "Keep Out" signs to be posted at each open door.
 4. After the installation of the cold storage rooms and prior to the installation of the wearing floor has cured, the cold storage room doors are to be closed and locked.
- R. Coordinate with the Plumbing and Electrical Divisions and provide penetrations in foodservice equipment for plumbing and electrical service to and through the fixtures, as required. This includes welded sleeves, collars, ferrules, or escutcheons. These services are to be located so that they do not interfere with intended use and/or servicing of the fixture.
- S. All equipment provided by this Section, that requires light bulb(s), are to be provided with heavy-duty, energy efficient, extra long-life bulbs with a minimum life expectancy of 5000 hours, and as required by the local Jurisdictions. All light bulbs in and/or above foodservice equipment and/or areas are to be coated or provided with shields in compliance with local health codes.
- T. All equipment provided by this Section, shall include any-and-all parts, components, options, accessories, etc. necessary to provide a completely functional item for its intended use under normal conditions; and if appropriate, after the final utility connections are completed by other Divisions. This shall generally apply to equipment such as soda systems, beer systems, and remote refrigeration systems, any type of remote system or equipment, or ice machines; but shall also apply to any equipment provided by this Section.
- 3.4 COUNTERTOP INSTALLATION:
- A. General: Install countertops, except for vanities, over plywood sub-tops with a full spread of water-cleanable epoxy adhesive.
- B. Install components plumb, level and rigid, scribed to adjacent finishes, in accordance with approved shop drawings and product data.
1. Tops:
 - a. Flat and true to within 1/8" (3 mm) of a flat surface over a 10' length.
 - b. Allow a minimum of 1/16" (1.6mm) to a maximum of 1/8" (3mm) clearance between surface and each wall.

-
- C. Fit countertops around projections and to adjacent construction. Smooth and clean field cut edges. Ensure that trim will completely cover cut edges.
 - D. Bond seams with stone seam adhesive and draw tight as countertops are set. Mask areas of countertops adjacent to seams to prevent adhesive smears. Use clamps to ensure countertop units are properly aligned and seams are minimum width.
 - E. Complete cutouts not finished in shop. Mask areas of countertops adjacent to cutouts while cutting to prevent damage.
 - F. Install backsplash and end splash by adhering to wall with water-cleanable epoxy adhesive.
 - G. Leave 1/16-inch (1.6mm) gap between countertop and splash for filling with sealant. Use temporary shims to ensure uniform spacing.
 - H. Heat isolation for hot food wells, heated deck and other drop-in heated equipment.
 - 1. Three (3) layers of Nomex insulation held in place with aluminum tape.
 - 2. 16-gauge stainless-steel collar.
 - 3. Heat resistant, food safe silicone caulking.
 - 4. Provide a 1/8" (3 mm) minimum space between the heat source and the insulation.
 - I. Apply sealant to seams and to gap between countertops and splashes; comply with Section 07 92 00 (07920) "Joint Sealants."
 - J. Countertop Adjusting and Cleaning:
 - 1. Remove and replace or repair stonework of the following description:
 - a. Broken, chipped, stained, or otherwise damaged stones. Broken, chipped, stained, or otherwise damaged stone may be repaired, providing the methods and results are acceptable to Owner's Representative.
 - b. Defective joints.
 - c. Stones and joints not matching approved samples.
 - d. Stonework not complying with other requirements indicated.
 - 2. Replace in manner that results in stonework matching approved samples and field-constructed mock-ups, complying with other requirements, and showing no evidence of replacement.
 - 3. Clean stone countertops not less than six days after completion of work, using clean water and stiff and soft rags. Do not use wire brushes, acid-type cleaning agents, cleaning compounds with caustic or harsh fillers, or other materials or methods that could damage the stone.
 - K. Countertop Sealer Application:
 - 1. All surfaces must be clean and free from all loose grit and debris, satins, dirt, and wax coatings. Surfaces shall remain dry for a minimum of 24 hours before the application of sealer and remain dry for 24 hours after the application of sealer.
 - 2. Floor surface temperature must be above 50° F. and below 90° F.
 - 3. Test on a small area before using to determine if the product is acceptable with type of stone.
 - 4. Two (2) uniform coatings of sealer shall be applied before or after installation of stone materials. If prior to installation, adequate documentation shall be included with the material confirming it has been sealed. If after installation, install in strict accordance with Sealer manufacturer's recommendations.

3.5 PROTECTION OF WORK:

- A. Use all means reasonable to protect the materials of this Section against theft and damage before, during, and after installation; and to protect the associated work and materials of the other trades.
- B. Fabricated fixtures: cardboard, fiberboard or plywood taped to tops and exposed body panels/components.
- C. Manufactured Equipment: cardboard, fiberboard or plywood taped as required by equipment shape and installation-access requirements.
- D. Prohibited use of equipment includes tool and materials storage, workbench, scaffolding and stacking of construction materials.
- E. Damaged Equipment: immediately document and submit to Owner with Contractor's recommendation of action for repair or replacement and its impact on the Project Schedule and Contract Amount.
- F. Pre-fabricated walk-in coolers/freezers are not to be used as general storage; and should be locked before leaving the site daily. Damage and theft resulting from failure to secure units will be repaired or replaced at Contractor's expense.

3.6 ADJUSTING:

- A. Equipment to be tested for leaks, poor connections, inadequate or faulty performance.
 - 1. Thermostatically controlled equipment and equipment with automatic features shall be operated for 14 days to prove controls are functioning as intended. Walk-in refrigerators and freezers shall be turned on and ran for a minimum of fourteen days.
- B. Refrigeration equipment to run a minimum of three days duration before acceptance.
- C. Lubricate and adjust drawer slides, hinges, casters.
- D. Adjust pressure regulating valves, timed-delay relays, thermostatic controls, temperature sensors, exhaust hood grilles, etc.
- E. Clean or replace faucet aerators, line strainers.
- F. Repair, adjust or replace equipment, which is found to be defective in its operation, including units which are below capacity or operating with excessive noise or vibration.

3.7 CLEANING, RESTORING AND REPAIRING:

- A. After completion of installation, and completion of other major work in foodservice areas, remove protective coverings and clean foodservice equipment, internally and externally. Repair all damage as a result-of this installation.
- B. Restore exposed and semi-exposed finishes removing abrasions and other damages; polish exposed metal surfaces and touch-up painted surfaces. Replace work, which cannot be successfully restored.
- C. Polish glass, plastic, hardware and accessories, fixtures, and fittings.

- D. Wash and clean equipment and leave in a condition ready for the Owner to sanitize and use.

3.8 TESTING:

- A. Delay the start-up of equipment until service lines have been tested, balanced, and adjusted for pressure, voltage and similar considerations; and until water and steam lines have been cleaned and treated for sanitation.
- B. Contractor, with assistance from a factory-certified representative from the exhaust hood manufacturer, shall conduct an exhaust hood performance test for each exhaust hood in the Contractor's scope of work at the conclusion-of the project when all hoods and related cooking equipment are in operation. Contractor shall have manufacturer's factory authorized representative test and measure exhaust airflow rates, dampers, switches, demand control ventilation, and sequence of operation, with all appliances at operating temperatures. Contractor shall furnish a written report within ten (10) working days of substantial completion and acceptance of the project by the Owner, indicating the design requirements for each hood and the actual operating parameters as tested and measured.
- C. Refrigeration Piping Testing:
 - 1. Each system shall be pressure tested for leaks. Tests for to be on the high side and on the low side. All valves shall be fully open during last test.
 - 2. Tests are to be accomplished as follows:
 - a. Charge the systems with refrigerant through the port of liquid shut-off valves of the receivers to a pressure of 10 to 20 psi
 - b. Add dry nitrogen, the supply of which shall be equipped with a pressure regulating valve to provide the specified pressure.
 - c. Carefully test all joints for leaks using either a Halide torch or an electronic Halogen leak detector.
 - 3. Precautions to be taken to disconnect the low-pressure controls for protection of the bellows during testing.
 - 4. Refrigeration System Evacuation:
 - a. Evacuation shall be with a vacuum pump with an indicating gauge registering pressure in microns. Pump shall be connected to the system with a 5/8" (15 mm) O.D. line or larger.
 - b. Evacuate both high and low sides to 500 microns. Break the vacuum with refrigerant to 0 psi evacuate high and low sides to 100 microns; and then break vacuum to 0 psi. with the refrigerant to be used in the system.

3.9 START-UP AND INSTRUCTIONS:

- A. Make-arrangements for demonstration of foodservice equipment operation and maintenance, in advance with the Owner/Operator.
- B. Demonstrate foodservice equipment, to familiarize the Owner and the Operator on operation and maintenance procedures, including periodic preventative maintenance measures required. Include an explanation of service requirements and simple on-site service procedures, as well as information concerning the name, address and telephone number of qualified local source of service. The individual(s) performing the demonstration are to be knowledgeable of operating and service aspects of the equipment.
- C. Provide a written report of the demonstration, to the Owner, outlining the equipment demonstrated and malfunctions or deficiencies noted. Identify individuals present at demonstration.

- D. Final Cleaning: After testing and start-up, clean the foodservice equipment, and leave in a condition ready for the Owner to sanitize and use.
- E. All keys for all locks provided with equipment provided under this Section, are to be gathered up, individually tagged with the equipment they belong to, put into a single box, and handed over to the Owner's authorized representative. A list of the keys and their associated equipment Item numbers is to be provided with the O&M Manuals, along with a copy of the list, signed by the Owner's representative, acknowledging receipt of the keys.

3.10 CLEAR AWAY

- A. Throughout the progress of their work, Contractor is to keep the working area free from debris and remove rubbish from premises resulting from work being done by them. At the completion of their work, Contractor is to leave the premises in a clean and finished condition.

3.11 EXISTING EQUIPMENT TO BE USED AFTER COMPLETION OF CONSTRUCTION:
(Applicable only to projects with existing equipment to be used after completion of construction.)

- A. Within ten working days of award of contract Contractor is responsible for identifying and recording by means of a spreadsheet with accompanying digital photography and heat-resistant tagging of all existing to remain or to be replaced in previous location or relocated equipment that will be used after completion of construction utilizing item numbers from received contract documents. If such equipment has been removed and relocated, contractor is still responsible for this identification and logging process. Contractor shall verify and coordinate specific equipment with these plans and specifications and verify same with the Owner, Architect and Foodservice Design Consultant. This includes items existing to remain or to be relocated, or to be removed, stored or refurbished and set back in place and used after completion of construction - and the associated work necessary - at the time of the signing of the Contract for the Foodservice Equipment section - and does not include any items added, changed, or damaged (by other than the Contractor) after the signing; except to the extent of work that would have been included with the original existing items. Contractor shall then remove such equipment to the agreed-upon storage location previously assigned and verified by the GC and Owner. Existing equipment to be re-placed in previous location or re-located and used after completion of construction shall be identified in both storage during construction location and intended final placement location on heat-resistant tag secured to unit by Contractor. Contractor shall also define critical clearances and utilities within this time frame including the testing of actual electrical, plumbing, mechanical values of any equipment without service or factory-applied serial numbered plates. When equipment is removed and re-located or placed back in original location, contractor is responsible for ensuring manufacturer-recommended clearances to walls and adjacent equipment, structural support needs, pour paths, correct MEP rough-in connection values and any applicable fire suppression and exhaust system protection.
- B. Remove from existing locations, clean, and renovate/refurbish as noted below, store and re-install existing equipment to be used after completion of construction, in the new locations as shown on plans ready for utility connections, as appropriate. Existing equipment to be used after completion of construction, with utility connections, to be removed after disconnection as noted in paragraph J, below.

-
- C. Perform work in cooperation with Owner, so that normal functioning of services is minimally interrupted. Coordinate all removal and replacement scheduling with the Construction Scheduling Manager (or similar responsible party), to ensure adequate time to complete the necessary work. If adequate time to properly relocate and reset the existing items and complete all cleaning and repair will not be available, due to continuing use of the existing items, or the allotted construction time; contact the Owner and obtain a written agreement as to what work is to be deleted or delayed, such as cleaning, repainting, or repairs.
 - D. All surface dirt, grease, oil, food residues, ingredients, extraneous matter and other soiling materials is to be removed in order to obtain minimum acceptable sanitation and foodservice standards. Thorough final rinsing of all cleaning agents to be at a minimum temperature of 180 degrees Fahrenheit (82.2 Centigrade) where possible without damage to equipment or controls. Otherwise, use USDA approved cleaning agents and/or cleaning agents, which are acceptable for use with commercial foodservice equipment. This includes all exterior surfaces of the existing equipment to be reused, and interior work surfaces such as inside oven compartments, fryer vats, ware washers, etc.
 - E. All painted items with major paint blemishes to be sanded, primed, and repainted to match the original color and type paint. Primer and paint to be of a type approved for use with commercial foodservice equipment. All controls, lights, view windows, non-painted parts, etc. to be protected as recommended by the Manufacturer. Minor paint blemishes can be touched-up in a professional manner. This work is to be included in the Bid Submittal, as a separate line cost, at the end of the Bid Submittal.
 - F. Replace and/or repair minor broken parts to produce a cleanable and functional item. Repairs and/or parts are for minor required items such as control knobs, handles, pilot lamps, belts, oil changes, minor adjustments, and recalibrations, etc. This does not include addition or replacement of any wearing components such as cutters, blades, etc.; or any accessory components such as mixer beaters, hooks, whips, etc., except for presently existing accessory components which are broken and non-functional, or as noted in the itemized specifications.
 - G. Where required by local code authorities, provide additional parts and/or modifications to comply with code requirements in place at the time of this project.
 - H. Where required, remove existing equipment to be used after completion of construction from the premises for repairs, alterations, and cleaning.
 - I. Refer to schedule on the Foodservice Drawings and to the Itemized Specifications at the end of this section for existing equipment to be used after completion of construction.
 - J. Disconnection of existing equipment to be relocated and/or existing equipment to be used in its found place after completion of construction and disconnection and removal/disposal of existing equipment that will not be used after completion of construction, is work as designated by the Architect, and not included in this Section. (See page 114000-2, 1.3.F.)

- K. Cost estimates for any repairs and/or parts more than the minor items stated above, or repairs requiring significant disassembling of the item, should be submitted to the Owner for consideration and approval as an addition to the Contract. In general, this would be considered as any repairs and/or parts amounting to an estimate up to 10% of the cost of a comparable new item. Any item, which would require repairs and/or parts amounting to an estimate up to 25% or more, should include an alternate cost for supplying a comparable new item as a consideration by the Owner, and an addition to the Contract. Estimates are for each existing equipment to be used after completion of construction only that require repairs and/or parts, and only to the extent that work is required; and should not be considered as a lump-sum estimate on all existing equipment to be used after completion of construction combined, or as an allowance for adding accessories or options.

3.12 ITEMIZED SPECIFICATIONS:

- A. Refer to the following pages for specific-information on each item included in this Section.

(Remainder of page left blank intentionally.)

Unified Government Memorial Hall Kitchen & Audio/Visual Renovations

Unified Government of Wyandotte County & Kansas City, KS

ISSUED FOR BID

ITEM #A1 SPARE NO.

ITEM #A2, A3, A3.1 BAG-N-BOX SODA RACK, CARBONATOR, WATER FILTRATION SYSTEM,
QTY ONE (1) N.I.K.E.C. - BY PURVEYOR/OWNER

ITEM #A4 CO2 TANK, QTY ONE (1) N.I.K.E.C. - BY PURVEYOR/OWNER

ITEM #A5 SODA SYSTEM CONDUIT ENTRANCE, QTY ONE (1) N.I.K.E.C. - BY EC

ITEM #A6 HOSE REEL WITH RECESSED CONTROL PANEL

Quantity: One (1)
Manufacturer: T&S Brass
Model: B-2339-7122C01J

Fabricate/Furnish and set in place per plans, details and the following:

1. Hose Reel Assembly, enclosed, 3/8" x 30' hose (rated to 300 PSI), flush mount stainless steel rinse control cabinet, adjustable hose bumper, loose key mixing valve with compression spindles, dual check valves, shut-off valve, 1.07 GPM spray valve with swivel, thermometer, water hammer arrestor, includes multi-fit bracket, 1/2" NPT female inlets.
2. Spray gun.
3. Control panel to be recessed in wall.

ITEM #A7, A7.1 POT SINK AND PRE-RINSE FAUCET

Quantity: One (1)
Manufacturer: Fabricated
Model: Stainless Steel

Fabricate/Furnish and set in place per plans, details and the following:

1. Pot sink, see plans for width, length, height, and configuration. Standard details are to be utilized as basic minimum guidelines only. Refer to these written specifications and any fabrication details included in the contract drawings for precise and complete fabrication instructions. Similar to standard details FSD1-4B, FSD1-5A, FSD1-7, FSD1-8, FSD1-10, FSD1-13, FSD3-1, FSD3-3 and FSD3-4.
2. Provide side splash where pot sink end meets wall or adjacent equipment.
3. Integral sinks to have three (3) rotary waste assemblies with overflows. Provide stainless steel waste lever brackets similar to standard detail FSD1-13.
4. T&S Brass Model B-0287-427-BC Big-Flow Pre-Rinse Unit, wall mount, 8" centers, 12" add-on swing nozzle, 4-arm handles, .65 GPM spray valve, 3/4" NPT, EPA Act 2005 compliant (B-0107-C).
5. T&S Brass Model B-0290-0427 Kettle & Pot Sink Mixing Faucet, wall mount, 8" adjustable centers, 12" Big-Flo swing nozzle with plain end outlet, 4-arm kitchen handles with color coded indexes, 00LL street elbows with 3/4" female NPT inlets, B-0427 supply nipple kits, ADA Compliant
6. Provide open base for a trash receptacle below the left drainboard.
7. Provide open base for a dishwasher below the right drainboard.

Unified Government Memorial Hall Kitchen & Audio/Visual Renovations

Unified Government of Wyandotte County & Kansas City, KS

ISSUED FOR BID

ITEM #A8 ROUND TRASH RECEPTACLE, 32 Gallon, QTY TWO (2) N.I.K.E.C. - BY OWNER

ITEM #A9 WALL FLASHING

Quantity: One (1)
Manufacturer: Fabricated
Model: Stainless Steel

Fabricate/Furnish and set in place per plans, details and the following:

1. Similar to standard detail FSD1-39. This standard detail is to be utilized as a basic minimum guideline only. Refer to these written specifications and any fabrication details included in the contract drawings for precise and complete fabrication instructions.
2. Provide 20 gauge stainless steel panels from top of coved base to ceiling. Cover walls on left, right, rear of pot sink, and on wall with hose reel.

ITEM #A10 TUBULAR WALL SHELF

Quantity: One (1)
Manufacturer: Fabricated
Model: Stainless Steel

Fabricate/Furnish and set in place per plans, details and the following:

1. Tubular wall shelf to be similar to standard detail FSD12-8A. This standard detail is to be utilized as a basic minimum guideline only. Refer to these written specifications and any fabrication details included in the contract drawings for precise and complete fabrication instructions.

ITEM #A11 CHEMICAL DISPENSING SYSTEM, QTY ONE (1) N.I.K.E.C. - BY PURVEYOR/OWNER

ITEM #A12 DISH MACHINE, UNDERCOUNTER (ALTERNATE #4)

Quantity: One (1)
Manufacturer: Champion
Model: UH330ADA

Fabricate/Furnish and set in place per plans, details and the following:

1. Dishwasher, undercounter, 24"W x 26-3/4"D x 29-7/8"H (ADA compliant), high temperature sanitizing, with Heat Recovery Condensate Removal, Dry Assist & StemsSure™ soft start to protect glasses & dishes from chipping & breaking, (30) racks per hour capacity, 120 second cycle, top mounted precise digital temperature display & Vari-cycle controls, 12"H door opening, stainless steel top & side panels, insulated booster & panels, detergent & rinse aid pumps, automatic drain cycle, pumped drain, built-in electric booster for 180°F final rinse water (standard 66°F/82°C rise), rinse sentry – extends the cycle time to ensure 180°F final rinse, (1) peg rack, (1) flat rack, 1 HP wash pump motor, Multi-Power – includes: Multi-Volt & Multi-Phase, NSF, cETLus, ENERGY STAR®.
2. 208-240v/60/1-ph, 3 wire plus ground.
3. Power cord kit.
4. Model 901259 Champion ION scale prevention system (unmounted) (1-HW only).
5. Drain water tempering kit (un-mounted)
6. Coordinate installation below pot sink drainboard.

ITEM #A13 CLEAN DISH STORAGE SHELIVING

Quantity: Three (3)
Manufacturer: Metro
Model: MetroSeal

Fabricate/Furnish and set in place per plans, details and the following:

1. Length, width and configuration per plan and verified room dimensions.
2. Super Erecta Metroseal 3 wire shelving. Corrosion-resistant finish, with Microban® antimicrobial protection.
3. 86" High with five tiers.
4. Each section shall be free-standing with four legs.
5. Each section to have two (2) #5MPpolyurethane swivel casters and two (2) #5MPB polyurethane casters with brakes.

ITEM #A14, A14.1, A14.2 ICE MACHINE, CUBE-STYLE WITH BIN AND WATER FILTRATION SYSTEM

Quantity: One (1)
Manufacturer: Manitowoc
Model: IYT0420A

Fabricate/Furnish and set in place per plans, details and the following:

1. Indigo NXT™ Series Ice Maker, cube-style, air-cooled, self-contained condenser, 22"W x 24-1/2"D x 21-1/2"H, production capacity up to 460 lb/24 hours at 70°/50° (375 lb AHRI certified at 90°/70°), easyTouch display with 13 different language options, date/time stamp display, automatic reminder/alert icon, one touch asset information, automatic detection of accessories, continuous operating status, programmable production options (time, weight, day or night), one touch cleaning with displayed instructions, Alpha-San anti-microbial protection, acoustical ice sensing probe, self-diagnostic technology, DuraTech™ exterior, half-dice size cubes, R410A refrigerant, NSF, cULus, CE, ENERGY STAR®.
2. (-161) 115v/60/1-ph.
3. Model AR-10000-P Arctic Pure® Plus Primary Water Filter Assembly, includes head, shroud, hardware, mounting assembly, & (1) filter cartridge, 15,000 gallon capacity, 0-600 lbs./ice per day. Installation by plumbing division. Coordinate installation to ensure easy access for cartridge replacement and servicing, and in compliance with local codes.
4. Model D320 Ice Bin, 22"W x 34"D x 38"H, with side-hinged front-opening door, side grips, 264 lbs. application capacity, AHRI certified 8.9 cu. ft., for top-mounted ice maker, Duratech exterior, NSF.
5. Legs, 6" adjustable stainless steel, standard.

ITEM #A15 FLOOR TROUGH

Quantity: One (1)
Manufacturer: IMC/Teddy
Model: FWR-24-SGAS

Fabricate/Furnish and set in place per plans, details and the following:

1. Floor Water Receptacle, 24"W x 7-1/2"D, 4" deep receptacle, (1) 4" OD tailpiece, stainless steel beehive strainer, 16/304 stainless steel construction, brushed satin finish, (SGAS) anti-slip subway grating, NSF, Made in USA.
2. Verify and coordinate dimensions with site conditions and General Contractor.
3. General Contractor to install.

ITEM #A16 EXHAUST HOOD WITH MUA

Quantity: One (1)
Manufacturer: Captive-Aire
Model: 6030 ND-2-PSP-F

Fabricate/Furnish and set in place per plans, details and the following:

1. Filter type exhaust hood, length and width as shown on plans.
2. Construction to consist of 18 Gauge type 304 stainless steel, including any exposed back.
3. External welded construction in accordance with the latest edition of NFPA 96. All welds to be ground and polished.
4. U.L. Classified, removable, stainless steel non adjustable grease filters.
5. Stainless steel, removable grease cans.
6. Sloped grease trough, full length below filters to grease cans.
7. Hangers, supports and miscellaneous accessories as required for installation.
8. Air space at walls to accommodate requirements of the latest edition of NFPA 96 clearance to combustibles.
9. All welded duct collars.
10. Pre piping for hood fire suppression system.
11. Final connections to hood duct collar(s) by the Mechanical Division.
12. Hood construction and components to be UL and NSF listed.
13. Mounting height of bottom edge of front of hood to be 6'-8" above finished floor.
14. Verify and coordinate all dimensions, and duct requirements and locations with site conditions and Mechanical Division.
15. See ventilation drawing sheet for general size and location of ducts.
16. If not installed against the finished ceiling, provide matching stainless steel closure panels above hood to finished ceiling, to conceal ducts and hood fire suppression system piping; verify height. If finished ceiling is more than 24" above the top of the hood, or ceiling is open type ceiling, verify requirement for closure panels with Architect/Interior Designer.
17. Recessed 3500K LED light fixtures and bulbs, U.L. listed for use in commercial cooking hoods, NSF approved. Provide an adequate number and type of light fixtures to provide a minimum light level of 50 foot candles at 36" AFF, below the hood. The Kitchen Equipment Contractor shall provide light bulbs as required by hood manufacturer to meet this requirement. If light bulbs are not readily available through retail outlets the Kitchen Equipment Contractor shall provide two (2) complete sets.
18. Hood shall not have any controls or switches on the canopy.
19. Demand control ventilation system. Locate keypad on wall.
20. Fire suppression to be installed at end of hood.
21. Refer to Q702 series sheets for further information.

ITEM #A16.1 FIRE SUPPRESSION SYSTEM

Quantity: One (1)
Manufacturer: Tank/Captive-Aire
Model: Wet Chemical

Fabricate/Furnish and set in place per plans, details and the following:

1. A pre-engineered fire suppression system, fixed pipe, automatic wet chemical agent fire suppression system for protection of all hazard areas associated with cooking operations, including exhaust hoods, plenums, ductwork, and cooking appliances.
2. TANK Fire Suppression System shall be UL & ULC listed in accordance with UL300, UL1254, ULCORD-C1254.6.
3. Microprocessor-based control board shall be ETL Listed to UL Standard 864 and CAN/ ULC-S527-11.
4. TANK Fire Suppression System intended for installation and for use in accordance with the National Fire Protection Association Standards:
 - A. Wet Chemical Extinguishing Systems, NFPA 17A.
 - B. National Electrical Code, NFPA 70.
 - C. National Fire Alarm & Signaling Code, NFPA 72.
5. Exhaust hood fire system components to be factory installed-cylinder and valve assembly, distribution nozzles, distribution system, suppression system.
6. Electrical Division to provide shunt trip breakers at main power panel, or disconnects, as designated by the Electrical Engineer; interconnection provided at hood control panel for the signal to shut down all electricity in and under the exhaust hood. Shunt trips/disconnects to accomplish shut off of electricity in the event of fire system activation by others.
7. Printed circuit board with microprocessor-based controller that provides all the necessary monitoring, timing, and supervision functions required for the reliable operation of the fire system.
8. Independent supervised loops incorporate redundancy and fault detection.
9. Real-time cloud-based monitoring connection provided with system by ownership.
10. Primary power supply, with battery backup for power loss.
11. Electric gas valve provided for equipment below exhaust hood. Coordinate size and installation with Plumbing Division.
12. All wiring is to be in accordance with the applicable manufacturer's instructions for the fire alarm control panel, gas shut-off valve, manual reset relay, and contractor supplied shut-off devices.
13. As part of this item, provide wall mounted type K handheld portable fire extinguisher, placard, and mounting bracket as required in the immediate vicinity of each cooking area, per NFPA-96 and NFPA-10. Additional fire extinguishers as required in the kitchen area are to be specified by the Architect and provided by the General Contractor.
14. Manual pull station and micro switches with two sets of normally open and two sets of normally closed contact points.
15. All exposed pipe and fittings to be chrome plated or stainless steel.
16. Tank to provide complete shop drawings, locate and/or verify and coordinate system tanks, panels, and pull stations locations and requirements, and verify and coordinate with Mechanical Engineer's documents and Division 15's exhaust and supply air requirements for hoods; for proper protection of hoods and equipment in and below the hoods, controlling of associated components, and interconnection of multiple fire systems as required.
17. Provision and installation of components and systems to be by dealer and installer authorized, factory trained, and certified to sell, install, and service TANK fire suppression systems as noted in this specification, at the time of bidding, installation, start-up, and warranty period of this project.

ITEM #A17 FRYER WITH FILTER (ALTERNATE #4)

Quantity: One (1)
Manufacturer: Pitco Frialator (Middleby)
Model: SSH55-1FD

Fabricate/Furnish and set in place per plans, details and the following:

1. Solstice Supreme™ High Efficiency Prepackaged Fryer System with Solstice™ Solo Filter System, gas, (1) 40-50 lb. oil capacity full tank, solid state controls, boil out, drain valve interlock, melt cycle, stainless steel tank, front & sides, under-fryer drawer filtration, 80,000 BTU (-F), ENERGY STAR®, CSA Flame, CSA Star, NSF, CE.
2. Digital Controller.
3. 115v/60/1-ph.
4. Model P6072145 Basket, (2) oblong/twin size, 13-1/2" x 6-1/2" x 5-3/4" deep, long handle, regular mesh.
5. Model B2101501 Tank Cover, 18 gauge light duty.
6. Model B3902303 Casters, 10", rigid, (each) locking, for fryers with Solo Filter.
7. Natural gas. Gas pressure regulating valve with built-in vent limiting device.
8. One (1) T&S commercial use A.G.A. and local code approved poly coated flexible stainless steel gas hose assembly 48" long, with FreeSpin fittings and SwiveLinks on both ends, quick disconnect assembly on one end, and with installation/restraining kit. Install the restraining device and provide instructions and coordination for the Plumbing Division's use in installing the hose components.

ITEM #A18 RANGE, 60", 6 BURNERS, 24" GRIDDLE WITH STANDARD OVENS

Quantity: One (1)
Manufacturer: Imperial (Middleby)
Model: IR-6-G24T

Fabricate/Furnish and set in place per plans, details and the following:

1. Pro Series Restaurant Range, gas, 60"W, (6) open burners & pilot lights, low simmer feature, cast iron grates, (1) 24" griddle, 3"W grease trough, removable grease can & crumb tray, (2) standard ovens, porcelain interior, (1) chrome rack per oven, manual controls, stainless steel front, sides, backguard, shelf, 3-1/2"D landing ledge & kick plate, 6" legs with adjustable feet, 302,000 BTU, 89kW, NSF, CE, CSA Flame, CSA Star.
2. Griddle on right.
3. Thermostat control for 24" griddle.
4. Swivel casters (set of 4) two with brakes, per set.
5. Natural gas. Gas pressure regulating valve with built-in vent limiting device.
6. One (1) T&S commercial use A.G.A. and local code approved poly coated flexible stainless steel gas hose assembly 48" long, with FreeSpin fittings and SwiveLinks on both ends, quick disconnect assembly on one end, and with installation/restraining kit. Install the restraining device and provide instructions and coordination for the Plumbing Division's use in installing the hose components.

ITEM #A19 WALL FLASHING

Quantity: One (1)
Manufacturer: Fabricated
Model: Stainless Steel

Fabricate/Furnish and set in place per plans, details and the following:

1. Similar to standard detail FSD1-39. This standard detail is to be utilized as a basic minimum guideline only. Refer to these written specifications and any fabrication details included in the contract drawings for precise and complete fabrication instructions.
2. Cover wall behind the cooking equipment and on the right side, from the finished floor to the bottom of the exhaust hood, the length of the exhaust hood.

ITEM #A20 DRY STORAGE SHELVING

Quantity: Six (6)
Manufacturer: Metro
Model: MetroSeal

Fabricate/Furnish and set in place per plans, details and the following:

1. Length, width and configuration per plan and verified room dimensions.
2. Super Erecta Metroseal 3 wire shelving. Corrosion-resistant finish, with Microban® antimicrobial protection.
3. 74" High with four tiers.
4. Each section shall be free-standing with four legs.
5. Each section to have two (2) #5MP polyurethane swivel casters and two (2) #5MPB polyurethane casters with brakes.

ITEM #A21 24" CHARBROILER WITH CABINET BASE

Quantity: One (1)
Manufacturer: Imperial (Middleby)
Model: IR-24BR-XB

Fabricate/Furnish and set in place per plans, details and the following:

1. Pro Series Restaurant Series Range Match, gas, 24"W, charbroiler, cast iron radiants & top grates, open cabinet, bottom shelf, grease trough, removable drip pan, stainless steel front, sides, 11"H backguard, landing ledge & kick plate, 6" legs with adjustable feet, 60,000 BTU, 18kW, NSF, CSA Flame, CSA Star.
2. Stainless steel center shelf in open cabinet base.
3. Swivel casters (set of 4) two with brakes, per set.
4. Natural gas. Gas pressure regulating valve with built-in vent limiting device.
5. One (1) T&S commercial use A.G.A. and local code approved poly coated flexible stainless steel gas hose assembly 48" long, with FreeSpin fittings and SwiveLinks on both ends, quick disconnect assembly on one end, and with installation/restraining kit. Install the restraining device and provide instructions and coordination for the Plumbing Division's use in installing the hose components.

ITEM #A22 MOBILE WORK TABLE, STAINLESS STEEL TOP

Quantity: One (1)
Manufacturer: Advance Tabco
Model: SS-243 TA-61 MODIFIED

Fabricate/Furnish and set in place per plans, details and the following:

1. Work Table, 36"W x 24"D, 14 gauge 304 stainless steel top, 18 gauge adjustable stainless steel undershelf, stainless steel legs & adjustable bullet feet, NSF.
2. Modify table dimensions to be 36" x 20".
3. Model TA-25S-4 Casters, 5" diameter, set of 4 (2 with brakes) with stainless steel legs for standard working height of 35-1/2".
4. Model TA-25B Upgrade standard casters to have brakes on all wheels.

ITEM #A23 REACH-IN REFRIGERATOR

Quantity: One (1)
Manufacturer: True Mfg. - General Foodservice
Model: STA2R-2S-HC

Fabricate/Furnish and set in place per plans, details and the following:

1. SPEC SERIES® Refrigerator, reach-in, two-section, (2) stainless steel doors with locks, cam-lift hinges, digital temperature control, (6) chrome shelves, LED interior lights, stainless steel front & sides, aluminum interior sides & walls, stainless floor & ceiling, 5" castors, R290 Hydrocarbon refrigerant, 1/2 HP, 115v/60/1-ph, NEMA 5-15P, cULus, UL EPH Classified, Made in USA, ENERGY STAR®.

ITEM #A24 REACH-IN FREEZER

Quantity: One (1)
Manufacturer: True Mfg. - General Foodservice
Model: STA1F-1S-HC

Fabricate/Furnish and set in place per plans, details and the following:

1. SPEC SERIES® Freezer, reach-in, -10°F, one-section, (1) stainless steel door with lock, cam-lift hinges, digital temperature control, (3) chrome shelves, LED interior lights, stainless steel front & sides, aluminum interior, 5" castors, R290 Hydrocarbon refrigerant, 1/2 HP, 115v/60/1-ph, NEMA 5-15P, cULus, UL EPH Classified, Made in USA.

ITEM #A25 PREP TABLE WITH SINKS

Quantity: One (1)
Manufacturer: Fabricated
Model: Stainless Steel

Fabricate/Furnish and set in place per plans, details and the following:

1. 36" Tall work table, see plans for width, length and configuration.
2. Standard details are to be utilized as basic minimum guidelines only. Refer to these written specifications and any fabrication details included in the contract drawings for precise and complete fabrication instructions. Similar to standard details FSD1-7 and FSD1-10.
3. Prep table with backsplash, similar to detail FSD2-20.
4. 6"-high backsplash similar to detail FSD1-5A.
5. Provide two (2) integral sinks, similar to detail FSD2-7. Size and location as shown on plans and on elevations. Provide rotary waste assemblies with overflows and lever brackets similar to detail FSD1-13.
6. Provide one (1) T&S B-0231 (or Fisher equal) backsplash mounted faucet (12" spout) with wrist-action handles.
7. Provide stainless steel adjustable bullet feet
8. Marine edge profile similar to detail FSD1-4A.
9. Provide three (3) tiered drawer assembly. Each drawer shall be 20" x 20" x 5" deep, similar to detail FSD1-15 and FSD1-16, number and location as shown on plans.
10. Provide open base for Owner provided trash receptacle in location shown on plans.

ITEM #A26 DOUBLE WALL SHELF

Quantity: One (1)
Manufacturer: Fabricated
Model: Stainless Steel

Fabricate/Furnish and set in place per plans, details and the following:

1. Double-tier wall mounted shelf similar to standard detail FSD12-1A. This standard detail is to be utilized as a basic minimum guideline only. Refer to these written specifications & any fabrication details included in the contract drawings for precise & complete fabrication instructions.

ITEM #A27 SPARE NO.

ITEM #A28 HAND SINK

Quantity: One (1)
Manufacturer: Advance Tabco
Model: 7-PS-20

Fabricate/Furnish and set in place per plans, details and the following:

1. Hand Sink, wall mounted, 14" wide x 10" front-to-back x 5" deep bowl, 20 gauge 304 stainless steel, with heavy duty deck mounted fixed faucet, basket drain, NSF, cCSAus.
2. Model K-316-LU Wrist Handles Only, for splash or deck mount hand sink faucet (1 pair hot & cold 4" long blades), fits faucets supplied after November 2015 with hot & cold color rings that do not have exposed screw head.
3. Model K-08 Low-flow aerator 0.5gpm, fits 55/64-27 male or 15/16-27 female thread on spout, conforms to California AB 1953.
4. Model 7-PS-17B Welded Side Splash, 7-3/4"H (installed height), both sides, for hand sinks with 10" x 14" bowl & deck mounted faucets.

ITEM #A29 SPARE NO.

ITEM #A30 SPARE NO.

ITEM #A31 SOAP/TOWEL DISPENSER, QTY ONE (1) N.I.K.E.C. - BY OWNER

**ITEM #A32 SODA ICE & BEVERAGE DISPENSER, QTY ONE (1) N.I.K.E.C. - BY
PURVEYOR/OWNER**

ITEM #A33 SODA SYSTEM CONDUIT EXIT, QTY ONE (1) N.I.K.E.C. - BY EC

**ITEM #A34, A34.1 TEA BREWER AND WATER FILTRATION SYSTEM, QTY ONE (1) N.I.K.E.C. - BY
PURVEYOR/OWNER**

**ITEM #A35, A35.1 COFFEE BREWER AND WATER FILTRATION SYSTEM, QTY ONE (1) N.I.K.E.C. -
BY PURVEYOR/OWNER**

ITEM #A36 UNDERCOUNTER REFRIGERATOR (ALTERNATE #4)

Quantity: One (1)
Manufacturer: True Mfg. - General Foodservice
Model: TUC-48G-HC~SPEC3

Fabricate/Furnish and set in place per plans, details and the following:

1. SPEC SERIES® Undercounter Refrigerator, 33 - 38°F, SPEC Package 3 includes: stainless steel top, (2) Low-E glass doors, steel handles, door lock standard, (4) PVC coated adjustable wire shelves, electronic temperature control with digital temperature display, stainless steel sides & back, stainless steel interior, R290 Hydrocarbon refrigerant, 1/5 HP, 115v/60/1-ph, NEMA 5-15P, cULus, UL EPH Classified, Made in USA.
2. Castors, 1-1/2" (31-7/8" work surface height = LP).
3. Coordinate installation below GC provided millwork counter top.

ITEM #A37, A37.1 ICE MACHINE, CUBE-STYLE AND FILTRATION SYSTEM (ALTERNATE #4)

Quantity: One (1)
Manufacturer: Manitowoc
Model: IYT0300A

Fabricate/Furnish and set in place per plans, details and the following:

1. Indigo NXT™ Series Ice Maker, cube-style, air-cooled, self-contained condenser, 30"W x 24-1/2"D x 16-1/2"H, production capacity up to 310 lb/24 hours at 70°/50° (230 lb AHRI certified at 90°/70°), easyTouch display with 13 different language options, date/time stamp display, automatic reminder/alert icon, one touch asset information, automatic detection of accessories, continuous operating status, programmable production options (time, weight, day or night), one touch cleaning with displayed instructions, Alpha-San anti-microbial protection, acoustical ice sensing probe, self-diagnostic technology, DuraTech™ exterior, half-dice size cubes, R404a refrigerant, NSF, cULus, CE, ENERGY STAR®.
2. (-161) 115v/60/1-ph.
3. Model AR-10000-P Arctic Pure® Plus Primary Water Filter Assembly, includes head, shroud, hardware, mounting assembly, & (1) filter cartridge, 15,000 gallon capacity, 0-600 lbs./ice per day. Installation by plumbing division. Coordinate installation to ensure easy access for cartridge replacement and servicing, and in compliance with local codes.
4. Coordinate installation on top of Owner/Purveyor provided soda dispenser.

ITEM #A38 SPARE NO.

ITEM #A39 SPARE NO.

ITEM #A40 SPARE NO.

END 114000 SPECIFICATIONS

SECTION 210500 - BASIC FIRE SUPPRESSION REQUIREMENTS

PART 1 - GENERAL

1.1 SECTION INCLUDES

- A. Requirements applicable to all Division 21 Sections. Also refer to Division 01 - General Requirements.
- B. All materials and installation methods shall conform to the applicable standards, guidelines and codes referenced herein and within each specification section.

1.2 SCOPE OF WORK

- A. This Specification and the associated drawings govern the furnishing, installing, testing and placing into satisfactory operation the Mechanical Systems.
- B. Each Contractor shall provide all new materials indicated on the drawings and/or in these specifications, and all items required to make the portion of the Mechanical Work a finished and working system.
- C. All work will be awarded under a single General Contract. The division of work listed below is for the Contractor's convenience and lists normal breakdown of the work.
- D. Scope of Work:
 - 1. Plumbing Work: Refer to Section 220500 "Basic Plumbing Requirements".
 - 2. Heating Work: Refer to Section 230500 "Basic HVAC Requirements".
 - 3. Air Conditioning and Ventilating Work: Refer to Section 230500 "Basic HVAC Requirements".
 - 4. Temperature Control Work: Refer to Section 230500 "Basic HVAC Requirements".
 - 5. Fire Protection Work shall include, but is not necessarily limited to:
 - a. Extend existing wet pipe sprinkler system for areas noted on the drawings.
 - b. Furnish and install all items listed on the Fire Protection Material List.
 - c. Furnish all hydraulic calculations and working sprinkler drawings.
 - d. Furnish and install seismic restraint and equipment designed for use in seismic conditions described in Section 210550.
 - e. Furnish and install firestopping systems for penetrations of fire-rated construction associated with this Contractor's work.
 - f. Complete all applicable tests, certifications, forms, and matrices.
 - 6. Testing, Adjusting, and Balancing Work: Refer to Section 230500 "Basic HVAC Requirements".

1.3 WORK SEQUENCE

- A. All work that will produce excessive noise or interference with normal building operations, as determined by the Owner, shall be scheduled with the Owner. It may be necessary to schedule such work during unoccupied hours. The Owner reserves the right to determine when restricted construction hours will be required.

1.4 DIVISION OF WORK BETWEEN MECHANICAL, ELECTRICAL & CONTROL CONTRACTORS

A. Definitions:

1. "Mechanical Contractors" refers to the following:
 - a. Plumbing Contractor.
 - b. Heating Contractor.
 - c. Air Conditioning and Ventilating Contractor.
 - d. Temperature Control Contractor.
 - e. Fire Protection Contractor.
 - f. Testing, Adjusting, and Balancing Contractor.
2. Motor Control Wiring: The wiring associated with the remote operation of the magnetic coils of magnetic motor starters or relays, or the wiring that permits direct cycling of motors by means of devices in series with the motor power wiring. In the latter case the devices are usually single phase and are usually connected to the motor power wiring through a manual motor starter having "Manual-Off-Auto" provisions.
3. Control devices such as start-stop push buttons, thermostats, pressure switches, flow switches, relays, etc., generally represent the types of equipment associated with motor control wiring.
4. Motor control wiring is single phase and usually 120 volts. In some instances, the voltage will be the same as the motor power wiring. Generally, where the motor power wiring exceeds 120 volts, a control transformer is used to give a control voltage of 120 volts.
5. Temperature Control Wiring: The wiring associated with the operation of a motorized damper, solenoid valve or motorized valve, etc., either modulating or two-position, as opposed to wiring which directly powers or controls a motor used to drive equipment such as fans, pumps, etc.
 - a. This wiring will be from a 120 volt source and may continue as 120 volt, or be reduced in voltage (24 volt) in which case a control transformer shall be furnished as part of the temperature control wiring.
6. Control Motor: An electric device used to operate dampers, valves, etc. It may be two-position or modulating. Conventional characteristics of such a motor are 24 volts, 60 cycles, 1 phase, although other voltages may be encountered.
7. Voltage is generally specified and scheduled as distribution voltage. Motor submittals may be based on utilization voltage if it corresponds to the correct distribution voltage.

Distribution/Nominal Voltage	Utilization Voltage
120	115
208	200
240	230
277	265
480	460

B. General:

1. The purpose of these Specifications is to outline the Electrical and Mechanical Contractor's responsibilities related to electrical work required for items such as temperature controls, mechanical equipment, fans, chillers, compressors and the like. The exact wiring requirements for much of the equipment cannot be determined until the systems have been selected and submittals reviewed. Therefore, the electrical drawings show only known wiring related to such items. All wiring not shown on the electrical drawings, but required for mechanical systems, is the responsibility of the Mechanical Contractor.
2. Where the drawings require the Electrical Contractor to wire between equipment furnished by the Mechanical Contractor, such wiring shall terminate at terminals provided in the equipment. The Mechanical Contractor shall provide complete electrical power/controls wiring diagrams and supervision to the Electrical Contractor and designate the terminal numbers for correct wiring.
3. All electrical work shall conform to the National Electrical Code. All provisions of the Electrical Specifications concerning wiring, protection, etc., apply to wiring provided by the Mechanical Contractor unless noted otherwise.
4. Control low (24V) and control line (120V) voltage wiring, conduit, and related switches and relays required for the automatic control and/or interlock of motors and equipment, including final connection, are to be furnished and installed under Divisions 21, 22 and 23. Materials and installation to conform to Class 1 or 2 requirements.
5. All Contractors shall establish utility elevations prior to fabrication and shall coordinate their material and equipment with other trades. When a conflict arises, priority is as follows:
 - a. Light fixtures.
 - b. Gravity flow piping, including steam and condensate.
 - c. Electrical busduct.
 - d. Sheet metal.
 - e. Electrical cable trays, including access space.
 - f. Sprinkler piping and other piping.
 - g. Electrical conduits and wireway.

C. Mechanical Contractor's Responsibility:

1. Assumes responsibility for internal wiring of all equipment provided by the Mechanical Contractor, for example:
 - a. Burners.
 - b. Condensing Units.
 - c. Makeup Air Units.
 - d. Gas Trains.
 - e. Package Air Handling Units.
 - f. Packaged Rooftop Units.
2. Assumes all responsibility for the Temperature Control wiring, when the Temperature Control Contractor is a Subcontractor to the Mechanical Contractor.
3. Shall verify all existing equipment sizes and capacities where units are to be modified, moved or replaced. Contractor shall notify Architect/Engineer of any discrepancies prior to ordering new units or replacement parts, including replacements of equipment motors.
4. Temperature Control Subcontractor's Responsibility:
 - a. Wiring of all devices needed to make the Temperature Control System functional.

- b. Verifying any control wiring on the electrical drawings as being by the Electrical Contractor. All wiring required for the Control System, but not shown on the electrical drawings, is the responsibility of the Temperature Control Subcontractor.
 - c. Coordinating equipment locations (such as relays, transformers, etc.) with the Electrical Contractor, where wiring of the equipment is by the Electrical Contractor.
5. This Contractor is responsible for coordination of utilities with all other Contractors. If any field coordination conflicts are found, the Contractor shall coordinate with other Contractors to determine a viable layout.

D. Electrical Contractor's Responsibility:

- 1. Provides all combination starters, manual starters and disconnect devices shown on the Electrical Drawings or indicated to be by the Electrical Contractor on the Mechanical Drawings or Specifications.
- 2. Installs and wires all remote control devices furnished by the Mechanical Contractor or Temperature Control Subcontractor when so noted on the Electrical Drawings.
- 3. Provides motor control and temperature control wiring, where so noted on the drawings.
- 4. Coordinate with the Mechanical Contractor for size of motors and/or other electrical devices involved with repair or replacement of existing equipment.
- 5. Furnishes, installs and connects all relays, etc., for automatic shutdown of certain fans upon actuation of the Fire Alarm System as indicated and specified in Division 28.
- 6. This Contractor is responsible for coordination of utilities with all other Contractors. If any field coordination conflicts are found, the Contractor shall coordinate with other Contractors to determine a viable layout.

1.5 COORDINATION DRAWINGS

A. Definitions:

- 1. Coordination Drawings: A compilation of the pertinent layout and system drawings that show the sizes and locations, including elevations, of system components and required access areas to ensure that no two objects will occupy the same space.
 - a. Mechanical trades shall include, but are not limited to, mechanical equipment, ductwork, fire protection systems, plumbing piping, medical gas systems, hydronic piping, steam and steam condensate piping, and any item that may impact coordination with other disciplines.
 - b. Electrical trades shall include, but are not limited to, electrical equipment, conduit 1.5" and larger, conduit racks, cable trays, pull boxes, transformers, raceway, busway, lighting, ceiling-mounted devices, and any item that may impact coordination with other disciplines.
 - c. Technology trades shall include, but are not limited to, technology equipment, racks, conduit 1.5" and larger, conduit racks, cable trays, ladder rack, pull boxes, raceway, ceiling-mounted devices, and any item that may impact coordination with other disciplines.
 - d. Maintenance clearances and code-required dedicated space shall be included.
 - e. The coordination drawings shall include all underground, underfloor, in-floor, in chase, and vertical trade items.

-
2. Spaces with open/cloud ceiling architecture shall indicate the overhead utilities and locate equipment as required to maintain clearance above lights. The intent for the installation is to maintain a maximum allowable vertical clearance and an organized/clean manner in the horizontal. Notify Architect/Engineer of the maximum clearance which can be maintained. Failure to comply will result in modifications with no cost to Owner.
 - a. In cloud ceiling architecture, when open cabling/wire and/or cable tray crosses gaps between ceiling clouds and/or walls, cabling is to transition to conduits to span the gaps in order to conceal cabling from below.
 3. The contractors shall use the coordination process to identify the proper sequence of installation of all utilities above ceilings and in other congested areas, to ensure an orderly and coordinated end result, and to provide adequate access for service and maintenance.
- B. Participation:
1. The contractors and subcontractors responsible for work defined above shall participate in the coordination drawing process.
 2. One contractor shall be designated as the Coordinating Contractor for purposes of preparing a complete set of composite electronic CAD coordination drawings that include all applicable trades, and for coordinating the activities related to this process. The Coordinating Contractor for this project shall be the Mechanical Contractor.
 - a. The Coordinating Contractor shall utilize personnel familiar with requirements of this project and skilled as draftspersons/CAD operators, competent to prepare the required coordination drawings.
 3. Electronic CAD drawings shall be submitted to the Coordinating Contractor for addition of work by other trades. IMEG will provide electronic file copies of applicable drawings for contractor's use if the contractor signs and returns an "Electronic File Transfer" waiver provided by IMEG. IMEG will not consider blatant reproductions of original file copies an acceptable alternative for coordination drawings.
- C. Drawing Requirements:
1. The file format and file naming convention shall be coordinated with and agreed to by all contractors participating in the coordination process and the Owner.
 - a. Scale of drawings:
 - 1) General plans: 1/4 Inch = 1'-0" (minimum).
 - 2) Mechanical, electrical, communication rooms, and including the surrounding areas within 10 feet: 1/2 Inch = 1'-0" (minimum).
 - 3) Shafts and risers: 1/2 Inch = 1'-0" (minimum).
 - 4) Sections of shafts and mechanical and electrical equipment rooms: 1/4 Inch = 1'-0" (minimum).
 - 5) Sections of congested areas: 1/2 Inch = 1'-0" (minimum).
 2. Ductwork layout drawings shall be the baseline system for other components. Ductwork layout drawings shall be modified to accommodate other components as the coordination process progresses.
 3. There may be more drawings required for risers, top and bottom levels of mechanical rooms, and shafts.

4. The minimum quantity of drawings will be established at the first coordination meeting and sent to the Architect/Engineer for review. Additional drawings may be required if other areas of congestion are discovered during the coordination process.

D. General:

1. Coordination drawing files shall be made available to the Architect/Engineer and Owner's Representative. The Architect/Engineer will only review identified conflicts and give an opinion, but will not perform as a coordinator.
2. A plotted set of coordination drawings shall be available at the project site.
3. Coordination drawings are not shop drawings and shall not be submitted as such.
4. The contract drawings are schematic in nature and do not show every fitting and appurtenance for each utility. Each contractor is expected to have included in the bid sufficient fittings, material, and labor to allow for adjustments in routing of utilities made necessary by the coordination process and to provide a complete and functional system.
5. The contractors will not be allowed additional costs or time extensions due to participation in the coordination process.
6. The contractors will not be allowed additional costs or time extensions for additional fittings, reroutings or changes of duct size, that are essentially equivalent sizes to those shown on the drawings and determined necessary through the coordination process.
7. The Architect/Engineer reserves the right to determine space priority of equipment in the event of spatial conflicts or interference between equipment, piping, conduit, ducts, and equipment provided by the trades.
8. Changes to the contract documents that are necessary for systems installation and coordination shall be brought to the attention of the Architect/Engineer.
9. Access panels shall preferably occur only in gypsum board walls or plaster ceilings where indicated on the drawings.
 - a. Access to mechanical, electrical, technology, and other items located above the ceiling shall be through accessible lay-in ceiling tile areas.
 - b. Potential layout changes shall be made to avoid additional access panels.
 - c. Additional access panels shall not be allowed without written approval from the Architect/Engineer at the coordination drawing stage.
 - d. Providing additional access panels shall be considered after other alternatives are reviewed and discarded by the Architect/Engineer and the Owner's Representative.
 - e. When additional access panels are required, they shall be provided without additional cost to the Owner.
10. Complete the coordination drawing process and obtain sign off of the drawings by all contractors prior to installing any of the components.
11. Conflicts that result after the coordination drawings are signed off shall be the responsibility of the contractor or subcontractor who did not properly identify their work requirements, or installed their work without proper coordination.
12. Updated coordination drawings that reflect as-built conditions may be used as record documents.

1.6 QUALITY ASSURANCE

A. Contractor's Responsibility Prior to Submitting Pricing Data:

1. The Contractor is responsible for constructing complete and operating systems. The Contractor acknowledges and understands that the Contract Documents are a two-dimensional representation of a three-dimensional object, subject to human interpretation. This representation may include imperfect data, interpreted codes, utility guidelines, three-dimensional conflicts, and required field coordination items. Such deficiencies can be corrected when identified prior to ordering material and starting installation. The Contractor agrees to carefully study and compare the individual Contract Documents and report at once in writing to the Design Team any deficiencies the Contractor may discover. The Contractor further agrees to require each subcontractor to likewise study the documents and report at once any deficiencies discovered.
2. The Contractor shall resolve all reported deficiencies with the Architect/Engineer prior to awarding any subcontracts, ordering material, or starting any work with the Contractor's own employees. Any work performed prior to receipt of instructions from the Design Team will be done at the Contractor's risk.

B. Qualifications:

1. Only products of reputable manufacturers are acceptable.
2. All Contractors and subcontractors shall employ only workers skilled in their trades.

C. Compliance with Codes, Laws, Ordinances:

1. Conform to all requirements of the City of Kansas City, Kansas Codes, Laws, Ordinances and other regulations having jurisdiction.
2. Conform to all published standards of Unified Government of Wyandotte County.
3. Conform to all State Codes.
4. If there is a discrepancy between the codes and regulations and these specifications, the Architect/Engineer shall determine the method or equipment used.
5. If the Contractor notes, at the time of bidding, that any parts of the drawings or specifications do not comply with the codes or regulations, Contractor shall inform the Architect/Engineer in writing, requesting a clarification. If there is insufficient time for this procedure, Contractor shall submit with the proposal a separate price to make the system comply with the codes and regulations.
6. All changes to the system made after letting of the contract, to comply with codes or requirements of Inspectors, shall be made by the Contractor without cost to the Owner.
7. If there is a discrepancy between manufacturer's recommendations and these specifications, the manufacturer's recommendations shall govern.
8. All rotating shafts and/or equipment shall be completely guarded from all contact. Partial guards and/or guards that do not meet all applicable OSHA standards are not acceptable. Contractor is responsible for providing this guarding if it is not provided with the equipment supplied.

D. Permits, Fees, Taxes, Inspections:

1. Procure all applicable permits and licenses.
2. Abide by all laws, regulations, ordinances, and other rules of the State or Political Subdivision where the work is done, or as required by any duly constituted public authority.
3. Pay all charges for permits or licenses.
4. Pay all fees and taxes imposed by the State, Municipal and/or other regulatory bodies.

5. Pay all charges arising out of required inspections by an authorized body.
6. Pay all charges arising out of required contract document reviews associated with the project and as initiated by the Owner or authorized agency/consultant.
7. Where applicable, all fixtures, equipment and materials shall be listed by Underwriters' Laboratories, Inc. and approved by FM Global.

E. Utility Company Requirements:

1. Secure from the appropriate private or public utility company all applicable requirements.
2. Comply with all utility company requirements.
3. Make application for and pay for fire protection water service connection.

F. Examination of Drawings:

1. The drawings for the fire protection work are completely diagrammatic, intended to convey the scope of the work and to indicate the general arrangements and locations of equipment, outlets, etc., and the approximate sizes of equipment.
2. Contractor shall determine the exact locations of equipment and rough-ins, and the exact routing of pipes and ducts to best fit the layout of the job.
3. Scaling of the drawings is not sufficient or accurate for determining these locations.
4. Where job conditions require reasonable changes in indicated arrangements and locations, such changes shall be made by the Contractor at no additional cost to the Owner.
5. Because of the scale of the drawings, certain basic items, such as fittings, boxes, valves, unions, etc., may not be shown, but where required by other sections of the specifications or required for proper installation of the work, such items shall be furnished and installed.
6. If an item is either on the drawings or in the specifications, it shall be included in this contract.
7. Determination of quantities of material and equipment required shall be made by the Contractor from the documents. Where discrepancies arise between drawings, schedules and/or specifications, the greater number shall govern.
8. Where used in fire protection documents, the word "furnish" shall mean supply for use, the word "install" shall mean connect complete and ready for operation, and the word "provide" shall mean to supply for use and connect complete and ready for operation.
 - a. Any item listed as furnished shall also be installed, unless otherwise noted.
 - b. Any item listed as installed shall also be furnished, unless otherwise noted.

G. Field Measurements:

1. Verify all pertinent dimensions at the job site before ordering any materials or fabricating any supports, pipes or ducts.

H. Electronic Media/Files:

1. Construction drawings for this project have been prepared utilizing Revit.
2. Contractors and Subcontractors may request electronic media files of the contract drawings and/or copies of the specifications. Specifications will be provided in PDF format.
3. Upon request for electronic media, the Contractor shall complete and return a signed "Electronic File Transmittal" form provided by IMEG.
4. If the information requested includes floor plans prepared by others, the Contractor will be responsible for obtaining approval from the appropriate Design Professional for use of that part of the document.

5. The electronic contract documents can be used for preparation of shop drawings and as-built drawings only. The information may not be used in whole or in part for any other project.
6. The drawings prepared by IMEG for bidding purposes may not be used directly for ductwork layout drawings or coordination drawings.
7. The use of these CAD documents by the Contractor does not relieve them from their responsibility for coordination of work with other trades and verification of space available for the installation.
8. The information is provided to expedite the project and assist the Contractor with no guarantee by IMEG as to the accuracy or correctness of the information provided. IMEG accepts no responsibility or liability for the Contractor's use of these documents.

1.7 WEB-BASED PROJECT SOFTWARE

- A. The General Contractor shall provide a web-based project software site for the purpose of hosting and managing project communication and documentation until completion of the warranty phase.
- B. The web-based project software shall include, at a minimum, the following features: construction schedule, submittals, RFIs, ASIs, construction change directives, change orders, drawing management, specification management, payment applications, contract modifications, meeting minutes, construction progress photos.
- C. Provide web-based project software user licenses for use by the Architect/Engineer. Access will be provided from the start of the project through the completion of the warranty phase.
- D. At project completion, provide digital archive of entire project in format that is readable by common desktop software applications in format acceptable to Architect/Engineer. Provide data in locked format to prevent further changes.

1.8 SUBMITTALS

- A. Submittals shall be required for the following items, and for additional items where required elsewhere in the specifications or on the drawings.

1. Submittals list:

Referenced Specification Section	Submittal Item
21 05 00	Owner Training Agenda
21 05 03	Fire Seal Systems
21 05 29	Hangers and Supports
21 05 50	Seismic Restraint Systems
21 05 53	Mechanical Identification
21 13 00	Sprinkler Systems

- B. General Submittal Procedures: In addition to the provisions of Division 01, the following are required:

1. Transmittal: Each transmittal shall include the following:

- a. Date
- b. Project title and number
- c. Contractor's name and address

- d. Division of work (e.g., plumbing, heating, ventilating, etc.)
 - e. Description of items submitted and relevant specification number
 - f. Notations of deviations from the contract documents
 - g. Other pertinent data
- 2. Submittal Cover Sheet: Each submittal shall include a cover sheet containing:
 - a. Date
 - b. Project title and number
 - c. Architect/Engineer
 - d. Contractor and subcontractors' names and addresses
 - e. Supplier and manufacturer's names and addresses
 - f. Division of work (e.g., plumbing, heating, ventilating, etc.)
 - g. Description of item submitted (using project nomenclature) and relevant specification number
 - h. Notations of deviations from the contract documents
 - i. Other pertinent data
 - j. Provide space for Contractor's review stamps
- 3. Composition:
 - a. Submittals shall be submitted using specification sections and the project nomenclature for each item.
 - b. Individual submittal packages shall be prepared for items in each specification section. All items within a single specification section shall be packaged together where possible. An individual submittal may contain items from multiple specifications sections if the items are intimately linked (e.g., pumps and motors).
 - c. All sets shall contain an index of the items enclosed with a general topic description on the cover.
- 4. Content: Submittals shall include all fabrication, erection, layout, and setting drawings; manufacturers' standard drawings; schedules; descriptive literature, catalogs and brochures; performance and test data; electrical power criteria (e.g., voltage, phase, amps, horsepower, kW, etc.) wiring and control diagrams; Short Circuit Current Rating (SCCR); dimensions; shipping and operating weights; shipping splits; service clearances; and all other drawings and descriptive data of materials of construction as may be required to show that the materials, equipment or systems and the location thereof conform to the requirements of the contract documents.
- 5. Contractor's Approval Stamp:
 - a. The Contractor shall thoroughly review and approve all shop drawings before submitting them to the Architect/Engineer. The Contractor shall stamp, date and sign each submittal certifying it has been reviewed.
 - b. Unstamped submittals will be rejected.
 - c. The Contractor's review shall include, but not be limited to, verification of the following:
 - 1) Only approved manufacturers are used.
 - 2) Addenda items have been incorporated.
 - 3) Catalog numbers and options match those specified.
 - 4) Performance data matches that specified.
 - 5) Electrical characteristics and loads match those specified.
 - 6) Equipment connection locations, sizes, capacities, etc. have been coordinated with other affected trades.

- 7) Dimensions and service clearances are suitable for the intended location.
 - 8) Equipment dimensions are coordinated with support steel, housekeeping pads, openings, etc.
 - 9) Constructability issues are resolved (e.g., weights and dimensions are suitable for getting the item into the building and into place, sinks fit into countertops, etc.).
 - d. The Contractor shall review, stamp and approve all subcontractors' submittals as described above.
 - e. The Contractor's approval stamp is required on all submittals. Approval will indicate the Contractor's review of all material and a complete understanding of exactly what is to be furnished. Contractor shall clearly mark all deviations from the contract documents on all submittals. If deviations are not marked by the Contractor, then the item shall be required to meet all drawing and specification requirements.
6. Submittal Identification and Markings:
- a. The Contractor shall clearly mark each item with the same nomenclature applied on the drawings or in the specifications.
 - b. The Contractor shall clearly indicate the size, finish, material, etc.
 - c. Where more than one model is shown on a manufacturer's sheet, the Contractor shall clearly indicate exactly which item and which data is intended.
 - d. All marks and identifications on the submittals shall be unambiguous.
7. Schedule submittals to expedite the project. Coordinate submission of related items.
8. Identify variations from the contract documents and product or system limitations that may be detrimental to the successful performance of the completed work.
9. Reproduction of contract documents alone is not acceptable for submittals.
10. Incomplete submittals will be rejected without review. Partial submittals will only be reviewed with prior approval from the Architect/Engineer.
11. Submittals not required by the contract documents may be returned without review.
12. The Architect/Engineer's responsibility shall be to review one set of shop drawing submittals for each product. If the first submittal is incomplete or does not comply with the drawings and/or specifications, the Contractor shall be responsible to bear the cost for the Architect/Engineer to recheck and handle the additional shop drawing submittals.
13. Submittals shall be reviewed and approved by the Architect/Engineer **before** releasing any equipment for manufacture or shipment.
14. Contractor's responsibility for errors, omissions, or deviation from the contract documents in submittals is not relieved by the Architect/Engineer's approval.
15. Schedule shall allow for adequate time to perform orderly and proper review of submittals, including time for consultants and Owner if required, and resubmittals by Contractor if necessary, and to cause no delay in Work or in activities of Owner or other contractors.
- a. Allow at least two weeks for Architect's/Engineer's review and processing of each submittal.
16. Architect/Engineer reserves the right to withhold action on a submittal which, in the Architect/Engineer's opinion, requires coordination with other submittals until related submittals are received. The Architect/Engineer will notify the Contractor, in writing, when they exercise this right.

C. Electronic Submittal Procedures:

1. Distribution: Email submittals as attachments to all parties designated by the Architect/Engineer, unless a web-based submittal program is used.
2. Transmittals: Each submittal shall include an individual electronic letter of transmittal.
3. Format: Electronic submittals shall be in PDF format only. Scanned copies, in PDF format, of paper originals are acceptable. Submittals that are not legible will be rejected. Do not set any permission restrictions on files; protected, locked, or secured documents will be rejected.
4. File Names: Electronic submittal file names shall include the relevant specification section number followed by a description of the item submitted, as follows. Where possible, include the transmittal as the first page of the PDF instead of using multiple electronic files.
 - a. Submittal file name: 21XXXX.description.YYYYMMDD
 - b. Transmittal file name: 21XXXX.description.YYYYMMDD
5. File Size: Files shall be transmitted via a pre-approved method. Larger files may require an alternative transfer method, which shall also be pre-approved.

1.9 CHANGE ORDERS

- A. A detailed material and labor takeoff shall be prepared for each change order, along with labor rates and markup percentages. Change orders shall be broken down by sheet or associated individual line item indicated in the change associated narrative, whichever provides the most detailed breakdown. Change orders with inadequate breakdown will be rejected.
- B. Itemized pricing with unit cost shall be provided from all distributors and associated subcontractors.
- C. Change order work shall not proceed until authorized.

1.10 EQUIPMENT SUPPLIERS' INSPECTION

- A. The following equipment shall not be placed in operation until a competent installation and service representative of the manufacturer has inspected the installation and certified that the equipment is properly installed, adjusted and lubricated; that preliminary operating instructions have been given; and that the equipment is ready for operation:
 1. Fire Seal Systems
- B. Contractor shall arrange for and obtain supplier's on-site inspection(s) at proper time(s) to assure each phase of equipment installation and/or connection is in accordance with the manufacturer's instructions.
- C. Submit copies of start-up reports to the Architect/Engineer and include copies of Owner's Operation and Maintenance Manuals.

1.11 PRODUCT DELIVERY, STORAGE, HANDLING & MAINTENANCE

- A. Exercise care in transporting and handling to avoid damage to materials. Store materials on the site to prevent damage. Keep materials clean, dry and free from harmful conditions. Immediately remove any materials that become wet or that are suspected of becoming contaminated with mold or other organisms.
- B. Protect equipment, components, and openings with airtight covers and exercise care at every stage of storage, handling, and installation of equipment to prevent airborne dust and dirt from entering or fouling equipment to include, but not limited to:
 - 1. Motor windings and ventilation openings.
 - 2. Bearings.
 - 3. Equipment Pipe and Accessories connection openings.
 - 4. Starter and control cabinets.
 - 5. Pump Seals.
 - 6. Engine cooling, air intake, and exhaust openings.
- C. Equipment and components that are visibly damaged or have been subject to environmental conditions prior to building turnover to Owner that could shorten the life of the component (for example, water damage, humidity, dust and debris, excessive hot or cold storage location, etc.) shall be repaired or replaced with new equipment or components without additional cost to the building owner.
- D. Keep all bearings properly lubricated and all belts properly tensioned and aligned.
- E. Coordinate the installation of heavy and large equipment with the General Contractor and/or Owner. If the Mechanical Contractor does not have prior documented experience in rigging and lifting similar equipment, he/she shall contract with a qualified lifting and rigging service that has similar documented experience. Follow all equipment lifting and support guidelines for handling and moving.
- F. Contractor is responsible for moving equipment into the building and/or site. Contractor shall review site prior to bid for path locations and any required building modifications to allow movement of equipment. Contractor shall coordinate the work with other trades.

1.12 NETWORK / INTERNET CONNECTED EQUIPMENT

- A. These specifications may require certain equipment or systems to have network, Internet and/or remote access capability ("Network Capability"). Any requirement for Network Capability shall be interpreted only as a functional capability and is not to be construed as authority to connect or enable any Network Capability. Network Capability may only be connected or enabled with the express written consent of the Owner.

1.13 WARRANTY

- A. Provide one-year warranty, unless otherwise noted, to the Owner for all fixtures, equipment, materials, and workmanship.

- B. The warranty period for all work in this Division of the specifications shall commence on the date of final acceptance, unless a whole or partial system or any separate piece of equipment or component is put into use for the benefit of any party other than the installing contractor with prior written authorization. In this instance, the warranty period shall commence on the date when such whole system, partial system or separate piece of equipment or component is placed in operation and accepted in writing by the Owner.
- C. Warranty requirements shall extend to correction, without cost to the Owner, of all Work found to be defective or nonconforming to the contract documents. The Contractor shall bear the cost of correcting all damage resulting from defects or nonconformance with contract documents.

1.14 INSURANCE

- A. Contractor shall maintain insurance coverage as set forth in Division 0 of these specifications.

1.15 MATERIAL SUBSTITUTION

- A. Where several manufacturers' names are given, the scheduled manufacturer is the basis for job design and establishes the quality required.
- B. Equivalent equipment manufactured by the other listed manufacturers may be used. Contractor shall ensure that all items submitted by these other manufacturers meet all requirements of the drawings and specifications and fits in the allocated space. When using other listed manufacturers, the Contractor shall assume responsibility for any and all modifications necessary (including, but not limited to structural supports, electrical connections, piping and ductwork connections and arrangement, plumbing connections and rough-in, and regulatory agency approval, etc.) and coordinate such with other contractors.
- C. Any material, article or equipment of other unnamed manufacturers which will adequately perform the services and duties imposed by the design and is of a quality equal to or better than the material, article or equipment identified by the drawings and specifications may be used if approval is secured in writing from the Architect/Engineer not later than ten days prior to the bid opening.
- D. This Contractor assumes all costs incurred as a result of using the offered material, article or equipment, on the Contractors part or on the part of other Contractors whose work is affected.
- E. This Contractor may list voluntary add or deduct prices for alternate materials on the bid form. These items will not be used in determining the low bidder.
- F. All material substitutions requested later than ten (10) days prior to bid opening must be listed as voluntary changes on the bid form.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION

3.1 JOBSITE SAFETY

- A. Neither the professional activities of the Architect/Engineer, nor the presence of the Architect/Engineer or the employees and subconsultants at a construction site, shall relieve the Contractor and other entity of their obligations, duties and responsibilities including, but not limited to, construction means, methods, sequence, techniques or procedures necessary for performing, superintending or coordinating all portions of the work of construction in accordance with the contract documents and any health or safety precautions required by any regulatory agencies. The Architect/Engineer and personnel have no authority to exercise any control over any construction contractor or other entity or their employees in connection with their work or any health or safety precautions. The Contractor is solely responsible for jobsite safety. The Architect/Engineer and the Architect/Engineer's consultants shall be indemnified and shall be made additional insureds under the Contractor's general liability insurance policy.

3.2 ARCHITECT/ENGINEER OBSERVATION OF WORK

- A. The Contractor shall provide seven (7) calendar days' notice to the Architect/Engineer prior to:
 - 1. Placing fill over underground and underslab utilities.
 - 2. Covering exterior walls, interior partitions and chases.
 - 3. Installing hard or suspended ceilings and soffits.
- B. The Architect/Engineer will have the opportunity to review the installation and provide a written report noting deficiencies requiring correction. The Contractor's schedule shall account for these reviews and show them as line items in the approved schedule.
- C. Above-Ceiling Final Observation
 - 1. All work above the ceilings must be complete prior to the Architect/Engineer's review. This includes, but is not limited to:
 - a. Pipe wall penetrations are sealed.
 - b. Pipe identification is installed.
 - c. Branch piping in the location of sprinklers shall be dropped to the ceiling.
 - 2. In order to prevent the Above-Ceiling Final Observation from occurring too early, the Contractor shall review the status of the work and certify, in writing, that the work is ready for the Above-Ceiling Final Observation.
 - 3. It is understood that if the Architect/Engineer finds the ceilings have been installed prior to this review and prior to 7 days elapsing, the Architect/Engineer may not recommend further payments to the contractor until such time as full access has been provided.

3.3 PROJECT CLOSEOUT

- A. The following paragraphs supplement the requirements of Division 01.
- B. Final Jobsite Observation:
 - 1. In order to prevent the Final Jobsite Observation from occurring too early, the Contractor is required to review the completion status of the project and certify that the job is ready for the final jobsite observation.

2. Attached to the end of this section is a typical list of items that represent the degree of job completeness expected prior to requesting a review.
3. Upon Contractor certification that the project is complete and ready for a final observation, the Contractor shall sign the attached certification and return it to the Architect/Engineer so that the final observation can be scheduled.
4. It is understood that if the Architect/Engineer finds the job not ready for the final observation and that additional trips and observations are required to bring the project to completion, the costs incurred by the Architect/Engineer's additional time and expenses will be deducted from the Contractor's contract retainage prior to final payment at the completion of the job.

C. Before final payment is authorized, this Contractor must submit the following:

1. Operation and maintenance manuals with copies of approved shop drawings.
2. Record documents including marked-up or reproducible drawings and specifications.
3. A report documenting the instructions given to the Owner's representatives complete with the number of hours spent in the instruction. The report shall bear the signature of an authorized agent of This Contractor and shall be signed by the Owner's representatives.
4. Inspection report by the State Fire Marshal of the fire protection system.
5. Start-up reports on all equipment requiring a factory installation inspection or start-up.
6. Provide spare parts, maintenance, and extra materials in quantities specified in individual specification sections. Deliver to project site and place in location as directed; receipt by Architect/Engineer required prior to final payment approval.

3.4 OPERATION AND MAINTENANCE MANUALS

A. General:

1. Provide an electronic copy of the O&M manuals as described below for Architect/Engineer's review and approval. The electronic copy shall be corrected as required to address the Architect/Engineer's comments. Once corrected, electronic copies and paper copies shall be distributed as directed by the Architect/Engineer.
2. Approved O&M manuals shall be completed and in the Owner's possession prior to Owner's acceptance and at least 10 days prior to instruction of operating personnel.

B. Electronic Submittal Procedures:

1. Distribution: Email the O&M manual as attachments to all parties designated by the Architect/Engineer.
2. Transmittals: Each submittal shall include an individual electronic letter of transmittal.
3. Format: Electronic submittals shall be in PDF format only. Scanned copies, in PDF format, of paper originals are acceptable. Submittals that are not legible will be rejected. Do not set any permission restrictions on files; protected, locked, or secured documents will be rejected.
4. File Names: Electronic submittal file names shall include the relevant specification section number followed by a description of the item submitted, as follows. Where possible, include the transmittal as the first page of the PDF instead of using multiple electronic files.
 - a. O&M file name: O&M.div21.contractor.YYYYMMDD
 - b. Transmittal file name: O&Mtransmittal.div21.contractor.YYYYMMDD
5. File Size: Files shall be transmitted via a pre-approved method. Larger files may require an alternative transfer method, which shall also be pre-approved.

6. Provide the Owner with an approved copy of the O&M manual on compact discs (CD), digital video discs (DVD), or flash drives with a permanently affixed label, printed with the title "Operation and Maintenance Instructions", title of the project and subject matter of disc/flash drive when multiple disc/flash drives are required.
7. All text shall be searchable.
8. Bookmarks shall be used, dividing information first by specification section, then systems, major equipment and finally individual items. All bookmark titles shall include the nomenclature used in the construction documents and shall be an active link to the first page of the section being referenced.

C. Operation and Maintenance Instructions shall include:

1. Title Page: Include title page with project title, Architect, Engineer, Contractor, all subcontractors, and major equipment suppliers, with addresses, telephone numbers, website addresses, email addresses and point of contacts. Website URLs and email addresses shall be active links in the electronic submittal.
2. Table of Contents: Include a table of contents describing specification section, systems, major equipment, and individual items.
3. Copies of all final approved shop drawings and submittals. Include Architect's/Engineer's shop drawing review comments. Insert the individual shop drawing directly after the Operation and Maintenance information for the item(s) in the review form.
4. Copy of final approved test and balance reports.
5. Copies of all factory inspections and/or equipment startup reports.
6. Copies of warranties.
7. Schematic electrical power/controls wiring diagrams of the equipment that have been updated for field conditions. Field wiring shall have label numbers to match drawings.
8. Dimensional drawings of equipment.
9. Capacities and utility consumption of equipment.
10. Detailed parts lists with lists of suppliers.
11. Operating procedures for each system.
12. Maintenance schedule and procedures. Include a chart listing maintenance requirements and frequency.
13. Repair procedures for major components.
14. List of lubricants in all equipment and recommended frequency of lubrication.
15. Instruction books, cards, and manuals furnished with the equipment.

3.5 INSTRUCTING THE OWNER'S REPRESENTATIVES

- A. Adequately instruct the Owner's designated representatives in the maintenance, care, and operation of all systems installed under this contract.
- B. Provide verbal and written instructions to the Owner's representatives by FACTORY PERSONNEL in the care, maintenance, and operation of the equipment and systems.
- C. Contractor shall make a DVD video recording of instructions to the Owner while explaining the system so additional personnel may view the instructions at a later date. The video recording shall be the property of the Owner.
- D. The instructions shall include:
 1. Explanation of all system flow diagrams.
 2. Maintenance of equipment.
 3. Start-up procedures for all major equipment.

4. Explanation of seasonal system changes.
 5. Description of emergency system operation.
- E. Notify the Architect/Engineer of the time and place for the verbal instructions to be given to the Owner's representative so a representative can attend if desired.
- F. Minimum hours of instruction for each item shall be:
1. Sprinkler System(s) - 2 hours.
- G. The Contractor shall prepare a detailed, written training agenda and submit it to the Architect/Engineer a minimum of two weeks prior to the formal training for approval. The written agenda shall include specific training points within the items described above. For example: how to adjust setpoints, troubleshooting, proper start-up, proper shut-down, seasonal changes, draining, venting, changing filters, changing belts, etc. Failure to provide and follow an approved training agenda may result in additional training required at the expense of the Contractor.
- H. Operating Instructions:
1. Contractor is responsible for all instructions to the Owner's representatives for the fire protection and control systems.
 2. If the Contractor does not have staff that can adequately provide the required instructions the Contractor shall include in the bid an adequate amount to reimburse the Owner for the Architect/Engineer to perform these services.
- 3.6 SYSTEM STARTING AND ADJUSTING
- A. The fire protection systems shall be complete and operating. System startup, testing, adjusting, and balancing to obtain satisfactory system performance is the responsibility of the Contractor. This includes calibration and adjustments of all controls, noise level adjustments and final comfort adjustments as required.
- B. Complete all manufacturer-recommended startup procedures and checklists to verify proper motor rotation, electrical power voltage is within equipment limitations, equipment controls maintain pressures and temperatures within acceptable ranges, all filters and protective guards are in-place, acceptable access is provided for maintenance and servicing, and equipment operation does not pose a danger to personnel or property.
- C. All operating conditions and control sequences shall be tested during the start-up period. Test all interlocks, safety shutdowns, controls, and alarms.
- D. The Contractor, subcontractors, and equipment suppliers shall have skilled technicians to ensure that all systems perform properly. If the Architect/Engineer is requested to visit the job site for trouble shooting, assisting in start-up, obtaining satisfactory equipment operation, resolving installation and/or workmanship problems, equipment substitution issues or unsatisfactory system performance, including call backs during the warranty period, through no fault of the design; the Contractor shall reimburse the Owner on a time and materials basis for services rendered at the Architect/Engineer's standard hourly rates in effect when the services are requested. The Contractor shall pay the Owner for services required that are product, installation or workmanship related. Payment is due within 30 days after services are rendered.

3.7 RECORD DOCUMENTS

- A. The following paragraphs supplement Division 01 requirements.
- B. Maintain at the job site a separate and complete set of fire protection drawings and specifications with all changes made to the systems clearly and permanently marked in complete detail.
- C. Mark drawings to indicate revisions to piping size and location, both exterior and interior; including locations of other control devices, and other units requiring periodic maintenance or repair; actual equipment locations, dimensioned from column lines; actual inverts and locations of underground piping; concealed equipment, dimensioned from column lines; mains and branches of piping systems, with valves and control devices located and numbered, concealed unions located, and with items requiring maintenance located; Change Orders; concealed control system devices.
- D. Before completion of the project, a set of reproducible fire protection drawings will be given to the Contractor for transfer of all as-built conditions from the paper set maintained at the job site. All marks on reproducibles shall be clear and permanent.
- E. Mark specifications to show approved substitutions; Change Orders, and actual equipment and materials used.
- F. Record changes daily and keep the marked drawings available for the Architect/Engineer's examination at any normal work time.
- G. Upon completing the job, and before final payment is made, give the marked-up drawings to the Architect/Engineer.

3.8 PAINTING

- A. This Contractor shall paint the following items:
 - 1. Piping exposed in kitchen
- B. After surfaces have been thoroughly cleaned and are free of oil, dirt, and other foreign matter, paint all pipes and equipment with the following:
 - 1. Bare Metal Surfaces: Apply one coat of primer suitable for the metal being painted. Finish with two coats of Alkyd base enamel paint.
 - 2. Color of paint shall be as follows:
 - a. Piping exposed in kitchen:
 - 1) All Piping: White

3.9 ADJUST AND CLEAN

- A. Thoroughly clean all equipment and systems prior to the Owner's final acceptance of the project. Clean all foreign paint, grease, oil, dirt, labels, stickers, and other foreign material from all equipment.

- B. Clean all areas where moisture is present. Immediately report any mold, biological growth, or water damage.
- C. Remove all rust, scale, dirt, oils, stickers and thoroughly clean exterior of all exposed piping, hangers, and accessories.
- D. Remove all rubbish, debris, etc., accumulated during construction from the premises.

3.10 SPECIAL REQUIREMENTS

- A. Contractor shall coordinate the installation of all equipment, valves, etc., with other trades to maintain clear access area for servicing.
- B. All equipment shall be installed in such a way to maximize access to parts needing service or maintenance. Review the final field location, placement, and orientation of equipment with the Owner's designated representative prior to setting equipment.
- C. Installation of equipment or devices without regard to coordination of access requirements and confirmation with the Owner's designated representative will result in removal and reinstallation of the equipment at the Contractor's expense.

3.11 IAQ MAINTENANCE FOR OCCUPIED FACILITIES UNDER CONSTRUCTION

- A. Contractors shall make all reasonable efforts to prevent construction activities from affecting the air quality of the occupied areas of the building or outdoor areas near the building. These measures shall include, but not be limited to:
 - 1. All contractors shall endeavor to minimize the amount of contaminants generated during construction. Methods to be employed shall include, but not be limited to:
 - a. Minimizing the amount of dust generated.
 - b. Reducing solvent fumes and VOC emissions.
 - c. Maintain good housekeeping practices, including sweeping and periodic dust and debris removal. There should be no visible haze in the air.
 - 2. Request that the Owner designate an IAQ representative.
 - 3. Review and receive approval from the Owner's IAQ representative for all IAQ-related construction activities and negative pressure containment plans.
 - 4. Inform the IAQ representative of all conditions that could adversely impact IAQ, including operations that will produce higher than normal dust production or odors.
 - 5. Schedule activities that may cause IAQ conditions that are not acceptable to the Owner's IAQ representative during unoccupied periods.
 - 6. Request copies of and follow all of the Owner's IAQ and infection control policies.
 - 7. Unless no other access is possible, the entrance to construction site shall not be through the existing facility.
 - 8. To minimize growth of infectious organisms, do not permit damp areas in or near the construction area to remain for over 24 hours.
 - 9. In addition to the criteria above, provide measures as recommended in the SMACNA "IAQ Guidelines for Occupied Buildings Under Construction".

READINESS CERTIFICATION PRIOR TO FINAL JOBSITE OBSERVATION

To prevent the final job observation from occurring too early, we require that the Contractor review the completion status of the project and, by copy of this document, certify that the job is indeed ready for the final job observation. The following is a typical list of items that represent the degree of job completeness expected prior to your requesting a final job observation.

1. Penetrations fire sealed and labeled in accordance with specifications.
2. All pumps operating and balanced.
3. Fire protection system operational.
4. Pipes labeled.

Accepted by:

Prime Contractor _____

By _____ Date _____

Upon Contractor certification that the project is complete and ready for a final job observation, we require the Contractor to sign this agreement and return it to the Architect/Engineer so that the final observation can be scheduled.

It is understood that if the Architect/Engineer finds the job not ready for the final observation and that additional trips and observations are required to bring the project to completion, the costs incurred by the Architect/Engineers for additional time and expenses will be deducted from the Contractor's contract retainage prior to final payment at the completion of the job.

END OF SECTION 210500

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 210503 - THROUGH PENETRATION FIRESTOPPING

PART 1 - GENERAL

1.1 SECTION INCLUDES

- A. Through-Penetration Firestopping.

1.2 QUALITY ASSURANCE

- A. Manufacturer: Company specializing in manufacturing products specified in this Section.
- B. Installer: Individuals performing work shall be certified by the manufacturer of the system selected for installation.

1.3 REFERENCES

- A. UL 263 - Fire Tests of Building Construction and Materials
- B. UL 723 - Surface Burning Characteristics of Building Materials
- C. ANSI/UL 1479 - Fire Tests of Through Penetration Firestops
- D. UL 2079 - Tests for Fire Resistance of Building Joint Systems
- E. UL Fire Resistance Directory Through Penetration Firestop Systems (XHEZ)
- F. Intertek / Warnock Hersey - Directory of Listed Products
- G. ASTM E84 - Standard Test Method for Surface Burning Characteristics of Building Materials
- H. ASTM E814 - Standard Test Method for Fire Tests of Through-Penetration Firestops
- I. The Building Officials and Code Administrators National Building Code
- J. 1997 Uniform Building Code
- K. 2018 International Building Code
- L. NFPA 5000 - Building Construction Safety Code
- M. HCAI - Health Care Access and Information (California)

1.4 SUBMITTALS

- A. Submit under provisions of Section 210500.
- B. Submit Firestopping Installers Certification for all installers on the project.

- C. Shop Drawings: Submit for each condition requiring firestopping. Include descriptions of the specific penetrating item, actual wall/floor construction, manufacturer's installation instructions, and UL or Intertek / Warnock Hersey Assembly number.
- D. Through-Penetration Firestop System Schedule: Indicate locations of each through-penetration firestop system, along with the following information:
 - 1. Types of penetrating items.
 - 2. Types of constructions penetrated, including fire-resistance ratings and, where applicable, thicknesses of construction penetrated.
 - 3. Through-penetration firestop systems for each location identified by firestop design designation of qualified testing and inspecting agency.
 - 4. F ratings for each firestop system.
- E. Maintain a notebook on the job site at all times that contains copies of approved submittals for all through penetration firestopping to be installed. Notebook shall be made available to the Authority Having Jurisdiction at their request and turned over to the Owner at the end of construction as part of the O&M Manuals.

1.5 DELIVERY, STORAGE, AND HANDLING

- A. Store, protect and handle products on site. Accept material on site in factory containers and packing. Inspect for damage. Protect from deterioration or damage due to moisture, temperature changes, contaminants, or other causes. Follow manufacturer's instructions for storage.
- B. Install material prior to expiration of product shelf life.

1.6 PERFORMANCE REQUIREMENTS

- A. General: For penetrations through the following fire-resistance-rated constructions, including both empty openings and openings containing penetrating items, provide through-penetration firestop systems that are produced and installed to resist spread of fire according to requirements indicated, resist passage of smoke and other gases, and maintain original fire-resistance rating of construction penetrated.
 - 1. Fire-resistance-rated walls including fire partitions, fire barriers, and smoke barriers.
 - 2. Fire-resistance-rated horizontal assemblies including floors, floor/ceiling assemblies, and ceiling membranes of roof/ceiling assemblies.
- B. Rated Systems: Provide through-penetration firestop systems with the following ratings determined per UL 1479:
 - 1. F-Rated Systems: Provide through-penetration firestop systems with F-ratings indicated, but not less than that equaling or exceeding fire-resistance rating of constructions penetrated.
 - 2. L-Rated Systems: Provide through-penetration firestop systems with L-ratings of not more than 5.0 CFM/sq. ft at both ambient temperature and 400F for smoke barriers.
- C. For through-penetration firestop systems exposed to light, traffic, moisture, or physical damage, provide products that, after curing, do not deteriorate when exposed to these conditions both during and after construction.

- D. For through-penetration firestop systems exposed to view, provide products with flame-spread and smoke-developed indexes of less than 25 and 450, respectively, as determined per ASTM E 84.
- E. For through-penetration firestop systems in air plenums, provide products with flame-spread and smoke-developed indexes of less than 25 and 50, respectively, as determined per ASTM E 84.

1.7 MEETINGS

- A. Pre-installation meeting: A pre-installation meeting shall be scheduled and shall include the General Contractor, all Subcontractors associated with the installation of systems penetrating fire barriers, Firestopping Manufacturer's Representative, and the Owner.
 - 1. Review foreseeable methods related to firestopping work.
 - 2. Tour representative areas where firestopping is to be installed; inspect and discuss each type of condition and each type of substrate that will be encountered, and preparation to be performed by other trades.

1.8 WARRANTY

- A. Provide one year warranty on parts and labor.
- B. Warranty shall cover repair or replacement of firestop systems which fail in joint adhesion, cohesion, abrasion resistance, weather resistance, extrusion resistance, migration resistance, stain resistance, general durability, or appear to deteriorate in any manner not clearly specified by the manufacturer as an inherent quality of the material.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. Products: Subject to compliance with requirements, provide one of the through-penetration firestop systems indicated for each application that are produced by one of the following manufacturers. All firestopping systems installed shall be provided by a single manufacturer.
- B. Manufacturers:
 - 1. 3M; Fire Protection Products Division.
 - 2. Hilti, Inc.
 - 3. RectorSeal Corporation, Metacaulk.
 - 4. Tremco; Sealant/Weatherproofing Division.
 - 5. Johns-Manville.
 - 6. Specified Technologies Inc. (S.T.I.)
 - 7. Spec Seal Firestop Products
 - 8. Dow Corning Corp.

2.2 THROUGH PENETRATION FIRESTOP SYSTEMS

- A. Provide materials and systems classified by or listed by Intertek / Warnock Hersey to provide firestopping equal to time rating of construction being penetrated.

Unified Government Memorial Hall Kitchen & Audio/Visual Renovations

Unified Government of Wyandotte County & Kansas City, KS

ISSUED FOR BID

- B. All firestopping materials shall be free of asbestos, lead, PCB's, and other materials that would require hazardous waste removal.
- C. Firestopping shall be flexible to allow for normal penetrating item movement due to expansion and contraction.
- D. Firestopping systems for plumbing and wet pipe sprinkler piping shall be moisture resistant.
- E. Provide firestopping systems capable of supporting floor loads where systems are exposed to possible floor loading or traffic.
- F. Provide firestopping systems allowing continuous insulation for all insulated pipes.
- G. Provide firestopping systems classified by UL or listed by Intertek / Warnock Hersey for penetrations through all fire rated construction. Firestopping systems shall be selected from the UL or listed by Intertek / Warnock Hersey Fire Resistance Directory Category XHEZ based on substrate construction and penetrating item size and material and shall fall within the range of numbers listed:

1. Non-Combustible Framed Walls - 1 or 2 Hour Rated:

- a. F Rating = Wall Rating
- b. L Rating = Penetrations in Smoke Barriers

Penetrating Item	UL System No.
No Penetrating Item	WL 0000-0999*
Metallic Pipe or Conduit	WL 1000-1999
Non-Metallic Pipe or Conduit	WL 2000-2999
Electrical Cables	WL 3000-3999
Cable Trays	WL 4000-4999
Insulated Pipes	WL 5000-5999
Bus Duct and Misc. Electrical	WL 6000-6999
Duct without Damper and Misc. Mechanical	WL 7000-7999
Multiple Penetrations	WL 8000-8999
*Alternate method of firestopping is patching opening to match original rated construction.	

2. Concrete or Masonry Floors and Walls - 1 or 2 Hour Rated:

- a. F Rating = Wall/Floor Rating
- b. L Rating = Penetrations in Smoke Barriers

Penetrating Item	UL System No.
No Penetrating Item	CAJ 0000-0999*
Metallic Pipe or Conduit	CAJ 1000-1999
Non-Metallic Pipe or Conduit	CAJ 2000-2999
Electrical Cables	CAJ 3000-3999
Cable Trays	CAJ 4000-4999
Insulated Pipes	CAJ 5000-5999
Bus Duct and Misc. Electrical	CAJ 6000-6999
Duct without Damper and Misc. Mechanical	CAJ 7000-7999
Multiple Penetrations	CAJ 8000-8999
*Alternate method of firestopping is patching opening to match original rated construction.	

- H. Any opening in walls or floors not covered by the listed series of numbers shall be coordinated with the firestopping manufacturer.
- I. Any openings in floors or walls not described in the UL or listed by Intertek / Warnock Hersey Fire Resistance Directory, or outlined in manufacturer's information shall be sealed in a manner agreed upon by the Firestopping Manufacturer, Owner, and the Authority Having Jurisdiction.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Ensure all surfaces that contact seal materials are free of dirt, dust, grease, oil, rust, or loose materials. Clean and repair surfaces as required. Remove laitance and form-release agents from concrete.
- B. Ensure substrate and penetrating items have been permanently installed prior to installing firestopping systems. Ensure penetrating items have been properly spaced and have proper clearance prior to installing firestopping systems.
- C. Surfaces to which sealing materials are to be installed must meet the selected UL or Intertek / Warnock Hersey system substrate criteria.
- D. Prime substrates where recommended in writing by through-penetration firestop system manufacturer. Confine primer to area of bond.

3.2 INSTALLATION

- A. In existing construction, provide firestopping of openings prior to and after installation of penetrating items. Remove any existing coatings on surfaces prior to firestopping installation. Temporary firestopping shall consist of packing openings with fire resistant mineral wool for the full thickness of substrate, or an alternate method approved by the Authority Having Jurisdiction. All openings shall be temporarily firestopped immediately upon their installation and shall remain so until the permanent UL or listed by Intertek / Warnock Hersey listed firestopping system is installed.
- B. Install penetration seal materials in accordance with printed instructions of the UL or Intertek / Warnock Hersey Fire Resistance Directory and with the manufacturer's printed application instructions.
- C. Install dams as required to properly contain firestopping materials within openings and as required to achieve required fire resistance rating. Remove combustible damming after appropriate curing.

3.3 CLEANING AND PROTECTING

- A. Clean excess fill materials adjacent to openings as Work progresses by methods and with cleaning materials that are approved in writing by through-penetration firestop system manufacturers and that do not cause damage.

- B. Provide final protection and maintain conditions during and after installation that ensure that through-penetration firestop systems are without damage or deterioration at time of Substantial Completion. If, despite such protection, damage or deterioration occurs, remove damaged or deteriorated through-penetration firestop systems immediately and install new materials to produce systems complying with specified requirements.

3.4 INSPECTION

- A. All penetrations shall be inspected by the manufacturer's representative to ensure proper installation.
- B. Access to firestop systems shall be maintained for examination by the Authority Having Jurisdiction at their request.
- C. Proceed with enclosing through-penetration firestop system with other construction only after inspection reports are issued and firestop installations comply with requirements.
- D. The Contractor shall allow for visual destructive review of 5% of installed firestop systems (minimum of one) to prove compliance with specifications and manufacturer's instructions and details. Destructive system removal shall be performed by the Contractor and witnessed by the Architect/Engineer and manufacturer's factory representative. The Architect/Engineer shall have sole discretion of which firestop system installations will be reviewed. The Contractor is responsible for all costs associated with this requirement including labor and material for removing and replacing the installed firestop system. If any firestop system is found to not be installed per manufacturer's specific instructions and details, all firestop systems are subject to destructive review and replacement at the Architect/Engineer's discretion and the Contractor's expense.

END OF SECTION 210503

SECTION 210505 - FIRE SUPPRESSION DEMOLITION FOR REMODELING

PART 1 - GENERAL

1.1 SECTION INCLUDES

- A. Mechanical Demolition.
- B. Cutting and Patching.

PART 2 - PRODUCTS

2.1 MATERIALS AND EQUIPMENT

- A. Materials and equipment shall be as specified in individual Sections.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. THE DRAWINGS ARE INTENDED TO INDICATE THE GENERAL SCOPE OF WORK AND DO NOT SHOW EVERY PIPE, DUCT, OR PIECE OF EQUIPMENT THAT MUST BE REMOVED. THE CONTRACTOR SHALL VISIT THE SITE AND VERIFY CONDITIONS PRIOR TO SUBMITTING A BID.
- B. Where walls, ceilings, etc., are shown as being removed on general drawings, the Contractor shall remove all mechanical equipment, devices, fixtures, piping, ducts, systems, etc., from the removed area.
- C. Where ceilings, walls, partitions, etc., are temporarily removed and replaced by others, This Contractor shall remove, store, and replace equipment, devices, fixtures, pipes, ducts, systems, etc.
- D. Verify that abandoned utilities serve only abandoned equipment or facilities. Extend services to facilities or equipment that shall remain in operation following demolition.
- E. Coordinate work with all other Contractors and the Owner. Schedule removal of equipment to avoid conflicts.
- F. This Contractor shall verify all existing equipment sizes and capacities where equipment is scheduled to be replaced or modified, prior to ordering new equipment.
- G. Bid submittal shall mean the Contractor has visited the project site and verified existing conditions and scope of work.

3.2 PREPARATION

- A. Disconnect fire protection systems in walls, floors, and ceilings scheduled for removal.

- B. Provide temporary connections to maintain existing systems in service during construction. When work must be performed on operating equipment, use personnel experienced in such operations.

3.3 DEMOLITION AND EXTENSION OF EXISTING MECHANICAL WORK

- A. Remove, relocate, and extend existing installations to accommodate new construction.
- B. Remove abandoned piping to source of supply and/or main lines.
- C. Remove exposed abandoned pipes, including abandoned pipes above accessible ceilings. Cut pipes above ceilings, below floors and behind walls. Cap remaining lines. Repair building construction to match original. Remove all clamps, hangers, supports, etc. associated with pipe and duct removal.
- D. Disconnect and remove mechanical devices and equipment serving equipment that has been removed.
- E. Repair adjacent construction and finishes damaged during demolition and extension work.
- F. Maintain access to existing mechanical installations which remain. Modify installation or provide access panels as appropriate.
- G. Extend existing installations using materials and methods compatible with existing installations, or as specified.

3.4 CUTTING AND PATCHING

- A. This Contractor is responsible for all penetrations of existing construction required to complete the work of this project. Refer to Section 210529 for additional requirements.
- B. Penetrations in existing construction should be reviewed carefully prior to proceeding with any work.
- C. Penetrations shall be neat and clean with smooth and/or finished edges. Core drill where possible for clean opening.
- D. Repair existing construction as required after penetration is complete to restore to original condition. Use similar materials and match adjacent construction unless otherwise noted or agreed to by the Architect/Engineer prior to start of work.
- E. Floor slabs may contain conduit systems. This Contractor is responsible for taking any measures required to ensure no conduits or other services are damaged. This includes X-ray or similar non-destructive means.
- F. This Contractor is responsible for all costs incurred in repair, relocations, or replacement of any cables, conduits, or other services if damaged without proper investigation.

3.5 CLEANING AND REPAIR

- A. Clean and repair existing materials and equipment which remain or are to be reused.

- B. Clean all systems adjacent to project which are affected by the dust and debris caused by this construction.
- C. FIRE PROTECTION ITEMS REMOVED AND NOT RELOCATED REMAIN THE PROPERTY OF THE OWNER. CONTRACTOR SHALL PLACE ITEMS RETAINED BY THE OWNER IN A LOCATION COORDINATED WITH THE OWNER. THE CONTRACTOR SHALL DISPOSE OF MATERIAL THE OWNER DOES NOT WANT TO REUSE OR RETAIN FOR MAINTENANCE PURPOSES.

3.6 SPECIAL REQUIREMENTS

- A. Install temporary filter media over outside air intakes which are within 100 feet of the limits of construction or as noted on the drawings. This Contractor shall complete any cleaning required for existing systems which are affected by construction dust and debris.
- B. Review locations of all new penetrations in existing floor slabs or walls. Determine construction type and review for possible interferences. Bring all concerns to the attention of the Architect/Engineer before proceeding.

END OF SECTION 210505

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 210529 - FIRE SUPPRESSION SUPPORTS AND ANCHORS

PART 1 - GENERAL

1.1 SECTION INCLUDES

- A. Hangers, Supports, and Associated Anchors.
- B. Sleeves and Seals.
- C. Flashing and Sealing of Equipment and Pipe Stacks.
- D. Cutting of Openings.
- E. Escutcheon Plates and Trim.

1.2 QUALITY ASSURANCE

- A. Support Sprinkler Piping in conformance with NFPA 13.
- B. Support Standpipes in conformance with NFPA 14.

1.3 REFERENCES

- A. MSS SP-58 - Pipe Hangers and Supports - Materials, Design, Manufacture, Selection, Application, and Installation.
- B. MSS SP 69 - Pipe Hangers and Supports - Selection and Application.
- C. MSS SP 89 - Pipe Hangers and Supports - Fabrication and Installation Practices.
- D. MSS SP-127 - Bracing for Piping Systems Seismic-Wind-Dynamic Design, Selection, Application
- E. NFPA 13 - Standard for the Installation of Sprinkler Systems.
- F. NFPA 14 - Standard for the Installation of Standpipe and Hose Systems.

1.4 SUBMITTALS

- A. Submit shop drawings and product data under provisions of Section 210500.

1.5 WORK FURNISHED BUT INSTALLED UNDER OTHER SECTIONS

- A. Furnish sleeves and hanger inserts to General Contractor for placement into formwork.

PART 2 - PRODUCTS

2.1 SEISMIC RESTRAINTS

- A. Refer to Section 210550 for additional requirements for seismic restraints.

2.2 HANGER RODS

- A. Hanger rods for single rod hangers supporting steel, copper, and CPVC piping shall conform to the following:
 - 1. Hanger Rod Diameter:
 - a. 4" and smaller: 3/8"
 - b. 5", 6", and 8": 1/2"
 - c. 10" and 12": 5/8"
- B. Hanger rods and accessories used in mechanical spaces or otherwise dry areas shall have ASTM B633 electro-plated zinc finish.
- C. All hanger rods, nuts, washers, clevises, etc., in damp areas shall have ASTM A123 hot-dip galvanized finish applied after fabrication. This applies to the following areas:

2.3 PIPE HANGERS AND SUPPORTS

- A. General:
 - 1. All pipe hangers, clamps, and supports shall conform to Manufacturers Standardization Society MSS-SP-58, 69, 89, and 127 (where applicable).
- B. Vertical Supports:
 - 1. Support and laterally brace vertical pipes at every floor level in multi-story structures, and more frequently when required by applicable codes, but never at intervals over 15 feet. Support vertical pipes with riser clamps installed below hubs, couplings or lugs. Provide sufficient flexibility to accommodate expansion and contraction without compromising fire barrier penetrations and other fixed takeoff locations.
 - a. Products:
 - 1) Eaton Fig. B3373 Series
 - 2) nVent 510 Series
 - 3) Anvil Fig. 90
 - 2. Wall supports shall be used where vertical height of structure exceeds minimum spacing requirements. Install wall supports at same spacing as hangers or strut supports along vertical length of pipe runs.
 - 3. Masonry Anchors: Fasten to concrete masonry units with expansion anchors or self-tapping masonry screws. For expansion anchors into hollow concrete block, use sleeve-type anchors designed for the specific application. Do not fasten in masonry joints. Do not use powder actuated fasteners, wooden plugs, or plastic inserts.

C. Hangers and Clamps:

1. Hangers in direct contact with bare copper pipe shall include plastic pipe insert similar to Unistrut Cush-A-Clamp, Hydra-Zorb, nVent Cushion Clamp or Eaton Vibra-Clamp.
2. Unless otherwise indicated, hangers shall be as follows:
 - a. Clevis Type: Service: Bare Metal Pipe, Rigid Plastic Pipe
 - 1) Products: Bare Steel, Plastic or Insulated Pipe
 - a) Anvil Fig. 260
 - b) Eaton Fig. 3100
 - c) nVent Model 400
 - b. Adjustable Swivel Ring Type: Service: Bare Metal Pipe - 4 inches and Smaller
 - 1) Products: Bare Steel Pipe
 - a) Anvil Fig. 69
 - b) Eaton Fig. B3170NF
 - c) nVent Model 115
 3. Support may be fabricated from U-channel strut or similar shapes. Piping less than 4" in diameter shall be secured to strut with clamps of proper design and capacity as required to maintain spacing and alignment. Strut shall be independently supported from hanger drops or building structure. Size and support shall be per manufacturer's installation requirements for structural support of piping. Clamps shall not interrupt piping insulation.
 4. Strut used in mechanical spaces or otherwise dry areas shall have ASTM B633 electro-plated zinc finish.
 5. Strut used in damp areas listed in hanger rods shall have ASTM A123 hot-dip galvanized finish applied after fabrication.
 6. Unless otherwise indicated, pipe supports for use with struts shall be as follows:
 - a. Clamp Type: Service: Bare Metal Pipe, Rigid Plastic Pipe
 - 1) Clamps in direct contact with copper pipe shall include plastic pipe insert similar to Unistrut Cush-A-Clamp, Hydra-Zorb, nVent Cushion Clamp or Eaton Vibra-Clamp.
 - 2) Pipes subject to expansion and contraction shall have clamps slightly oversized to allow limited pipe movement.
 - 3) Products: Bare Steel, Plastic or Insulated Pipe
 - a) Unistrut Fig. P1100 or P2500
 - b) Eaton Fig. B2000 or B2400
 - c) Anvil AS1200
 - d) nVent USC

D. Upper (Structural) Attachments:

1. Unless otherwise shown, upper attachments for hanger rods or support struts shall be as follows:
 - a. Concrete Anchors: Fasten to concrete using cast-in or post-installed anchors designed per the requirements of Appendix D of ACI 318-17. Post-installed anchors shall be qualified for use in cracked concrete by ACI-355.2.
 - b. Masonry Anchors: Fasten to concrete masonry units with expansion anchors or self-tapping masonry screws. For expansion anchors into hollow concrete block, use sleeve-type anchors designed for the specific application. Do not fasten in masonry joints. Do not use powder actuated fasteners, wooden plugs, or plastic inserts.
 - c. Steel Structure Welding:
 - d. Unless otherwise noted, hangers, clips, and auxiliary support steel may be welded in lieu of bolting, clamping, or riveting to the building structural frame. Take adequate precautions during all welding operations for fire prevention and for protecting walls and ceilings from being damaged by smoke.

2.4 OPENINGS IN FLOORS, WALLS AND CEILINGS

- A. Exact locations of all openings for the installation of materials shall be determined by the Contractor and given to the General Contractor for installation or construction as the structure is built.
- B. Coordinate all openings with other Contractors.
- C. Hire the proper tradesman and furnish all labor, material and equipment to cut openings in or through existing structures, or openings in new structures that were not installed, or additional openings. Repair all spalling and damage to the satisfaction of the Architect/Engineer. Make saw cuts before breaking out concrete to ensure even and uniform opening edges.
- D. Said cutting shall be at the complete expense of each Contractor. Failure to coordinate openings with other Contractors shall not exempt the Contractor from providing openings at Contractor's expense.
- E. Do not cut structural members without written approval of the Architect or Structural Engineer.

2.5 ESCUTCHEON PLATES AND TRIM

- A. Fit escutcheons to all insulated or uninsulated exposed pipes passing through walls, floors, or ceilings of finished rooms.
- B. Escutcheons shall be heavy gauge, cold rolled steel, copper coated under a chromium plated finish, heavy spring clip, rigid hinge and latch.
- C. Install galvanized steel (unless otherwise indicated) trim strip to cover vacant space and raw construction edges of all rectangular openings in finished rooms. This includes duct and pipe openings.

2.6 PIPE PENETRATIONS

- A. Seal all pipe penetrations. Seal non-rated walls and floor penetrations with grout or caulk. Backing material may be used.
- B. Seal fire rated wall and floor penetrations with fire seal system as specified.

2.7 PIPE ANCHORS

- A. Provide all items needed to allow adequate expansion and contraction of all piping. All piping shall be supported, guided, aligned, and anchored as required.
- B. Repair all piping leaks and associated damage. Pipes shall not rub on any part of the building.

2.8 FINISH

- A. Prime coat exposed steel hangers and supports. Hangers and supports in crawl spaces, pipe shafts, and suspended ceiling spaces are not considered exposed.

PART 3 - EXECUTION

3.1 FIRE SUPPRESSION SUPPORTS AND ANCHORS

- A. General Installation Requirements:
 - 1. Install all items per manufacturer's instructions.
 - 2. Coordinate the location and method of support of piping systems with all installations under other Divisions and Sections of the Specifications.
 - 3. Where pipe support members are welded to structural building framing, scrape, brush clean, and apply one coat of zinc rich primer to welding.
 - 4. Supports shall extend directly to building structure. Do not support piping from duct hangers. Do not allow lighting or ceiling supports to be hung from piping supports.
- B. Supports Requirements:
 - 1. Where building structural steel is fireproofed, all hangers, clamps, auxiliary steel, etc., which attach to it shall be installed prior to application of fireproofing. Repair all fireproofing damaged during pipe installation.
 - 2. Furnish, install and prime all auxiliary structural steel for support of piping systems that are not shown on the Drawings as being by others.
 - 3. Install hangers and supports complete with lock nuts, clamps, rods, bolts, couplings, swivels, inserts and required accessories.
 - 4. Hangers for horizontal piping shall have adequate means of vertical adjustment for alignment.
- C. Pipe Requirements:
 - 1. Support all piping and equipment, including valves, strainers, and other specialties and accessories to avoid objectionable or excessive stress, deflection, swaying, sagging or vibration in the piping or building structure during erection, cleaning, testing and normal operation of the systems.

-
2. Do not, however, restrain piping to cause it to snake or buckle between supports or to prevent proper movement due to expansion and contraction.
 3. Support piping at equipment and valves so they can be disconnected and removed without further supporting the piping.
 4. Piping shall not introduce strains or distortion to connected equipment.
 5. Parallel horizontal pipes may be supported on trapeze hangers made of structural shapes and hanger rods; otherwise, pipes shall be supported with individual hangers.
 6. Trapeze hangers may be used where ducts interfere with normal pipe hanging.
 7. Provide additional supports where pipe changes direction, adjacent to flanged valves and strainers, at equipment connections and heavy fittings.
 8. Provide at least one hanger adjacent to each joint in grooved end steel pipe with mechanical couplings.
- D. Provided the installation complies with all loading requirements of truss and joist manufacturers, the following practices are acceptable:
1. Loads of 100 lbs or less may be attached anywhere along the top or bottom chords of trusses or joists with a minimum 3' spacing between loads.
 2. Loads greater than 100 lbs. must be hung concentrically and may be hung from top or bottom chord, provided one of the following conditions is met:
 - a. The hanger is attached within 6" from a web/chord joint.
 - b. Additional L2x2x1/4 web reinforcement is installed per manufacturer's requirements.
 3. It is prohibited to cantilever a load using an angle or other structural component that is attached to a truss or joist in such a fashion that a torsional force is applied to that structural member.
 4. If conditions cannot be met, coordinate installation with truss or joist manufacturer and contact Architect/Engineer.
- E. After piping and insulation installation are complete, cut hanger rods back at trapeze supports so they do not extend more than 3/4" below bottom face of lowest fastener and blunt any sharp edges.
- F. Do not exceed 25 lbs. per hanger and a minimum spacing of 2'-0" on center when attaching to metal roof decking (limitation not required with concrete on metal deck). This 25 lbs. load and 2'-0" spacing include adjacent electrical and architectural items hanging from deck. If the hanger restrictions cannot be achieved, supplemental framing off steel framing will need to be added.
- G. Do not exceed the manufacturer's recommended maximum load for any hanger or support.
- H. Spacing of hangers shall in no case exceed the following:
1. Steel (All steel pipe unless otherwise noted):
 - a. Maximum Spacing:
 - 1) 1-1/4" & under: 12'-0"
 - 2) 1-1/2" & larger: 15'-0"

- I. Installation of hangers shall conform to MSS SP-58, 69, 89, and applicable NFPA standards.

END OF SECTION 210529

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 210550 - SEISMIC REQUIREMENTS FOR EQUIPMENT AND SUPPORTS

PART 1 - GENERAL

1.1 SECTION INCLUDES

- A. Seismic Requirements.

1.2 QUALITY ASSURANCE

A. General:

1. The contractor shall retain a specialty consultant or equipment manufacturer to develop a seismic restraint and support system and perform seismic calculations in accordance with these specifications, state, and local codes.
2. Items used for seismic restraint of equipment and systems shall be specifically manufactured for seismic restraint.
3. These requirements are beyond those listed in Section 210529 of these specifications. Where a conflict arises between the seismic requirements of this section and any other section, the Architect/Engineer shall be immediately notified for direction to proceed.

B. Manufacturer:

1. System Supports/Restraints: Company specializing in the manufacture of products specified in this Section.
2. Equipment: Each company providing equipment that must meet seismic requirements shall provide certification included in project submittals the equipment supplied for the project meets or exceeds the seismic requirements of the project.

- C. Testing Agency: An independent testing agency, acceptable to Authorities Having Jurisdiction, with experience and capability to conduct the testing indicated.

- D. Installer: Company specializing in performing the work of this Section.

1.3 REFERENCES

- A. International Building Code, 2018.
- B. ASHRAE - A Practical Guide to Seismic Restraint.
- C. ASCE 7-16, Chapter 13.
- D. SMACNA - Seismic Restraint Manual Guidelines for Mechanical Systems.
- E. NFPA 13 - Installation of Sprinkler Systems.
- F. NFPA 14 - Standpipe and Hose Systems.

1.4 SUBMITTALS

- A. Submit under provisions of Section 210500.

B. Shop Drawings:

1. Calculations, restraint selections, and installation details shall be designed and sealed by a Professional Engineer licensed in the state where the project is located experienced in seismic restraint design and installation.
2. Coordination Drawings: Plans and sections drawn to scale, coordinating seismic bracing of mechanical components with other systems and equipment in the vicinity, including other seismic restraints.
3. Manufacturer's Certifications: Professional Engineer licensed in the state where the project is located shall review and approve manufacturer's certifications of compliance.
4. System Supports/Restraints - Submit for each condition requiring seismic bracing:
 - a. Calculations for each seismic brace and detail utilized on the project.
 - b. Plan drawings showing locations and types of seismic braces on contractor fabrication/installation drawings.
 - c. Cross-reference between details and plan drawings to indicate exactly which brace is being installed at each location. Details provided are to clearly indicate attachments to structure, correctly representing the fastening requirements of bracing.
 - d. Clear indication of brace design forces and maximum potential component forces at attachment points to building structure for confirmation of acceptability by the Structural Engineer of Record.
5. Equipment - Submit for each piece of equipment supplied:
 - a. Certification that the equipment supplied for the project meets or exceeds the seismic requirements specified.
 - b. Specific details of seismic design features of equipment and maximum seismic loads imparted to the structural support.
 - c. Engineering calculations and details for equipment anchorage and support structure.

- C. A seismic restraint designer shall be provided whether or not exceptions listed in the applicable building code are met. If seismic restraints are not provided for a system that requires seismic bracing, the seismic designer shall submit a signed and sealed letter to the Architect/Engineer and Authorities Having Jurisdiction stating the exceptions, along with code reference, utilized for each item. Seismic designer shall review system installation for general conformance to the exception requirements stated in the code and document, in writing, the system has been installed in accordance to the exception.

1.5 TESTING AND INSPECTION

- A. Special Inspection and Testing shall be done in accordance with Chapter 17 of the Building Code.
- B. The Owner shall employ a Special Inspection Agency to perform the duties and responsibilities specified in Section 1704 and 1705.
- C. Work performed on the premises of a fabricator approved by the building official need not be tested and inspected. The fabricator shall submit a certificate of compliance that the work has been performed in accordance with the approved plans and specifications to the building official and the Architect and Engineer of Record.

- D. The Special Inspection Agency shall furnish inspection reports to the building official, the Owner, the Architect, the Engineer of Record, and the General Contractor. The reports shall be completed and furnished within 48 hours of inspected work. A final signed report stating whether the work requiring special inspection was, to the best of the Special Inspection Agency's knowledge, in conformance with the approved plans and specifications shall be submitted.

1.6 DELIVERY, STORAGE, AND HANDLING

- A. Deliver, store, protect and handle products to site. Accept material on site in factory containers and packing. Inspect for damage. Protect from damage and contamination by maintaining factory packaging until installation. Follow manufacturer's instructions for storage.

1.7 DESIGN REQUIREMENTS

- A. This project is subject to the seismic bracing requirements of the International Building Code, 2018 edition.
- B. The following criteria are applicable to this project:
 - 1. Risk Category: III
 - 2. Seismic Importance Factor: $I_E = 1.0$
 - 3. Seismic Design Category: B
 - 4. Component Amplification Factors (a_p) and Component Response Modification Factors (R_p) shall be taken from Table 13.5-1 in ASCE 7-16 for the individual equipment or system being restrained.
 - 5. Component Importance Factors (I_p) shall be taken from Section 13.1.3 in ASCE 7-16 for the individual equipment or system being restrained.
 - 6. The total height of the structure and the height of the system to be restrained within the structure shall be determined in coordination with architectural plans and the General Contractor.
- C. Forces shall be calculated with the above requirements and Equation 13.3-1, -2, and -3 of ASCE 7-16, unless exempted by 13.1.4.
- D. Equipment shall meet International Building Code and ASCE 7 seismic qualification requirements in concurrence with ICC ES AC156 Acceptance Criteria for Seismic Qualification by Shake-Table Testing of Nonstructural Components and Systems.
- E. All seismic anchorage and bracing shall comply with FM Global Property Loss Prevention Data Sheet 1-11, Fire Following Earthquakes.

1.8 COORDINATION

- A. Coordinate layout and installation of seismic bracing with building structural systems and architectural features, and with mechanical, fire-protection, electrical and other building features in the vicinity.
- B. Coordinate concrete bases with building structural system.

1.9 WARRANTY

- A. Provide one-year warranty on parts and labor for manufacturer defects and installation workmanship.

PART 2 - PRODUCTS

2.1 SUPPLIERS

- A. Following is a partial list of manufacturer/supplier contact information for seismic restraints:

1. B-Line Systems, Inc. (800) 851-7415, www.b-line.com.
2. Unistrut Corporation <http://www.unistrut.us/>
3. Kinetics Noise Control (877) 457-2695, www.kineticsnoise.com.
4. Mason Industries, Inc. www.mason-ind.com.
5. Loos & Co., Inc. (800) 321-5667, www.loosnaples.com.
6. Tolco (909) 737-5599, www.tolco.com
7. ISAT 877.523.6060, www.isatsb.com
8. Vibro-Acoustics (416) 291-7371, <https://virs.vibro-acoustics.com/>

2.2 SEISMIC DESIGN CRITERIA

- A. This section describes the requirements for seismic restraint of systems and equipment related to continued operation of the facility after a design seismic event.

- B. Definitions

1. Stay in Place:
 - a. All systems and equipment shall be anchored and restrained such that the anchoring system is intended not to fail and equipment and/or system components will not fall.

2.3 SEISMIC BRACING AND SUPPORT OF SYSTEMS AND COMPONENTS

- A. General:

1. Seismic restraint designer shall coordinate all attachments with the Structural Engineer of Record; refer to submittal requirements.
2. The seismic restraint design shall be based on actual equipment data obtained from manufacturer's submittals or the manufacturer. The equipment manufacturer shall verify and provide written certification the attachment points on the equipment can accept the combination of seismic, weight, and other imposed loads.
3. Design analysis shall include calculated dead loads, static seismic loads, and capacity of materials utilized for the connection of the equipment or system to the structure.
4. Analysis shall detail anchoring methods, bolt diameter, embedment, and weld length.
5. All seismic restraint devices shall be designed to accept without failure the forces calculated per the applicable building code.
6. All seismic restraints and combination isolator/restraints shall have verification of their seismic capabilities witnessed by an independent testing agency.

- B. Friction from gravity loads shall not be considered resistance to seismic forces.

- C. Fire protection systems shall meet the requirements of NFPA-13 and NFPA-14 for the building seismic requirements.

2.4 MATERIALS

- A. Use the following materials for restraints:
 - 1. Indoor Dry Locations: Steel, zinc plated.
 - 2. Outdoors and Damp Locations: Galvanized steel.
 - 3. Corrosive Locations: Stainless steel.

2.5 ANCHORAGE AND STRUCTURAL ATTACHMENT COMPONENTS

- A. Strength: Defined in reports by ICC Evaluation Service or another agency acceptable to authorities having jurisdiction.
 - 1. Structural Safety Factor: Strength in tension and shear of components used shall be at least two times the maximum seismic forces to which they will be subjected.
- B. Concrete and Masonry Anchor Bolts and Studs: Steel-expansion wedge type. Comply with IBC, ACI and ICC ES requirements for cracked concrete anchors.
- C. Concrete Inserts: Steel-channel type.
- D. Through Bolts: Structural type, hex head, high strength. Comply with ASTM F3125, Grade A 325.
- E. Welding Lugs: Comply with MSS SP-69, Type 57.
- F. Beam Clamps for Steel Beams and Joists: Double sided. Single-sided type is not acceptable.
- G. Bushings for Floor-Mounted Equipment Anchors: Neoprene units designed for seismically rated rigid equipment mountings, and matched to the type and size of anchor bolts and studs used.
- H. Bushing Assemblies for Wall-Mounted Equipment Anchorage: Assemblies of neoprene elements and steel sleeves designed for seismically rated rigid equipment mountings, and matched to the type and size of attachment devices used.

2.6 SEISMIC BRACING COMPONENTS

- A. Slotted Steel Channel: 1-5/8-by-1-5/8-inch cross section, formed from 0.1046-inch-thick steel, with 9/16-by-7/8-inch slots at a maximum of 2 inches o.c. in webs, and flange edges turned toward web.
 - 1. Materials for Channel: ASTM A 1011, GR 33.
 - 2. Materials for Fittings and Accessories: ASTM A 635, ASTM A 576, or ASTM A 36.
 - 3. Fittings and Accessories: Products of the same manufacturer as channels and designed for use with that product.
 - 4. Finish: Baked, rust-inhibiting, acrylic-enamel paint applied after cleaning and phosphate treatment, unless otherwise indicated.
- B. Channel-Type Bracing Assemblies: Slotted steel channel, with adjustable hinged steel brackets and bolts.

- C. Cable-Type Bracing Assemblies: Zinc-coated, high-strength steel wire rope cable attached to steel thimbles, brackets, and bolts designed for cable service.
 - 1. Arrange units for attachment to the braced component at one end and to the structure at the other end.
 - 2. Wire Rope Cable: Comply with ASTM A 603. Use 49- or 133-strand cable with a minimum strength of 2 times the calculated maximum seismic force to be resisted.
- D. Hanger Rod Stiffeners: Slotted steel channels with internally bolted connections to hanger rod.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Refer to the applicable code sections and Authority Having Jurisdiction for the exact seismic restraint requirements of piping, ductwork, conduit, equipment, etc.
- B. Layout of transverse and longitudinal bracing shall follow recommendations of approved design standards listed in Part 1 of this specification section.
- C. All rigid floor mounted equipment shall have a resilient media between the equipment mounting hole and the anchor bolt in concrete.
- D. All seismic restraint systems shall be installed in strict accordance with the manufacturer's written instructions and all certified submittal data.
- E. Installation of seismic restraints shall not cause any change in position of equipment, piping, or ductwork, resulting in stresses or misalignment.
- F. No rigid connections between equipment and the building structure shall be made that degrade the noise and vibration-isolation system specified.
- G. Do not install any equipment, piping, duct, or conduit that makes rigid connections with the building unless isolation is not specified.
- H. Coordinate work with all other trades to avoid rigid contact with the building. Any conflicts with other trades that will result in rigid contact with equipment or piping due to inadequate space or other unforeseen conditions shall be brought to the Architect/Engineer's attention prior to specific equipment selection.
- I. Prior to installation, bring to the Architect/Engineer's attention any discrepancies between the specifications and the field conditions, or changes required due to specific equipment selection.
- J. Bracing may occur from flanges of structural beams, upper truss cords of bar joists, cast in place inserts, or International Code Council approved seismic anchors for installation in concrete.
- K. Cable restraints shall be installed slightly slack to avoid short-circuiting the isolated suspended equipment, ductwork, piping, or conduit.
- L. Cable assemblies shall be installed taut on non-isolated systems. Solid braces may be used in place of cables on rigidly attached systems only.

-
- M. Do not install cables over sharp corners.
 - N. Brace support rods when necessary to accept compressive loads. Welding of compression braces to the vertical support rods is not acceptable.
 - O. Provide reinforced clevis bolts when required.
 - P. The vibration isolation manufacturer shall furnish integral structural steel bases as required. Independent steel rails are not acceptable.
 - Q. Post-Installed anchors shall be provided to meet seismic requirements.
 - R. Vertical pipe risers flexibly supported to accommodate thermal motion and/or pipe vibration shall be guided to maintain pipe stability and provide horizontal seismic restraint.
 - S. Seismic restraints shall be mechanically attached to the system. Looping restraints around the system is not acceptable.
 - T. Piping crossing building seismic or expansion joints, passing from building to building, or supported from different portions of the building shall be installed to allow differential support displacements without damaging the pipe, equipment connections, or support connections. Pipe offsets, loops, anchors, and guides shall be installed as required to provide required motion capability and limit motion of adjacent piping.
 - U. Water tanks shall be secured to their saddles by welding or proper concrete attachment, and those saddles shall be properly attached to the structure.
 - V. Brace all terminal units with water coils as required by the building code and provide flexible connection to the coil if bracing is required.
 - W. Independently brace duct mounted equipment (terminal units, in-line fans, etc.) and the associated suspended ductwork.
 - X. Do not brace a system to two different structures such as a wall and a ceiling.
 - Y. Provide appropriately sized openings in walls, floors, and ceilings for anticipated seismic movement. Provide fire seal systems in fire-rated walls.
 - Z. Positively attach all roof mounted equipment to roof curbs. Positively attach all roof curbs to building structure.
 - AA. Exposed seismic supports in occupied areas shall be guarded or covered to protect occupants.
 - BB. Coordinate seismic bracing of architecturally exposed ductwork with the Architect/Engineer.
- 3.2 SEISMIC RESTRAINT EXCLUSIONS
- A. Refer to the applicable code sections and Authority Having Jurisdiction for allowable exclusions.

END OF SECTION 210550

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 210553 - FIRE SUPPRESSION IDENTIFICATION

PART 1 - GENERAL

1.1 SECTION INCLUDES

- A. Identification of products installed under Division 21.

1.2 REFERENCES

- A. ANSI/ASME A13.1 - Scheme for the Identification of Piping Systems.
- B. ASTM B-1, B-3, and B-8 for copper conductors.
- C. ASTM D-1248 for Polyethylene Extrusion Materials, ICEA S-70-547 Weatherproof Resistant Polyethylene Conductors, ICEA S-61-402/NEMA WC5 Thermoplastic Insulated Wire & Cable, ICEA S-95-658/NEMA WC70 Non-Shielded 0 - 2kv Cables.
- D. UL 1581 Standard for Electrical Wires, Cables, and Flexible Cords.

1.3 SUBMITTALS

- A. Submit shop drawings under provisions of Section 210500. Include list of items identified, wording, letter sizes, and color coding.
- B. Include valve chart and schedule listing valve tag number, location, function, and valve manufacturer's name and model number.

PART 2 - PRODUCTS

2.1 ACCEPTABLE MANUFACTURERS

- A. 3M
- B. Bunting
- C. Craftmark
- D. Emedco
- E. Kolbi Industries
- F. Seton
- G. W.H. Brady
- H. Marking Services.

2.2 MATERIALS

- A. All pipe markers shall conform to ANSI A13.1. Marker lengths and letter sizes shall be at least the following:
- | OD of Pipe or Insulation | Marker Length | Size of Letters |
|----------------------------|---------------|-----------------|
| Up to and including 1-1/4" | 8" | 1/2" |
| 1-1/2" to 2" | 8" | 3/4" |
| 2-1/2" to 6" | 12" | 1-1/4" |
| 8" to 10" | 24" | 2-1/2" |
| Over 10" | 32" | 3-1/2" |
- Plastic tags may be used for outside diameters under 3/4"
- B. Plastic Nameplates: Laminated three-layer phenolic with engraved black, 1/4" minimum letters on light contrasting background.
- C. Brass Tags: Brass background with engraved black letters. Tag size minimum 1-1/2" square or 1-1/2" round.
- D. Plastic Pipe Markers: Semi-rigid plastic, preformed to fit around pipe or pipe covering; indicating flow direction and fluid conveyed.
- E. Vinyl Pipe Markers: Colored vinyl with permanent pressure sensitive adhesive backing.
- F. Stencil Painted Pipe Markers: Use industrial enamel spray paint per ANSI Standard A13.1. Indicate fluid conveyed and flow direction.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Install all products per manufacturer's recommendations.
- B. Degrease and clean surfaces to receive adhesive for identification materials.
- C. Valves:
- All valves (except shutoff valves at equipment) shall have numbered tags.
 - Provide or replace numbered tags on all existing valves that are connected to new systems or that have been revised.
 - Provide all existing valves used to extend utilities to this project with numbered tags. Review tag numbering sequence with the Owner prior to ordering tags.
 - Secure tags with heavy duty key chain and brass "S" link or with mechanically fastened plastic straps.
 - Attach to handwheel or around valve stem.
 - Number all tags and show the service of the pipe.
 - Provide two sets of laminated 8-1/2" x 11" (letter size) copies of a valve directory listing all valves, with respective tag numbers, uses, and locations. The directory shall be reviewed by the Owner and Architect/Engineer prior to laminating final copies. Laminated copies shall have brass eyelet in at least one corner for easy hanging.

D. Pipe Markers:

1. Adhesive Backed Markers: Use Brady Style 1, 2, or 3 on pipes 3" diameter and larger. Use Brady Style 4, 6, or 8 on pipes under 3" diameter. Similar styles by other listed manufacturers are acceptable. Secure all markers at both ends with a wrap of pressure sensitive tape completely around the pipe.
2. Snap-on Markers: Use Seton "Setmark" on pipes up to 5-7/8" OD. Use Seton "Setmark" with nylon or Velcro ties for pipes 6" OD and over. Similar styles by other listed manufacturers are acceptable.
3. Stencil Painted Pipe Markers:
 - a. Remove rust, grease, dirt, and all foreign substances from the pipe surface.
 - b. Apply primer on non-insulated pipes before painting.
 - c. Use background and letter colors as scheduled later in this section.
4. Apply markers and arrows in the following locations where clearly visible:
 - a. At each valve.
 - b. On both sides of walls that pipes penetrate.
 - c. At least every 20 feet along all pipes.
 - d. On each riser and each leg of each "T" joint.
 - e. At least once in every room and each story traversed.

E. Equipment:

1. All equipment not easily identifiable such as controls, relays, gauges, etc.; and all equipment in an area remote from its function shall have nameplates or plastic tags listing name, function, and drawing symbol. Do not label exposed equipment in public areas.
2. Fasten nameplates or plastic tags with stainless steel self-tapping screws or permanently bonding cement.
3. Mechanical equipment that is not covered by the U.S. National Appliance Energy Conservation Act (NAECA) of 1987 shall carry a permanent label installed by the manufacturer stating that the equipment complies with the requirements of ASHRAE 90.1.

3.2 SCHEDULE

- A. Pipes to be marked shall be labeled with text shown as follows, regardless of which method or material is used:
1. FIRE PROTECTION WATER: White lettering; red background
 2. SPRINKLER WATER: White lettering; red background
- B. All piping downstream of the fire protection backflow preventer, upstream of sprinkler zone valves, standpipe piping, and combination sprinkler standpipe piping shall be labeled Fire Protection Water. All piping downstream of sprinkler zone valves shall be labeled Sprinkler Water.

END OF SECTION 210553

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 211300 - FIRE PROTECTION SYSTEMS

PART 1 - GENERAL

1.1 SECTION INCLUDES

- A. Pipe, Fittings, Valves, and Connections for Fire Protection System.
- B. Wet-Pipe Sprinkler System.

1.2 QUALITY ASSURANCE

- A. Welding Materials and Procedures: Conform to ASME Code.
- B. Equipment and Components: Bear UL/FM label or marking.
- C. Valves: Bear UL/FM label or marking. Provide manufacturer's name and pressure rating marked on valve body. Pressure rating shall match specified pipe system pressure rating. Remanufactured valves are not acceptable.
- D. Specialist Firm: Company specializing in sprinkler systems with minimum three years' experience.
- E. Sprinkler design drawings submitted by the Contractor shall be prepared by a NICET Water-Based Fire Protection Systems Layout Level III or Level IV designer or PE.

1.3 REFERENCES

- A. ANSI/ASME B16.1 - Cast Iron Pipe Flanges and Flanged Fittings, Class 25, 125, 250, and 800.
- B. ANSI/ASME B16.3 - Malleable Iron Threaded Fittings, Class 150 and 300.
- C. ANSI/ASME B16.4 - Cast Iron Threaded Fittings, Class 125 and 250.
- D. ANSI/ASME B16.5 - Pipe Flanges and Flanged Fittings.
- E. ANSI/ASME B16.9 - Factory-made Wrought Steel Butt-Welding Fittings.
- F. ANSI/ASME B16.11 - Forged Steel Fittings, Socket-Welding and Threaded.
- G. ANSI/ASME B16.25 - Butt-Welding Ends.
- H. ANSI/ASME B36.10 - Welded and Seamless Wrought Steel Pipe.
- I. ANSI/ASME Section 9 - Welding and Brazing Qualifications.
- J. ANSI/ASTM A47 - Malleable Iron Castings.
- K. ANSI/ASTM A135 - Electric-Resistance-Welded Steel Pipe.
- L. ANSI/AWWA C110 - Ductile Iron and Gray Iron Fittings.

Unified Government Memorial Hall Kitchen & Audio/Visual Renovations

Unified Government of Wyandotte County & Kansas City, KS

ISSUED FOR BID

-
- M. ANSI/AWWA C151 - Ductile Iron Pipe, Centrifugally Cast.
 - N. ASME - Boiler and Pressure Vessel Code - Section IX, Welding and Brazing Requirements.
 - O. ASTM A153 - Pipe, Steel, Black and Hot-Dipped, Zinc-coated Welded and Seamless.
 - P. AWS A5.8 - Brazing Filler Metal.
 - Q. AWS B2.2 - Standard for Brazing Procedure and Performance Qualification.
 - R. AWS D10.9 - Specifications for Qualification of Welding Procedures and Welders for Piping and Tubing.
 - S. BOCA National Building Code.
 - T. FM Global - FM Global Approval Guide.
 - U. FM Global Datasheet 2-0 - Installation Guidelines for Automatic Sprinklers
 - V. FM Global Datasheet 3-26 - Fire Protection Water Demand for Nonstorage Sprinklered Properties
 - W. FM Global Datasheet 4-4N - Standpipe and Hose Systems
 - X. FM Global Datasheet 8-9 - Storage of Class 1, 2, 3, 4, and Plastic Commodities
 - Y. IBC - International Building Code.
 - Z. MSS SP-73 - Brazing Joints for Wrought and Cast Copper Alloy Solder Joint and Pressure Fittings.
 - AA. NFPA 101 - Life Safety Code,
 - BB. NFPA 13 - Standard for the Installation of Sprinkler Systems.
 - CC. NFPA 13D - Standard for the Installation of Sprinkler Systems in One- and Two-Family Dwellings and Manufactured Homes.
 - DD. NFPA 13R - Standard for the Installation of Sprinkler Systems in Residential Occupancies up to and Including Four Stories in Height.
 - EE. NFPA 14 - Standard for the Installation of Standpipe and Hose Systems.
 - FF. NFPA 24 - Standard for the Installation of Private Fire Service Mains and Their Appurtenances.
 - GG. NFPA 25 - Standard for the Inspection, Testing, and Maintenance of Water-Based Fire Protection Systems.
 - HH. UBC - Uniform Building Code.
 - II. UL - Underwriter's Laboratory Fire Protection Equipment Directory.

1.4 SUBMITTALS

- A. Submit shop drawings per Section 210500. Indicate pipe materials, joining methods, supports, floor and wall penetration seals, sprinklers, equipment data and ratings, and hydraulic calculations.
- B. Submit detailed pipe and sprinkler layout and other calculations and forms as described in NFPA 13.
- C. Submit detailed working drawings and obtain review of them in the following order:
 - 1. Owner's Insurance Company
 - 2. Architect/Engineer
 - 3. Local Fire Department
 - 4. Owner's Insurance Company
 - 5. Architect/Engineer
- D. Working drawings shall include piping and sprinkler layout, sprinkler types and ratings, sections and elevations at critical points. Show coordination with lighting, ductwork, and diffusers, and indicate basic flow and hydraulic design information, including main location and date that the test was taken.
- E. Provide the Owner with one copy of NFPA 25. Standard for the Inspection Testing and Maintenance of Water-based Fire Protection Systems.

1.5 DELIVERY, STORAGE, AND HANDLING

- A. Store valves and sprinklers in shipping containers, with labels in place.
- B. Provide temporary protective coating on iron and steel valves.
- C. Maintain temporary end caps and closures in place until installation.

1.6 WORK FURNISHED BUT INSTALLED UNDER OTHER SECTIONS

- A. Furnish sleeves to General Contractor for placement in walls and floors. Sleeve location to be determined by the Fire Protection Contractor prior to construction. If additional sleeves are required, they shall be core drilled by the Fire Protection Contractor.

1.7 SYSTEM DESCRIPTION

- A. Contractor shall design and install the following water-based fire protection systems for the areas noted on the contract documents:
 - 1. Wet pipe sprinkler system(s)
- B. Sprinkler systems shall be designed and installed according to the following standard(s):
 - 1. NFPA 13 - Standard for the Installation of Sprinkler Systems
 - 2. FM Global Datasheet 2-0 - Installation Guideline for Automatic Sprinklers
 - 3. FM Global Datasheet 3-26 - Fire Protection Water Demand for Nonstorage Sprinklered Properties

- C. System design and installation shall include all requirements by the Authority Having Jurisdiction, local and state building codes, and Owner's insurance company in addition to the previously listed design standard(s). Those requirements shall take precedence over the contract documents in the case of discrepancies.
- D. Systems shall be hydraulically calculated in accordance with the applicable design standard(s). Contractor is responsible for final pipe sizing based on results from hydraulic calculations. Pipe sizing shown on drawings for service entrance and main risers is preliminary and for coordination purposes only.
- E. The water supply source for this project is the following:
 - 1. Public waterworks system.
 - 2. The system design shall be based on water supply information provided on the contract drawings. Supply shall be presumed to be at the point of connection to existing water supply infrastructure unless noted otherwise. The Fire Protection Contractor is responsible to verify this information and conduct all tests required. Base all pipe sizing and hydraulic calculations on flow test data no older than 12 months.

1.8 COORDINATION DRAWINGS

- A. Reference Coordination Drawings article in Section 210500 for required fire protection systems electronic CAD drawings to be provided to Coordinating Contractor for inclusion into composite coordination drawings.

1.9 OPERATION AND MAINTENANCE DATA

- A. Submit manufacturers' operation and maintenance data. Include written maintenance data on components of system, servicing requirements, and record drawings.

1.10 JOB CONDITIONS

- A. Fire Protection Contractor shall determine the flow and pressure available at the service connection. The Fire Protection Contractor is responsible to verify this information and make all tests required. Base all pipe sizing and hydraulic calculations on flow test data no older than 18 months.

PART 2 - PRODUCTS

2.1 PIPE AND FITTINGS - WET PIPE SPRINKLER SYSTEMS

- A. Piping - 2" and Under (Steel Pipe):
 - 1. Design Pressure: 175 psig
 - 2. Pipe: Schedule 40, black steel, ASTM A53, ASTM A795, UL/FM. Inner wall shall be coated with an anti-MIC (microbiologically influenced corrosion) coating.
 - 3. Schedule 40 Joints: Threaded or roll grooved (2" and 1.5" only) or flanged.
 - 4. Fittings:
 - a. Threaded:
 - 1) Cast iron, Class 125, black, UL/FM, ANSI/ASME B16.4ASTM A153.

-
- 2) Malleable iron, Class 150, black, UL/FM, ANSI/ASME B16.3ASTM A153.
 - 3) Ductile iron, Class 150, black, UL/FM, ANSI/ASME B16.3ASTM A153.
 - b. Grooved:
 - 1) Ductile iron housing ASTM A-536, Grade 65-45-12, UL/FM, enamel coating, Grade E (Type A) EPDM molded pressure-responsive gaskets suited for 40F to 150F. Carbon steel bolts and nuts.
 - c. Flanged:
 - 1) Cast iron, Class 125, black, UL/FM, ANSI/ASME B16.1ASTM A153.
 - 5. Unions: Class 150 malleable iron, ANSI B16.39, ground joint with copper or copper alloy-to-iron seat.
- B. Piping - 2-1/2" and Above (Steel Pipe):
- 1. Design Pressure: 175 psig
 - 2. Pipe: Schedule 40, black steel ASTM A53, ASTM A795, UL/FM. Inner wall shall be coated with an anti-MIC (microbiologically influenced corrosion) coating.
 - 3. Joints: Roll Grooved or flanged.
 - 4. Fittings:
 - a. Grooved:
 - 1) Ductile iron housing ASTM A-536, Grade 65-45-12, UL/FM, enamel coating, Grade E (Type A) EPDM molded pressure-responsive gaskets suited for 40F to 150F. Carbon steel bolts and nuts.
 - b. Flanged:
 - 1) Cast iron, Class 125, black, UL/FM, ANSI/ASME B16.1ASTM A153.
 - c. Saddle Branch Fittings:
 - 1) In lieu of a TEE fitting for systems using steel piping where connecting a branch line to a main, saddle branch connections utilizing a bolted clamp or a U-bolt support around the main pipe with a ductile iron sealing surface and gasket are permitted based on these size limitations:
 - a) Up to 6" Mains: Branch pipe maximum size is nominally one pipe size smaller than main.
 - b) 8" and Larger Mains: Branch pipe maximum size is nominally two pipe sizes smaller than main.

2.2 FLEXIBLE FIRE SPRINKLER CONNECTIONS

- A. Flexible Connection: Stainless steel hose, 175 psig max working pressure, fully welded non-mechanical fittings, stainless steel braid, maximum of 6' hose length, leak-tested with a minimum 7/8" internal corrugated hose diameter made of 304 stainless steel, end fittings made of carbon or stainless steel. Outlet of end fittings shall be 1/2" or 3/4" to match sprinkler connection. UL/FM.
- B. Ceiling Bracket: G90 galvanized steel, direct attachment type, integrated snap-on clip ends, tamper resistance screws, removable attachment hub with set screw for attachment and adjustment of stainless steel hose.
 - 1. Manufacturers:
 - a. Flexhead Industries
 - b. Victaulic VicFlex,
 - c. Sprinkflex

2.3 VALVES

- A. Provide handwheels for gate valves. Provide gear operators for butterfly valves.
- B. Provide all connections to match pipe joints. Valves shall be same size as pipe.

2.4 RISER LABELING AND IDENTIFICATION

- A. Hydraulic nameplates shall be affixed to each riser and shall include the following minimum information:
 - 1. Installation contractor
 - 2. Date installed
 - 3. Riser location
 - 4. Number of sprinklers
 - 5. Basis of design (density GPM/ft² and area of coverage ft²)
 - 6. Water flow rate (GPM) and residual pressure (psi) at the base of riser
 - 7. Hose stream allowance (GPM).
 - 8. Occupancy classification
 - 9. Commodity classification (if applicable)
 - 10. Maximum storage height (if applicable)

2.5 PIPE LABELING AND IDENTIFICATION

- A. All pipe shall be marked along its length by the manufacturer in such a way as to properly identify the type of pipe. The manufacturer pipe marking shall be visible on every piece of pipe over 2 ft (600 mm) long. Manufacturer pipe identification shall include the manufacturer's name, model designation, and/or schedule. Provide additional identification as described in Section 210553.

PART 3 - EXECUTION

3.1 INSTALLATION - PIPING

A. General Installation Requirements:

1. Coordinate piping and sprinkler locations with all other trades. Ductwork, diffusers and light fixture locations shall have priority over sprinkler piping and sprinklers.
2. Ream pipe and tube ends to full inside diameter. Remove burrs. Remove scale and foreign material, inside and outside, before assembly.
3. Die cut screw joints with full cut standard taper pipe threads.
4. Coat threads with pipe joint compound or wrap with Teflon tape.
5. Locate piping to minimize obstruction of other work.
6. Route piping in concealed spaces above finished ceiling.
7. Use full and double lengths of pipe wherever possible.
8. Slope all piping for complete drainage. Install auxiliary drains for all trapped piping per NFPA 13.
9. Reducers are generally not shown. Where pipe sizes change at tee, the tee shall be the size of the largest pipe shown connecting to it.
10. Comply with manufacturer's installation instructions.

B. Wall/Floor Penetration:

1. Provide sleeves when penetrating floors and walls.
2. Seal pipes passing through exterior walls with a wall seal per Section 210529. Provide Schedule 40 galvanized sleeve at least 2 pipe sizes larger than the pipe. Sleeves through floors shall extend minimum 1.5" above finished floor.
3. Fire seal all pipe and sleeve penetrations (both wall and floor) to maintain fire separation required without restraining pipe.

C. Installation Requirements in Electrical Rooms:

1. Do not install piping or other equipment above electrical switchboards or panelboards. This includes a dedicated space extending 25 feet from the floor to the structural ceiling with width and depth equal to the equipment. Fire protection equipment dedicated to the electrical equipment room or space may be installed above equipment if other alternatives are not available.

D. Hangers and Supports:

1. Provide hangers and supports as required by NFPA 13 and UL/FM, with the following exceptions:
 - a. Do not use powder driven devices, explosive devices, wooden plugs, or plastic inserts.
 - b. Do not install fasteners to carry the load in tension, unless absolutely necessary.

E. Exposed Piping:

1. Install chrome plated steel escutcheons where exposed pipes penetrate walls or floors.
2. Remove all scale, rust, dirt, oils, stickers and thoroughly clean exterior of all bare metal exposed piping, hangers, and accessories in preparation to be painted.

3.2 INSTALLATION - VALVES

- A. Install gate valves with stems upright or horizontal, not inverted.
- B. Shutoff Valve:
 - 1. Provide drain valves at main shutoff valves, low points of piping and apparatus.
 - 2. Provide monitor switches on all shutoff valves.

3.3 INSTALLATION - EQUIPMENT

- A. Coordinate piping and sprinkler locations with all other trades. Ductwork, diffusers and light fixture locations shall have priority over system equipment and sprinklers.
- B. Test Valves:
 - 1. Install test valves where required. Pipe to outdoors or drain. Test connection shall have flow equivalent to the smallest K-factor sprinkler.
- C. Sprinklers:
 - 1. Locate sprinklers to clear lights, ducts and diffusers. Do not run sprinkler pipes through ducts. Ductwork has priority over sprinkler pipes. Offset pipes as needed.
 - 2. Center sprinklers in two directions in ceiling tiles and provide offsets as required.
 - 3. Do not allow concealed sprinkler cover plates to be painted. Sprinkler cover plates are to be factory painted only. Do not field paint.
 - 4. Apply strippable or paper covers so concealed sprinkler cover plates do not receive field paint finish.

3.4 SYSTEMS CLEANING AND TESTING

- A. General Requirement:
 - 1. All water used for testing and remaining in the piping system shall be obtained from a potable water source.
- B. Interior Piping:
 - 1. Verify adequate water flow at the inspector's test connection.
 - 2. Flush all interior piping to remove scale and other foreign material before placing system into service.
 - 3. Hydrostatically test the entire interior piping system at a minimum of 200 psig or 50 psig more than the normal system working pressure for systems subjected to pressures more than 150 psig. Maintain test pressure for 2 hours without loss of pressure.
- C. Fire Alarm System:
 - 1. Test the alarm system by operating the inspector's test connection or the alarm test valves. Verify that the building fire alarm system activates.
 - 2. Adjust all monitor switches for proper operation.

3.5 INSTALLATION - CORROSION PRODUCTS/NITROGEN GENERATOR EQUIPMENT

A. General Installation Requirements:

1. Comply with manufacturer's installation instructions.

B. System Start-up and Commissioning Protocol:

1. Confirm the operation of system air compressor and connect air compressor and nitrogen generator to the dry pipe system.
2. Determine the operating pressure range for the dry/preaction system and set the system air maintenance device for each zone to the correct setting.
3. Confirm the air maintenance device is taken out of the fast fill (by-pass) setting when the system is placed in service.
4. Confirm the water discharge from the air compressor drain and the Nitrogen Generator drain are piped to a floor drain or building exterior per local requirements.
5. Confirm that back pressure regulator of each dry pipe valve is set to close above the low air pressure alarm of the dry pipe system. The isolation ball valve of each device shall be closed during hydrostatic and/or air pressure testing of the dry pipe system and then placed in the open position for the commissioning and operation of the system.
6. Coordinate with Nitrogen System manufacturer to establish and record the final pressure range settings of the nitrogen generator system to coordinate with the dry pipe system operational pressure ranges.
7. Return in two - four weeks to perform a full system inspection after final commissioning of the Nitrogen Generator. Adjustments to system settings may be required. Verify that dry pipe system nitrogen concentration has reached 98% or greater. The Purge System shall have a connection allowing the portable handheld or manifold to attach and sample the purity of Nitrogen within the dry pipe system to ensure that proper nitrogen purity levels have been obtained.

END OF SECTION 211300

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 220500 - BASIC PLUMBING REQUIREMENTS

PART 1 - GENERAL

1.1 SECTION INCLUDES

- A. Requirements applicable to all Division 22 Sections. Also refer to Division 1 - General Requirements.
- B. All materials and installation methods shall conform to the applicable standards, guidelines and codes referenced herein and within each specification section.

1.2 SCOPE OF WORK

- A. This Specification and the associated drawings govern the furnishing, installing, testing and placing into satisfactory operation the Mechanical Systems.
- B. Each Contractor shall provide all new materials indicated on the drawings and/or in these specifications, and all items required to make the portion of the Mechanical Work a finished and working system.
- C. All work will be awarded under a single General Contract. The division of work listed below is for the Contractor's convenience and lists normal breakdown of the work.
- D. Scope of Work:
 - 1. Plumbing Work shall include, but is not necessarily limited to:
 - a. Furnish and install all items listed in the Plumbing Material List.
 - b. Extend existing domestic water piping system including cold, hot, and hot water circulating piping within the building. Insulate all piping as specified.
 - c. Extend existing gas piping system...
 - d. Revise and/or replace water heaters.
 - e. Furnish and install condensate drain piping from plumbing related equipment such as ice machines.
 - f. Extend existing sanitary sewer and vent system.
 - g. Furnish and install firestopping systems for penetrations of fire-rated construction associated with this Contractor's work.
 - h. Complete all applicable tests, certifications, forms, and matrices.
 - 2. Heating Work: Refer to Section 230500 "Basic HVAC Requirements".
 - 3. Air Conditioning and Ventilating Work: Refer to Section 230500 "Basic HVAC Requirements".
 - 4. Temperature Control Work: Refer to Section 230500 "Basic HVAC Requirements".
 - 5. Fire Protection Work: Refer to Section 210500 "Basic Fire Suppression Requirements".
 - 6. Testing, Adjusting, and Balancing Work: Refer to Section 230500 "Basic HVAC Requirements".

1.3 WORK SEQUENCE

- A. All work that will produce excessive noise or interference with normal building operations, as determined by the Owner, shall be scheduled with the Owner. It may be necessary to schedule such work during unoccupied hours. The Owner reserves the right to determine when restricted construction hours will be required.

1.4 DIVISION OF WORK BETWEEN MECHANICAL, ELECTRICAL & CONTROL CONTRACTORS

A. Definitions:

1. "Mechanical Contractors" refers to the following:
 - a. Plumbing Contractor.
 - b. Heating Contractor.
 - c. Air Conditioning and Ventilating Contractor.
 - d. Temperature Control Contractor.
 - e. Fire Protection Contractor.
 - f. Testing, Adjusting, and Balancing Contractor.
2. Motor Control Wiring: The wiring associated with the remote operation of the magnetic coils of magnetic motor starters or relays, or the wiring that permits direct cycling of motors by means of devices in series with the motor power wiring. In the latter case the devices are usually single phase and are usually connected to the motor power wiring through a manual motor starter having "Manual-Off-Auto" provisions.
3. Control devices such as start-stop push buttons, thermostats, pressure switches, flow switches, relays, etc., generally represent the types of equipment associated with motor control wiring.
4. Motor control wiring is single phase and usually 120 volts. In some instances, the voltage will be the same as the motor power wiring. Generally, where the motor power wiring exceeds 120 volts, a control transformer is used to give a control voltage of 120 volts.
5. Temperature Control Wiring: The wiring associated with the operation of a motorized damper, solenoid valve or motorized valve, etc., either modulating or two-position, as opposed to wiring which directly powers or controls a motor used to drive equipment such as fans, pumps, etc.
 - a. This wiring will be from a 120 volt source and may continue as 120 volt, or be reduced in voltage (24 volt) in which case a control transformer shall be furnished as part of the temperature control wiring.
6. Control Motor: An electric device used to operate dampers, valves, etc. It may be two-position or modulating. Conventional characteristics of such a motor are 24 volts, 60 cycles, 1 phase, although other voltages may be encountered.
7. Voltage is generally specified and scheduled as distribution voltage. Motor submittals may be based on utilization voltage if it corresponds to the correct distribution voltage.

Distribution/Nominal Voltage	Utilization Voltage
120	115
208	200
240	230
277	265
480	460

B. General:

1. The purpose of these Specifications is to outline the Electrical and Mechanical Contractor's responsibilities related to electrical work required for items such as temperature controls, mechanical equipment, fans, chillers, compressors and the like. The exact wiring requirements for much of the equipment cannot be determined until the systems have been selected and submittals reviewed. Therefore, the electrical drawings show only known wiring related to such items. All wiring not shown on the electrical drawings, but required for mechanical systems, is the responsibility of the Mechanical Contractor.
2. Where the drawings require the Electrical Contractor to wire between equipment furnished by the Mechanical Contractor, such wiring shall terminate at terminals provided in the equipment. The Mechanical Contractor shall provide complete electrical power/controls wiring diagrams and supervision to the Electrical Contractor and designate the terminal numbers for correct wiring.
3. All electrical work shall conform to the National Electrical Code. All provisions of the Electrical Specifications concerning wiring, protection, etc., apply to wiring provided by the Mechanical Contractor unless noted otherwise.
4. Control low (24V) and control line (120V) voltage wiring, conduit, and related switches and relays required for the automatic control and/or interlock of motors and equipment, including final connection, are to be furnished and installed under Divisions 21, 22 and 23. Materials and installation to conform to Class 1 or 2 requirements.
5. All Contractors shall establish utility elevations prior to fabrication and shall coordinate their material and equipment with other trades. When a conflict arises, priority is as follows:
 - a. Light fixtures.
 - b. Gravity flow piping, including steam and condensate.
 - c. Electrical busduct.
 - d. Sheet metal.
 - e. Electrical cable trays, including access space.
 - f. Sprinkler piping and other piping.
 - g. Electrical conduits and wireway.

C. Mechanical Contractor's Responsibility:

1. Assumes responsibility for internal wiring of all equipment provided by the Mechanical Contractor, for example:
 - a. Burners.
 - b. Condensing Units.
 - c. Gas Trains.
 - d. Packaged Rooftop Units.
2. Assumes all responsibility for the Temperature Control wiring, when the Temperature Control Contractor is a Subcontractor to the Mechanical Contractor.
3. Shall verify all existing equipment sizes and capacities where units are to be modified, moved or replaced. Contractor shall notify Architect/Engineer of any discrepancies prior to ordering new units or replacement parts, including replacements of equipment motors.
4. Temperature Control Subcontractor's Responsibility:
 - a. Wiring of all devices needed to make the Temperature Control System functional.

- b. Verifying any control wiring on the electrical drawings as being by the Electrical Contractor. All wiring required for the Control System, but not shown on the electrical drawings, is the responsibility of the Temperature Control Subcontractor.
 - c. Coordinating equipment locations (such as relays, transformers, etc.) with the Electrical Contractor, where wiring of the equipment is by the Electrical Contractor.
5. This Contractor is responsible for coordination of utilities with all other Contractors. If any field coordination conflicts are found, the Contractor shall coordinate with other Contractors to determine a viable layout.

D. Electrical Contractor's Responsibility:

- 1. Provides all combination starters, manual starters and disconnect devices shown on the Electrical Drawings or indicated to be by the Electrical Contractor on the Mechanical Drawings or Specifications.
- 2. Installs and wires all remote control devices furnished by the Mechanical Contractor or Temperature Control Subcontractor when so noted on the Electrical Drawings.
- 3. Provides motor control and temperature control wiring, where so noted on the drawings.
- 4. Coordinate with the Mechanical Contractor for size of motors and/or other electrical devices involved with repair or replacement of existing equipment.
- 5. Furnishes, installs and connects all relays, etc., for automatic shutdown of certain fans upon actuation of the Fire Alarm System as indicated and specified in Division 28.
- 6. This Contractor is responsible for coordination of utilities with all other Contractors. If any field coordination conflicts are found, the Contractor shall coordinate with other Contractors to determine a viable layout.

1.5 COORDINATION DRAWINGS

A. Definitions:

- 1. Coordination Drawings: A compilation of the pertinent layout and system drawings that show the sizes and locations, including elevations, of system components and required access areas to ensure that no two objects will occupy the same space.
 - a. Mechanical trades shall include, but are not limited to, mechanical equipment, ductwork, fire protection systems, plumbing piping, medical gas systems, hydronic piping, steam and steam condensate piping, and any item that may impact coordination with other disciplines.
 - b. Electrical trades shall include, but are not limited to, electrical equipment, conduit 1.5" and larger, conduit racks, cable trays, pull boxes, transformers, raceway, busway, lighting, ceiling-mounted devices, and any item that may impact coordination with other disciplines.
 - c. Technology trades shall include, but are not limited to, technology equipment, racks, conduit 1.5" and larger, conduit racks, cable trays, ladder rack, pull boxes, raceway, ceiling-mounted devices, and any item that may impact coordination with other disciplines.
 - d. Maintenance clearances and code-required dedicated space shall be included.
 - e. The coordination drawings shall include all underground, underfloor, in-floor, in chase, and vertical trade items.

-
2. Spaces with open/cloud ceiling architecture shall indicate the overhead utilities and locate equipment as required to maintain clearance above lights. The intent for the installation is to maintain a maximum allowable vertical clearance and an organized/clean manner in the horizontal. Notify Architect/Engineer of the maximum clearance which can be maintained. Failure to comply will result in modifications with no cost to Owner.
 - a. In cloud ceiling architecture, when open cabling/wire and/or cable tray crosses gaps between ceiling clouds and/or walls, cabling is to transition to conduits to span the gaps in order to conceal cabling from below.
 3. The contractors shall use the coordination process to identify the proper sequence of installation of all utilities above ceilings and in other congested areas, to ensure an orderly and coordinated end result, and to provide adequate access for service and maintenance.
- B. Participation:
1. The contractors and subcontractors responsible for work defined above shall participate in the coordination drawing process.
 2. One contractor shall be designated as the Coordinating Contractor for purposes of preparing a complete set of composite electronic CAD coordination drawings that include all applicable trades, and for coordinating the activities related to this process. The Coordinating Contractor for this project shall be the Mechanical Contractor.
 - a. The Coordinating Contractor shall utilize personnel familiar with requirements of this project and skilled as draftspersons/CAD operators, competent to prepare the required coordination drawings.
 3. Electronic CAD drawings shall be submitted to the Coordinating Contractor for addition of work by other trades. IMEG will provide electronic file copies of applicable drawings for contractor's use if the contractor signs and returns an "Electronic File Transfer" waiver provided by IMEG. IMEG will not consider blatant reproductions of original file copies an acceptable alternative for coordination drawings.
- C. Drawing Requirements:
1. The file format and file naming convention shall be coordinated with and agreed to by all contractors participating in the coordination process and the Owner.
 - a. Scale of drawings:
 - 1) General plans: 1/4 Inch = 1'-0" (minimum).
 - 2) Mechanical, electrical, communication rooms, and including the surrounding areas within 10 feet: 1/2 Inch = 1'-0" (minimum).
 - 3) Shafts and risers: 1/2 Inch = 1'-0" (minimum).
 - 4) Sections of shafts and mechanical and electrical equipment rooms: 1/4 Inch = 1'-0" (minimum).
 - 5) Sections of congested areas: 1/2 Inch = 1'-0" (minimum).
 2. Ductwork layout drawings shall be the baseline system for other components. Ductwork layout drawings shall be modified to accommodate other components as the coordination process progresses.
 3. There may be more drawings required for risers, top and bottom levels of mechanical rooms, and shafts.

4. The minimum quantity of drawings will be established at the first coordination meeting and sent to the Architect/Engineer for review. Additional drawings may be required if other areas of congestion are discovered during the coordination process.

D. General:

1. Coordination drawing files shall be made available to the Architect/Engineer and Owner's Representative. The Architect/Engineer will only review identified conflicts and give an opinion, but will not perform as a coordinator.
2. A plotted set of coordination drawings shall be available at the project site.
3. Coordination drawings are not shop drawings and shall not be submitted as such.
4. The contract drawings are schematic in nature and do not show every fitting and appurtenance for each utility. Each contractor is expected to have included in the bid sufficient fittings, material, and labor to allow for adjustments in routing of utilities made necessary by the coordination process and to provide a complete and functional system.
5. The contractors will not be allowed additional costs or time extensions due to participation in the coordination process.
6. The contractors will not be allowed additional costs or time extensions for additional fittings, reroutings or changes of duct size, that are essentially equivalent sizes to those shown on the drawings and determined necessary through the coordination process.
7. The Architect/Engineer reserves the right to determine space priority of equipment in the event of spatial conflicts or interference between equipment, piping, conduit, ducts, and equipment provided by the trades.
8. Changes to the contract documents that are necessary for systems installation and coordination shall be brought to the attention of the Architect/Engineer.
9. Access panels shall preferably occur only in gypsum board walls or plaster ceilings where indicated on the drawings.
 - a. Access to mechanical, electrical, technology, and other items located above the ceiling shall be through accessible lay-in ceiling tile areas.
 - b. Potential layout changes shall be made to avoid additional access panels.
 - c. Additional access panels shall not be allowed without written approval from the Architect/Engineer at the coordination drawing stage.
 - d. Providing additional access panels shall be considered after other alternatives are reviewed and discarded by the Architect/Engineer and the Owner's Representative.
 - e. When additional access panels are required, they shall be provided without additional cost to the Owner.
10. Complete the coordination drawing process and obtain sign off of the drawings by all contractors prior to installing any of the components.
11. Conflicts that result after the coordination drawings are signed off shall be the responsibility of the contractor or subcontractor who did not properly identify their work requirements, or installed their work without proper coordination.
12. Updated coordination drawings that reflect as-built conditions may be used as record documents.

1.6 QUALITY ASSURANCE

A. Contractor's Responsibility Prior to Submitting Pricing Data:

1. The Contractor is responsible for constructing complete and operating systems. The Contractor acknowledges and understands that the Contract Documents are a two-dimensional representation of a three-dimensional object, subject to human interpretation. This representation may include imperfect data, interpreted codes, utility guidelines, three-dimensional conflicts, and required field coordination items. Such deficiencies can be corrected when identified prior to ordering material and starting installation. The Contractor agrees to carefully study and compare the individual Contract Documents and report at once in writing to the Design Team any deficiencies the Contractor may discover. The Contractor further agrees to require each subcontractor to likewise study the documents and report at once any deficiencies discovered.
2. The Contractor shall resolve all reported deficiencies with the Architect/Engineer prior to awarding any subcontracts, ordering material, or starting any work with the Contractor's own employees. Any work performed prior to receipt of instructions from the Design Team will be done at the Contractor's risk.

B. Qualifications:

1. Only products of reputable manufacturers are acceptable.
2. All Contractors and subcontractors shall employ only workers skilled in their trades.

C. Compliance with Codes, Laws, Ordinances:

1. Conform to all requirements of the City of Kansas City, Kansas Codes, Laws, Ordinances and other regulations having jurisdiction.
2. Conform to all published standards of Unified Government of Wyandotte County.
3. Conform to all State Codes.
4. Conform to Federal Act S.3874 requiring the reduction of lead in drinking water.
5. If there is a discrepancy between the codes and regulations and these specifications, the Architect/Engineer shall determine the method or equipment used.
6. If the Contractor notes, at the time of bidding, that any parts of the drawings or specifications do not comply with the codes or regulations, Contractor shall inform the Architect/Engineer in writing, requesting a clarification. If there is insufficient time for this procedure, Contractor shall submit with the proposal a separate price to make the system comply with the codes and regulations.
7. All changes to the system made after letting of the contract, to comply with codes or requirements of Inspectors, shall be made by the Contractor without cost to the Owner.
8. If there is a discrepancy between manufacturer's recommendations and these specifications, the manufacturer's recommendations shall govern.
9. All rotating shafts and/or equipment shall be completely guarded from all contact. Partial guards and/or guards that do not meet all applicable OSHA standards are not acceptable. Contractor is responsible for providing this guarding if it is not provided with the equipment supplied.

D. Permits, Fees, Taxes, Inspections:

1. Procure all applicable permits and licenses.
2. Abide by all laws, regulations, ordinances, and other rules of the State or Political Subdivision where the work is done, or as required by any duly constituted public authority.
3. Pay all charges for permits or licenses.

4. Pay all fees and taxes imposed by the State, Municipal and/or other regulatory bodies.
5. Pay all charges arising out of required inspections by an authorized body.
6. Pay all charges arising out of required contract document reviews associated with the project and as initiated by the Owner or authorized agency/consultant.
7. Where applicable, all fixtures, equipment and materials shall be listed by Underwriters' Laboratories, Inc. and approved by FM Global.

E. Utility Company Requirements:

1. Secure from the appropriate private or public utility company all applicable requirements.
2. Comply with all utility company requirements.
3. Make application for and pay for service connections, such as sewer and water and gas.
4. Make application for and pay for all meters and metering systems required by the utility company.

F. Examination of Drawings:

1. The drawings for the plumbing work are completely diagrammatic, intended to convey the scope of the work and to indicate the general arrangements and locations of equipment, outlets, etc., and the approximate sizes of equipment.
2. Contractor shall determine the exact locations of equipment and rough-ins, and the exact routing of pipes and ducts to best fit the layout of the job.
3. Scaling of the drawings is not sufficient or accurate for determining these locations.
4. Where job conditions require reasonable changes in indicated arrangements and locations, such changes shall be made by the Contractor at no additional cost to the Owner.
5. Because of the scale of the drawings, certain basic items, such as fittings, boxes, valves, unions, etc., may not be shown, but where required by other sections of the specifications or required for proper installation of the work, such items shall be furnished and installed.
6. If an item is either on the drawings or in the specifications, it shall be included in this contract.
7. Determination of quantities of material and equipment required shall be made by the Contractor from the documents. Where discrepancies arise between drawings, schedules and/or specifications, the greater number shall govern.
8. Where used in mechanical documents, the word "furnish" shall mean supply for use, the word "install" shall mean connect complete and ready for operation, and the word "provide" shall mean to supply for use and connect complete and ready for operation.
 - a. Any item listed as furnished shall also be installed, unless otherwise noted.
 - b. Any item listed as installed shall also be furnished, unless otherwise noted.

G. Field Measurements:

1. Verify all pertinent dimensions at the job site before ordering any materials or fabricating any supports, pipes or ducts.

H. Electronic Media/Files:

1. Construction drawings for this project have been prepared utilizing Revit.
2. Contractors and Subcontractors may request electronic media files of the contract drawings and/or copies of the specifications. Specifications will be provided in PDF format.
3. Upon request for electronic media, the Contractor shall complete and return a signed "Electronic File Transmittal" form provided by IMEG.

4. If the information requested includes floor plans prepared by others, the Contractor will be responsible for obtaining approval from the appropriate Design Professional for use of that part of the document.
5. The electronic contract documents can be used for preparation of shop drawings and as-built drawings only. The information may not be used in whole or in part for any other project.
6. The drawings prepared by IMEG for bidding purposes may not be used directly for ductwork layout drawings or coordination drawings.
7. The use of these CAD documents by the Contractor does not relieve them from their responsibility for coordination of work with other trades and verification of space available for the installation.
8. The information is provided to expedite the project and assist the Contractor with no guarantee by IMEG as to the accuracy or correctness of the information provided. IMEG accepts no responsibility or liability for the Contractor's use of these documents.

1.7 WEB-BASED PROJECT SOFTWARE

- A. The General Contractor shall provide a web-based project software site for the purpose of hosting and managing project communication and documentation until completion of the warranty phase.
- B. The web-based project software shall include, at a minimum, the following features: construction schedule, submittals, RFIs, ASIs, construction change directives, change orders, drawing management, specification management, payment applications, contract modifications, meeting minutes, construction progress photos.
- C. Provide web-based project software user licenses for use by the Architect/Engineer. Access will be provided from the start of the project through the completion of the warranty phase.
- D. At project completion, provide digital archive of entire project in format that is readable by common desktop software applications in format acceptable to Architect/Engineer. Provide data in locked format to prevent further changes.

1.8 SUBMITTALS

- A. Submittals shall be required for the following items, and for additional items where required elsewhere in the specifications or on the drawings.

1. Submittals List:

Referenced Specification	Submittal Item
Section	
220500	Owner Training Agenda
220503	Fire Seal Systems
220513	Motors
220529	Hangers and Supports
220553	Plumbing Identification
220719	Plumbing Pipe Insulation
220900	Instrumentation
221000	Plumbing Piping Systems and Valves
221023	Natural Gas and Propane Piping Systems
221030	Plumbing Specialties
221123	Domestic Water Pumps
22 30 00	Plumbing Equipment

Referenced Specification

Section

22 40 00

Submittal Item

Plumbing Fixtures

- B. General Submittal Procedures: In addition to the provisions of Division 1, the following are required:
1. Transmittal: Each transmittal shall include the following:
 - a. Date
 - b. Project title and number
 - c. Contractor's name and address
 - d. Division of work (e.g., plumbing, heating, ventilating, etc.)
 - e. Description of items submitted and relevant specification number
 - f. Notations of deviations from the contract documents
 - g. Other pertinent data
 2. Submittal Cover Sheet: Each submittal shall include a cover sheet containing:
 - a. Date
 - b. Project title and number
 - c. Architect/Engineer
 - d. Contractor and subcontractors' names and addresses
 - e. Supplier and manufacturer's names and addresses
 - f. Division of work (e.g., plumbing, heating, ventilating, etc.)
 - g. Description of item submitted (using project nomenclature) and relevant specification number
 - h. Notations of deviations from the contract documents
 - i. Other pertinent data
 - j. Provide space for Contractor's review stamps
 3. Composition:
 - a. Submittals shall be submitted using specification sections and the project nomenclature for each item.
 - b. Individual submittal packages shall be prepared for items in each specification section. All items within a single specification section shall be packaged together where possible. An individual submittal may contain items from multiple specifications sections if the items are intimately linked (e.g., pumps and motors).
 - c. All sets shall contain an index of the items enclosed with a general topic description on the cover.
 4. Content: Submittals shall include all fabrication, erection, layout, and setting drawings; manufacturers' standard drawings; schedules; descriptive literature, catalogs and brochures; performance and test data; electrical power criteria (e.g., voltage, phase, amps, horsepower, kW, etc.) wiring and control diagrams; Short Circuit Current Rating (SCCR); dimensions; shipping and operating weights; shipping splits; service clearances; and all other drawings and descriptive data of materials of construction as may be required to show that the materials, equipment or systems and the location thereof conform to the requirements of the contract documents.

5. Contractor's Approval Stamp:
 - a. The Contractor shall thoroughly review and approve all shop drawings before submitting them to the Architect/Engineer. The Contractor shall stamp, date and sign each submittal certifying it has been reviewed.
 - b. Unstamped submittals will be rejected.
 - c. The Contractor's review shall include, but not be limited to, verification of the following:
 - 1) Only approved manufacturers are used.
 - 2) Addenda items have been incorporated.
 - 3) Catalog numbers and options match those specified.
 - 4) Performance data matches that specified.
 - 5) Electrical characteristics and loads match those specified.
 - 6) Equipment connection locations, sizes, capacities, etc. have been coordinated with other affected trades.
 - 7) Dimensions and service clearances are suitable for the intended location.
 - 8) Equipment dimensions are coordinated with support steel, housekeeping pads, openings, etc.
 - 9) Constructability issues are resolved (e.g., weights and dimensions are suitable for getting the item into the building and into place, sinks fit into countertops, etc.).
 - d. The Contractor shall review, stamp and approve all subcontractors' submittals as described above.
 - e. The Contractor's approval stamp is required on all submittals. Approval will indicate the Contractor's review of all material and a complete understanding of exactly what is to be furnished. Contractor shall clearly mark all deviations from the contract documents on all submittals. If deviations are not marked by the Contractor, then the item shall be required to meet all drawing and specification requirements.
6. Submittal Identification and Markings:
 - a. The Contractor shall clearly mark each item with the same nomenclature applied on the drawings or in the specifications.
 - b. The Contractor shall clearly indicate the size, finish, material, etc.
 - c. Where more than one model is shown on a manufacturer's sheet, the Contractor shall clearly indicate exactly which item and which data is intended.
 - d. All marks and identifications on the submittals shall be unambiguous.
7. Schedule submittals to expedite the project. Coordinate submission of related items.
8. Identify variations from the contract documents and product or system limitations that may be detrimental to the successful performance of the completed work.
9. Reproduction of contract documents alone is not acceptable for submittals.
10. Incomplete submittals will be rejected without review. Partial submittals will only be reviewed with prior approval from the Architect/Engineer.
11. Submittals not required by the contract documents may be returned without review.
12. The Architect/Engineer's responsibility shall be to review one set of shop drawing submittals for each product. If the first submittal is incomplete or does not comply with the drawings and/or specifications, the Contractor shall be responsible to bear the cost for the Architect/Engineer to recheck and handle the additional shop drawing submittals.
13. Submittals shall be reviewed and approved by the Architect/Engineer **before** releasing any equipment for manufacture or shipment.

14. Contractor's responsibility for errors, omissions or deviation from the contract documents in submittals is not relieved by the Architect/Engineer's approval.
15. Schedule shall allow for adequate time to perform orderly and proper review of submittals, including time for consultants and Owner if required, and resubmittals by Contractor if necessary, and to cause no delay in Work or in activities of Owner or other contractors.
 - a. Allow at least two weeks for Architect's/Engineer's review and processing of each submittal.
16. Architect/Engineer reserves the right to withhold action on a submittal which, in the Architect/Engineer's opinion, requires coordination with other submittals until related submittals are received. The Architect/Engineer will notify the Contractor, in writing, when they exercise this right.

C. Electronic Submittal Procedures:

1. Distribution: Email submittals as attachments to all parties designated by the Architect/Engineer, unless a web-based submittal program is used.
2. Transmittals: Each submittal shall include an individual electronic letter of transmittal.
3. Format: Electronic submittals shall be in PDF format only. Scanned copies, in PDF format, of paper originals are acceptable. Submittals that are not legible will be rejected. Do not set any permission restrictions on files; protected, locked, or secured documents will be rejected.
4. File Names: Electronic submittal file names shall include the relevant specification section number followed by a description of the item submitted, as follows. Where possible, include the transmittal as the first page of the PDF instead of using multiple electronic files.
 - a. Submittal file name: 22XXXX.description.YYYYMMDD
 - b. Transmittal file name: 22XXXX.description.YYYYMMDD
5. File Size: Files shall be transmitted via a pre-approved method. Larger files may require an alternative transfer method, which shall also be pre-approved.

1.9 CHANGE ORDERS

- A. A detailed material and labor takeoff shall be prepared for each change order, along with labor rates and markup percentages. Change orders shall be broken down by sheet or associated individual line item indicated in the change associated narrative, whichever provides the most detailed breakdown. Change orders with inadequate breakdown will be rejected.
- B. Itemized pricing with unit cost shall be provided from all distributors and associated subcontractors.
- C. Change order work shall not proceed until authorized.

1.10 EQUIPMENT SUPPLIERS' INSPECTION

- A. The following equipment shall not be placed in operation until a competent installation and service representative of the manufacturer has inspected the installation and certified that the equipment is properly installed, adjusted and lubricated; that preliminary operating instructions have been given; and that the equipment is ready for operation:
 - 1. Fire Seal Systems
- B. Contractor shall arrange for and obtain supplier's on-site inspection(s) at proper time(s) to assure each phase of equipment installation and/or connection is in accordance with the manufacturer's instructions.
- C. Submit copies of start-up reports to the Architect/Engineer and include copies of Owner's Operation and Maintenance Manuals.

1.11 PRODUCT DELIVERY, STORAGE, HANDLING & MAINTENANCE

- A. Exercise care in transporting and handling to avoid damage to materials. Store materials on the site to prevent damage. Keep materials clean, dry and free from harmful conditions. Immediately remove any materials that become wet or that are suspected of becoming contaminated with mold or other organisms.
- B. Protect equipment, components, and openings with airtight covers and exercise care at every stage of storage, handling, and installation of equipment to prevent airborne dust and dirt from entering or fouling equipment to include, but not limited to:
 - 1. Motor windings and ventilation openings.
 - 2. Bearings.
 - 3. Equipment Pipe and Accessories connection openings. (e.g. boiler connections, coil connections, etc.)
 - 4. Starter and control cabinets.
 - 5. Heat transfer coils.
 - 6. Pump Seals.
 - 7. Combustion burner and blower equipment (e.g. combustion air intake, combustion vent/flue, etc.)
- C. Equipment and components that are visibly damaged or have been subject to environmental conditions prior to building turnover to Owner that could shorten the life of the component (for example, water damage, humidity, dust and debris, excessive hot or cold storage location, etc.) shall be repaired or replaced with new equipment or components without additional cost to the building owner.
- D. Keep all bearings properly lubricated and all belts properly tensioned and aligned.
- E. Coordinate the installation of heavy and large equipment with the General Contractor and/or Owner. If the Mechanical Contractor does not have prior documented experience in rigging and lifting similar equipment, he/she shall contract with a qualified lifting and rigging service that has similar documented experience. Follow all equipment lifting and support guidelines for handling and moving.

- F. Contractor is responsible for moving equipment into the building and/or site. Contractor shall review site prior to bid for path locations and any required building modifications to allow movement of equipment. Contractor shall coordinate the work with other trades.

1.12 NETWORK / INTERNET CONNECTED EQUIPMENT

- A. These specifications may require certain equipment or systems to have network, Internet and/or remote access capability ("Network Capability"). Any requirement for Network Capability shall be interpreted only as a functional capability and is not to be construed as authority to connect or enable any Network Capability. Network Capability may only be connected or enabled with the express written consent of the Owner.

1.13 WARRANTY

- A. Provide one-year warranty, unless otherwise noted, to the Owner for all fixtures, equipment, materials, and workmanship.
- B. The warranty period for all work in this Division of the specifications shall commence on the date of final acceptance, unless a whole or partial system or any separate piece of equipment or component is put into use for the benefit of any party other than the installing contractor with prior written authorization. In this instance, the warranty period shall commence on the date when such whole system, partial system or separate piece of equipment or component is placed in operation and accepted in writing by the Owner.
- C. Warranty requirements shall extend to correction, without cost to the Owner, of all Work found to be defective or nonconforming to the contract documents. The Contractor shall bear the cost of correcting all damage resulting from defects or nonconformance with contract documents.

1.14 INSURANCE

- A. Contractor shall maintain insurance coverage as set forth in Division 0 of these specifications.

1.15 MATERIAL SUBSTITUTION

- A. Where several manufacturers' names are given, the first manufacturer is the basis for job design and establishes the quality.
- B. Equivalent equipment manufactured by the other listed manufacturers may be used. Contractor shall ensure that all items submitted by these other manufacturers meet all requirements of the drawings and specifications and fits in the allocated space. When using other listed manufacturers, the Contractor shall assume responsibility for any and all modifications necessary (including, but not limited to structural supports, electrical connections, piping and ductwork connections and arrangement, plumbing connections and rough-in, and regulatory agency approval, etc.) and coordinate such with other contractors.
- C. Any material, article or equipment of other unnamed manufacturers which will adequately perform the services and duties imposed by the design and is of a quality equal to or better than the material, article or equipment identified by the drawings and specifications may be used if approval is secured in writing from the Architect/Engineer not later than ten days prior to the bid opening.
- D. This Contractor assumes all costs incurred as a result of using the offered material, article or equipment, on the Contractor's part or on the part of other Contractors whose work is affected.

- E. This Contractor may list voluntary add or deduct prices for alternate materials on the bid form. These items will not be used in determining the low bidder.
- F. All material substitutions requested later than ten (10) days prior to bid opening must be listed as voluntary changes on the bid form.

1.16 PROJECT COMMISSIONING

- A. The Contractor shall work with the Commissioning Agent (CxA) as described in Section 01 91 00 and 22 08 00 and provide all services as described in the Commissioning Plan.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION

3.1 JOBSITE SAFETY

- A. Neither the professional activities of the Architect/Engineer, nor the presence of the Architect/Engineer or the employees and subconsultants at a construction site, shall relieve the Contractor and other entity of their obligations, duties and responsibilities including, but not limited to, construction means, methods, sequence, techniques or procedures necessary for performing, superintending or coordinating all portions of the work of construction in accordance with the contract documents and any health or safety precautions required by any regulatory agencies. The Architect/Engineer and personnel have no authority to exercise any control over any construction contractor or other entity or their employees in connection with their work or any health or safety precautions. The Contractor is solely responsible for jobsite safety. The Architect/Engineer and the Architect/Engineer's consultants shall be indemnified and shall be made additional insureds under the Contractor's general liability insurance policy.

3.2 EXCAVATION, FILL, BACKFILL, COMPACTION

- A. General:
 - 1. Prior to the commencement of any excavation or digging, the Contractor shall verify all underground utilities with the regional utility locator. Provide prior notice to the locator before excavations. Contact information for most regional utility locaters can be found at the following website (<https://call811.com/>) or by calling 811.
 - 2. The Contractor shall do all excavating, filling, backfilling and compacting associated with the work.
- B. Excavation:
 - 1. Make all excavations to accurate, solid, undisturbed earth, and to proper dimensions.
 - 2. Where excavations are made in error below foundations, concrete of same strength as specified for the foundations or thoroughly compacted sand-gravel fill, as determined by the Architect/Engineer, shall be placed in such excess excavations. Place thoroughly compacted, clean, stable fill in excess excavations under slabs on grade, at the Contractor's expense.
 - 3. Trim bottom and sides of excavations to grades required for foundations.
 - 4. Protect excavations against frost and freezing.

-
5. Take care in excavating not to damage surrounding structures, equipment, or buried pipe. Do not undermine footing or foundation.
 6. Perform all trenching in a manner to prevent cave-ins and risk to workers.
 7. Where original surface is pavement or concrete, the surface shall be saw cut to provide clean edges and assist in the surface restoration.
 8. Where satisfactory bearing soil for foundations is not found at the indicated levels, the Architect/Engineer or their representative shall be notified immediately, and no further work shall be done until further instructions are given by the Architect/Engineer or their representative.
- C. Dewatering:
1. Contractor shall furnish, install, operate, and remove all dewatering pumps and pipes needed to keep trenches and pits free of water.
- D. Underground Obstructions:
1. Known underground piping, foundations, and other obstructions in the vicinity of construction are shown on the drawings. Use great care in making installations near underground obstruction.
 2. If objects not shown on the drawings are encountered, remove, relocate, or perform extra work as directed by the Architect/Engineer.
- E. Fill and Backfilling:
1. Utilities Bedding: Lay underground utilities on minimum of 6" sand bedding or CA6 crushed stone. Compact bedding under utilities smooth, with no sharp edges protruding, to protect the utilities from puncture. Shape bedding to provide continuous support for bells, joints, and barrels of utilities and for joints and fittings.
 2. Envelope Around Utilities to 6" Above Utilities: Place sand or CA6 crushed stone to a height of 6" over utilities in 6" layers. After connection joints are made, any misalignment can be corrected by tamping backfill around the utilities.
 3. Backfill From 6" Above Utilities to Earthen Grade: Place all backfill materials above the utilities in uniform layers not exceeding 6" deep.
 4. Backfill From 6" Above Utilities to Below Slabs or Paved Area: Where the sand or CA6 crushed stone fill and backfill will ultimately be under a building, floor or paving, each layer of backfill materials shall be compacted to 95% of the maximum density determined by AASHTO Designation T 99 or ASTM Designation D 698. Moisture content of soil at time of compaction shall not exceed plus or minus 2% of optimum moisture content determined by AASHTO T 99 or ASTM D 698 test.
 5. Backfill Materials:
 - a. Sand, CA6: Each layer shall be placed, then carefully and uniformly tamped, to eliminate lateral or vertical displacement.
 - b. Native Soil: Native soil materials may be used as backfill if approved by the Geotechnical Engineer. Native soils shall be free of rock or gravel larger than 3" in any dimension and shall be free of debris, waste, frozen materials, vegetation, high void content, and other deleterious materials. Each layer shall be placed, then carefully and uniformly tamped, to eliminate lateral or vertical displacement.

- c. Flowable Fill: Cementitious, self-leveling, self-compacting slurry as defined by the ACI with compressive strength of 50-100psi at 28 days; consisting of a mixture of fine aggregate or filler, water and cementitious materials. Filler material consist of sand, fly ash, spent foundry sand, quarry fines, baghouse dust. Cementitious materials consist of Portland cement, pozzolanic materials, and self-cementing materials. Flowable fill may be placed in a pour instead of 6" layers noted above.
6. Water shall not be permitted to rise in unbackfilled trenches.
7. Dispose of excess excavated earth as directed.
8. Backfill all trenches and excavations immediately after installing utilities or removal of forms, unless other protection is provided.
9. Around piers and isolated foundations and structures, backfill and fill shall be placed and consolidated simultaneously on all sides to prevent wedge action and displacement. Fill and backfill materials shall be spread in 6 inch uniform horizontal layers with each layer compacted separately to required density.

F. Surface Restoration:

1. Where trenches are cut through existing graded, planted, or landscaped areas, the areas shall be restored to the original condition. Replace all planting removed or damaged to its original condition. A minimum of 6 inches of topsoil shall be applied where disturbed areas are to be seeded or sodded.
2. Concrete or asphalt type pavement, seal coat, rock, gravel or earth surfaces removed or damaged shall be replaced with comparable materials and restored to original condition.

3.3 ARCHITECT/ENGINEER OBSERVATION OF WORK

A. The Contractor shall provide seven (7) calendar days' notice to the Architect/Engineer prior to:

1. Placing fill over underground and underslab utilities.
2. Covering exterior walls, interior partitions and chases.
3. Installing hard or suspended ceilings and soffits.

B. The Architect/Engineer will have the opportunity to review the installation and provide a written report noting deficiencies requiring correction. The Contractor's schedule shall account for these reviews and show them as line items in the approved schedule.

C. Above-Ceiling Final Observation

1. All work above the ceilings must be complete prior to the Architect/Engineer's review. This includes, but is not limited to:
 - a. Pipe insulation is installed and fully sealed.
 - b. Pipe wall penetrations are sealed.
 - c. Pipe identification and valve tags are installed.
2. In order to prevent the Above-Ceiling Final Observation from occurring too early, the Contractor shall review the status of the work and certify, in writing, that the work is ready for the Above-Ceiling Final Observation.
3. It is understood that if the Architect/Engineer finds the ceilings have been installed prior to this review and prior to 7 days elapsing, the Architect/Engineer may not recommend further payments to the contractor until such time as full access has been provided.

3.4 PROJECT CLOSEOUT

- A. The following paragraphs supplement the requirements of Division 1.
- B. Final Jobsite Observation:
 - 1. In order to prevent the Final Jobsite Observation from occurring too early, the Contractor is required to review the completion status of the project and certify that the job is ready for the final jobsite observation.
 - 2. Attached to the end of this section is a typical list of items that represent the degree of job completeness expected prior to requesting a review.
 - 3. Upon Contractor certification that the project is complete and ready for a final observation, the Contractor shall sign the attached certification and return it to the Architect/Engineer so that the final observation can be scheduled.
 - 4. It is understood that if the Architect/Engineer finds the job not ready for the final observation and that additional trips and observations are required to bring the project to completion, the costs incurred by the Architect/Engineer's additional time and expenses will be deducted from the Contractor's contract retainage prior to final payment at the completion of the job.
- C. Before final payment is authorized, this Contractor must submit the following:
 - 1. Operation and maintenance manuals with copies of approved shop drawings.
 - 2. Record documents including marked-up or reproducible drawings and specifications.
 - 3. A report documenting the instructions given to the Owner's representatives complete with the number of hours spent in the instruction. The report shall bear the signature of an authorized agent of This Contractor and shall be signed by the Owner's representatives.
 - 4. Start-up reports on all equipment requiring a factory installation inspection or start-up.
 - 5. Provide spare parts, maintenance, and extra materials in quantities specified in individual specification sections. Deliver to project site and place in location as directed; receipt by Architect/Engineer required prior to final payment approval.

3.5 OPERATION AND MAINTENANCE MANUALS

- A. General:
 - 1. Provide an electronic copy of the O&M manuals as described below for Architect/Engineer's review and approval. The electronic copy shall be corrected as required to address the Architect/Engineer's comments. Once corrected, electronic copies and paper copies shall be distributed as directed by the Architect/Engineer.
 - 2. Approved O&M manuals shall be completed and in the Owner's possession prior to Owner's acceptance and at least 10 days prior to instruction of operating personnel.
- B. Electronic Submittal Procedures:
 - 1. Distribution: Email the O&M manual as attachments to all parties designated by the Architect/Engineer.
 - 2. Transmittals: Each submittal shall include an individual electronic letter of transmittal.
 - 3. Format: Electronic submittals shall be in PDF format only. Scanned copies, in PDF format, of paper originals are acceptable. Submittals that are not legible will be rejected. Do not set any permission restrictions on files; protected, locked, or secured documents will be rejected.

4. File Names: Electronic submittal file names shall include the relevant specification section number followed by a description of the item submitted, as follows. Where possible, include the transmittal as the first page of the PDF instead of using multiple electronic files.
 - a. O&M file name: O&M.div22.contractor.YYYYMMDD
 - b. Transmittal file name: O&Mtransmittal.div22.contractor.YYYYMMDD
5. File Size: Files shall be transmitted via a pre-approved method. Larger files may require an alternative transfer method, which shall also be pre-approved.
6. Provide the Owner with an approved copy of the O&M manual on compact discs (CD), digital video discs (DVD), or flash drives with a permanently affixed label, printed with the title "Operation and Maintenance Instructions", title of the project and subject matter of disc/flash drive when multiple disc/flash drives are required.
7. All text shall be searchable.
8. Bookmarks shall be used, dividing information first by specification section, then systems, major equipment and finally individual items. All bookmark titles shall include the nomenclature used in the construction documents and shall be an active link to the first page of the section being referenced.

C. Operation and Maintenance Instructions shall include:

1. Title Page: Include title page with project title, Architect, Engineer, Contractor, all subcontractors, and major equipment suppliers, with addresses, telephone numbers, website addresses, email addresses and point of contacts. Website URLs and email addresses shall be active links in the electronic submittal.
2. Table of Contents: Include a table of contents describing specification section, systems, major equipment, and individual items.
3. Copies of all final approved shop drawings and submittals. Include Architect's/Engineer's shop drawing review comments. Insert the individual shop drawing directly after the Operation and Maintenance information for the item(s) in the review form.
4. Copy of final approved test and balance reports.
5. Copies of all factory inspections and/or equipment startup reports.
6. Copies of warranties.
7. Schematic electrical power/controls wiring diagrams of the equipment that have been updated for field conditions. Field wiring shall have label numbers to match drawings.
8. Dimensional drawings of equipment.
9. Capacities and utility consumption of equipment.
10. Detailed parts lists with lists of suppliers.
11. Operating procedures for each system.
12. Maintenance schedule and procedures. Include a chart listing maintenance requirements and frequency.
13. Repair procedures for major components.
14. List of lubricants in all equipment and recommended frequency of lubrication.
15. Instruction books, cards, and manuals furnished with the equipment.
16. Owner and Contractor attendance list for domestic water systems operation, maintenance, and flushing training.

3.6 INSTRUCTING THE OWNER'S REPRESENTATIVES

- A. Adequately instruct the Owner's designated representatives in the maintenance, care, and operation of all systems installed under this contract.

-
- B. Provide verbal and written instructions to the Owner's representatives by FACTORY PERSONNEL in the care, maintenance, and operation of the equipment and systems.
- C. Contractor shall make a DVD video recording of instructions to the Owner while explaining the system so additional personnel may view the instructions at a later date. The video recording shall be the property of the Owner.
- D. The instructions shall include:
1. Explanation of all system flow diagrams.
 2. Maintenance of equipment.
 3. Start-up procedures for all major equipment.
 4. Explanation of seasonal system changes.
 5. Explanation of Owner's Responsibilities to operate, maintain, and flush domestic water system (i.e., ASHRAE Standard 188).
- E. Notify the Architect/Engineer of the time and place for the verbal instructions to be given to the Owner's representative so a representative can attend if desired.
- F. Minimum hours of instruction for each item shall be:
1. Domestic Hot Water System - 2 hours
- G. The Contractor shall prepare a detailed, written training agenda and submit it to the Architect/Engineer a minimum of two weeks prior to the formal training for approval. The written agenda shall include specific training points within the items described above. For example: how to adjust setpoints, troubleshooting, proper start-up, proper shut-down, seasonal changes, draining, venting, changing filters, changing belts, etc. Failure to provide and follow an approved training agenda may result in additional training required at the expense of the Contractor.
- H. Operating Instructions:
1. Contractor is responsible for all instructions to the Owner's representatives for the mechanical and control systems.
 2. If the Contractor does not have staff that can adequately provide the required instructions the Contractor shall include in the bid an adequate amount to reimburse the Owner for the Architect/Engineer to perform these services.
- 3.7 SYSTEM STARTING AND ADJUSTING
- A. The plumbing systems shall be complete and operating. System startup, testing, adjusting, and balancing to obtain satisfactory system performance is the responsibility of the Contractor. This includes calibration and adjustments of all controls, noise level adjustments and final adjustments as required.
- B. Complete all manufacturer-recommended startup procedures and checklists to verify proper motor rotation, electrical power voltage is within equipment limitations, equipment controls maintain pressures and temperatures within acceptable ranges, all filters and protective guards are in-place, acceptable access is provided for maintenance and servicing, and equipment operation does not pose a danger to personnel or property.

- C. Contractor shall adjust the plumbing systems and controls at season changes during the one year warranty period, as required, to provide satisfactory operation and to prove performance of all systems in all seasons.
- D. All operating conditions and control sequences shall be tested during the start-up period. Test all interlocks, safety shutdowns, controls, and alarms.
- E. The Contractor, subcontractors, and equipment suppliers shall have skilled technicians to ensure that all systems perform properly. If the Architect/Engineer is requested to visit the job site for trouble shooting, assisting in start-up, obtaining satisfactory equipment operation, resolving installation and/or workmanship problems, equipment substitution issues or unsatisfactory system performance, including call backs during the warranty period, through no fault of the design; the Contractor shall reimburse the Owner on a time and materials basis for services rendered at the Architect/Engineer's standard hourly rates in effect when the services are requested. The Contractor shall pay the Owner for services required that are product, installation or workmanship related. Payment is due within 30 days after services are rendered.

3.8 RECORD DOCUMENTS

- A. The following paragraphs supplement Division 1 requirements.
- B. Maintain at the job site a separate and complete set of plumbing drawings and specifications with all changes made to the systems clearly and permanently marked in complete detail.
- C. Mark drawings to indicate revisions to piping size and location, both exterior and interior; including locations devices, requiring periodic maintenance or repair; actual equipment locations, dimensioned from column lines; actual inverts and locations of underground piping; concealed equipment, dimensioned from column lines; mains and branches of piping systems, with valves and control devices located and numbered, concealed unions located, and with items requiring maintenance located; Change Orders; concealed control system devices.
- D. Before completion of the project, a set of reproducible plumbing drawings will be given to the Contractor for transfer of all as-built conditions from the paper set maintained at the job site. All marks on reproducibles shall be clear and permanent.
- E. Mark specifications to show approved substitutions; Change Orders, and actual equipment and materials used.
- F. Record changes daily and keep the marked drawings available for the Architect/Engineer's examination at any normal work time.
- G. Upon completing the job, and before final payment is made, give the marked-up drawings to the Architect/Engineer.

3.9 PAINTING

- A. This Contractor shall paint the following items:
 - 1. All piping in mechanical room
 - 2. Piping exposed in kitchen

- B. Paint all equipment that is marred or damaged prior to the Owner's acceptance. Paint and color shall match original equipment paint and shall be obtained from the equipment supplier if available.
- C. Equipment in occupied spaces, or if standard to the unit, shall have a baked primer with baked enamel finish coat free from scratches, abrasions, chips, etc. If color option is specified or is standard to the unit, this Contractor shall, before ordering, verify with the Architect/Engineer the color preference and furnish this color.
- D. Paint all outdoor uninsulated steel piping the color selected by Owner or Architect/Engineer.
- E. Paint all outdoor exposed natural gas piping the color selected by Owner or Architect/Engineer.
- F. After surfaces have been thoroughly cleaned and are free of oil, dirt, and other foreign matter; paint all pipes and equipment with the following:
 - 1. Bare Metal Surfaces - Apply one coat of primer suitable for the metal being painted. Finish with two coats of Alkyd base enamel paint.
 - 2. Insulated Surfaces - Paint insulation jackets with two coats of semi-gloss acrylic latex paint.
 - 3. Color of paint shall be as follows:
 - a. Piping exposed in kitchen:
 - 1) All Piping: White

3.10 ADJUST AND CLEAN

- A. Thoroughly clean all equipment and systems prior to the Owner's final acceptance of the project. Clean all foreign paint, grease, oil, dirt, labels, stickers, and other foreign material from all equipment.
- B. Clean all areas where moisture is present. Immediately report any mold, biological growth, or water damage.
- C. Remove all rust, scale, dirt, oils, stickers and thoroughly clean exterior of all exposed piping, hangers, and accessories.
- D. Remove all rubbish, debris, etc., accumulated during construction from the premises.

3.11 SPECIAL REQUIREMENTS

- A. Contractor shall coordinate the installation of all equipment, valves, dampers, operators, etc., with other trades to maintain clear access area for servicing.
- B. All equipment shall be installed in such a way to maximize access to parts needing service or maintenance. Review the final field location, placement, and orientation of equipment with the Owner's designated representative prior to setting equipment.
- C. Installation of equipment or devices without regard to coordination of access requirements and confirmation with the Owner's designated representative will result in removal and reinstallation of the equipment at the Contractor's expense.

3.12 IAQ MAINTENANCE FOR OCCUPIED FACILITIES UNDER CONSTRUCTION

- A. Contractors shall make all reasonable efforts to prevent construction activities from affecting the air quality of the occupied areas of the building or outdoor areas near the building. These measures shall include, but not be limited to:
1. All contractors shall endeavor to minimize the amount of contaminants generated during construction. Methods to be employed shall include, but not be limited to:
 - a. Minimizing the amount of dust generated.
 - b. Reducing solvent fumes and VOC emissions.
 - c. Maintain good housekeeping practices, including sweeping and periodic dust and debris removal. There should be no visible haze in the air.
 - d. Protect stored on-site and installed absorptive materials from moisture damage.
 2. Request that the Owner designate an IAQ representative.
 3. Review and receive approval from the Owner's IAQ representative for all IAQ-related construction activities and negative pressure containment plans.
 4. Inform the IAQ representative of all conditions that could adversely impact IAQ, including operations that will produce higher than normal dust production or odors.
 5. Schedule activities that may cause IAQ conditions that are not acceptable to the Owner's IAQ representative during unoccupied periods.
 6. Request copies of and follow all of the Owner's IAQ and infection control policies.
 7. Unless no other access is possible, the entrance to construction site shall not be through the existing facility.
 8. To minimize growth of infectious organisms, do not permit damp areas in or near the construction area to remain for over 24 hours.
 9. In addition to the criteria above, provide measures as recommended in the SMACNA "IAQ Guidelines for Occupied Buildings Under Construction".

3.13 UTILITY REBATE

- A. Submit utility rebate forms, where offered at project location, with rebate items completed. Rebate may include lighting, lighting controls, variable speed drives, heat pumps, package terminal A/C, air conditioners, chillers, water heaters, programmable thermostats, and motors.

READINESS CERTIFICATION PRIOR TO FINAL JOBSITE OBSERVATION

To prevent the final job observation from occurring too early, we require that the Contractor review the completion status of the project and, by copy of this document, certify that the job is indeed ready for the final job observation. The following is a typical list of items that represent the degree of job completeness expected prior to your requesting a final job observation.

1. Penetrations fire sealed and labeled in accordance with specifications.
2. All pumps operating and balanced.
3. All plumbing fixtures installed and caulked.
4. Pipe insulation complete, pipes labeled and valves tagged.
5. Owner and Contractor attendance list for domestic water systems operation, maintenance, and flushing training.

Accepted by:

Prime Contractor _____

By _____ Date _____

Upon Contractor certification that the project is complete and ready for a final job observation, we require the Contractor to sign this agreement and return it to the Architect/Engineer so that the final observation can be scheduled.

It is understood that if the Architect/Engineer finds the job not ready for the final observation and that additional trips and observations are required to bring the project to completion, the costs incurred by the Architect/Engineers for additional time and expenses will be deducted from the Contractor's contract retainage prior to final payment at the completion of the job.

END OF SECTION 220500

SECTION 220503 - THROUGH PENETRATION FIRESTOPPING

PART 1 - GENERAL

1.1 SECTION INCLUDES

- A. Through-Penetration Firestopping.

1.2 QUALITY ASSURANCE

- A. Manufacturer: Company specializing in manufacturing products specified in this Section.
- B. Installer: Individuals performing work shall be certified by the manufacturer of the system selected for installation.

1.3 REFERENCES

- A. UL 263 - Fire Tests of Building Construction and Materials
- B. UL 723 - Surface Burning Characteristics of Building Materials
- C. ANSI/UL 1479 - Fire Tests of Through Penetration Firestops
- D. UL 2079 - Tests for Fire Resistance of Building Joint Systems
- E. UL Fire Resistance Directory Through Penetration Firestop Systems (XHEZ)
- F. Intertek / Warnock Hersey - Directory of Listed Products
- G. ASTM E84 - Standard Test Method for Surface Burning Characteristics of Building Materials
- H. ASTM E814 - Standard Test Method for Fire Tests of Through-Penetration Firestops
- I. 2018 International Building Code

1.4 SUBMITTALS

- A. Submit under provisions of Section 220500.
- B. Submit Firestopping Installers Certification for all installers on the project.
- C. Shop Drawings: Submit for each condition requiring firestopping. Include descriptions of the specific penetrating item, actual wall/floor construction, manufacturer's installation instructions, and UL or Intertek / Warnock Hersey Assembly number.
- D. Through-Penetration Firestop System Schedule: Indicate locations of each through-penetration firestop system, along with the following information:
 - 1. Types of penetrating items.
 - 2. Types of constructions penetrated, including fire-resistance ratings and, where applicable, thicknesses of construction penetrated.

-
- 3. Through-penetration firestop systems for each location identified by firestop design designation of qualified testing and inspecting agency.
 - 4. F ratings for each firestop system.
- E. Maintain a notebook on the job site at all times that contains copies of approved submittals for all through penetration firestopping to be installed. Notebook shall be made available to the Authority Having Jurisdiction at their request and turned over to the Owner at the end of construction as part of the O&M Manuals.
- 1.5 DELIVERY, STORAGE, AND HANDLING
- A. Store, protect and handle products on site. Accept material on site in factory containers and packing. Inspect for damage. Protect from deterioration or damage due to moisture, temperature changes, contaminants, or other causes. Follow manufacturer's instructions for storage.
 - B. Install material prior to expiration of product shelf life.
- 1.6 PERFORMANCE REQUIREMENTS
- A. General: For penetrations through the following fire-resistance-rated constructions, including both empty openings and openings containing penetrating items, provide through-penetration firestop systems that are produced and installed to resist spread of fire according to requirements indicated, resist passage of smoke and other gases, and maintain original fire-resistance rating of construction penetrated.
 - 1. Fire-resistance-rated walls including fire partitions, fire barriers, and smoke barriers.
 - 2. Fire-resistance-rated horizontal assemblies including floors, floor/ceiling assemblies, and ceiling membranes of roof/ceiling assemblies.
 - B. Rated Systems: Provide through-penetration firestop systems with the following ratings determined per UL 1479:
 - 1. F-Rated Systems: Provide through-penetration firestop systems with F-ratings indicated, but not less than that equaling or exceeding fire-resistance rating of constructions penetrated.
 - 2. L-Rated Systems: Provide through-penetration firestop systems with L-ratings of not more than 5.0 CFM/sq. ft at both ambient temperature and 400F or smoke barriers.
 - C. For through-penetration firestop systems exposed to light, traffic, moisture, or physical damage, provide products that, after curing, do not deteriorate when exposed to these conditions both during and after construction.
 - D. For through-penetration firestop systems exposed to view, provide products with flame-spread and smoke-developed indexes of less than 25 and 450, respectively, as determined per ASTM E 84.
 - E. For through-penetration firestop systems in air plenums, provide products with flame-spread and smoke-developed indexes of less than 25 and 50, respectively, as determined per ASTM E 84.

1.7 MEETINGS

- A. Pre-installation meeting: A pre-installation meeting shall be scheduled and shall include the General Contractor, all Subcontractors associated with the installation of systems penetrating fire barriers, Firestopping Manufacturer's Representative, and the Owner.
 - 1. Review foreseeable methods related to firestopping work.
 - 2. Tour representative areas where firestopping is to be installed; inspect and discuss each type of condition and each type of substrate that will be encountered, and preparation to be performed by other trades.

1.8 WARRANTY

- A. Provide one year warranty on parts and labor.
- B. Warranty shall cover repair or replacement of firestop systems which fail in joint adhesion, cohesion, abrasion resistance, weather resistance, extrusion resistance, migration resistance, stain resistance, general durability, or appear to deteriorate in any manner not clearly specified by the manufacturer as an inherent quality of the material.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. Products: Subject to compliance with requirements, provide one of the through-penetration firestop systems indicated for each application that are produced by one of the following manufacturers. All firestopping systems installed shall be provided by a single manufacturer.
 - 1. 3M; Fire Protection Products Division.
 - 2. Hilti, Inc.
 - 3. RectorSeal Corporation, Metacaulk.
 - 4. Tremco; Sealant/Weatherproofing Division.
 - 5. Johns-Manville.
 - 6. Specified Technologies Inc. (S.T.I.)
 - 7. Spec Seal Firestop Products
 - 8. Dow Corning Corp.

2.2 THROUGH PENETRATION FIRESTOP SYSTEMS

- A. Provide materials and systems classified by or listed by Intertek / Warnock Hersey to provide firestopping equal to time rating of construction being penetrated.
- B. All firestopping materials shall be free of asbestos, lead, PCB's, and other materials that would require hazardous waste removal.
- C. Firestopping shall be flexible to allow for normal penetrating item movement due to expansion and contraction.
- D. Firestopping systems for plumbing and wet pipe sprinkler piping shall be moisture resistant.
- E. Provide firestopping systems capable of supporting floor loads where systems are exposed to possible floor loading or traffic.

- F. Provide firestopping systems allowing continuous insulation for all insulated pipes.
- G. Provide firestopping systems classified by UL or listed by Intertek / Warnock Hersey for penetrations through all fire rated construction. Firestopping systems shall be selected from the UL or listed by Intertek / Warnock Hersey Fire Resistance Directory Category XHEZ based on substrate construction and penetrating item size and material and shall fall within the range of numbers listed:

1. Non-Combustible Framed Walls - 1 or 2 Hour Rated:

- a. F Rating = Floor/Wall Rating
b. L Rating = Penetrations in Smoke Barriers

Penetrating Item	UL System No.
No Penetrating Item	WL 0000-0999*
Metallic Pipe or Conduit	WL 1000-1999
Non-Metallic Pipe or Conduit	WL 2000-2999
Electrical Cables	WL 3000-3999
Cable Trays	WL 4000-4999
Insulated Pipes	WL 5000-5999
Bus Duct and Misc. Electrical	WL 6000-6999
Duct without Damper and Misc. Mechanical	WL 7000-7999
Multiple Penetrations	WL 8000-8999
*Alternate method of firestopping is patching opening to match original rated construction.	

2. Concrete or Masonry Floors and Walls - 1 or 2 Hour Rated:

- a. F Rating = Wall/Floor Rating
b. L Rating = Penetrations in Smoke Barriers

Penetrating Item	UL System No.
No Penetrating Item	CAJ 0000-0999*
Metallic Pipe or Conduit	CAJ 1000-1999
Non-Metallic Pipe or Conduit	CAJ 2000-2999
Electrical Cables	CAJ 3000-3999
Cable Trays	CAJ 4000-4999
Insulated Pipes	CAJ 5000-5999
Bus Duct and Misc. Electrical	CAJ 6000-6999
Duct without Damper and Misc. Mechanical	CAJ 7000-7999
Multiple Penetrations	CAJ 8000-8999
*Alternate method of firestopping is patching opening to match original rated construction.	

- H. Any opening in walls or floors not covered by the listed series of numbers shall be coordinated with the firestopping manufacturer.
- I. Any openings in floors or walls not described in the UL or listed by Intertek / Warnock Hersey Fire Resistance Directory, or outlined in manufacturer's information shall be sealed in a manner agreed upon by the Firestopping Manufacturer, Owner, and the Authority Having Jurisdiction.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Ensure all surfaces that contact seal materials are free of dirt, dust, grease, oil, rust, or loose materials. Clean and repair surfaces as required. Remove laitance and form-release agents from concrete.
- B. Ensure substrate and penetrating items have been permanently installed prior to installing firestopping systems. Ensure penetrating items have been properly spaced and have proper clearance prior to installing firestopping systems.
- C. Surfaces to which sealing materials are to be installed must meet the selected UL or Intertek / Warnock Hersey system substrate criteria.
- D. Prime substrates where recommended in writing by through-penetration firestop system manufacturer. Confine primer to area of bond.

3.2 INSTALLATION

- A. In existing construction, provide firestopping of openings prior to and after installation of penetrating items. Remove any existing coatings on surfaces prior to firestopping installation. Temporary firestopping shall consist of packing openings with fire resistant mineral wool for the full thickness of substrate, or an alternate method approved by the Authority Having Jurisdiction. All openings shall be temporarily firestopped immediately upon their installation and shall remain so until the permanent UL or listed by Intertek / Warnock Hersey listed firestopping system is installed.
- B. Install penetration seal materials in accordance with printed instructions of the UL or Intertek / Warnock Hersey Fire Resistance Directory and with the manufacturer's printed application instructions.
- C. Install dams as required to properly contain firestopping materials within openings and as required to achieve required fire resistance rating. Remove combustible damming after appropriate curing.

3.3 CLEANING AND PROTECTING

- A. Clean excess fill materials adjacent to openings as Work progresses by methods and with cleaning materials that are approved in writing by through-penetration firestop system manufacturers and that do not cause damage.
- B. Provide final protection and maintain conditions during and after installation that ensure that through-penetration firestop systems are without damage or deterioration at time of Substantial Completion. If, despite such protection, damage or deterioration occurs, remove damaged or deteriorated through-penetration firestop systems immediately and install new materials to produce systems complying with specified requirements.

3.4 INSPECTION

- A. All penetrations shall be inspected by the manufacturer's representative to ensure proper installation.

- B. Access to firestop systems shall be maintained for examination by the Authority Having Jurisdiction at their request.
- C. Proceed with enclosing through-penetration firestop system with other construction only after inspection reports are issued and firestop installations comply with requirements.
- D. The Contractor shall allow for visual destructive review of 5% of installed firestop systems (minimum of one) to prove compliance with specifications and manufacturer's instructions and details. Destructive system removal shall be performed by the Contractor and witnessed by the Architect/Engineer and manufacturer's factory representative. The Architect/Engineer shall have sole discretion of which firestop system installations will be reviewed. The Contractor is responsible for all costs associated with this requirement including labor and material for removing and replacing the installed firestop system. If any firestop system is found to not be installed per manufacturer's specific instructions and details, all firestop systems are subject to destructive review and replacement at the Architect/Engineer's discretion and the Contractor's expense.

END OF SECTION 220503

SECTION 220505 - PLUMBING DEMOLITION FOR REMODELING

PART 1 - GENERAL

1.1 SECTION INCLUDES

- A. Mechanical Demolition.
- B. Cutting and Patching.

PART 2 - PRODUCTS

2.1 MATERIALS AND EQUIPMENT

- A. Materials and equipment shall be as specified in individual Sections.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. THE DRAWINGS ARE INTENDED TO INDICATE THE GENERAL SCOPE OF WORK AND DO NOT SHOW EVERY PIPE, DUCT, OR PIECE OF EQUIPMENT THAT MUST BE REMOVED. THE CONTRACTOR SHALL VISIT THE SITE AND VERIFY CONDITIONS PRIOR TO SUBMITTING A BID.
- B. Where walls, ceilings, etc., are shown as being removed on general drawings, the Contractor shall remove all mechanical equipment, devices, fixtures, piping, ducts, systems, etc., from the removed area.
- C. Where ceilings, walls, partitions, etc., are temporarily removed and replaced by others, This Contractor shall remove, store, and replace equipment, devices, fixtures, pipes, ducts, systems, etc.
- D. Verify that abandoned utilities serve only abandoned equipment or facilities. Extend services to facilities or equipment that shall remain in operation following demolition.
- E. Coordinate work with all other Contractors and the Owner. Schedule removal of equipment to avoid conflicts.
- F. This Contractor shall verify all existing equipment sizes and capacities where equipment is scheduled to be replaced or modified, prior to ordering new equipment.
- G. Bid submittal shall mean the Contractor has visited the project site and verified existing conditions and scope of work.

3.2 PREPARATION

- A. Disconnect plumbing systems in walls, floors, and ceilings scheduled for removal.

- B. Provide temporary connections to maintain existing systems in service during construction. When work must be performed on operating equipment, use personnel experienced in such operations.
- C. Existing Plumbing System: Maintain service to all plumbing fixtures until new piping is installed. Obtain permission from Owner at least 48 hours before shutting down system for any reason. Make changeover to new piping with minimum outage. Do not disconnect any roof drainage piping until new piping is in place and operational.

3.3 DEMOLITION AND EXTENSION OF EXISTING MECHANICAL WORK

- A. Demolish and extend existing plumbing work under provisions of Division 2 and this Section.
- B. Remove, relocate, and extend existing installations to accommodate new construction.
- C. Remove abandoned piping to source of supply and/or main lines.
- D. Remove exposed abandoned pipes, including abandoned pipes above accessible ceilings. Cut pipes above ceilings, below floors and behind walls. Cap remaining lines. Repair building construction to match original. Remove all clamps, hangers, supports, etc. associated with pipe and duct removal.
- E. Disconnect and remove mechanical devices and equipment serving equipment that has been removed.
- F. Repair adjacent construction and finishes damaged during demolition and extension work.
- G. Extend existing installations using materials and methods compatible with existing installations, or as specified.
- H. Remove unused sections of domestic water piping back to mains and cap. Capped pipe shall be less than 2 feet from main to prevent "dead legs".
- I. Temporarily cap all openings to the sanitary and vent system to prevent odor from entering the work area and building.

3.4 CUTTING AND PATCHING

- A. This Contractor is responsible for all penetrations of existing construction required to complete the work of this project. Refer to Section 220529 for additional requirements.
- B. Penetrations in existing construction should be reviewed carefully prior to proceeding with any work.
- C. Penetrations shall be neat and clean with smooth and/or finished edges. Core drill where possible for clean opening.
- D. Repair existing construction as required after penetration is complete to restore to original condition. Use similar materials and match adjacent construction unless otherwise noted or agreed to by the Architect/Engineer prior to start of work.

- E. Floor slabs may contain conduit systems. This Contractor is responsible for taking any measures required to ensure no conduits or other services are damaged. This includes X-ray or similar non-destructive means.
- F. This Contractor is responsible for all costs incurred in repair, relocations, or replacement of any cables, conduits, or other services if damaged without proper investigation.

3.5 CLEANING AND REPAIR

- A. Clean and repair existing materials and equipment which remain or are to be reused.
- B. Clean all systems adjacent to project which are affected by the dust and debris caused by this construction.
- C. PLUMBING ITEMS REMOVED AND NOT RELOCATED REMAIN THE PROPERTY OF THE OWNER. CONTRACTOR SHALL PLACE ITEMS RETAINED BY THE OWNER IN A LOCATION COORDINATED WITH THE OWNER. THE CONTRACTOR SHALL DISPOSE OF MATERIAL THE OWNER DOES NOT WANT TO REUSE OR RETAIN FOR MAINTENANCE PURPOSES.

3.6 SPECIAL REQUIREMENTS

- A. Install temporary filter media over outside air intakes which are within 100 feet of the limits of construction. This Contractor shall complete any cleaning required for existing systems which are affected by construction dust and debris.
- B. Review locations of all new penetrations in existing floor slabs or walls. Determine construction type and review for possible interferences. Bring all concerns to the attention of the Architect/Engineer before proceeding.

END OF SECTION 220505

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 220513 - MOTORS

PART 1 - GENERAL

1.1 SECTION INCLUDES

- A. Single Phase and Three Phase Electric Motors.

1.2 REFERENCES

- A. AFBMA 9 - Load Ratings and Fatigue Life for Ball Bearings.
- B. AFBMA 11 - Load Ratings and Fatigue Life for Roller Bearings.
- C. ANSI/ASHRAE/IES Standard 90.1 (latest published edition) - Energy Standard for Buildings Except Low-Rise Residential Buildings.
- D. ANSI/IEEE 112 - Test Procedure for Polyphase Induction Motors and Generators.
- E. ANSI/NEMA MG 1 - Motors and Generators.
- F. ANSI/NFPA 70 - National Electrical Code.
- G. Energy Independence and Act of 2007.

1.3 SUBMITTALS

- A. Submit shop drawings under provisions of Section 220500. Include nominal efficiency and power factor for all premium efficiency motors. Efficiencies must meet or exceed the nominal energy efficiency levels presented below.
- B. Submit shop drawings for all three phase motors.
- C. Submit motor data with equipment when motor is installed by the manufacturer at the factory.
- D. Submit for all motors as required.

1.4 DELIVERY, STORAGE, AND HANDLING

- A. Protect motors stored on site from weather and moisture by maintaining factory covers and suitable weatherproof coverings. For extended outdoor storage, follow manufacturer's recommendations for equipment and motor.

1.5 OPERATION AND MAINTENANCE DATA

- A. Submit operation and maintenance data including assembly drawings, bearing data including replacement sizes, and lubrication instructions.

1.6 QUALIFICATIONS

- A. Manufacturer: Company specializing in the manufacture of commercial and industrial motors and accessories, with a minimum of three years documented manufacturing experience.

PART 2 - PRODUCTS**2.1 GENERAL CONSTRUCTION AND REQUIREMENTS**

- A. Refer to the drawings for required electrical characteristics. Voltage is generally specified and scheduled as distribution voltage. Motor submittals may be based on utilization voltage if it corresponds to the correct distribution voltage.

Distribution/Nominal Voltage	Utilization Voltage
120	115
208	200
240	230
277	265
480	460

- B. Design motors for continuous operation in 40°C environment, and for temperature rise in accordance with ANSI/NEMA MG 1 limits for insulation class, service factor, and motor enclosure type.
- C. Visible Nameplate: Indicating horsepower, voltage, phase, hertz, RPM, full load amps, locked rotor amps, frame size, manufacturer's name and model number, service factor, power factor, insulation class.
- D. Electrical Connection: Boxes, threaded for conduit. For fractional horsepower motors where connection is made directly, provide conduit connection in end frame.
- E. Unless otherwise indicated, motors 3/4 HP and smaller shall be single phase, 60 hertz, open drip-proof or totally enclosed fan-cooled type.
- F. Unless otherwise indicated, motors 1 HP and larger shall be three phase, 60 hertz, squirrel cage type, NEMA Design Code B (low current in-rush, normal starting torque), open drip-proof or totally enclosed fan-cooled type.
- G. Each contractor shall set all motors furnished by him.
- H. All motors shall have a minimum service factor of 1.15.
- I. All motors shall have ball or roller bearings with a minimum L-10 fatigue life of 150,000 hours in direct-coupled applications and 50,000 hours for belted applications. Belted rating shall be based on radial loads and pulley sizes called out in NEMA MG1-14.43.
- J. Bearings shall be sealed type for 10 HP and smaller motors. Bearings shall be regreasable type for larger motors.
- K. Aluminum end housings are not permitted on motors 15 HP or larger.

L. Motor Driven Equipment:

1. No equipment shall be selected or operate above 90% of its motor nameplate rating. Motor size may not be increased to compensate for equipment with efficiency lower than that specified.
2. If a larger motor than specified is required on equipment, the contractor supplying the equipment is responsible for all additional costs due to larger starters, wiring, etc.

M. Provide all belted motors with a means of moving and securing the motor to tighten belts. Motors over 2 HP shall have screw type tension adjustment. Motors over 40 HP shall have dual screw adjusters. Slide bases shall conform to NEMA standards.

N. Motors for pumps 1/12 HP or greater and less than 1 HP shall be electronically-commutated motors or shall have a minimum motor efficiency of 70% when rated in accordance with DOE 10 CFR 431. These motors shall also have the means to adjust motor speed for either balancing or remote control.

2.2 ELECTRONICALLY COMMUTATED MOTORS (ECM)

A. Motor shall be variable speed, constant torque, brushless DC motor for direct-drive applications. Electronics shall be encapsulated for moisture protection and shall integral surge protection. Motor shall be pre-wired for specific voltage and phase.

B. Motor frame shall be NEMA 48; UL recognized components shall be provided for the motor construction.

C. All EC motors shall be a minimum of 85% efficient at all speeds.

D. Motors shall be permanently lubricated; utilize ball bearings to match with the connected driven equipment.

E. Provide motor with onboard motor control module. Motor speed shall be limited to provide electronic over current protection. Starter shall provide soft start to reduce inrush current and shall be controllable from 20% to 100% of full rated speed.

F. Operational mode shall be as scheduled and shall be one of the following:

1. Constant Flow
2. Constant Temperature
3. Constant Pressure

2.3 PREMIUM EFFICIENCY MOTORS (INCLUDING MOST 3-PHASE GENERAL PURPOSE MOTORS)

A. All motors, unless exempted by EPCa legislation that became federal law on December 19, 2010, shall comply with the efficiencies listed in that standard, which are reprinted below. These match the 2010 NEMA premium efficiency ratings. All ratings listed are nominal full load efficiencies, verified in accordance with IEEE Standard 112, Test Method B. Average expected (not guaranteed minimum) power factors shall also be at least the following:

HP	Full-Load Efficiencies %					
	Open Drip-Proof			Totally Enclosed Fan Cooled		
	1200 rpm	1800 rpm	3600 rpm	1200 rpm	1800 rpm	3600 rpm
1.0	82.5	85.5	77.0	82.5	85.5	77.0
1.5	86.5	86.5	84.0	87.5	86.5	84.0
2.0	87.5	86.5	85.5	88.5	86.5	85.5
3.0	88.5	89.5	85.5	89.5	89.5	86.5
5.0	89.5	89.5	86.5	89.5	89.5	88.5
7.5	90.2	91.0	88.5	91.0	91.7	89.5
10.0	91.7	91.7	89.5	91.0	91.7	90.2
15.0	91.7	93.0	90.2	91.7	92.4	91.0
20.0	92.4	93.0	91.0	91.7	93.0	91.0
25.0	93.0	93.6	91.7	93.0	93.6	91.7
30.0	93.6	94.1	91.7	93.0	93.6	91.7
40.0	94.1	94.1	92.4	94.1	94.1	92.4
50.0	94.1	94.5	93.0	94.1	94.5	93.0
60.0	94.5	95.0	93.6	94.5	95.0	93.6
75.0	94.5	95.0	93.6	94.5	95.4	93.6
100.0	95.0	95.4	93.6	95.0	95.4	94.1
125.0	95.0	95.4	94.1	95.0	95.4	95.0
150.0	95.4	95.8	94.1	95.8	95.8	95.0
200.0	95.4	95.8	95.0	95.8	96.2	95.4
250.0	95.4	95.8	95.0	95.8	96.2	95.8
300.0	95.4	95.8	95.4	95.8	96.2	95.8
350.0	95.4	95.8	95.4	95.8	96.2	95.8
400.0	95.8	95.8	95.8	95.8	96.2	95.8
450.0	96.2	96.2	95.8	95.8	96.2	95.8
500.0	96.2	96.2	95.8	95.8	96.2	95.8

- B. Motor nameplate shall be noted with the above ratings.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. All rotating shafts and/or equipment shall be completely guarded from all contact. Partial guards and/or guards that do not meet all applicable OSHA standards are not acceptable. Contractor is responsible for providing this guarding if it is not provided with the equipment supplied.
- B. For flexible coupled drive motors, mount coupling to the shafts in accordance with the coupling manufacturer's recommendations. Align shafts to manufacturer's requirements or within 0.002 inch per inch diameter of coupling hub.

END OF SECTION 220513

SECTION 220529 - PLUMBING SUPPORTS AND ANCHORS

PART 1 - GENERAL

1.1 SECTION INCLUDES

- A. Hangers, Supports, and Associated Anchors.
- B. Flashing and Sealing of Equipment and Pipe Stacks.
- C. Cutting of Openings.
- D. Escutcheon Plates and Trim.

1.2 REFERENCES

- A. MSS SP-58 - Pipe Hangers and Supports - Materials, Design, Manufacture, Selection, Application, and Installation.
- B. MSS SP 69 - Pipe Hangers and Supports - Selection and Application.
- C. MSS SP 89 - Pipe Hangers and Supports - Fabrication and Installation Practices
- D. MSS SP-127 - Bracing for Piping Systems Seismic-Wind-Dynamic Design, Selection, Application.

1.3 SUBMITTALS

- A. Submit shop drawings and product data under provisions of Section 220500. Include plastic pipe manufacturers' support spacing requirements.

1.4 WORK FURNISHED BUT INSTALLED UNDER OTHER SECTIONS

- A. Furnish sleeves and hanger inserts to General Contractor for placement into formwork.

PART 2 - PRODUCTS

2.1 HANGER RODS

- A. Hanger rods for single rod hangers shall conform to the following:
 - 1. Steel, Cast Iron, and Glass Pipe:
 - a. Hanger Rod Diameter:
 - 1) 2-1/2" and smaller: 3/8"
 - 2) 3" through 3-5/8": 3/8"
 - 3) 4" through 6": 1/2"
 - 4) 8": 5/8"
 - 5) 10": 3/4"

- 6) 12": 7/8"
- 7) 14" and 16": 1"
- 8) 18" and 24": 1-1/4")

2. Copper and Plastic Pipe:

a. Hanger Rod Diameter:

- 1) 2-1/2" and smaller: 3/8"
- 2) 3") through 3-5/8": 3/8"
- 3) 4") through 6": 1/2"
- 4) 8": 5/8"
- 5) 10": 3/4"
- 6) 12": 7/8"
- 7) 14" and 16": 1"
- 8) 18" and 24": 1-1/4"

- B. Rods for double rod hangers may be reduced one size. Minimum rod diameter is 3/8 inches.
- C. Hanger rods and accessories used in mechanical spaces or otherwise dry areas shall have ASTM B633 electro-plated zinc finish.
- D. All hanger rods, nuts, washers, clevises, etc., in damp areas shall have ASTM A123 hot-dip galvanized finish applied after fabrication. This applies to the following areas:

2.2 PIPE AND STRUCTURAL SUPPORTS

A. General:

- 1. Pipe hangers, clamps, and supports shall conform to Manufacturers Standardization Society MSS SP-58, 69, 89, and 127 (where applicable).
- 2. On all insulated piping, provide at each support an insert of same thickness and contour as adjoining insulation, between the pipe and insulation jacket, to prevent insulation from sagging and crushing. Refer to insulation specifications for materials and additional information.
- 3. Copper piping located in an exposed area, including indirect waste piping in kitchens and janitor's closets, shall use split ring standoff hangers for copper tubing. Support shall include plastic pipe insert similar to Unistrut Cush-A-Clamp, Hydra-Zorb, nVent Cushion Clamp or Eaton Vibra-Clamp. Use electro-galvanized or more corrosion resistant and threaded rod for floor applications. Use anchors applicable to the wall type with corrosion resistant threaded rod for wall applications.

a. Products:

- 1) nVent/M-Co Model #456
- 2) Eaton Fig. 3198HCT
- 3) Anvil Fig. CT138R

B. Vertical Supports:

1. Support and laterally brace vertical pipes at every floor level in multi-story structures, unless otherwise noted by applicable codes, but never at intervals over 15 feet. Support vertical pipes with riser clamps installed below hubs, couplings, or lugs. Provide sufficient flexibility to accommodate expansion and contraction to avoid compromising fire barrier penetrations or stressing piping at fixed takeoff locations.

a. Products:

- 1) Eaton Fig B3373 Series
- 2) nVent 510 Series
- 3) Anvil Fig. 90

2. Cold Pipe: Place restrained neoprene mounts beneath vertical pipe riser clamps to prevent sweating of cold pipes. Select neoprene mounts based on the weight of the pipe to be supported. Insulate over mounts.

a. Products:

- 1) Mason RBA, RCA or RDA
- 2) Mason BR

3. Cold Pipe Alternative: Insulated pipe riser clamp with no thermal bridging between clamp and pipe; water repellant calcium silicate insulation material adhered inside the clamp; ASTM A653 galvanized steel clamp.

a. Products:

- 1) Pipeshields E100

4. Wall supports shall be used where vertical height of structure exceeds minimum spacing requirements. Install wall supports at same spacing as hangers or strut supports along vertical length of pipe runs. Wall supports shall be coordinated with the Structural Engineer.
5. Masonry Anchors: Fasten to concrete masonry units with expansion anchors or self-tapping masonry screws. For expansion anchors into hollow concrete block, use sleeve-type anchors designed for the specific application. Do not fasten in masonry joints. Do not use powder actuated fasteners, wooden plugs, or plastic inserts.

C. Hangers and Clamps:

1. Oversize all hangers, clamps, and supports on insulated piping to allow insulation and jacket to pass through unbroken. This applies to both hot and cold pipes.
2. Hangers in direct contact with bare copper pipe shall include plastic pipe insert similar to Unistrut Cush-A-Clamp, Hydra-Zorb, nVent Cushion Clamp or Eaton Vibra-Clamp within their temperature limits of -65F to +275F.
3. Vertical cold pipe drops and rough-ins to fixtures shall be supported by insulated pipe clamps to prevent thermal bridging and condensation.
4. On all insulated piping, provide a semi-cylindrical metallic shield and vapor barrier jacket.

-
5. Unless otherwise indicated, hangers shall be as follows:
- a. Clevis Type: Bare Metal Pipe, Rigid Plastic Pipe, Insulated Cold Pipe, Insulated Hot Pipe - 3 inches & Smaller
 - 1) Products: Bare Steel Plastic or Insulated Pipe:
 - a) Anvil Fig. 260
 - b) Eaton Fig. 3100
 - c) nVent Model 400
 - 2) Products: Bare Copper Pipe Felt or PVC Coated:
 - a) Eaton Fig. B3104F or B3100CTC
 - b) Anvil Fig. CT65
 - c) nVent Fig. 402
 - b. Continuous Channel with Clevis Type: Service: Plastic Tubing, Flexible Hose, Soft Copper Tubing:
 - 1) Products:
 - a) Eaton Fig. B3106, with Fig. B3106V
 - b) nVent Model 104, with Model 104V
 - c) Anvil Fig. 1V
6. Support may be fabricated from U-channel strut or similar shapes. Piping less than 4" in diameter shall be secured to strut with clamps of proper design and capacity as required to maintain spacing and alignment. Strut shall be independently supported from hanger drops or building structure. Size and support shall be per manufacturer's installation requirements for structural support of piping. Clamps shall not interrupt piping insulation.
- a. Strut used in mechanical spaces or otherwise dry areas shall have ASTM B633 electro-plated zinc finish.
 - b. Strut used in damp areas listed in hanger rods shall have ASTM A123 hot-dip galvanized finish applied after fabrication.
7. Unless otherwise indicated, pipe supports for use with struts shall be as follows:
- a. Clamp Type: Bare Metal Pipe, Rigid Plastic Pipe, Insulated Cold Pipe, Insulated Hot Pipe - 3 inches and smaller
 - 1) Clamps in direct contact with copper pipe shall include plastic pipe insert similar to Unistrut Cush-A-Clamp, Hydra-Zorb, nVent Cushion Clamp or Eaton Vibra-Clamp.
 - 2) Pipes subject to expansion and contraction shall have clamps oversized to allow limited pipe movement.
 - 3) Products: Bare Steel, Plastic or Insulated Pipe:
 - a) Unistrut Fig. P1100 or P2500
 - b) Eaton Fig. B2000 or B2400
 - c) Anvil Fig. AS1200
 - d) nVent USC

- 4) Products: Bare Copper Pipe:
 - a) Eaton Fig. BVT
 - b) nVent CADDY Cushion Clamp

D. Upper (Structural) Attachments:

- 1. Unless otherwise shown, upper attachments for hanger rods or support struts shall be as follows:
 - a. Concrete Anchors: Fasten to concrete using cast-in or post-installed anchors designed per the requirements of Appendix D of ACI 318-17. Post-installed anchors shall be qualified for use in cracked concrete by ACI-355.2.
 - b. Masonry Anchors: Fasten to concrete masonry units with expansion anchors or self-tapping masonry screws. For expansion anchors into hollow concrete block, use sleeve-type anchors designed for the specific application. Do not fasten in masonry joints. Do not use powder actuated fasteners, wooden plugs, or plastic inserts.
 - c. Steel Structure Welding:
 - 1) Unless otherwise noted, hangers, clips, and auxiliary support steel may be welded in lieu of bolting, clamping, or riveting to the building structural frame. Take adequate precautions during all welding operations for fire prevention and protecting walls and ceilings from smoke damage.

2.3 OPENINGS IN FLOORS, WALLS AND CEILINGS

- A. Exact locations of all openings for the installation of materials shall be determined by the Contractor and given to the General Contractor for installation or construction as the structure is built.
- B. Coordinate all openings with other Contractors.
- C. Hire the proper tradesman and furnish all labor, material and equipment to cut openings in or through existing structures, or openings in new structures that were not installed, or additional openings. Repair all spalling and damage to the satisfaction of the Architect/Engineer. Make saw cuts before breaking out concrete to ensure even and uniform opening edges.
- D. Said cutting shall be at the complete expense of each Contractor. Failure to coordinate openings with other Contractors shall not exempt the Contractor from providing openings at Contractor's expense.
- E. Do not cut structural members without written approval of the Architect or Structural Engineer.
- F. Exposed Housing Penetrations: Seal pipes with surface temperature below 150F, penetrating housings with conical stepped, white silicone, EPDM or neoprene pipe flashings and stainless steel clamps equal to Portals Plus Pipe Boots or Pipetite.

2.4 ROOF PENETRATIONS

- A. Conical Pipe Boot: Seal pipes with surface temperature below 150F, penetrating single-ply roofs with conical stepped, UV-resistant silicone, EPDM or neoprene pipe flashings and stainless steel clamps equal to Portals Plus Pipe Boots or Pipetite. Color: Black shall match roofing membrane.
- B. Break insulation only at the clamp for pipes between 60F and 150F. Seal outdoor insulation edges watertight.

2.5 ESCUTCHEON PLATES AND TRIM

- A. Fit escutcheons to all insulated or uninsulated exposed pipes passing through walls, floors, or ceilings of finished rooms.
- B. Escutcheons shall be heavy gauge, cold rolled steel, copper coated under a chromium plated finish, heavy spring clip, rigid hinge and latch.
- C. Install galvanized steel (unless otherwise indicated) trim strip to cover vacant space and raw construction edges of all rectangular openings in finished rooms. This includes pipe openings.

2.6 PIPE PENETRATIONS

- A. Seal all pipe penetrations. Seal non-rated walls and floor penetrations with grout or caulk. Backing material may be used.
- B. Seal fire rated wall and floor penetrations with fire seal system as specified.

2.7 PIPE ANCHORS

- A. Provide all items needed to allow adequate expansion and contraction of all piping. All piping shall be supported, guided, aligned, and anchored as required.
- B. Repair all piping leaks and associated damage. Pipes shall not rub on any part of the building.

2.8 FINISH

- A. Prime coat exposed steel hangers and supports. Hangers and supports in crawl spaces, pipe shafts, and suspended ceiling spaces are not considered exposed.

PART 3 - EXECUTION

3.1 PLUMBING SUPPORTS AND ANCHORS

- A. General Installation Requirements:
 - 1. Install all items per manufacturer's instructions.
 - 2. Coordinate the location and method of support of piping systems with all installations under other Divisions and Sections of the Specifications.
 - 3. Where pipe support members are welded to structural building framing, scrape, brush clean, and apply one coat of zinc rich primer to welding.

-
4. Supports shall extend directly to building structure. Do not support piping from duct hangers unless coordinated with Sheet Metal Contractor prior to installation. Do not allow lighting or ceiling supports to be hung from piping supports.
- B. Supports Requirements:
1. Where building structural steel is fireproofed, all hangers, clamps, auxiliary steel, etc., which attach to it shall be installed prior to application of fireproofing. Repair all fireproofing damaged during pipe installation.
 2. Set all concrete inserts in place before pouring concrete.
 3. Furnish, install and prime all auxiliary structural steel for support of piping systems that are not shown on the Drawings as being by others.
 4. Install hangers and supports complete with lock nuts, clamps, rods, bolts, couplings, swivels, inserts and required accessories.
 5. Hangers for horizontal piping shall have adequate means of vertical adjustment for alignment.
- C. Pipe Requirements:
1. Support all piping and equipment, including valves, strainers, traps and other specialties and accessories to avoid objectionable or excessive stress, deflection, swaying, sagging or vibration in the piping or building structure during erection, cleaning, testing and normal operation of the systems.
 2. Do not, however, restrain piping to cause it to snake or buckle between supports or to prevent proper movement due to expansion and contraction.
 3. Support piping at equipment and valves so they can be disconnected and removed without further supporting the piping.
 4. Piping shall not introduce strains or distortion to connected equipment.
 5. Parallel horizontal pipes may be supported on trapeze hangers made of structural shapes and hanger rods; otherwise, pipes shall be supported with individual hangers.
 6. Trapeze hangers may be used where ducts interfere with normal pipe hanging.
 7. Provide additional supports where pipe changes direction, adjacent to flanged valves and strainers, at equipment connections and heavy fittings.
 8. Provide at least one hanger adjacent to each joint in grooved end steel pipe with mechanical couplings.
- D. Provided the installation complies with all loading requirements of truss and joist manufacturers, the following practices are acceptable:
1. Loads of 100 lbs. or less may be attached anywhere along the top or bottom chords of trusses or joists with a minimum 3' spacing between loads.
 2. Loads greater than 100 lbs. must be hung concentrically and may be hung from top or bottom chord, provided one of the following conditions is met:
 - a. The hanger is attached within 6" from a web/chord joint.
 - b. Additional L2x2x1/4 web reinforcement is installed per manufacturer's requirements.
 3. It is prohibited to cantilever a load using an angle or other structural component that is attached to a truss or joist in such a fashion that a torsional force is applied to that structural member.
 4. If conditions cannot be met, coordinate installation with truss or joist manufacturer and contact Architect/Engineer.

-
- E. After piping and insulation installation are complete, cut hanger rods back at trapeze supports so they do not extend more than 3/4" below bottom face of lowest fastener and blunt any sharp edges.
- F. Do not exceed 25 lbs. per hanger and a minimum spacing of 2'-0" on center when attaching to metal roof decking (limitation not required with concrete on metal deck). This 25 lbs. load and 2'-0" spacing include adjacent electrical and architectural items hanging from deck. If the hanger restrictions cannot be achieved, supplemental framing off steel framing will need to be added.
- G. Do not exceed the manufacturer's recommended maximum load for any hanger or support.
- H. Steel/Concrete Structure: Spacing of hangers shall not exceed the compressive strength of the insulation inserts, and in no case shall exceed the following:
1. Steel and Fiberglass (Std. Weight or Heavier - Liquid Service):
 - a. Maximum Spacing:
 - 1) 1-1/4" & under: 7'-0"
 - 2) 1-1/2": 9'-0"
 - 3) 2": 10'-0"
 - 4) 2-1/2": 11'-0"
 - 5) 3": 12'-0"
 - 6) 4" & larger: 12'-0"
 2. Steel (Std. Weight or Heavier - Vapor Service):
 - a. Maximum Spacing:
 - 1) 1-1/4" and under: 9'-0"
 - 2) 1-1/2": 12'-0"
 - 3) 2" & larger: 12'-0"
 3. Hard Drawn Copper & Brass (Liquid Service):
 - a. Maximum Spacing:
 - 1) 3/4" and under: 5'-0"
 - 2) 1": 6'-0"
 - 3) 1-1/4": 7'-0"
 - 4) 1-1/2": 8'-0"
 - 5) 2": 8'-0"
 - 6) 2-1/2": 9'-0"
 - 7) 3": 10'-0"
 - 8) 4": 12'-0"
 - 9) 6": 12'-0"

4. Hard Drawn Copper & Brass (Vapor Service):
 - a. Maximum Spacing:
 - 1) 3/4" & under: 7'-0"
 - 2) 1": 8'-0"
 - 3) 1-1/4": 9'-0"
 - 4) 1-1/2": 10'-0"
 - 5) 2": 11'-0"
 - 6) 2-1/2" & larger: 12'-0"
 5. Ultra-Flexible Pipe, and Flexible Hose, and Soft Copper Tubing:
 - a. Continuous channel with hangers maximum 8'-0" OC.
- I. Installation of hangers shall conform to MSS SP-58, 69, 89 and the applicable Plumbing Code.

END OF SECTION 220529

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 220530 - ROOF SUPPORT

PART 1 - GENERAL

1.1 SECTION INCLUDES

- A. Rooftop Pipe Support

1.2 QUALITY ASSURANCE

- A. Manufacturer:
 - 1. System Supports/Restraints: Company specializing in the manufacture of products specified in this section.
- B. Installer: Installed by Contractor.

1.3 REFERENCES

- A. International Building Code 2018

1.4 SUBMITTALS

- A. Submit under provisions of Section 220500.

1.5 DELIVERY, STORAGE AND HANDLING

- A. Deliver, store, protect and handle products to site. Accept material on site in factory containers and packing. Inspect for damage. Protect from damage and contamination by maintaining factory packaging until installation. Follow manufacturer's instructions for storage.

1.6 COORDINATION

- A. Coordinate layout and installation of anchoring with building structural systems and architectural features, and with mechanical, fire-protection, electrical and other building features in the vicinity.

1.7 WARRANTY

- A. Provide one-year warranty on parts and labor for manufacturer defects and installation workmanship.

PART 2 - PRODUCTS

2.1 ROOF PIPING SUPPORTS

- A. Non-Penetrating Pillow Block Supports:
 - 1. Provide pre-fabricated non-penetrating pillow block roof pipe supports for all piping installed on the roof.

2. Pillow block base shall be UV resistant polycarbonate rounded to prevent damage to the roof, and drainage holes shall prevent ponding of water in the support.
3. Acceptable Products:
 - a. Anvil International HBS-Base Series
 - b. Cooper B-Line Dura-Blok
 - c. Erico Caddy Pyramid 50, 150, 300, or 600 (to match load)
 - d. Miro Industries 1.5, 3-R, 4-R or 5-R (to match pipe)

PART 3 - EXECUTION

3.1 GENERAL

- A. Install all items per manufacturer's instructions.
- B. Piping crossing building seismic or expansion joints, passing from building to building, or supported from different portions of the building shall be installed to allow differential support displacements without damaging the pipe, equipment connections, or support connections. Pipe offsets, loops, anchors, and guides shall be installed as required to provide required motion capability and limit motion of adjacent piping.
- C. Where pipe support members are welded to structural building framing, scrape, brush clean, and apply one coat of zinc rich primer to welding.
- D. Supports shall extend directly to building structure.
- E. Furnish, install and prime all auxiliary structural steel for support of piping systems that are not shown on the drawings as being by others.
- F. Install hangers and supports complete with lock nuts, clamps, rods, bolts, couplings, swivels, inserts and required accessories.

3.2 ROOF PIPING SUPPORTS

- A. Roof Supports: Install per manufacturer's requirements. Coordinate with Roofing Contractor.
- B. Install roof pipe supports to resist wind movement per manufacturer's recommendations. Method of securing base to roof shall be compatible with roofing materials.
- C. Hangers for horizontal piping shall have adequate means of vertical adjustment for alignment.
- D. Support all piping and equipment, including valves, strainers, traps and other specialties and accessories, to avoid objectionable or excessive stress, deflection, swaying, sagging or vibration in the piping or building structure during erection, cleaning, testing and normal operation of the systems.
- E. Do not, however, restrain piping to cause it to snake or buckle between supports or to prevent proper movement due to expansion and contraction.
- F. Support piping at equipment and valves so it can be disconnected and removed without further supporting the piping.

- G. Piping shall not introduce strains or distortion to connected equipment.
- H. Provide additional supports where pipe changes direction, adjacent to flanged valves and strainers, and at equipment connections and heavy fittings.
- I. Spacing: Refer to Supports and Anchors section for pipe spacing requirements.

END OF SECTION 220530

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 220553 - PLUMBING IDENTIFICATION

PART 1 - GENERAL

1.1 SECTION INCLUDES

- A. Identification of products installed under Division 22.

1.2 REFERENCES

- A. ANSI/ASME A13.1 - Scheme for the Identification of Piping Systems.
- B. ASTM B-1, B-3, and B-8 for copper conductors.
- C. ASTM D-1248 for Polyethylene Extrusion Materials, ICEA S-70-547 Weatherproof Resistant Polyethylene Conductors, ICEA S-61-402/NEMA WC5 Thermoplastic Insulated Wire & Cable, ICEA S-95-658/NEMA WC70 Non-Shielded 0" 2kV Cables.
- D. CGA Pamphlet C-9, Standard Color-Marking of Compressed Gas Cylinders for Medical Use.
- E. NFPA-99: Health Care Facilities.
- F. UL 1581 Standard for Electrical Wires, Cables, and Flexible Cords.

1.3 SUBMITTALS

- A. Submit shop drawings under provisions of Section 220500. Include list of items identified, wording, letter sizes, and color coding.
- B. Include valve chart and schedule listing valve tag number, location, function, and valve manufacturer's name and model number.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- 1. 3M
- 2. Bunting
- 3. Calpico
- 4. Craftmark
- 5. Emedco
- 6. Seton
- 7. W.H. Brady
- 8. Marking Services

2.2 MATERIALS

- A. All pipe markers shall conform to ANSI A13.1. Marker lengths and letter sizes shall be at least the following:
- | OD of Pipe or Insulation | Marker Length | Size of Letters |
|----------------------------|---------------|-----------------|
| Up to and including 1-1/4" | 8" | 1/2" |
| 1-1/2" to 2" | 8" | 3/4" |
| 2-1/2" to 6" | 12" | 1-1/4" |
| 8" to 10" | 24" | 2-1/2" |
| Over 10" | 32" | 3-1/2" |
- Plastic tags may be used for outside diameters under 3/4"
- B. Plastic Nameplates: Laminated three-layer phenolic with engraved black, 1/4" minimum letters on light contrasting background.
- C. Brass Tags: Brass background with engraved black letters. Tag size minimum 1-1/2" square or 1-1/2" round.
- D. Plastic Pipe Markers: Semi-rigid plastic, preformed to fit around pipe or pipe covering; indicating flow direction and fluid conveyed.
- E. Vinyl Pipe Markers: Colored vinyl with permanent pressure sensitive adhesive backing.
- F. Stencil Painted Pipe Markers: Use industrial enamel spray paint per ANSI Standard A13.1. Indicate fluid conveyed and flow direction.
- G. Underground Pipe Markers: Bright colored continuously printed plastic ribbon tape 6" wide by 3.5 mils thick, manufactured for direct burial, with aluminum foil core for location by non-ferrous metal detectors and bold lettering identifying buried item.
- H. Tracer Wire:
1. Single copper conductors shall be solid or stranded annealed or hard uncoated copper per UL83 and ASTM requirements. Tracer tape or copper-coated steel wire is not acceptable.
 2. Conductor shall be insulated with HMWPE as specified and applied in a concentric manner. The minimum at any point shall not be less than 90% of the specified average thickness in compliance with UL 83.
 3. Tracer wire shall be continuously spark tested at 7500 Volts DC. Other electrical and mechanical tests shall be in accordance with UL 1581.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Install all products per manufacturer's recommendations.
- B. Degrease and clean surfaces to receive adhesive for identification materials.

C. Valves:

1. All valves (except shutoff valves at equipment) shall have numbered tags.
2. Provide or replace numbered tags on all existing valves that are connected to new systems or that have been revised.
3. Provide all existing valves used to extend utilities to this project with numbered tags. Review tag numbering sequence with the Owner prior to ordering tags.
4. Secure tags with heavy duty key chain and brass "S" link or with mechanically fastened plastic straps.
5. Attach to handwheel or around valve stem.
6. Number all tags and show the service of the pipe.
7. Provide two sets of laminated 8-1/2" x 11" (letter size) copies of a valve directory listing all valves, with respective tag numbers, uses, and locations. The directory shall be reviewed by the Owner and Architect/Engineer prior to laminating final copies. Laminated copies shall have brass eyelet in at least one corner for easy hanging.

D. Pipe Markers:

1. Adhesive Backed Markers: Use Brady Style 1, 2, or 3 on pipes 3" diameter and larger. Use Brady Style 4, 6, or 8 on pipes under 3" diameter. Similar styles by other listed manufacturers are acceptable. Secure all markers at both ends with a wrap of pressure sensitive tape completely around the pipe.
2. Snap-on Markers: Use Seton "Setmark" on pipes up to 5-7/8" OD. Use Seton "Setmark" with nylon or Velcro ties for pipes 6" OD and over. Similar styles by other listed manufacturers are acceptable.
3. Stencil Painted Pipe Markers:
 - a. Remove rust, grease, dirt, and all foreign substances from the pipe surface.
 - b. Apply primer on non-insulated pipes before painting.
 - c. Use background and letter colors as scheduled later in this section.
4. Apply markers and arrows in the following locations where clearly visible:
 - a. At each valve.
 - b. On both sides of walls that pipes penetrate.
 - c. At least every 20 feet along all pipes.
 - d. On each riser and each leg of each "T" joint.
 - e. At least once in every room and each story traversed.
5. Underground Pipe Markers: Install 8" to 10" below grade, directly above buried pipes.

E. Equipment:

1. All equipment not easily identifiable such as controls, relays, gauges, etc.; and all equipment in an area remote from its function shall have nameplates or plastic tags listing name, function, and drawing symbol. Do not label exposed equipment in public areas.
2. Mechanical equipment that is not covered by the U.S. National Appliance Energy Conservation Act (NAECA) of 1987 shall carry a permanent label installed by the manufacturer stating that the equipment complies with the requirements of ASHRAE 90.1.

F. Tracer Wire:

1. Tracer wire shall be installed on top of all non-metallic buried utilities.
2. Tracer wire shall be taped directly to plastic water or drain pipe.
3. Tracer wire shall not be fastened directly or indirectly to gas piping.
4. Tracer wire when attached shall be secured to the pipe a minimum of every 10 feet and at all changes of direction.
5. Tape shall be Polyken "930-35", Protecto-Wrap "310", or approved equal.
6. Tracer wire shall be continuous between boxes and shall be tested for continuity.
7. Splices in tracer wire shall be made with a water proof splice kit to prevent corrosion. Wire nuts shall not be used.
8. The tracer wire shall daylight to grade through a 2" PVC conduit, at the point of the utility entrance to building. PVC conduit shall be capped and labeled as future contact point to locate the utility.

3.2 SCHEDULE

A. Pipes to be marked shall be labeled with text as follows, regardless of which method or material is used:

1. CONDENSATE DRAIN: White lettering; green background
2. DOMESTIC COLD WATER: White lettering; green background
3. DOMESTIC HOT WATER: White lettering; green background
4. DOMESTIC HOT WATER CIRCULATING: White lettering; green background
5. SANITARY SEWER: Black lettering; yellow background
6. VENT: Black lettering; yellow background
7. NATURAL GAS: Black lettering; yellow background
8. TEMPERED WATER: White lettering; green background
9. All Underground Pipes: Varies
10. Tracer Wire - Natural Gas Pipe Lines: Black lettering; yellow background
11. Tracer Wire - All other buried types: White lettering; green background

B. Non-Potable Piping: All piping conveying non-potable water shall be permanently identified by continuously painted or continuous adhesive backed marker along entire length of pipe and branches so the piping is readily distinguishable from piping carrying potable water. Pipe markers shall be located as described above.

1. NON-POTABLE WATER: White lettering; purple background

END OF SECTION 220553

SECTION 220593 - PLUMBING TESTING, ADJUSTING, AND BALANCING

PART 1 - GENERAL

1.1 SECTION INCLUDES

- A. Testing, adjusting, and balancing of plumbing systems.

1.2 QUALITY ASSURANCE

- A. Agency shall be a company specializing in the adjusting and balancing of systems specified in this section with minimum three years' experience. Perform work under supervision of AABC Certified Test and Balance Engineer, NEBB Certified Testing, Balancing and Adjusting Supervisor, or TABB Certified Supervisor.
- B. Work shall be performed in accordance with the requirements of the references listed at the start of this section.

1.3 REFERENCES

- A. AABC - National Standards for Total System Balance, 2002.
- B. ASHRAE - 2003 HVAC Applications Handbook; Chapter 37, Testing, Adjusting and Balancing.
- C. TABB - International Standards for Environmental Systems Balance.

1.4 SUBMITTALS

- A. Submit copies of report forms, balancing procedures, and the name and qualifications of testing and balancing agency for approval within 30 days after award of Contract.
- B. Electronic Copies:
 - 1. Submit a certified copy of test reports to the Architect/Engineer for approval. Electronic copies shall be in PDF format only. Scanned copies, in PDF format, of paper originals are acceptable. Copies that are not legible will be returned to the Contractor for resubmittal. Do not set any permission restrictions on files; protected, locked, or secured documents will be rejected.
 - 2. Electronic file size shall be limited to a maximum of 10MB. Larger files shall be divided into files that are clearly labeled as "1 of 2", "2 of 2", etc.
 - 3. All text shall be searchable.
 - 4. Bookmarks shall be used. All bookmark titles shall be an active link to the index page and index tabs.

1.5 REPORT FORMS

- A. Submit reports on AABC, SMACNA or NEBB forms. Use custom forms approved by the Architect/Engineer when needed to supply specified information.

- B. Include in the final report a schematic drawing showing each system component, including balancing devices, for each system. Each drawing shall be included with the test reports required for that system. The schematic drawings shall identify all testing points and cross-reference these points to the report forms and procedures.
- C. Refer to PART 4 for required reports.

1.6 WARRANTY/GUARANTEE

- A. The TAB Contractor shall include an extended warranty of 90 days after owner receipt of a completed balancing report, during which time the Owner may request a recheck of terminals, or resetting of any outlet, coil, or device listed in the test report. This warranty shall provide a minimum of 8 manhours of onsite service time. If it is determined that the new test results are not within the design criteria, the balancer shall rebalance the system according to design criteria.
- B. Warranty/Guarantee must meet one of the following programs: TABB International Quality Assurance Program, AABC National Project Performance Guarantee, NEBB's Conformance Certification.

1.7 SCHEDULING

- A. Coordinate schedule with other trades. Provide a minimum of seven days' notice to all trades and the Architect/Engineer prior to performing each test.
- B. Project will be constructed in phases. Provide balancing report after each phase is complete.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION

3.1 GENERAL REQUIREMENTS

- A. All procedures must conform to a published standard listed in the References article of this section. All equipment shall be adjusted in accordance with the manufacturer's recommendations. Any system not listed in this specification but installed under the contract documents shall be balanced using a procedure from a published standard listed in the References article.
- B. The Balancing Contractor shall incorporate all pertinent documented construction changes (e.g., submittals/shop drawings, change orders, RFIs, ASIs, etc.) and include in the balancing report.
- C. Recorded data shall represent actual measured or observed conditions.
- D. Cut insulation, pipes, and equipment cabinets for installation of test probes to the minimum extent necessary to allow adequate performance of procedures. After testing and balancing is complete, close probe holes and patch insulation with new materials as specified. Restore vapor barrier and finish as specified.

- E. Permanently mark setting of valves and other adjustment devices allowing for settings to be restored. Set and lock memory stops.
- F. Leave systems in proper working order, closing access doors, closing doors to electrical switch boxes, plugging test holes, and restoring thermostats to specified settings.
- G. Installations with systems consisting of multiple components shall be balanced with all system components operating.

3.2 EXAMINATION

- A. Before beginning work, verify that systems are complete and operable. Ensure the following:
 - 1. General Equipment Requirements:
 - a. Equipment is safe to operate and in normal condition.
 - b. Equipment with moving parts is properly lubricated.
 - c. Temperature control systems are complete and operable.
 - d. Proper thermal overload protection is in place for electrical equipment.
 - e. Direction of rotation of all pumps is correct.
 - f. Access doors are closed and end caps are in place.
 - 2. Pipe System Requirements:
 - a. Hydronic systems have been cleaned, filled, and vented.
 - b. Strainer screens are clean and in place.
 - c. Shutoff, throttling and balancing valves are open.
- B. Report any defects or deficiencies to Architect/Engineer.
- C. Promptly report items that are abnormal or prevent proper balancing.
- D. If, for design reasons, system cannot be properly balanced, report as soon as observed.
- E. Beginning of work means acceptance of existing conditions.

3.3 PREPARATION

- A. Provide instruments required for testing, adjusting, and balancing operations. Make instruments available to the Architect/Engineer for spot checks during testing.
- B. Instruments shall be calibrated within six months of testing performed for project, or more recently if recommended by the instrument manufacturer.

3.4 INSTALLATION TOLERANCES

- A. $\pm 10\%$ of scheduled values:
 - 1. Adjust piping systems to $\pm 10\%$ of design values.

3.5 ADJUSTING

- A. After adjustment, take measurements to verify balance has not been disrupted or that disruption has been rectified.
- B. Once balancing of systems is complete, at least one valve must be 100% open.
- C. After testing, adjusting and balancing are complete, operate each system and randomly check measurements to verify system is operating as reported in the report. Document any discrepancies.
- D. Contractor responsible for each motor shall also be responsible for replacement sheaves. Coordinate with contractor.
- E. Contractor responsible for pump shall trim impeller to final duty point as instructed by this contractor on all pumps not driven by a VFD. Coordinate with contractor.

3.6 SUBMISSION OF REPORTS

- A. Fill in test results on appropriate forms.

PART 4 - SYSTEMS TO BE TESTED, ADJUSTED AND BALANCED

4.1 GENERAL REQUIREMENTS

- A. Title Page:
 - 1. Project name.
 - 2. Project location.
 - 3. Project Architect.
 - 4. Project Engineer (IMEG Corp.).
 - 5. Project General Contractor.
 - 6. TAB Company name, address, phone number.
 - 7. TAB Supervisor's name and certification number.
 - 8. TAB Supervisor's signature and date.
 - 9. Report date.
- B. Report Index
- C. General Information:
 - 1. Test conditions.
 - 2. Nomenclature used throughout report.
 - 3. Notable system characteristics/discrepancies from design.
 - 4. Test standards followed.
 - 5. Any deficiencies noted.
 - 6. Quality assurance statement.
- D. Instrument List:
 - 1. Instrument.
 - 2. Manufacturer, model, and serial number.

3. Range.
4. Calibration date.

4.2 PLUMBING SYSTEMS

A. Pump Data:

1. Drawing symbol.
2. Service.
3. Manufacturer, size, and model.
4. Impeller size: specified, actual, and final (if trimmed).
5. Flow Rate (gpm): specified and actual.
6. Pump Head: specified, operating and shutoff.
7. Suction Pressure: operating and shutoff.
8. Discharge Pressure: operating and shutoff.

B. Electric Motors:

1. Drawing symbol of equipment served.
2. Manufacturer, model, frame.
3. Nameplate: HP, phase, service factor, RPM, operating amps, efficiency.
4. Measured: Amps for each phase.

C. Balancing Valve:

1. Drawing symbol.
2. Service.
3. Location.
4. Size.
5. Manufacturer and model.
6. Flow rate (gpm): specified and actual.
7. Pressure drop: specified and actual.

END OF SECTION 220593

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 220719 - PLUMBING PIPING INSULATION

PART 1 - GENERAL

1.1 SECTION INCLUDES

- A. Piping Insulation.
- B. Insulation Jackets.

1.2 QUALITY ASSURANCE

- A. Applicator: Company specializing in piping insulation application with five years minimum experience.
- B. Materials: Listed and labeled for flame spread/smoke developed rating of no more than 25/50 when tested per ASTM E84 or UL 723 as required by code. Factory label insulation and jacket materials and adhesive, mastic, tapes, and cement material containers with appropriate markings of applicable testing agency.
- C. Products shall not contain asbestos, lead, mercury, or mercury compounds.
- D. Products that come in contact with stainless steel shall have a leachable chloride content of less than 50 ppm when tested according to ASTM C 871. Insulation materials for use on austenitic stainless steel shall be qualified as acceptable according to ASTM C 795.
- E. Foam insulation materials shall not use CFC or HCFC blowing agents in the manufacturing process.

1.3 REFERENCES

- A. ANSI/ASHRAE/IES Standard 90.1 (latest published edition) - Energy Standard for Buildings Except Low-Rise Residential Buildings.
- B. ANSI/ASTM C533 - Calcium Silicate Block and Pipe Thermal Insulation.
- C. ANSI/ASTM C534 - Elastomeric Foam Insulation.
- D. ASTM C591 - Unfaced Preformed Rigid Cellular Polyisocyanurate Insulation.
- E. ASTM C1126 - Standard Specification for Faced or Unfaced Rigid Cellular Phenolic Thermal Insulation.
- F. ASTM C1729 - Standard Specification for Aluminum Jacketing for Insulation.
- G. ASTM C1767 - Standard Specification for Stainless Steel Jacketing for Insulation.
- H. ASTM E84 - Surface Burning Characteristics of Building Materials.
- I. NFPA 255 - Surface Burning Characteristics of Building Materials.

J. UL 723 - Surface Burning Characteristics of Building Materials.

K. National Commercial & Industrial Insulation Standards - 1999 Edition - as published by Midwest Insulation Contractors Association and endorsed by National Insulation Contractors Association.

1.4 SUBMITTALS

A. Submit shop drawings per Section 220500. Include product description, list of materials and thickness for each service, and locations.

PART 2 - PRODUCTS

2.1 INSULATION

A. Type A: Glass fiber; ANSI/ASTM C547; 0.24 maximum 'K' value at 75°F; non-combustible. All-purpose polymer or polypropylene service jacket, listed and labeled at no more than 25/50 when tested per ASTM E84 or UL 723 as required by code.

B. Type B: Flexible elastomeric foam insulation; closed-cell, sponge or expanded rubber (polyethylene type is not permitted); ANSI/ASTM C534 Grade 1 Type I for tubular materials; flexible plastic; 0.25 maximum 'K' value at 75°F, listed and labeled at no more than 25/50 when tested per ASTM E84 or UL 723 as required by code. Maximum 1" thick per layer where multiple layers are specified.

C. Type C: Molded rigid cellular glass; ANSI/ASTM C-552; 0.29 maximum 'K' value at 75°F; density 7.3lb/ft; minimum compressive strength 90 psi parallel to rise; moisture resistant, non-combustible; suitable for -100°F to +900°F. For below grade installations, use asphaltic mastic paper vapor barrier jacket. Use self-seal all-purpose polymer or polypropylene service jacket for above grade installations.

D. Type D: Hydrous Calcium Silicate; ASTM C533; rigid molded pipe insulation; asbestos free; 0.40 'K' value at 300°F; 1200°F maximum service temperature; 16 gauge stainless steel tie wires on maximum 12" centers.

E. Type E: Preformed rigid cellular polyisocyanurate insulation; ANSI/ASTM C591; maximum 'K' value of 0.19 at 75°F; density 4.0lb/ft; minimum compressive strength 95 psi parallel to rise; moisture resistant; listed and labeled at no more than 25/50 when tested per ASTM E84 or UL 723 as required by code; suitable for -297°F to +300°F.

2.2 VAPOR BARRIER JACKETS

A. All-purpose polymer or polypropylene service jacket vapor barrier with self-sealing adhesive joints. Beach puncture resistance ratio of at least 50 units. Tensile strength: 35 psi minimum. Single, self-seal acrylic adhesive on longitudinal jacket laps and butt strips.

2.3 JACKET COVERINGS

A. Aluminum Jackets: ASTM C1729; 0.016" thick (thicker where required by ASTM C1729); stucco embossed finish with Z edge seams and aluminum bands for outdoor use. Where colored jacket covers are called for, provide factory-applied hard film acrylic paint in color selected by Architect.

- B. Plastic Jackets and Fitting Covers: High impact, glossy white, 0.030"thick, self-extinguishing plastic. Suitable for use indoors or outdoors with ultraviolet inhibitors. Suitable for -40°F to 150°F. Listed and labeled at no more than 25/50 when tested per ASTM E84 or UL 723 as required by code.

PART 3 - EXECUTION

3.1 PREPARATION

- A. Install insulation after piping has been tested. Pipe shall be clean, dry and free of rust before applying insulation.

3.2 INSTALLATION

- A. General Installation Requirements:

- 1. Install materials per manufacturer's instructions, building codes and industry standards.
 - 2. Continue insulation with vapor barrier through penetrations. This applies to all insulated piping. Maintain fire rating of all penetrations.

- B. Insulated Piping Operating Below 60°F:

- 1. Insulate fittings, valves, unions, flanges, strainers, flexible connections, flexible hoses, and expansion joints. Seal all penetrations of vapor barrier.
 - 2. On piping operating below 60°F in locations that are not mechanically cooled (e.g., penthouses, mechanical rooms, tunnels, chases at exterior walls, etc.), Type B insulation shall be used.
 - 3. All balance valves with fluid operating below 60°F shall be insulated with a removable plug wrapped with vapor barrier tape to allow reading and adjusting of the valve.

- C. Insulated Piping Operating Between 60°F and 140°F:

- 1. Do not insulate flanges and unions, but bevel and seal ends of insulation at such locations. Insulate all fittings, valves and strainers.

- D. Insulated Piping Operating Above 140°F:

- 1. Insulate fittings, valves, flanges, and strainers.
 - 2. All balance valves with fluid operating above 140°F shall be insulated and an opening shall be left in the insulation to allow for reading and adjusting the valve.

- E. Exposed Piping:

- 1. Locate and cover seams in least visible locations.
 - 2. Where exposed insulated piping extends above the floor, provide a sheet metal guard around the insulation extending 12" above the floor. Guard shall be 0.016" cylindrical smooth or stucco aluminum and shall fit tightly to the insulation.
 - 3. On exposed piping serving kitchen equipment or plumbing fixtures, the piping shall be insulated unless local code allows it to be uninsulated. In no instance should the uninsulated portion of the piping be more than 4ft in developed length.

3.3 SUPPORT PROTECTION

- A. Provide a shield on all insulated piping at each support between the insulation jacket and the support.
- B. On all insulated piping greater than 1-1/2", provide shield with insulation insert of same thickness and contour as adjoining insulation at each support, between the pipe and insulation jacket, to prevent insulation from sagging and crushing. Inserts shall be as follows:
 - 1. The insert shall be suitable for planned temperatures, be suitable for use with specific pipe material, and shall be a minimum 180° cylindrical segment the same length as metal shields. Inserts shall be:
 - a. Cellular glass (Type C) (for all temperature ranges) with a minimum compressive strength of 90 psi is acceptable for pipe sizes 14" and below. For pipe sizes larger than 14", provide rolled steel plate in addition to the shield.
 - b. Molded hydrous calcium silicate (Type D) (only use for pipes with operating temperatures above 90°F, with a minimum compressive strength of 100 psi is acceptable for pipe sizes 14" and below. For pipe sizes larger than 14", provide rolled steel plate in addition to the shield.
 - c. Polyisocyanurate insulation (Type E) (for pipes below 300°F with a minimum compressive strength of 24 psi is acceptable for pipe sizes 3" and below, minimum 60 psi for pipe sizes 4" to 10". For pipe sizes larger than 10", provide rolled steel plate in addition to the shield. Where insulation is installed on piping located within return air plenums and mechanical rooms, insulation shall be listed and labeled at no more than 25/50 when tested per ASTM E84 or UL 723 as required by code.
 - d. As an alternative to separate pipe insulation insert and saddle, properly sized manufactured integral rigid insulation insert and shield assemblies may be used.
 - 1) Products:
 - a) Buckaroo CoolDry
 - b) Cooper/B-Line Fig. B3380 through B3384
 - c) Pipe Shields A1000, A2000
 - e. Insulation Couplings:
 - 1) Molded thermoplastic slip coupling, -65°F to 275°F, sizes up to 4-1/8" OD, and receive insulation thickness up to 1". Suitable for use indoors or outdoors with UV stabilizers. Vertical insulation riser clamps shall have a 1,000lb vertical load rating. On cold pipes operating below 60°F, cover joint and coupling with vapor barrier mastic to ensure continuous vapor barrier.
 - 2) PET thermoplastic foam load bearing core with elastomeric foam ends and lap-seal jacket.
 - 3) Horizontal Strut Mounted Insulated Pipe Manufacturers:
 - a) Klo-Shure or equal
 - b) Armafix Ecolight
 - 4) Vertical:
 - a) Manufacturers: Klo-Shure Titan or equal

- f. Rectangular blocks, plugs, or wood material are not acceptable.
 - g. Temporary wood blocking may be used by the Piping Contractor for proper height; however, these must be removed and replaced with proper inserts by the Insulation Contractor. Refer to Supports and Anchors specification section for additional information.
- C. Neatly finish insulation at supports, protrusions, and interruptions.
- D. Install metal shields between all hangers or supports and the pipe insulation. Shields shall be galvanized sheet metal, half-round with flared edges. Adhere shields to insulation. On cold piping, seal the shields vapor-tight to the insulation as required to maintain the vapor barrier, or add separate vapor barrier jacket.
- E. Shields shall be at least the following lengths and gauges:
- | Pipe Size | Shield Size |
|----------------|---------------------|
| 1/2" to 3-1/2" | 12" long x 18 gauge |
| 4" | 12" long x 16 gauge |
| 5" to 6" | 18" long x 16 gauge |
| 8" to 14" | 24" long x 14 gauge |
| 16" to 24" | 24" long x 12 gauge |
- F. Elastomeric foam insulation shields/saddle; molded thermoplastic rigid pipe saddle sized for insulation outside diameter. Length as indicated above.
- G. Ferrous hot piping 4 inches and larger, provide steel saddle at rollers as described in Section 220529 "Plumbing Supports and Anchors".
- H. Minimum 1/4" rolled galvanized steel plates shall be provided in addition to the sleeves as reinforcement on large pipes to reduce point loading on roller, trapeze hanger and strut support locations depending on insulation compressive strength. Refer to section above for exact locations.

3.4 INSULATION

- A. Type A Insulation:
1. All Service Jackets: Seal all longitudinal joints with self-seal laps using a single pressure sensitive adhesive system. Do not staple.
 2. Insulation without self-seal lap may be used if installed with Benjamin Foster 85-20 or equivalent Chicago Mastic, 3M or Childers lap adhesive.
 3. Apply insulation with laps on top of pipe.
 4. Fittings, Valve Bodies and Flanges: For 4" and smaller pipes, insulate with 1 lb. density insulation wrapped under compression to a thickness equal to the adjacent pipe insulation. For pipes over 4", use mitered segments of pipe insulation. Finish with preformed plastic fitting covers. Secure fitting covers with pressure sensitive tape at each end. Overlap tape at least 2" on itself. For pipes operating below 60°F seal fitting covers with vapor retarder mastic in addition to tape.
- B. Type B Insulation:
1. Install per manufacturer's instructions or ASTM C1710.

-
2. Elastomeric Cellular Foam: Where possible, slip insulation over the open end of pipe without slitting. Seal all butt ends, longitudinal seams, and fittings with adhesive. At elbows and tees, use mitered connections. Do not compress or crush insulation at cemented joints. Joints shall be sealed completely and not pucker or wrinkle. Exterior installations shall contain factory applied polymeric, moisture, and UV resistant covering with ends sealed with adhesive and similar cover; or Contractor shall paint the outside of outdoor insulation with two coats of latex enamel paint recommended by the manufacturer.
 3. Insulation Installation on Straight Pipes and Tubes:
 - a. Seal longitudinal seams and end joints with manufacturer's recommended adhesive to eliminate openings in insulation that allow passage of air to surface being insulated.
 - b. Insulation must be installed in compression to allow for expansion and contraction. Insulation shall be pushed onto the pipe, never pulled. Stretching of insulation may result in open seams and joints.
 4. Insulation Installation on Valves and Pipe Specialties:
 - a. Install preformed sections of same material as straight segments of pipe insulation when available.
 - b. When preformed sections are not available, install mitered sections of pipe insulation to valve body.
 - c. Arrange insulation to permit access to packing and to allow valve operation without disturbing insulation.
- C. Type C Insulation:
1. Seal all longitudinal joints with manufacturer approved adhesive. Secure butt joint strips in a similar manner.
 2. Insulate fittings with prefabricated fittings.
- D. Type D Insulation:
1. Use pre-molded half sections. Butt longitudinal and circumferential joints tightly. Wire in place with 16 gauge stainless steel wire on maximum 12" centers.
 2. Apply in two layers. Stagger all joints between layers. Wire each layer individually.
- E. Type E Insulation:
1. Indoors, above grade or below grade, Polyvinylidene chloride (PVDC or Saran) vapor retarder film and tape: Seal all longitudinal joints with manufacturer approved adhesive. Secure butt joint strips in a similar manner. Refer to manufacturer's recommendations for installation guidelines.
 2. Insulate pipe fittings with prefabricated insulation fittings.
- 3.5 JACKET COVER INSTALLATION
- A. Metal Covering:
1. Provide vapor barrier as specified for insulation type. Cover with aluminum jacket covering with seams located on the bottom of horizontal piping. Include fittings, joints and valves.

2. Seal all interior and exterior butt joints with metal draw bands and sealant. Seal all exterior joints watertight.
3. Interior joints do not need to be sealed.
4. Use metal covering on the following pipes:
 - a. All exterior piping.
 - b. All Type D insulation.

B. Plastic Covering:

1. Provide vapor barrier as specified for insulation type. Cover with plastic jacket covering. Position seams to shed water.
2. Solvent weld all joints with manufacturer recommended cement.
3. Overlap all laps and butt joints 1-1/2" minimum. Repair any loose ends that do not seal securely. Solvent weld all fitting covers in the same manner. Final installation shall be watertight.
4. All joints in areas noted shall meet USDA standards for Totally Sealed Systems, including overlaps of 1" on circumferential and 1.5" to 2" on longitudinal seams.
5. Use plastic insulation covering on all exposed pipes including, but not limited to:
 - a. All exposed piping in finished spaces unless noted otherwise on the drawings.
 - b. All exposed piping in kitchen areas.
 - c. All exposed piping in unfinished areas as noted on drawings (e.g., storage rooms, janitor's closets, utility rooms, etc.).
 - d. All exposed piping in mechanical or equipment rooms below 8'-0" above floor.
 - e. All exposed piping in mechanical rooms that is subject to damage from normal operations. (Example: Piping that must be stepped over routinely.)

3.6 SCHEDULE

- A. Refer to drawings for insulation schedule.

END OF SECTION 220719

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 220800 - COMMISSIONING OF PLUMBING

PART 1 - GENERAL

1.1 SECTION INCLUDES

- A. Description
- B. Responsibilities
- C. Related Work
- D. Test Equipment

1.2 DESCRIPTION

- A. The purpose of this section is to specify Division 22 responsibilities in the commissioning process.
- B. The systems to be commissioned are listed in Section 019100.
- C. Commissioning requires the participation of the Division 22 Contractor to ensure that all systems are operating in a manner consistent with the Contract Documents. The general commissioning requirements and coordination are detailed in Section 019100. Division 22 Contractor shall be familiar with all parts of Section 019100 and shall execute all commissioning responsibilities assigned to them in the Contract Documents.

1.3 RESPONSIBILITIES

- A. Refer to Section 019100.

1.4 RELATED WORK

- A. Specific commissioning requirements are given in the following sections of these specifications. All the following sections apply to the Work of this section.
 - 1. Section 017823 - Operations and Maintenance
 - 2. Section 017900 - Demonstration and Training
 - 3. Section 019100 - Commissioning
 - 4. Section 230800 - Commissioning of HVAC
 - 5. Section 260800 - Commissioning of Electrical
 - 6. Section 270800 - Commissioning of Communications

PART 2 - PRODUCTS

2.1 TEST EQUIPMENT

- A. The Contractor shall provide all test equipment necessary to fulfill the testing requirements of this Division. This equipment includes, but is not limited to, the following:
 - 1. Handheld temperature and relative humidity meter.
 - 2. Infrared thermometer gun.
 - 3. Analog differential pressure gauge and associated tubing.
 - 4. Portable computer with access to the building automation system.
- B. All testing equipment shall be of sufficient quality and accuracy to test and/or measure system performance with the tolerances specified in the related specifications. If not otherwise noted, the following minimum requirements apply:
 - 1. Temperature sensors and digital thermometers shall have a certified calibration within the past year to an accuracy of 0.5°F and a resolution of +/- 0.1°F.
 - 2. Pressure sensors shall have an accuracy of +/- 2.0% of the value range being measured (not full range of meter) and have been calibrated within the last year.
 - 3. All equipment shall be calibrated according to the manufacturer's recommended intervals and when dropped or damaged. Calibration tags shall be affixed or certificates readily available.
- C. Refer to Section 019100 for additional Division 22 requirements.

PART 3 - EXECUTION

- A. Refer to Section 019100.

END OF SECTION 220800

SECTION 220900 - INSTRUMENTATION

PART 1 - GENERAL

1.1 SECTION INCLUDES

- A. Pressure Gauge.
- B. Pressure Gauge Accessories.
- C. Thermometers.
- D. Test Plugs.

1.2 REFERENCES

- A. ANSI/AWWA C700 - Cold Water Meters - Displacement Type, Bronze Main Case.
- B. ANSI/AWWA C701 - Cold Water Meters - Turbine Type, for Customer Service.
- C. ANSI/AWWA C702 - Cold Water Meters - Compound Type.
- D. ANSI/AWWA C706 - Direct Reading, Remote Registration Systems for Cold Water Meters.
- E. ASME B40.1 - Gauges - Pressure Indicating Dial Type - Elastic Element.
- F. ASME MFC-3M - Measurement of Fluid Flow in Pipes Using Orifice, Nozzle and Venturi.
- G. ASTM E1 - Specification for ASTM Thermometers.

1.3 SUBMITTALS

- A. Submit shop drawings per Section 220500. Include list that indicates use, operating range, total range and location for manufactured components.

PART 2 - PRODUCTS

2.1 PRESSURE GAUGES

- A. Gauges shall be 4-1/2" diameter with aluminum or stainless steel case with phosphor bronze bourdon tube, brass socket for water or oil application, 1/2" bottom connection. Gauges shall be 1% full scale accurate with bronze bushed brass movement and adjustable pointer. Standard ranges to be either pressure or pressure and vacuum as required of application.
 - 1. Manufacturers:
 - a. Ashcroft
 - b. Marsh
 - c. Marshalltown

- d. Terice
- e. Weksler
- f. Wika.

- B. Select gauge range for normal reading near center of gauge.

2.2 PRESSURE GAUGE ACCESSORIES

- A. All pressure gauges shall have valves and pressure snubbers. All pressure gauges on steam shall have pigtail syphon.
- B. Shutoff Valve: 1/2" ball valve as specified for each piping system.
- C. Pressure snubber, brass with 1/2" connections, porous metal type.
- D. All pressure gauge piping shall be minimum 1/2" 304 stainless steel pipe or copper tube.

2.3 THERMOMETERS

- A. Alcohol/Spirit Filled Type:
 - 1. 9" long phenolic case, steel stem, accuracy of 1% full scale. Adjustable elbow joint with 180 degree adjustment in vertical plane, 360 degree adjustment in horizontal plane, and locking device to allow rotation of thermometer to any angle.
 - 2. Select thermometer for appropriate temperature range.
 - 3. Stem: Copper plated steel, aluminum, or brass for separable socket. Stem lengths as required for application with minimum insertion of 3-1/2".
 - 4. Thermometers for water shall have brass or steel separable socket. Thermometer wells shall be stainless steel, pressure rated to match piping system design pressure; with 2-inch extension for insulated piping and threaded cap nut with chain permanently fastened to well and cap.
 - 5. Manufacturer:
 - a. Marsh
 - b. Miljoco
 - c. Terice
 - d. Weksler
 - e. Wika.

2.4 TEST PLUGS

- A. Test Plug: 1/4" or 1/2" brass fitting and cap, with Nordel core for temperatures up to 275°F, for receiving 1/8" outside diameter pressure or temperature probe. Plugs shall be rated for zero leakage from vacuum to 500 psi.
- B. Provide extended units for all plugs installed in insulated piping.
- C. Test Kit: Carrying case, internally padded and fitted containing one 3-1/2" diameter pressure gauge with 0-100 psi range, one gauge adapter with 1/8" probes, two 1-1/2" dial thermometers with 0° to 220°F and -25°F to 125°F ranges and 5" stems.

D. Manufacturers:

1. Sisco
2. Flow Design
3. Peterson Equipment
4. MG Piping Products Co.
5. Miljoco
6. Trerice
7. Watts Regulator.

PART 3 - EXECUTION

3.1 INSTALLATION

A. General Installation Requirements:

1. Install per manufacturer's instructions.
2. Coil and conceal excess capillary on remote element instruments.
3. Install gauges and thermometers in locations where they are easily read from normal operating level.
4. Do not install instrumentation when areas are under construction, except for required rough-in, taps, supports and test plugs.

B. Pressure Gauges:

1. Connect pressure gauges to suction and discharge side of all pumps.
2. Provide 1/2" tubing for pressure gauge and gauge accessories.
3. Provide snubber for each pressure gauge.
4. Provide coil syphon for each pressure gauge connected to steam piping.
5. Install gauges with bottom threaded connections at 6 o'clock position.

C. Thermometers:

1. Install piping system thermometers in sockets with short couplings. Enlarge pipes smaller than 2-1/2" for installation of thermometer sockets.
2. Install thermometer sockets adjacent to control system thermostat, transmitter and sensor sockets.

END OF SECTION 220900

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 221000 - PLUMBING PIPING

PART 1 - GENERAL

1.1 SECTION INCLUDES

- A. Pipe and Pipe Fittings.
- B. Valves.
- C. Check Valves.

1.2 QUALITY ASSURANCE

- A. Valves: Manufacturer's name and pressure rating marked on valve body. Remanufactured valves are not acceptable.
- B. Welding Materials and Procedures: Conform to ASME Code and applicable state labor regulations.
- C. Welders Certification: In accordance with ANSI/ASME Sec 9 or ANSI/AWS D1.1.
- D. Piping, Fittings, Valves, and Flux for Potable Water Systems: All components shall be lead free per Federal Act S.3874, Reduction of Lead in Drinking Water Act.

1.3 REFERENCES

- A. ANSI/ASME A112.3.1 - Stainless Steel Drainage Systems for Sanitary DWV, Storm, and Vacuum Applications, Above and Below Ground.
- B. ASME A112.6.9 - Siphonic Drain Test; The American Society of Mechanical Engineers.
- C. ANSI/ASME B16.22 - Wrought Copper and Bronze Solder-Joint Pressure Fittings.
- D. ANSI/ASME B16.23 - Cast Copper Alloy Solder Joint Drainage Fittings - DWV.
- E. ANSI/ASME B16.29 - Wrought Copper and Wrought Copper Alloy Solder Joint Drainage Fittings - DWV.
- F. ANSI/ASME B16.3 - Malleable Iron Threaded Fittings Class 150 NS 300.
- G. ANSI/ASME B16.5 - Pipe Flanges and Flanged Fittings.
- H. ANSI/ASME B16.9 - Factory-Made Wrought Steel Butt Welding Fittings.
- I. ANSI/ASME B31.3 - Chemical Plant and Petroleum Refinery Piping.
- J. ANSI/ASME Sec 9 - Welding and Brazing Qualifications.
- K. ANSI/ASTM B32 - Solder Metal.

Unified Government Memorial Hall Kitchen & Audio/Visual Renovations

Unified Government of Wyandotte County & Kansas City, KS

ISSUED FOR BID

-
- L. ANSI/ASTM C443 - Joints for Circular Concrete Sewer and Culvert Pipe, Using Rubber Gaskets.
 - M. ANSI/ASTM D2466 - PVC Plastic Pipe Fittings, Schedule 40.
 - N. ANSI/AWS D1.1 - Structural Welding Code.
 - O. ANSI/AWWA C110 - Ductile Iron and Gray Iron Fittings 3" through 48", for Water and Other Liquids.
 - P. ANSI/AWWA C111 - Rubber-Gasket Joints for Ductile Iron and Gray Iron Pressure Pipe and Fittings.
 - Q. ANSI/AWWA C151 - Ductile Iron Pipe, Centrifugally Cast in Metal Molds or Sand-Lined Molds, for Water or Other Liquids.
 - R. ANSI/AWWA C153 - Compact Ductile Iron Fittings 3" through 48", for Water and Other Liquids.
 - S. ASME - Boiler and Pressure Vessel Code.
 - T. ASSE 1003 - Water Pressure Reducing Valves for Domestic Water Supply Systems.
 - U. ASTM A53 - Pipe, Steel, Black and Hot-Dipped Zinc Coated, Welded and Seamless.
 - V. ASTM A74 - Hub and Spigot Cast Iron Soil Pipe and Fittings.
 - W. ASTM A234 - Pipe Fittings of Wrought Carbon Steel and Alloy Steel for Moderate and Elevated Temperatures.
 - X. ASTM A312 - Standard for Seamless, Welded, and Heavily Cold Worked Austenitic Stainless Steel Pipes.
 - Y. ASTM A554 - Standard for Welded Stainless Steel Mechanical Tubing.
 - Z. ASTM A674 - Standard Practice for Polyethylene Encasement for Ductile Iron Pipe for Water or Other Liquids.
 - AA. ASTM A888 - Hubless Cast Iron Soil Pipe and Fittings.
 - BB. ASTM B88 - Seamless Copper Water Tube.
 - CC. ASTM B306 - Copper Drainage Tube (DWV).
 - DD. ASTM C14 - Concrete Sewer, Storm Drain, and Culvert Pipe.
 - EE. ASTM C564 - Rubber Gaskets for Cast Iron Soil Pipe and Fittings.
 - FF. ASTM C1540 - Shielded Couplings Joining Hubless Cast Iron Soil Pipe and Fittings.
 - GG. ASTM D1784 - Standard Specification for Rigid Poly (Vinyl Chloride) (PVC) Compounds and Chlorinated Poly (Vinyl Chloride) (CPVC) Compounds.
 - HH. ASTM D1785 - Polyvinylchloride (PVC) Plastic Pipe, Schedules 40, 80 and 120.

Unified Government Memorial Hall Kitchen & Audio/Visual Renovations

Unified Government of Wyandotte County & Kansas City, KS

ISSUED FOR BID

-
- II. ASTM D2321 - Standard Practice for Underground Installation of Thermoplastic Pipe for Sewers and Other Gravity-Flow Applications.
 - JJ. ASTM D2661 - ABS DWV Pipe & Fittings.
 - KK. ASTM D2665 - PVC DWV Pipe & Fittings.
 - LL. ASTM D2846 - Standard Specification for Chlorinated Poly (Vinyl Chloride) (CPVC) Plastic Hot- and Cold-Water Distribution Systems
 - MM. ASTM D3033 - Type PSP (Polyvinylchloride) (PVC) Sewer Pipe and Fittings.
 - NN. ASTM D3034 - Type PSM (Polyvinylchloride) (PVC) Sewer Pipe and Fittings.
 - OO. ASTM F402 - Standard Practice for Safe Handling of Solvent Cements, Primers, and Cleaners Used for Joining Thermoplastic Pipe and Fittings.
 - PP. ASTM F437 - Standard Specification for Threaded Chlorinated Poly (Vinyl Chloride) (CPVC) Plastic Pipe Fittings, Schedule 80.
 - QQ. ASTM F439 - Standard Specification for Socket-Type Chlorinated Poly (Vinyl Chloride) (CPVC) Plastic Pipe Fittings, Schedule 80.
 - RR. ASTM F477 - Elastomeric Seals (Gaskets) for Joining Plastic Pipes.
 - SS. ASTM F493 - Standard Specification for Solvent Cements for Chlorinated Poly (Vinyl Chloride) (CPVC) Plastic Pipe and Fittings.
 - TT. ASTM F656 - Standard Specification for Primers for Use in Solvent Cement Joints of Poly (Vinyl Chloride) (PVC) Plastic Pipe and Fittings
 - UU. ASTM F876 - Standard Specification for Crosslinked Polyethylene (PEX) Tubing.
 - VV. ASTM F1412 - Standard Specification for Polyolefin Pipe and Fittings for Corrosive Waste Drainage Systems.
 - WW. ASTM F1960 - Standard Specification for Cold Expansion Fittings with PEX Reinforcing Rings for Use with Cross-linked Polyethylene (PEX) Tubing.
 - XX. ASTM F2618 - Standard Specification for Chlorinated Poly (Vinyl Chloride) (CPVC) Pipe and Fittings for Chemical Waste Drainage Systems.
 - YY. AWS A5.8 - Brazed Filler Metal.
 - ZZ. AWWA C651 - Disinfecting Water Mains.
 - AAA. CISPI 301 - Cast Iron Soil Pipe and Fittings for Hubless Cast Iron Sanitary Systems.
 - BBB. CISPI 310 - Joints for Hubless Cast Iron Sanitary Systems.
 - CCC. FM 1680 - Couplings Used in Hubless Cast Iron Systems.
 - DDD. NFPA 24 - Private Fire Service Mains and Their Appurtenances.

EEE. NFPA 54 - National Fuel Gas Code.

FFF. NFPA 58 - Storage and Handling of Liquefied Petroleum Gases.

GGG. NSF - National Sanitation Foundation

1.4 SUBMITTALS

A. Submit shop drawings per Section 220500.

1.5 DELIVERY, STORAGE, AND HANDLING

A. Deliver and store valves in shipping containers with labeling in place.

1.6 COORDINATION DRAWINGS

A. Reference Coordination Drawings article in Section 220500 for required plumbing systems electronic CAD drawings to be provided to Coordinating Contractor for inclusion into composite coordination drawings.

PART 2 - PRODUCTS

2.1 CAST IRON PIPE

A. Cast Iron; Standard Weight; Hub and Spigot Joints:

1. Pipe: Standard weight hub and spigot cast iron soil pipe, bituminous corrosion protective coating inside and outside, CISPI 301 and CISPI Trademark.
2. Design Pressure: Gravity Maximum Design Temperature: 180°F
3. Joints: Compression gasket, ASTM C564.
4. Restraints: Install pipe and fittings per the Cast Iron Soil Pipe Institute's Designation 301. Restrain pipe and fittings using an engineered and tested product manufactured for restraining no-hub cast iron soil pipe. Install per manufacturer's recommendations.
5. Adapters: Heavy duty no-hub transition for joining cast iron and PVC pipe. Adapters shall be tested and certified to ASTM C 1460 and be constructed with Type 304 stainless steel shield, thickness 0.015" shield, gasket material to meet ASTM C564, 1-1/2" to 4" will be 3" wide with four 304 stainless steel bands, and 6" to 10" will be 4" wide with six 304 stainless steel bands and 3/8" 305 stainless steel hex head screws torqued to 80 inch pounds.

B. Cast Iron; Standard Weight; No-Hub Sleeve Gaskets:

1. Pipe: Standard weight no-hub cast iron soil pipe, bituminous corrosion protective coating inside and outside, CISPI 301 and CISPI Trademark.
2. Design Pressure: Gravity Maximum Design Temperature: 180°F
3. Joints: ASTM C1540, FM 1680, and ASTM C-564.
 - a. Super Duty, Shielded Stainless Steel Couplings: Neoprene sleeve gasket, 0.015" thick 304 stainless steel shield, stainless steel 3/8" screw type clamps, minimum of four clamps for 1-1/2" to 4" and six clamps for 5" and larger pipe sizes. Clamps shall be tightened to minimum 80 inch pounds or as manufacturer requires. Husky SD-4000 or equal.

4. Restraints: Install pipe and fittings per the Cast Iron Soil Pipe Institute's Designation 310. Restrain pipe and fittings using an engineered and tested product manufactured for restraining no-hub cast iron soil pipe. Install per manufacturer's recommendations.
5. Adapters: Transition from cast iron soil pipe to other pipe materials with manufactured adapters specifically for the application. Adapter must meet the same requirements as the joints listed above. ASTM C1460. Sticker identifying transition fitting application must be visible to view. For example, the most commonly used transition fitting from cast iron no-hub to PVC would be the Husky SD-4200 series.

C. Cast Iron; Standard Weight Epoxy Coated; No-Hub Sleeve Gaskets:

1. Pipe and Fittings: Standard weight no-hub cast iron soil pipe, CISPI 301 and CISPI Trademark, epoxy paint corrosion protective coating inside and outside, EN-877.
2. Joints: ASTM C1540 and FM 1680.
 - a. Corrosion Resistant, Shielded Stainless Steel Couplings: Neoprene sleeve gasket, 0.015" thick 316 stainless steel shield, 316 stainless steel 3/8" screw type clamps, minimum of four clamps for 1-1/2" to 4" and six clamps for 5" and larger pipe sizes. Clamps shall be tightened to minimum 80 inch pounds or as manufacturer requires. Husky CR-7000 or equal.
3. Restraints: Install pipe and fittings per the Cast Iron Soil Pipe Institute's Designation 301. Restrain pipe and fittings using an engineered and tested product manufactured for restraining no-hub cast iron soil pipe. Install per manufacturer's recommendations.
4. Adapters: Transitions from cast iron soil pipe to other pipe materials with manufactured adapters specifically for the application. Adapter must meet the same requirements as the joints listed above. ASTM C1460. Sticker identifying transition fitting application must be visible to view.

2.2 COPPER PIPE

A. Copper Pipe; Type L; Solder Joints:

1. Pipe: Type L hard drawn seamless copper tube, ASTM B88.
2. Design Pressure: 175 psi; Maximum Design Temperature: 200°F.
3. Joints: Solder with 100% lead-free solder and flux, ASTM B32.
4. Fittings: Wrought copper solder joint, ANSI B16.22.

B. Copper Pipe; Type L; Mechanical Press Connection:

1. Pipe: Type L hard drawn seamless copper tube, ASTM B88.
2. Design Pressure: 175 psi; Maximum Design Temperature: 200°F.
3. Joints: Mechanical press connection.
4. Fittings: Copper, ANSI B-16.22, with embedded EPDM O-ring / sealing element engineered for this application, NSF-61.
5. Fitting Identification: Press ends shall provide the ability to identify an unpressed fitting from the floor prior to testing. The function of this feature is to provide the installer quick and easy identification of connections that have not been pressed prior to putting the system into operation.
6. Special Requirements: Mechanical press fitting manufacturer shall provide Contractor training prior to installation.
7. Manufacturers:
 - a. Viega ProPress

- b. NIBCO Press System Fittings and Valves
- c. Mueller Streamline PRS

C. Copper Pipe: Type DWV; Solder Joints:

- 1. Pipe: Type DWV hard temper seamless copper drainage tube, ASTM B306.
- 2. Design Pressure: Gravity Maximum Design Temperature: 180°F
- 3. Joints: Solder with 100% lead-free solder and flux, ASTM B32.
- 4. Fittings: Cast brass solder joint drainage type, ANSI B16.23 or wrought copper solder joint drainage type, ANSI B16.29.

2.3 PLASTIC PIPE

A. PVC-DWV or ABS-DWV; Schedule 40; Solvent Weld Joints:

- 1. Pipe: Schedule 40 rigid, PVC-DWV, or ABS-DWV, cell classification 12454 for PVC per ASTM D1784 or 42222 for ABS per ASTM D3965, with plain ends, conforming to ASTM Standards D2665 or D2661. Cellular core piping is not acceptable.
- 2. Design Pressure/Temperature: Gravity at 140°F.
- 3. Joints: Solvent-weld socket type with solvent recommended by pipe manufacturer.
- 4. Fittings: PVC-DWV, or ABS-DWV, cell classification 12454 for PVC per ASTM D1784 or 42222 for ABS per ASTM D3965, with solvent-weld socket type ends for Schedule 40 pipe.
- 5. Limits: Schedule 40 PVC-DWV, or ABS-DWV pipe must not be threaded. Do not use where exposed or in return air plenums.
- 6. Use: Use PVC or ABS only where allowed by local jurisdiction. Comply with all special requirements or limitations.
- 7. Special Requirements: Provide expansion loop(s) and/or expansion joints in the piping system per the manufacturer's guidelines and as shown on the drawings. Refer to Section 220516 for expansion joint requirements.

2.4 STAINLESS STEEL PIPE

A. Stainless Steel; Type 304; Hub and Spigot Joint:

- 1. Pipe: Stainless Steel Type 304, ASME A112.3.1
- 2. Design Pressure: Gravity. Design Temperature: 200°F minimum.
- 3. Fittings: Stainless Steel Type 304, ASME A112.3.1, push-on joints.
- 4. Joints: Push-on joint with integral rubber gaskets suitable for use with acid waste piping.
- 5. Adapters: Transition from stainless steel pipe to other pipe materials with manufactured adapters. Heavy duty neoprene sleeve gasket, ASTM C564, 300 Series stainless steel shield, clamp and screws with not less than four screw type clamps, FM 1680 or ASTM C1540.
- 6. Manufacturers:
 - a. ACO
 - b. Blucher
 - c. Watts
 - d. Josam
 - e. Approved equivalent

B. Stainless Steel; Type 316; Hub and Spigot Joint:

1. Pipe: Stainless Steel Type 316L, ASME A112.3.1
2. Design Pressure: Gravity. Design Temperature: 200°F minimum.
3. Fittings: Stainless Steel Type 316L, ASME A112.3.1, push-on joints.
4. Joints: Push-on joint with integral rubber gaskets suitable for use with greasy waste typical for kitchen grease sanitary applications.
5. Adapters: Transition from stainless steel pipe to other pipe materials with manufactured adapters. Heavy duty neoprene sleeve gasket, ASTM C564, 300 Series stainless steel shield, clamp and screws with not less than four screw type clamps, FM 1680 or ASTM C1540.
6. Manufacturers:
 - a. ACO
 - b. Blucher
 - c. Watts
 - d. Josam
 - e. Approved equivalent

2.5 VALVES

A. Shutoff Valves:

1. For pipe systems where mechanical press connections are allowed, shutoff valves with mechanical press connections are acceptable subject to the requirements in the paragraphs below.
2. Butterfly Valves:
 - a. BF-1:
 - 1) 2-1/2" thru 6", 175 psi CWP, elastomers rated for 20°F to 250°F at 125 psig, fully lugged end, ductile or cast iron body (not in contact with fluid); bronze, aluminum-bronze or stainless steel disc; EPDM seat, stainless steel stem, lead free NSF-372, extended neck, 175 psi bubble-tight, bi-directional dead-end shutoff without backing flange or nuts and with cap screws extending to centerline of valve body (for pipe extension without draining system), 10 position locking operator up to 6" size. Cv of at least 1580 in 6" size.
 - 2) Manufacturers:
 - a) Victaulic #300
 - b) Apollo Valves; a division of Aalberts-IPS LD141
 - c) Watts #DBF-03-121-1P
 - d) NIBCO N200 Series or LD2000 Series
 - e) Milwaukee CL series
3. Ball Valves:
 - a. BA-1: 3" and under, 150 psi saturated steam, 600 psi CWP, full port, threaded or solder ends (acceptable only if rated for soldering in line with 470°F melting point of lead-free solder), stainless steel ball and trim, Teflon seats and seals.

- 1) Body: Lead free NSF-372, two-piece bronze of a copper alloy containing less than 15% zinc. Apollo Valves; a division of Aalberts-IPS #77CLF140/240 Series, Milwaukee #UPBA450S, Watts #LFB6080G2-SS, NIBCO #T-585-66-LF, Jomar T-200CSSG.
- 2) Provide solid extended shaft for all insulated piping. (For example, Apollo adds option -04 Stem Extension, NIBCO Nib-Seal Handle-NS, and Jomar modifies valve part number with -IH for insulated handle.)
- 3) Provide lock out trim for all valves opening to atmosphere installed in domestic water piping over 120°F, heating water piping over 120°F, steam, condensate, boiler feed water piping, and gasoline/kerosene piping, and as indicated on the drawings. Solid extended shaft is not required on valves with lockout trim. (For example, Jomar and NIBCO modify valve part number with -LH for locking handle.)

B. Throttling Valves

1. Globe Valves:

- a. GL-1: 2" and under, 150 psi saturated steam, 300 psi CWP, screwed, bronze, lead free NSF-372. Milwaukee #UP502, Hammond #UP440.

2.6 STRAINERS

- A. For pipe systems where mechanical press connections are allowed, strainers with mechanical press connections are acceptable subject to the requirements in the paragraphs below.
- B. ST-1: Threaded Ends, 4" and under, lead free bronze or 304 stainless steel body, threaded connections, threaded removable cover, 0.045" 304 stainless steel perforated screen, 125 psi S @ 350°F, 200 psi CWP @ 150°F. Apollo Valves, a division of Aalberts-IPS YB-LF (59LF), Metraflex SSFT, Mueller / Watts LF351, Watts LF777, Jomar T-651G, Zurn SXL.
- C. ST-2: Flanged Ends, 2-1/2" thru 12", Lead free cast iron with FDA/NSF approved electrostatically applied fusion bonded epoxy coating body, flanged connections, bolted or flanged cover, 304 stainless steel perforated screen, 125 psi steam, 200 psi CWP. Watts 77F-DI-FDA-125, Victaulic Series 969-F, Apollo Valves, a division of Aalberts-IPS YCF0XM40E, Zurn FSC.

2.7 CHECK VALVES

- A. For pipe systems where mechanical press connections are allowed, check valves with mechanical press connections are acceptable subject to the requirements in the paragraphs below.
- B. CK-1: Threaded Ends, 2" and under, 125 psi steam @ 406°F, 200 psi CWP @ 150°F, threaded connection, lead free bronze body with brass or bronze disc, horizontal swing. Hammond #UP904, Milwaukee #UP509, NIBCO T-413-Y-LF, Jomar T-511G, Apollo Valves, a division of Aalberts-IPS #161T-LF.
- C. CK-2: Wafer Style, 2-1/2" thru 12", 200 psi CWP, double disc wafer type, lead free bronze or iron body, bronze trim, metal-to-metal, Buna-N, or EPDM seat, 316 SS shaft. NIBCO W-920-W-LF, Apollo Valves, a division of Aalberts-IPS 910WE-LF, Milwaukee UP1400, Watts ICV-125-2-T.

2.8 LOCK OUT TRIM

- A. Provide lock out trim for all quarter turn shutoff valves opening to atmosphere and installed in domestic water piping over 120°F and as indicated on the drawings.

2.9 VALVE OPERATORS

- A. Provide handwheels for gate valves and gear operators for butterfly valves.

2.10 VALVE CONNECTIONS

- A. Provide all connections to match pipe joints. Valves shall be same size as pipe unless noted otherwise.

2.11 CONNECTIONS BETWEEN DISSIMILAR METALS

- A. Connections between dissimilar metals shall be insulating dielectric types that provide a water gap between the connected metals, and that either allow no metal path for electron transfer or that provide a wide water gap lined with a non-conductive material to impede electron transfer through the water path.
- B. Joints shall be rated for the temperature, pressure, and other characteristics of the service in which they are used, including testing procedure.
- C. Aluminum, iron, steel, brass, copper, bronze, galvanized steel and stainless steel are commonly used and require isolation from each other with the following exceptions:
 - 1. Iron and steel connected to each other.
 - 2. Brass, copper, and bronze connected to each other.
 - 3. Brass or bronze valves and specialties connected in closed systems with steel, iron, or stainless steel on both sides of the brass or bronze valves and specialties. Where two or more brass or bronze items occur together, they shall be connected with brass nipples. Brass or bronze valves and specialties cannot be used as a dielectric separation between pipe materials.
- D. Dielectric protection is required at connections to equipment of a material different than the piping.
- E. Screwed and/or Grooved Joints (acceptable up to 4" size):
 - 1. Dielectric waterway rated for 300 psi CWP and 225°F.
 - 2. Optional: Copper-silicon casting conforming to UNS C87850 with grooved and/or threaded ends.
 - 3. UL classified in accordance with ANSI / NSF-61 for potable water service.
 - 4. Manufacturers:
 - a. Elster Group ClearFlow fittings
 - b. Victaulic Series 647
 - c. Grinnell Series 407
- F. Flanged Joints (any size):
 - 1. Use 1/8" minimum thickness, non-conductive, full-face gaskets.

2. Employ one-piece molded sleeve-washer combinations to break the electrical path through the bolts.
3. Sleeve-washers are required on one side only, with sleeves minimum 1/32" thick and washers minimum 1/8" thick.
4. Install steel washers on both sides of flanges to prevent damage to the sleeve-washer.
5. Separate sleeves and washers may be used only if the sleeves are manufactured to exact lengths and installed carefully so the sleeves must extend partially past each steel washer when tightened.
6. Manufacturers:
 - a. EPCO
 - b. Pipeline Seal and Insulator
 - c. F. H. Maloney
 - d. Calpico

PART 3 - EXECUTION

3.1 PREPARATION

- A. Install all products per manufacturer's recommendations.
- B. Ream pipe and tube ends. Remove burrs. Bevel plain end ferrous pipe.
- C. Remove scale and dirt, on inside and outside, before assembly.
- D. Remove all scale, rust, dirt, oils, stickers and thoroughly clean exterior of all bare metal exposed piping, hangers, and accessories in preparation to be painted.
- E. Connect to equipment with flanges or unions. Unions or flanges for servicing and disconnect are not required in installations using grooved joint couplings.
- F. Use only piping materials rated for the maximum temperature of the application, e.g., do not use PVC for dishwasher drainage or piping that receives boiler blowdown.
- G. Roof Penetration (Vent) Flashing:
 1. Built-up Roofing: Flash vents with 3# seamless sheet lead of sufficient size to extend 15" into roofing felts for built-up roofs.
 2. Membrane, Metal or Shingled Roofs: Flash vents with premolded pipe flashing cones for single-ply membrane roofs, metal roofs, or shingled roofs.
- H. Existing building sewers or building drains which are shown on the documents to be reused shall be inspected and recorded by closed circuit television for their condition. Report findings back to the Architect, Engineer, and Owner before proceeding with work so any necessary rework can take place if needed.

3.2 SYSTEM, PIPING AND VALVE SCHEDULE

- A. Cold Water, Hot Water, Tempered Water, Reclaimed Water - Potable and Non-Potable (Above Ground):
 1. Copper Pipe; Type L; Solder Joints: All Sizes

-
- 2. Copper Pipe; Type L; Mechanical Press Connection: 4" and Under
 - 3. Shutoff Valves: BF-1
 - 4. Throttling Valves: GL-1 Check Valves: CK-1, CK-2
 - B. Strainers: ST-1, ST-2 Sanitary Waste and Vent, Gravity (Above Ground):
 - 1. Cast Iron; Standard Weight; Hub and Spigot Joints: All Sizes
 - 2. Cast Iron; Standard Weight; No-Hub Sleeve Gaskets: 1-1/2" to 15" Copper Pipe: Type DWV; Solder Joints: 1-1/4" to 4"
 - C. Sanitary Indirect Drainage (Above Ground):
 - 1. Cast Iron; Standard Weight; Hub and Spigot Joints: All Sizes
 - 2. Cast Iron; Standard Weight; No-Hub Sleeve Gaskets: 1-1/2" to 15" Copper Pipe: Type DWV; Solder Joints: 1-1/4" to 4"
 - D. Sanitary Waste and Vent, Gravity (Underground - Inside Building):
 - 1. Cast Iron; Standard Weight; Hub and Spigot Joints: All Sizes
 - 2. PVC-DWV or ABS-DWV; Schedule 40; Solvent Weld Joints: All Sizes. PVC or ABS shall not be used for piping receiving hot liquids 140 degrees F and higher.
 - E. Sanitary Waste and Vent, Gravity (Underground - Outside Building):
 - 1. Cast Iron; Standard Weight; Hub and Spigot Joints: All Sizes
 - F. Kitchen Grease Drainage and Vent (Above Ground):
 - 1. Stainless Steel; Type 316; Hub and Spigot Joint: 2" to 8"
 - 2. Cast Iron; Standard Weight Epoxy Coated; No-Hub Sleeve Gaskets: 1-1/2" to 15"
 - G. Kitchen Grease Drainage and Vent (Underground):
 - 1. Stainless Steel; Type 316; Hub and Spigot Joint: 2" to 8"
 - 2. Cast Iron; Standard Weight Epoxy Coated; No-Hub Sleeve Gaskets: 1-1/2" to 15"
 - H. Sanitary Waste - Pumped (Above Ground - Inside Building):
 - 1. Copper Pipe; Type K; Solder Joints: All Sizes
 - 2. Copper Pipe; Type K; Mechanical Press Connection: All Sizes
 - 3. Galvanized Steel; Standard Weight; Threaded Joints: 4" and under
 - I. ||Condensate/Equipment Drainage:
 - 1. Cast Iron; Standard Weight; Hub and Spigot Joints: All Sizes
 - 2. Cast Iron; Standard Weight; No-Hub Sleeve Gaskets: 1-1/2" to 15"
 - 3. Copper Pipe: Type DWV; Solder Joints: 1-1/4" to 4"
- 3.3 TESTING PIPING
- A. Sanitary Drainage, Sanitary Vent:
 - 1. Test all piping with water to prove tight.

2. Test piping before insulation is applied.
3. Hydrostatically test all soil, waste, and vent piping inside of building with 10 feet head of water for 15 minutes. Inspect before fixtures are connected. If leaks appear, repair them and repeat the test.
4. Hydrostatically test interior downspouts with 10 feet head of water for 15 minutes with no leaks.
5. A smoke/air test at the same pressure may be used in lieu of the hydrostatic water test. Exception: Smoke/air test shall not be performed on plastic piping.
6. Test force mains with water at 105% of the operating pump discharge pressure for 15 minutes.
7. Test pressures stated above shall be as listed or as required by the Authority Having Jurisdiction, whichever is most stringent.

B. Hot Water - Potable and Non-Potable, Cold Water - Potable and Non-Potable, Tempered Water - Potable and Non-Potable:

1. Test pipes underground or in chases and walls before piping is concealed.
2. Test all pipes before the insulation is applied. If insulation is applied before the pipe is tested and a leak develops which ruins the insulation, replace damaged insulation.
3. Test the pipe with 100 psig water pressure or equal inert gas such as nitrogen. Exception: Inert gas test shall not be used to test plastic piping.
4. Hold test pressure for at least 2 hours.
5. Test to be witnessed by the Architect/Engineer's representative, if requested by the Architect/Engineer.

C. All Other Piping:

1. Test piping at 150% of normal operating pressure.
2. Piping shall hold this pressure for one hour with no drop in pressure.
3. Test piping using water, nitrogen, or air as compatible with the final service of the pipe. Do not use combustible fluids.
4. Drain and clean all piping after testing is complete.

3.4 CLEANING PIPING

A. Assembly:

1. Before assembling pipe systems, remove all loose dirt, scale, oil and other foreign matter on internal or external surfaces by means consistent with good piping practice subject to approval of the Architect/Engineer's representative. Blow chips and burrs from machinery or thread cutting operation out of pipe before assembly. Wipe cutting oil from internal and external surfaces.
2. During fabrication and assembly, remove slag and weld spatter from both internal and external joints by peening, chipping and wire brushing.
3. Notify the Architect/Engineer's representative before starting any post erection cleaning in sufficient time to allow witnessing the operation. Consult with and obtain approval from the Architect/Engineer's representative regarding specific procedures and scheduling. Dispose of cleaning and flushing fluids properly.
4. Prior to blowing or flushing erected piping systems, disconnect all instrumentation and equipment, open wide all valves, and be certain all strainer screens are in place.

B. Air Blow:

1. Blow out pipe and components with clean compressed air. Instrument air, argon, nitrogen and sulfuric acid lines shall be blown out with dry, oil free air or nitrogen gas. "Oil Free" is defined as air compressed in a centrifugal, Teflon ring, carbon ring or water pumped air compressor. Where air supply is judged to be inadequate to continually attain cleaning velocity, alternate pressurization and sudden relief procedure may be used until discharge at all blow out points is clean. Use 80-90 psig pressure unless otherwise indicated.
2. Air blow applies to the following systems:
 - a. Acetylene
 - b. Carbon Dioxide
 - c. Nitrogen (use oil free air or nitrogen gas)
 - d. Argon (use oil free air or nitrogen gas)
 - e. Instrument Air (use oil free air or nitrogen gas)
 - f. Distilled Water (use maximum of 50 psig pressure)
 - g. Chemical Feed
 - h. Air Compressor Intakes
 - i. Sulfuric Acid (use oil free air or nitrogen gas)

C. All Water Piping:

1. Flush all piping using faucets, flush valves, etc. until the flow is clean.
2. After flushing, thoroughly clean all inlet strainers, aerators, and other such devices.
3. If necessary, remove valves to clean out all foreign material.

3.5 INSTALLATION

A. General Installation Requirements:

1. Provide dielectric connections between dissimilar metals.
2. Route piping in orderly manner and maintain gradient. Install to conserve building space.
3. Group piping whenever practical at common elevations.
4. Install piping to allow for expansion and contraction without stressing pipe, joints, or equipment.
5. Slope water piping and arrange to drain at low points.
6. Install bell and spigot piping with bells upstream.
7. Where pipe supports are welded to structural building framing, scrape, brush clean, and apply one coat of zinc rich primer to welds.
8. Seal pipes passing through exterior walls with a wall seal per Section 220529. Provide Schedule 40 galvanized sleeve at least 2 pipe sizes larger than the pipe.
9. All non-potable outlets shall be clearly marked with a permanently affixed laminated sign with 3/8" high lettering saying "Non-Potable Water Not for Human Consumption." Sign shall have black lettering on a yellow background.
10. All vertical pipe drops to sinks or other equipment installed below the ceiling shall be routed within a wall cavity, unless specifically noted otherwise to be surface mounted. For renovation projects, this Contractor is responsible for opening and patching existing walls for installation of piping. Wall patching shall match existing condition.

B. Installation Requirements in Electrical Rooms:

1. Do not install piping or other equipment above electrical switchboards or panelboards. This includes a dedicated space extending 25 feet from the floor to the structural ceiling with width and depth equal to the equipment.

C. Installation Requirements in MRI (Magnetic Resonance Imaging - Healthcare):

1. All piping in MRI rooms shall be non-ferrous regardless of materials described on Part 2.

D. Valves/Fittings and Accessories:

1. Install shutoff valves that permit the isolation of equipment/fixtures in each room without isolating any other room or portion of the building. Individual fixture angle stops do not meet this requirement. Exception: Back-to-back rooms in no more than two adjacent rooms.
2. Provide clearance for installation of insulation and access to valves and fittings.
3. Provide access doors for concealed valves and fittings.
4. Install valve stems upright or horizontal, not inverted.
5. Provide one plug valve wrench for every ten plug valves 2" and smaller, minimum of one. Provide each plug valve 2-1/2" and larger with a wrench with set screw.
6. Install corrugated, stainless steel tubing system according to manufacturer's written instructions. Include striker plates to protect tubing from puncture where tubing is restrained and cannot move.

E. Underground Piping:

1. Install buried water piping outside the building with at least 4' of cover. Refer to Section 220500 for Excavation, Fill, Backfill and Compaction requirements

F. Sanitary and Storm Piping:

1. Install all sanitary and storm piping inside the building with a slope as shown on the drawings.
2. Install horizontal offset at all connections to roof drains to allow for pipe expansion.
3. Slope sanitary and storm piping outside the building to meet invert elevations shown on drawings and to maintain a minimum velocity of 2 feet per second.
4. Sway Bracing: Where horizontal sanitary and/or storm pipes 4 inches and larger change flow direction greater than 45°, rigid bracing or thrust restraints shall be installed to resist movement of the upstream pipe in the direction of pipe flow. The rigid bracing or thrust restraint shall be connected to structure. A change of flow direction from horizontal into a vertical pipe does not require the upstream pipe to be braced.
5. All sanitary and storm piping shall have at least 42" of cover when leaving the building.
6. Starter fittings with internal baffles are not permitted.

3.6 PIPE ERECTION AND LAYING

- A. Carefully inspect all pipe, fittings, valves, equipment and accessories before installation. Any items that are unsuitable, cracked or otherwise defective shall be removed from the job immediately.
- B. All pipe, fittings, valves, equipment and accessories shall have factory applied markings, stampings, or nameplates with sufficient data to determine their conformance with specified requirements.

- C. Exercise care at every stage of storage, handling, laying and erecting to prevent entry of foreign matter into piping, fittings, valves, equipment and accessories. Do not install any item that is not clean.
- D. Until system is fully operational, all openings in piping and equipment shall be kept closed except when actual work is being performed on that item or system. Closures shall be plugs, caps, blind flanges or other items specifically designed and intended for this purpose.
- E. Run pipes straight and true, parallel to building lines with minimum use of offsets and couplings. Provide only offsets required to provide needed headroom or clearance and to provide needed flexibility in pipe lines.
- F. Make changes in direction of pipes only with fittings or pipe bends. Changes in size only with fittings. Do not use miter fittings, face or flush bushings, or street elbows. All fittings shall be of the long radius type, unless otherwise shown on the drawings or specified.
- G. Provide flanges or unions at all final connections to equipment, traps and valves.
- H. Arrange piping and connections so equipment served may be totally removed without disturbing piping beyond final connections and associated shutoff valves.
- I. Use full and double lengths of pipe wherever possible.
- J. Unless otherwise indicated, install all piping, including shutoff valves and strainers, to coils, pumps and other equipment at line size with reduction in size being made only at control valve or equipment.
- K. Cut all pipe to exact measurement and install without springing or forcing except in the case of expansion loops where cold springing is indicated on the drawings.
- L. Underground pipe shall be laid in dry trenches maintained free of accumulated water. Refer to Section 220500 for Excavation, Fill, Backfill and Compaction requirements.
- M. Unless otherwise indicated, branch take-offs shall be from top of mains or headers at either a 45° or 90° angle from the horizontal plane for air lines, and from top, bottom or side for liquids.
- N. Do not use geotextile fabric with footing tile if silt content of soil exceeds 40% or if clay content exceeds 50%. The fabric shall be installed around 1" river rock or 2" limestone.

3.7 DRAINING AND VENTING

- A. Unless otherwise indicated on the drawings, all horizontal water lines, including branches, shall pitch 1" in 40 feet to low points for complete drainage, removal of condensate and venting.
- B. Maintain accurate grade where pipes pitch or slope for venting and drainage. No pipes shall have pockets due to changes in elevation.
- C. Provide drain valves at all low points of water piping systems for complete or sectionalized draining.
- D. Use eccentric reducing fittings on horizontal runs when changing size of pipes for proper drainage and venting. Install gravity drain pipes with bottom of pipe and eccentric reducers in a continuous line; all other liquid lines with top of pipe and eccentric reducers in a continuous line.

- E. Provide air vents at high points and wherever else required to eliminate air in all water piping systems.
- F. Install air vents in accessible locations. If necessary to trap and vent air in a remote location, install an 1/8" pipe from the tapping location to an accessible location and terminate with a venting device.
- G. All vent and drain piping shall be of same materials and construction for the service involved.

3.8 PLUMBING VENTS

- A. Vent as shown on the drawings and in accordance with all codes having jurisdiction.
- B. Extend the high side of the soil and waste stacks at least 12" above roof.
- C. Flash pipes at the roof with 3# lead sheet. Extend flashing under roofing 15" in all directions from pipe to be flashed. Extend a lead collar up on the outside of pipe to be flashed and extend 1" beyond the top of the pipe. The 1" excess length of collar shall be turned down into the top of the pipe where it shall fit tight to the inside of the pipe.
- D. Flash pipes at roof with premolded EPDM pipe flashing cones adhered to roof membrane by General Contractor. Secure top of cone with stainless steel clamp and seal watertight.
- E. Increase vent pipes through the roof two pipe sizes with long increasers located at least 12" below the roof.
- F. In no case shall the vent through the roof be less than 4" in diameter.
- G. Vent pipes through the roof shall be located a minimum of 15 feet from any air intake opening on the roof.

3.9 BRANCH CONNECTIONS

- A. For domestic water and vent systems only, make branch connections with standard tee or cross fittings of the type required for the service.
- B. Reducers are generally not shown. Where pipe sizes change at tee, the tee shall be the size of the largest pipe shown connecting to it.
- C. Do not use double wye or double combination wye and eighth bend DWV fittings in horizontal piping.
- D. Forged weld-on fittings are limited as follows:
 - 1. Must have at least same pressure rating as the main.
 - 2. Main must be 2-1/2" or larger.
 - 3. Branch line is at least two pipe sizes under main size.

3.10 JOINING OF PIPE

A. Solder Joints (Copper Pipe):

1. Make up joints with 100% lead-free solder, ASTM B32. Cut tubing so ends are perfectly square and remove all burrs inside and outside. Thoroughly clean sockets of fittings and ends of tubing to remove all oxide, dirt and grease just prior to soldering. Apply flux evenly, but sparingly, over all surfaces to be joined. Heat joints uniformly so solder will flow to all mated surfaces. Wipe excess solder, leaving a uniform fillet around cup of fitting.
2. Flux shall be non-acid type.
3. Solder end valves may be installed directly in the piping system if the entire valve is suitable for use with 470°F melting point solder. Remove discs and seals during soldering if they are not suitable for 470°F.

B. Brazed Joints (Copper Pipe):

1. Make up joints with silver alloy brazing filler metal conforming to ASTM B260 "Brazing Filler Metal" BAg-1 or BAg-2. Cut copper tubing so ends are perfectly square and remove all burrs inside and outside. Thoroughly clean sockets of fittings and ends of tubing to remove all oxide, dirt and grease just prior to brazing. Apply non-corrosive flux of the type recommended by filler alloy manufacturer, evenly, but sparingly, over all surfaces to be joined. Heat joints uniformly using oxygen-acetylene torch with tip size recommended by fitting manufacturer. Wipe and brush joint clean after alloy has set.
2. Remove discs from solder end valves during brazing.

C. Mechanical Press Connection (Copper and Stainless Steel Pipe):

1. Copper press fitting shall be made in accordance with the manufacturer's installation instructions.
2. Fully insert tubing into the fitting and mark tubing.
3. Prior to making connection, the fitting alignment shall be checked against the mark made on the tube to ensure the tubing is fully engaged in the fitting.
4. Joint shall be pressed with a tool approved by the manufacturer.
5. Installers shall be trained by manufacturer personnel or representative. Provide documentation upon request.

D. Hub and Spigot Joints - Sanitary Pipe and Storm Pipe (Cast Iron and Stainless Steel Pipe):

1. Lead and Oakum Joints: Pack joint with oakum made of vegetable fiber, cotton, or hemp. Pour joint with molten lead up to top of hub. Ensure leak-free joints by working joint with inside and outside caulking irons.
2. Compression Gasket Joints: Joint shall be one-piece double seal compression type gasket made specifically for joining cast iron soil pipe. Gasket shall be neoprene, permitting joint to flex as much as 5 degrees without loss of seal. Gasket shall be extra heavy weight class, conforming to ASTM C-564.

E. Solvent Weld Joints (PVC):

1. Make joints with a two-step process. Use primer conforming to ASTM F656 and solvent cement conforming to ASTM D2564.
2. All contractor personnel that will prepare solvent cemented joints shall be qualified for such bonding practices according to the bonding qualifications procedures described in ASME B31.3, Chapter VII for bonding of plastic piping.

-
- F. No-Hub Sleeve Gaskets (No-Hub) (Cast Iron Pipe):
1. Gasket shall be heavy weight class, conforming to ASTM C564.
 2. The gasket shall have an internal center stop.
 3. The gasket shall be covered by a stainless steel band secured with a minimum of four stainless steel bands per fitting/joint.
 4. Sleeve gaskets shall be installed in accordance with the manufacturer's installation instructions.
- G. Couplings: Assemblies with combinations of clamps, gaskets, sleeves, and threaded or flanged parts; compatible with piping and system liquid; and made by piping manufacturer for joining system piping.
- H. Adapters and Transition Fittings: Assemblies with combinations of clamps, couplings, adapters, gaskets, and threaded or flanged parts; compatible with piping and system liquid; and made for joining different piping materials.
- I. Flanges: Assemblies of companion flanges and gaskets complying with ASME B16.21 and compatible with system liquid, and bolts and nuts.

3.11 DISINFECTION OF DOMESTIC WATER PIPING SYSTEM

- A. Disinfection of the domestic water piping shall be completed within three (3) weeks prior to building occupancy. Contractor is responsible for disinfecting water piping if used by workers during construction; disinfection during construction does not eliminate the requirement for final disinfection prior to occupancy. Flushing of piping shall be completed within two (2) weeks prior to building occupancy.
- B. Provide necessary connections at the start of individual sections of mains for adding chlorine.
- C. Before starting work, verify system is complete, flushed and clean.
- D. Follow the disinfection of potable water procedure outlined in this project's applicable plumbing code. For example: IPC 610.1, UPC 609.10, CPC 609.9, and Illinois 890.1180. Where local codes do not outline a disinfection procedure, follow the International Plumbing Code procedure 610.1.
- E. Bleed water from all outlets to ensure chlorine distribution throughout the entire domestic water system.
- F. Take water samples, no sooner than 24 hours after flushing, from 2% of outlets and from water entry. Obtain, analyze, and test samples in accordance with AWWA C651, Section 5 - Verification.

END OF SECTION 221000

SECTION 221023 - NATURAL GAS PIPING

PART 1 - GENERAL

1.1 SECTION INCLUDES

- A. Pipe and Pipe Fittings.
- B. Valves.
- C. Natural Gas Piping System.

1.2 QUALITY ASSURANCE

- A. Valves: Manufacturer's name and pressure rating marked on valve body. Remanufactured valves are not acceptable.
- B. Welding Materials, Procedures, and Operators: Conform to ASME Section 9, ANSI/AWS D1.1, and applicable state labor regulations.
- C. Welders Certification: In accordance with ANSI/ASME Sec 9 or ANSI/AWS D1.1.

1.3 REFERENCES

- A. ANSI/AWS D1.1 - Structural Welding Code.
- B. ANSI AGA-LC1 - Standards for Fuel Gas Piping Systems Using Corrugated Stainless Steel Tubing.
- C. ANSI/AWWA C111/A21.11 - Rubber Gasket Joints for Ductile Iron Pressure Pipe and Fittings.
- D. ASME - Boiler and Pressure Vessel Code - Section 9.
- E. ASME B1.20.1 - Pipe Threads, General Purpose.
- F. ASME B16.3 - Malleable Iron Threaded Fittings Class 150 and 300.
- G. ASME B16.5 - Pipe Flanges and Flanged Fittings.
- H. ASME B16.9 - Factory-Made Wrought Steel Butt Welding Fittings.
- I. ASME B16.11 - Forged Steel Fittings, Socket-Welding and Threaded.
- J. ASME B16.21 - Nonmetallic Flat Gaskets for Pipes Flanges.
- K. ASME B16.39 - Malleable Iron Threaded Pipe Unions.
- L. ASME B18.2.1 - Square and Hex Bolts and Screws, Inch Series.
- M. ASME B18.2.2 - Square and Hex Nuts, Inch Series.

- N. ASTM A53 - Pipe, Steel, Black and Hot-Dipped Zinc Coated, Welded and Seamless.
- O. ASTM A105 - Standard Specification for Carbon Steel Forgings for Piping Applications.
- P. ASTM A181 - Forgings, Carbon Steel for General Purpose Piping.
- Q. ASTM A197 - Standard Specification for Cupola Malleable Iron.
- R. ASTM A234 - Piping Fittings of Wrought Carbon Steel and Alloy Steel for Moderate and High Temperature Service.
- S. ASTM A240 - Standard Specification for Chromium and Chromium-Nickel Stainless Steel Plate, Sheet, and Strip for Pressure Vessels and for General Applications.
- T. ASTM A307 - Standard Specification for Carbon Steel Bolts and Studs, 60,000 PSI Tensile Strength.
- U. ASTM D2513 - Thermoplastic Gas Pressure Pipe, Tubing and Fittings.
- V. ASTM D2683 - Socket-Type Polyethylene Fittings for Outside Diameter-Controlled Polyethylene Pipe.
- W. ASTM D2774 - Standard Practice for Underground Installation of Thermoplastic Pressure Piping.
- X. ASTM E84 - Standard Test Method for Surface Burning Characteristics of Building Materials.
- Y. NFPA 54 - National Fuel Gas Code.

1.4 SUBMITTALS

- A. Submit product data under provisions of Section 22 05 00. Include data on pipe materials, fittings, valves, and accessories.
- B. Test Reports: Provide results of piping system pressure test.
- C. Welders Certificates: Certify welders employed on the Work, verifying AWS qualification within previous 12 months.

1.5 DELIVERY, STORAGE, AND HANDLING

- A. Store and protect piping to prevent entrance of foreign matter into pipe and to prevent exterior corrosion.
- B. Deliver and store valves in shipping containers with labeling in place.

1.6 COORDINATION DRAWINGS

- A. Reference Coordination Drawings article in Section 22 05 00 for the required natural gas piping system electronic CAD drawings to be provided to Coordinating Contractor for inclusion into composite coordination drawings.

PART 2 - PRODUCTS

2.1 NATURAL GAS (0 to 125 PSI)

- A. Design Pressure: 125 psi. Maximum Design Temperature: 350°F
- B. Piping - 2" and Under:
 - 1. Pipe: Standard weight black steel, threaded and coupled, ASTM A53.
 - 2. Joints: Screwed. (NOTE: For below ground, all sizes to have welded joints.)
 - 3. Fittings: 150# steam - 300# CWP, black malleable iron, banded, ASTM A197, ANSI B16.3.
 - 4. Unions: 250# - 500# CWP, black malleable iron, ANSI B16.39, ground joint with brass seat.
- C. Piping - 2-1/2" and Over:
 - 1. Pipe: Standard weight black steel, beveled ends, ASTM A53.
 - 2. Joints: Butt welded or flanged.
 - 3. Fittings: Standard weight seamless steel, butt weld type, ASTM A234, Grade I, ANSI B16.9.
 - 4. Flanges: 150# forged steel, weld neck or slip-on, ASTM A181, Grade I, ANSI B16.5. Flange face seal weld (backweld) is required for slip-on flanges.
- D. Shutoff Valves/Throttling Valves:
 - 1. For pipe systems where mechanical press connections are allowed, shutoff valves with mechanical press connections are acceptable subject to the requirements in the paragraphs below.
 - 2. BA-13: 2" and under, threaded 600 psi CWP; UL listed for 250# LP, flammable liquid, heating oil, natural and manufactured gases, 150 psi steam, bronze body and chrome plated brass ball, Teflon seats and packing.
 - a. Body: Bronze.
 - 1) Manufacturers:
 - a) Apollo #80-100
 - b) Nibco #T580-70-UL or #T585-70-UL
 - 3. PL-1: 2" and under, 125# steam @ 450°F, 175# CWP @ 180°F, cast iron body, screwed, full port.
 - a. Manufacturers:
 - 1) Walworth #1700
 - 2) DeZurik #425, S-RS49

-
4. PL-2: 2-1/2" thru 4", 125# steam @ 450°F, 175# CWP @ 180°F, flanged, cast iron body, full port.
- a. Manufacturers:
- 1) Walworth #1700F
 - 2) DeZurik #425, F-RS49
- E. Check Valves:
1. For pipe systems where mechanical press connections are allowed, check valves with mechanical press connections are acceptable subject to the requirements in the paragraphs below.
 2. CK-1: 2" and under, 125# steam @ 406°F, 200# CWP @ 150°F, screwed, bronze, horizontal swing.
- a. Manufacturers:
- 1) Crane #37
 - 2) Stockham #B319-Y
 - 3) Walworth #3406
 - 4) Milwaukee #509
 - 5) Watts #B-5000
 - 6) Nibco Y-413B
3. CK-13: 2-1/2" thru 12", 200# CWP, double disc wafer type, iron body, bronze or aluminum-bronze discs, 316SS shaft and spring, Viton, EPDM or BUNA-N, Cv of at least 700 in 6" size.
- a. Manufacturers:
- 1) Mueller Steam Specialty Co. #71-AHB-6-H
 - 2) Stockham #WG-961 EPDM or #WG970 BUNA
 - 3) NIBCO W-920-W
 - 4) Crane
- F. Strainers:
1. For pipe systems where mechanical press connections are allowed, strainers with mechanical press connections are acceptable subject to the requirements in the paragraphs below.
 2. ST-2: Cast iron body, 125 lb. flanged ends, bolted cover, 125 psi S @ 350°F, 175 psi CWP @ 150°F.
- a. Manufacturers:
- 1) Armstrong #A1FL
 - 2) Mueller Steam Specialty Co. #751
 - 3) Sarco #CI-125
 - 4) Watts #77F-D

3. ST-4: Cast iron body, screwed ends, screwed cover, 250# steam @ 406°F, 300# CWP @ 150°F.

- a. Manufacturers:

- 1) Armstrong #A1SC
- 2) Mueller Steam Specialty Co. #11
- 3) Sarco #IT

2.2 STRAINERS

- A. Unless otherwise indicated, strainers shall be Y-pattern and have stainless steel screens with perforations as follows:

1. Gases:

- a. 1/4" - 2": 1/32" perforations
- b. 2-1/2" - 10": 3/64" perforations

- B. Furnish pipe nipple with shutoff valve to blow down all strainer screens.
- C. Use iron body strainers in ferrous piping.

2.3 DRAIN VALVES AND BLOWDOWN VALVES

- A. Drain valve and blowdown valve shall mean a shutoff valve as specified for the intended service with added 3/4" male hose thread outlet, cap, and retaining chain.

PART 3 - EXECUTION

3.1 PREPARATION

- A. Ream pipe and tube ends, remove burrs, bevel plain end ferrous pipe.
- B. Remove scale and dirt on inside and outside before assembly.
- C. Remove all scale, rust, dirt, oils, stickers and thoroughly clean exterior of all bare metal exposed piping, hangers, and accessories in preparation to be painted.
- D. Connect to all equipment with flanges or unions.
- E. After completion, fill, clean, and treat systems. Refer to Section 232500 for treatment.

3.2 TESTING PIPING

- A. Low Pressure - Up to 1 psi:
 1. Test piping with 20 psi air pressure. System must hold this pressure without adding air for two hours.

- B. High Pressure - Above 1 psi:
 - 1. Test piping with compressed air at twice the operating gas pressure, but at least 20 psi. System must hold this pressure without adding air for two hours.

- C. A non-combustible odorant, such as oil of wintergreen, may be added to help locate leaks.

3.3 CLEANING PIPING

- A. Assembly:
 - 1. Prior to assembly of pipe and piping components, remove all loose dirt, scale, oil and other foreign matter on internal or external surfaces by means consistent with good piping practice subject to approval of the Architect/Engineer. Blow chips and burrs out of pipe before assembly. Wipe cutting oil from internal and external surfaces.
 - 2. During fabrication and assembly, remove slag and weld spatter from both internal and external joints by peening, chipping and wire brushing to the degree consistent with good piping practices.
 - 3. Notify the Architect/Engineer prior to starting any post erection cleaning operation in time to allow witnessing the operation. Properly dispose of cleaning and flushing fluids.
 - 4. Prior to blowing or flushing erected piping systems, disconnect all instrumentation and equipment, open wide all valves, control valves, and balance valves, and verify all strainer screens are in place.

3.4 INSTALLATION

- A. Route piping in orderly manner, straight, plumb, with consistent pitch, parallel to building structure, with minimum use of offsets and couplings. Provide only offsets required for needed headroom or clearance and needed flexibility in pipe system.
- B. Install piping to conserve building space, and not interfere with other work.
- C. Do not install piping or other equipment above electrical switchboards or panelboards. This includes a dedicated space extending 25 feet from the floor to the structural ceiling with width and depth equal to the equipment.
- D. Group piping whenever practical at common elevations.
- E. Install piping to allow for expansion and contraction without stressing pipe, joints, or connected equipment.
- F. Provide chain operators for all valves over 2" size that are over 10'-0" above finished floor. Extend to 7'-0" above finished floor.
- G. Provide valve position indicator on all valves 10'-0" or greater above finish floor and not located above ceiling.
- H. Provide clearance for access to valves and fittings.
- I. Provide access doors where valves are not exposed.
- J. Prepare pipe, fittings, supports, and accessories for finish painting.

- K. Install valves with stems upright or horizontal, not inverted.
- L. Provide shutoff valves and flanges or unions at all connections to equipment, traps, and items that require servicing.
- M. Provide shutoff valves to isolate part of systems and vertical risers.
- N. Provide shutoff valves to boilers and water heaters in readily accessible location, maximum 6 feet above finished floor, within 6 feet of boiler connection per ASME CSD-1.
- O. Arrange piping and piping connections so equipment may be serviced or totally removed without disturbing piping beyond final connections and associated shutoff valves.
- P. Reducers are generally not shown. Where pipe sizes are not shown, the larger size in either direction shall continue through the fitting nearest to the indication of a smaller pipe size.
- Q. All vertical pipe drops to equipment installed below the ceiling shall be routed within a wall cavity, unless specifically noted otherwise to be surface mounted. For renovation projects, this Contractor is responsible for opening and patching existing walls for installation of piping. Wall patching shall match existing condition.

3.5 BONDING AND GROUNDING

- A. Each above ground portion of a corrugated stainless steel tubing gas piping systems shall be bonded to the electrical service grounding electrode system. The bonding jumper shall connect to a metallic pipe or fitting between the point of delivery and the first downstream corrugated stainless steel tube fitting. The bonding jumper shall not be smaller than 6 AWG copper wire or equivalent. Gas piping systems that contain one or more segments of corrugated stainless steel tubing shall be bonded in accordance with this section.
- B. Each above ground portion of a gas piping system, other than corrugated stainless steel tubing systems, that is likely to become energized shall be electrically continuous and bonded to an effective ground-fault current path. Gas piping, other than corrugated stainless steel tubing, shall be considered to be bonded when it is connected to appliances that are connected to the appliance grounding conductor of the circuit supplying that appliance.
- C. Gas piping shall not be used as a grounding conductor or electrode.

3.6 PIPE ERECTION AND LAYING

- A. Carefully inspect all pipe, fittings, valves, equipment and accessories prior to installation. Immediately reject and remove from the job any items which are unsuitable, cracked or otherwise defective.
- B. All pipe, fittings, valves, equipment and accessories shall have factory-applied markings, stampings, or nameplates sufficient to determine their conformance with specified requirements.
- C. Exercise care at every stage of storage, handling, laying and erecting to prevent entry of foreign matter into piping, fittings, valves, equipment and accessories. Do not erect or install any unclean item.

- D. During construction, until system is fully operational, keep all openings in piping and equipment closed at all times except when actual work is being performed on that item. Closures shall be plugs, caps, blind flanges or other items designed for this purpose.
- E. Change direction of pipes only with fittings or pipe bends. Change size only with fittings. Do not use miter fittings, face or flush bushings, or street elbows. All fittings shall be long radius type, unless otherwise shown on the drawings or specified. Construct welded elbows of angles not available as standard fittings by cutting and welding standard elbows to form smooth, long radius fittings.
- F. Use full and double lengths of pipe wherever possible.
- G. Cut all pipe to exact measurement and install without springing or forcing.
- H. Do not create, even temporarily, undue loads, forces or strains on valves, equipment or building elements.

3.7 DRAINING AND VENTING

- A. Unless otherwise indicated on the drawings, all horizontal pipes, including branches, shall pitch 1" in 40 feet to low points for complete drainage.
- B. Use eccentric reducing fittings on horizontal runs when changing size for proper drainage and venting. Install gas pipes with bottom of pipe and eccentric reducers in a continuous line.
- C. Provide drip legs at low points and at the base of all risers in gas pipes. Drip legs shall be full line size on pipes through 4" and at least 4", but not less than half line size over 4". Drip legs shall be 12" minimum length, capped with a reducer to a drain valve.

3.8 BRANCH CONNECTIONS

- A. Make branch connections with standard tee or cross fittings of the type required for the service unless otherwise specified herein or detailed on the drawings.
- B. At the option of the Contractor, branch connections from headers and mains may be cut into black steel pipe using forged weld-on fittings.
- C. Use of forged weld-on fittings is also limited as follows:
 - 1. Must have at least same pressure rating as the main.
 - 2. Header or main must be 2-1/2" or over.
 - 3. Branch line is at least two pipe sizes under header or main size.
- D. Reducers are generally not shown. Where pipe sizes change at tee, the tee shall be the size of the largest pipe shown connecting to it.
- E. All branch piping connections for natural gas shall take off on the top or on the side of the main.

3.9 JOINING OF PIPE

- A. Threaded Joints:
 - 1. Ream pipe ends and remove all burrs and chips.

2. Protect plated pipe and valve bodies from wrench marks when making up joints.
3. Apply gas-rated Teflon tape or thread compound to male threads.

B. Flanged Joints:

1. Steel flanges shall be raised face.
2. Bolting for services up to 500°F shall be ASTM A307 Grade B with square head bolts and heavy hexagonal nuts conforming to ANSI B18.2.1 "Square and Hex Bolts" and B18.2.2 "Square and Hex Nuts".
3. Torque bolts in at least three passes, tightening to 1/3, 2/3, and final torque in a cross pattern with an indicating torque wrench for equal tension in all bolts.
4. Gaskets for flat face flanges shall be full face type. Gaskets for raised faced flanges shall conform to requirements for "Group I Gaskets" in ANSI B16.5. Unless otherwise specified gaskets shall meet the following requirements:
 - a. Gasket material and thickness approved by manufacturer for intended service, chemical compatibility, pipe system test pressure, and operating temperature range.
 - b. Maximum pressure rating of at least 250 psig.
 - c. Minimum temperature rating: -10°F.
 - d. Maximum temperature rating of at least 170°F for water systems operating 140°F and less.

C. Welded Joints:

1. Welding of all pipe joints, both as to procedures and qualification of welders, shall be in accordance with Section IX, ASME "Boiler & Pressure Vessel Code" unless local codes take precedence.
2. Furnish certificates qualifying each welder to the Owner's Representative prior to start of work.
3. The Owner's Representative reserves the right to require qualifying demonstration, at the Contractor's expense, of any welders assigned to the job.
4. Ends of pipe and fittings to be joined by butt-welding shall be beveled, cleaned to bare metal and internal diameters aligned before tack welding.

3.10 PAINTING EXPOSED PIPE

- A. Paint all outdoor exposed natural gas piping the color selected by Owner or Architect/Engineer.

END OF SECTION 221023

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 221030 - PLUMBING SPECIALTIES

PART 1 - GENERAL

1.1 SECTION INCLUDES

- A. Cleanouts.
- B. Traps.
- C. Trap Seals and Primers.
- D. Floor Drains and Sinks
- E. Hub Drains and Standpipes
- F. Backflow Preventers.
- G. Strainers.
- H. Unions.
- I. Balancing Valves.
- J. Water Hammer Arresters.
- K. Dielectric Fittings (Connections Between Dissimilar Metals).
- L. Air Vents.
- M. Drain Valves.
- N. Relief Valves.

1.2 QUALITY ASSURANCE

- A. Manufacturer: For each product specified, provide components by same manufacturer throughout.
- B. Piping, Fittings, Valves, and Flux for Potable Water Systems: All components shall be lead free per Federal Act S.3874, Reduction of Lead in Drinking Water Act.

1.3 REFERENCES

- A. ANSI A112.21.1 - Floor Drains.
- B. ANSI A112.21.2 - Roof Drains.
- C. ASSE 1010 - Water Hammer Arresters.
- D. ANSI A112.6.3 - Floor and Trench Drains; The American Society of Mechanical Engineers.

Unified Government Memorial Hall Kitchen & Audio/Visual Renovations

Unified Government of Wyandotte County & Kansas City, KS

ISSUED FOR BID

-
- E. ANSI A112.6.4 - Roof, Deck, and Balcony Drains; The American Society of Mechanical Engineers.
 - F. ASME A112.6.9 - Siphonic Drain Test; The American Society of Mechanical Engineers.
 - G. ANSI 1011 - Hose Connection Vacuum Breakers; American Society of Sanitary Engineering.
 - H. ANSI 1012 - Backflow Preventer with Intermediate Atmospheric Vent; American Society of Sanitary Engineering.
 - I. ASSE 1013 - Reduced Pressure Principle Backflow Preventers and Reduced Pressure Fire Protection Principle Backflow Preventers; American Society of Sanitary Engineering; 1.
 - J. ASSE 1019 - Vacuum Breaker Wall Hydrants, Freeze Resistant Automatic Draining Type; American Society of Sanitary Engineering.
 - K. ASSE 1047 - Reduced Pressure Detector Assemblies.
 - L. ASTM C478 - Precast Reinforced Concrete Manhole Sections.
 - M. AWWA C506 - Backflow Prevention Devices - Reduced Pressure Principle and Double Check Valve Types.
 - N. PDI WH-201 - Water Hammer Arresters.

1.4 SUBMITTALS

- A. Submit shop drawings under provisions of Section 220500.
- B. Include sizes, rough-in requirements, service sizes, and finishes.

PART 2 - PRODUCTS

2.1 CLEANOUTS

- A. Provide cleanouts as shown and specified on the drawings as well as required by code.
- B. Coordinate floor cleanout cover with surrounding floor finish. Provide either solid, recessed for tile or terrazzo or carpet marker as applicable.
- C. Cleanouts on exposed pipes shall be cast iron with heavy duty cast brass plug with raised head.
- D. Cleanout shall be same size as the pipe up to 6" and 6" for larger pipes.

2.2 YARD CLEANOUTS

- A. Provide yard cleanouts as shown and specified on the drawings as well as required by code.
- B. Cleanout shall be same size as pipe up to 6" and 6" for larger pipes.

2.3 TRAPS

- A. Provide all individual connections to the sanitary system with P-traps, except where such drains discharge directly into a properly trapped collection basin or sump. Unless otherwise specified or shown, traps shall be of the same material as specified for waste system.
- B. All traps shall have accessible, removable cleanouts, except where installed on floor drains with removable strainers.
- C. Deep seal pattern traps shall be provided where required by code.
- D. Each trap shall be completely filled with water at the end of construction but before building turnover to the Owner. All floor drains, floor sinks, trench drains, etc. shall be filled with water.

2.4 TRAP SEALS AND PRIMERS

- A. Provide trap seals as specified on the drawings.
- B. Provide trap primers as shown and specified on the drawings.
- C. Where trap primers are shown on drawings, coordinate with corresponding floor drains to ensure they include a side inlet connection for the trap primer line.

2.5 FLOOR DRAINS AND SINKS

- A. Floor drains and sinks shall be in the form of a receptor with grate/strainer set flush with the surrounding floor.
- B. Provide floor drains and sinks as shown and specified on the drawings as well as required by code.

2.6 HUB DRAINS AND STANDPIPES

- A. A hub drain shall be in the form of a hub or pipe without a grate/strainer extending through the floor for receiving indirect waste. A hub drain has a flood level rim above the finished floor.
- B. Provide hub drains as shown and specified on the drawings as well as required by code.

2.7 BACKFLOW PREVENTERS

- A. Provide backflow preventers as shown and specified on the drawings as well as required by code.

2.8 STRAINERS

- A. Unless otherwise indicated, strainers shall be Y-pattern and have stainless steel screens with perforations as follows:
 - 1. Water:
 - a. 1/4" - 2": 3/64" perforations
 - b. 2-1/2" - 10": 1/16" perforations

- B. Furnish pipe nipple with shutoff valve to blow down all strainer screens.
- C. Use bronze body strainers in copper piping and iron body strainers in ferrous piping.

2.9 UNIONS

- A. Copper pipe - wrought copper fitting - ground joint.
- B. Black Steel (Schedule 40) Pipe - malleable iron, ground joint, 150 psi, bronze to bronze seat.

2.10 BALANCING VALVE

- A. Rated for 125 psi working pressure and 250°F operating temperature, taps for determining flow with a portable meter, positive shutoff valves for each meter connection, memory feature, tight shutoff, and a permanent pressure drop between 1' and 2' water column at full flow with valve 100% open. Furnish with molded, removable insulation covers.
- B. Provide a nomograph to determine flow from meter reading (and valve position on units which sense pressure across a valve). Graph shall extend below the specified minimum flow.
- C. Flow rate of 0.5 GPM or larger: Valves in copper piping shall be brass or bronze. Acceptable Manufacturers: Flow Design "Accusetter", Preso "B+", Armstrong "CVB", Bell & Gossett "Circuit Setter Plus", Griswold "Quickset", Gerand "Balvalve Venturi" or Nibco Globe Style balancing valve.
- D. Flow rate less than 0.5 GPM: Valves in copper piping shall be brass or bronze. Cv value shall be less than 1.0 when valve is completely open, and minimum balanceable flow rate shall not exceed 0.1 GPM with a meter reading of at least 2.5 feet. Acceptable manufacturers: Bell & Gossett "Circuit Setter RF", Flow Design, Preso, Armstrong, Griswold, Gerand, or Nibco balancing valve.
- E. Manufacturer shall size balancing valves for the scheduled flow rate. Flow rate shall be measurable on manufacturer's standard meters.

2.11 WATER HAMMER ARRESTERS

- A. Provide water hammer arresters as shown and specified on the drawings as well as required by code.
- B. ANSI A112.26.1; sized and located in accordance with PDI WH-201, precharged for operation between -100°F and 300°F and maximum 250 psig working pressure.

2.12 DIELECTRIC FITTINGS (CONNECTIONS BETWEEN DISSIMILAR METALS)

- A. Connections between dissimilar metals shall be insulating dielectric types that provide a water gap between the connected metals, and that either allow no metal path for electron transfer or that provide a wide water gap lined with a non-conductive material to impede electron transfer through the water path.
- B. Joints shall be rated for the temperature, pressure, and other characteristics of the service in which they are used, including testing procedure.

- C. Aluminum, iron, steel, brass, copper, bronze, and stainless steel are commonly used and require isolation from each other with the following exceptions:
 - 1. Iron, steel, and stainless steel connected to each other.
 - 2. Brass, copper, and bronze connected to each other.
 - 3. Brass or bronze valves and specialties connected in closed systems with steel, iron, or stainless steel on both sides of the brass or bronze valves and specialties. Where two or more brass or bronze items occur together, they shall be connected with brass nipples. Brass or bronze valves and specialties cannot be used as a dielectric separation between pipe materials.
- D. Dielectric protection is required at connections to equipment of a material different than the piping.
- E. Screwed Joints (acceptable up to 2" size):
 - 1. Dielectric waterway rated for 300 psi CWP and 225°F.
 - 2. Acceptable Manufacturers: Elster Group ClearFlow fittings, Victaulic Series 47, Grinnell Series 407, Matco-Norca.
- F. Flanged Joints (any size):
 - 1. Use 1/8" minimum thickness, non-conductive, full-face gaskets.
 - 2. Employ one-piece molded sleeve-washer combinations to break the electrical path through the bolts.
 - 3. Sleeve-washers are required on one side only, with sleeves minimum 1/32" thick and washers minimum 1/8" thick.
 - 4. Install steel washers on both sides of flanges to prevent damage to the sleeve-washer.
 - 5. Separate sleeves and washers may be used only if the sleeves are manufactured to exact lengths and installed carefully so the sleeves must extend partially past each steel washer when tightened.
 - 6. Acceptable Manufacturers: EPCO, Central Plastics, Pipeline Seal and Insulator, F. H. Maloney, or Calpico.

2.13 AIR VENTS

- A. Provide means for venting air at all high points in the piping system and at all other points where air may be trapped.
- B. At end of main and other points where large volume of air may be trapped - Use 1/4" globe valve, angle type, 125 psi, Crane #89, attached to coupling in top of main, 1/4" discharge pipe turned down with cap.

2.14 DRAIN VALVES

- A. Drain valves shall be shutoff valves as specified for the intended service with added 3/4" male hose thread outlet and cap.

2.15 RELIEF VALVES

- A. RV-3: (Compressed Air) Spring loaded disc type, cast iron or steel body, stainless steel disc, side outlet and lifting lever, 250# CWP. Acceptable Manufacturers: Consolidated Div. of Dresser Ind. Series 1900, Kunkle #463, Keckley Type 41.

- B. RV-4: (Domestic Hot Water) Pressure and Temperature relief, cast bronze body and internal parts, stainless steel spring, test lever, threaded inlet and outlet. Maximum setting of 150 psi and 210°F temperature. Capacities ASME certified and labeled. Acceptable Manufacturers: Cash Series FV, Watts #40, #120, #N240, #340.

PART 3 - EXECUTION

3.1 INSTALLATION AND APPLICATION

- A. Coordinate construction to receive drains at required invert elevations.
- B. Install all items per manufacturer's instructions.
- C. Water Hammer Arresters:
 - 1. Install water hammer arresters in accessible locations. Provide access doors as required. Coordinate type with Architect/Engineer/Owner.
 - 2. Water hammer arrestors shall be installed in cold and hot water lines upstream of all plumbing fixtures or equipment, with a quick acting valve or multiple quick acting valves. Quick acting valves shall be defined as solenoid actuated valves, manual flush valves, sensor activated faucets and flush valves, squeeze handle spray faucets, and other similar type valves.
 - 3. Install multiple water hammer arrestors in toilet group branch piping greater than 20 feet in developed length from the cold and hot water mains.
- D. Cleanouts:
 - 1. Provide cleanouts where shown on the drawings and as required by code, but in no case farther apart than 50 feet in pipe less than 6" size and 100 feet apart in 6" and larger pipes inside the building. Provide cleanouts at bases of all sanitary and storm risers as shown on the drawings and as required by code.
 - 2. Provide a cleanout at the upstream end of a horizontal waste pipe in a plumbing chase serving multiple plumbing fixtures; for example a bank of water closets or lavatories.
 - 3. Provide cleanouts on the branch line connected to individual plumbing fixtures as required by code; for example just below a sink, lavatory or urinal.
 - 4. Extend underfloor cleanouts up to the floor with long sweep elbows.
 - 5. Install a full size, two-way cleanout within 5 feet of the foundation inside of building.
 - 6. Extend cleanouts to finished floor or wall surface. Lubricate threaded cleanout plugs with graphite and linseed oil. Ensure clearance at cleanouts for rodding of drainage system.
 - 7. Wall cleanouts shall be installed above the flow line of the pipe they serve, but no less than 12" above the finished floor.
- E. Yard Cleanouts:
 - 1. Install cleanouts on maximum 90 foot centers (including riser) for pipes 8" and smaller.
 - 2. Extend cleanout to grade. Encase cleanout in 5" thick concrete pad extending 6" beyond cleanout, set low enough not to interfere with lawn mowers.
- F. Floor Drains and Floor Sinks:
 - 1. Drains in upper floors shall have a flashing of EPDM or similar membrane sheet. The sheet shall be at least 36" X 36" square with the drain in the center. Clamp membrane in auxiliary clamping ring of floor drain.

2. Use alternate sealing method when installing drains in existing floor slabs.
3. Coordinate sloping requirements with the architectural plans and specifications.
4. Top of floor drain and sink grate/strainer shall not extend above the finished floor elevation. Grate/strainer shall be installed flush with surrounding finished floor. Should the Plumbing Contractor believe this presents a conflict with code, the issue should be evaluated before installation of the floor drain or sink begins. Proceeding with installing a floor drain or sink raised above the finished floor without prior approval will result in the Contractor being required to remove the drain or sink in question and reinstall it at the approved elevation.

G. Hub Drains and Standpipes:

1. The top of a hub drain/standpipe shall extend above the finished floor elevation. Refer to drawings for dimensions above the finished floor.
2. Access shall be provided to drains and standpipes for rodding.

H. Backflow Preventer:

1. Provide an air gap fitting and piping to drain. On 2-1/2" and larger units, install a tail piece from air gap fitting to drain to prevent water from spraying out of drain air gap receptor. Maintain air gap distance required by Code.
2. Units shall be field tested and tagged in accordance with manufacturer's instructions and applicable codes by a certified tester before initial operation.
3. Install unit between 12" and 60" above finish floor in a location that is accessible for annual testing and maintenance.

I. Balancing Valves:

1. Install balancing valves with straight, unobstructed pipe section both upstream and downstream as required, per manufacturer's installation instructions.

END OF SECTION 221030

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 221123 - DOMESTIC WATER PUMPS

PART 1 - GENERAL

1.1 SECTION INCLUDES

- A. Domestic Water In-Line Circulators.

1.2 SUBMITTALS

- A. Submit shop drawings under provisions of Section 220500.
- B. Submit certified pump performance curves with pump and system operating point plotted. Include NPSH curve when applicable.
- C. Pumps with motors operating above the RPM the pump curves are based on shall have impellers trimmed to deliver GPM and head scheduled.

PART 2 - PRODUCTS

2.1 GENERAL

- A. Statically and dynamically balance rotating parts.
- B. Construction shall permit complete servicing without breaking piping or motor connections.
- C. Pumps shall operate at 1750 rpm unless specified otherwise.
- D. Pump connections shall be flanged, whenever available.
- E. Domestic hot water pumps shall be suitable for 225°F water.
- F. Motors shall comply with Section 220513.
- G. Submitted pump selections must have a diameter impeller that meets or exceeds the scheduled pump. The inlet and discharge pipe sizes shall also meet or exceed the scheduled pump.

2.2 DOMESTIC WATER IN-LINE CIRCULATORS

- A. Provide pumps as specified on the drawings.

PART 3 - EXECUTION

3.1 INSTALLATION

A. General Installation Requirements:

1. Install all products per manufacturer's recommendations.
2. Install pumps with access for periodic maintenance including removal of motors, impellers, couplings, and accessories.

B. In-Line Pump:

1. Support in-line pumps individually so there is no strain on the piping. Support pump so no weight is carried on pump casings. Install with a minimum of five diameters of straight pipe on pump suction and discharge.
2. Ensure pumps operate at specified fluid temperatures without vapor binding or cavitation, are non-overloading in parallel or individual operation, and operate within 25% of midpoint of published maximum efficiency curve.
3. Pumps shall be factory aligned. If alignment is not satisfactory, as determined by the Architect/Engineer, manufacturer shall provide a factory trained representative to field align the shafts.

C. Pump without VFD or ECM:

1. For pumps not powered by a VFD, trim impeller to meet maximum operating conditions. Coordinate final trimmed diameter with Testing, Adjusting, and Balancing Contractor and Architect/Engineer.

END OF SECTION 221123

SECTION 224000 - PLUMBING FIXTURES

PART 1 - GENERAL

1.1 SECTION INCLUDES

- A. All plumbing fixtures.

1.2 REFERENCES

- A. ANSI A112.6.1M - Supports for Off-the-Floor Plumbing Fixtures for Public Use.
- B. ANSI A112.18.1 - Finished and Rough Brass Plumbing Fixture Fittings.
- C. ANSI A112.19.1M - Enameled Cast Iron Plumbing Fixtures.
- D. ANSI A112.19.2M - Vitreous China Plumbing Fixtures.
- E. ANSI A112.19.3 - Stainless Steel Plumbing Fixtures (Designed for Residential Use).
- F. ASME A112.19.4 - Porcelain Enameled Formed Steel Plumbing Fixtures.
- G. ANSI A112.19.5 - Trim for Water-Closet Bowls, Tanks, and Urinals.
- H. ANSI Z358.1 - Emergency Eye Wash and Shower Equipment.
- I. AHRI 1010 - Drinking Fountains and Self-Contained Mechanically Refrigerated Drinking Water Coolers.
- J. ASSE 1002 - Water Closet Flush Tank Ball Cocks.
- K. Americans with Disabilities Act (ADA), Title III.
- L. The Energy Policy Act (EPA) of 2005.

1.3 SUBMITTALS

- A. Submit product data under provisions of Section 220500. Submittals shall include fixture carriers for record purposes only. Architect/Engineer does not review or approve carriers except for manufacturer.
- B. Include fixtures, sizes, rough-in dimensions, utility sizes, trim, and finishes.
- C. For fixtures and trim requiring electrical connections, submit product data indicating general assembly, components, electrical power/controls wiring diagrams, and service connections.

PART 2 - PRODUCTS

2.1 MATERIALS

- A. All fixtures shall be as shown on the drawings and as scheduled in the plumbing material list. Additional requirements below:
- B. All vitreous china fixtures shall be from the same manufacturer where possible.
- C. All lavatory and sink trim shall be from the same manufacturer where possible.
- D. All fixtures shall be lead free. Faucets, traps, stops, and other fixture accessories shall not contain more lead than allowed per the latest State or Federal Act.
- E. P-Traps and Tailpieces:
 - 1. Lavatories:
 - a. Accessible Type: 1-1/4" chrome plated 17-gauge cast brass offset tailpiece and p-trap with cleanout on bottom of trap.
 - b. Non-Accessible Type: Offset not required for tailpiece, otherwise same.
 - 2. Sinks:
 - a. Accessible Type: 1-1/2" chrome plated 17-gauge cast brass offset tailpiece and p-trap with cleanout on bottom of trap.
 - b. Non-Accessible Type: Offset not required for tailpiece, otherwise same.
 - 3. Acceptable Manufacturers:
 - a. McGuire
 - b. Dearborn Brass
 - c. Zurn
 - d. Chicago Faucet
- F. Insulation Covers and Enclosures for Accessible Lavatories and Sinks:
 - 1. Premanufactured cover for P-trap, stop valves, and supply lines.
 - a. 1/8" thick vinyl construction, paintable, tool free installation,
 - b. Acceptable Manufacturers:
 - 1) Truebro (Lav Guard 2)
 - 2) McGuire (Prowrap)
 - 3) Zurn
- G. Angle Stops and Supplies:
 - 1. Lavatories, Sinks and Tank Type Water Closets:
 - a. Lead-free, 3/8" chrome plated brass, quarter turn ball valve type with loose key stops, solder or compression connection type.

- b. Lead-free, 3/8" chrome plated soft copper risers or stainless steel braided reinforced PVC hose.
- c. Acceptable Manufacturers:
 - 1) McGuire
 - 2) BrassCraft
 - 3) Zurn
 - 4) Chicago Faucet

H. Wall Hung Fixture Carriers:

- 1. Material: All Metal, ASME/ANSI A112.6.1M.
- 2. Lavatory carrier shall be rated to support 250 lbs unless noted otherwise on the drawings.
- 3. Water closet carrier shall be rated to support 500 lbs unless noted otherwise on the drawings
- 4. Manufacturers:
 - a. Zurn
 - b. JR Smith
 - c. Wade
 - d. Josam
 - e. Watts
 - f. Mifab
 - g. Sioux Chief

PART 3 - EXECUTION

3.1 INSTALLATION

A. General Installation Requirements:

- 1. Review millwork shop drawings. Confirm location and size of fixtures and openings before rough-in and installation.
- 2. Install each fixture with trap easily removable for servicing and cleaning. Use screwed tailpiece couplings. Connect fixture waste to stack with slip fitting.
- 3. Provide fixtures with supply lines, stop valves, reducers, escutcheons, and any other items required for a complete and operational plumbing fixture assembly.
- 4. Install components level and plumb.
- 5. Caulk joint between finish floor and floor mounted fixtures and between finish walls and wall mounted fixtures with silicon caulk. Caulk the joint, between rim and fixture where a fixture builds into a counter top, with caulking compound. Refer to DIVISION 7 for "Caulking" requirements. Color to match fixture.
- 6. Where there is a possibility of water following pipe brackets, etc., into a wall; caulk escutcheons, space around brackets, etc., to exclude water. Refer to DIVISION 7 for "Caulking" requirements.
- 7. Refer to architectural drawings for fixture mounting heights.
- 8. All non-potable outlets shall be clearly marked with a permanently affixed laminated sign with 3/8" high lettering saying "Non-Potable Water Not for Human Consumption." Sign shall have black lettering on a yellow background.

B. Wall-Mounted Fixture Requirements:

1. All wall-mounted fixtures shall have compatible carriers designed for their intended service and suitable for the space available and configuration of fixtures. All carriers shall extend to the floor and be anchored to the slab as intended by the carrier manufacturer.

C. Floor-Mounted Fixture Requirements:

1. Where floor mounted fixtures are installed on a sloped floor, the open void below the fixture shall be grouted, leveled, and caulked to eliminate stress on the fixture and to prevent water migration to the floor below.

D. Exposed or Inside Accessible Cabinets Traps, Valve and Pipe Requirements:

1. All water or waste piping for plumbing fixtures that is exposed or inside cabinets shall be chrome plated.
2. All exposed flush valves for water closets and urinals shall have a chrome plated hanger to anchor the piping to the wall.
3. All exposed water supply piping and fittings in a finished space to a shower valve, hose bibb, or other water outlet shall be chrome plated.

E. ADA Accessible Exposed Sink and Lavatory Trim:

1. All exposed sink and lavatory traps, piping and angle stops installed at accessible sink and lavatory locations shall include offset style drain tailpiece, p-trap installed near and parallel with back wall, and insulation kit specially manufactured for this installation. Armaflex with duct tape is not acceptable.

3.2 ADJUSTING AND CLEANING

- A. Adjust stops or valves for intended water flow rate to fixtures without splashing, noise, or overflow.
- B. At completion, clean plumbing fixtures, equipment, and faucet aerator screens.

3.3 FIXTURE ROUGH-IN SCHEDULE

- A. Rough-in fixture piping connections in accordance with table on plumbing drawings of minimum sizes for particular fixtures.

END OF SECTION 224000

SECTION 230500 - BASIC HVAC REQUIREMENTS

PART 1 - GENERAL

1.1 SECTION INCLUDES

- A. Requirements applicable to all Division 23 Sections. Also refer to Division 01 - General Requirements.
- B. All materials and installation methods shall conform to the applicable standards, guidelines and codes referenced herein and within each specification section.

1.2 SCOPE OF WORK

- A. This Specification and the associated drawings govern the furnishing, installing, testing and placing into satisfactory operation the Mechanical Systems.
- B. Each Contractor shall provide all new materials indicated on the drawings and/or in these specifications, and all items required to make the portion of the Mechanical Work a finished and working system.
- C. All work will be awarded under a single General Contract. The division of work listed below is for the Contractor's convenience and lists normal breakdown of the work.
- D. Scope of Work:
 - 1. Plumbing Work: Refer to Section 220500 "Basic Plumbing Requirements".
 - 2. Heating Work shall include, but is not necessarily limited to:
 - a. Furnish and install refrigerant piping, accessories, and final charge of refrigerant.
 - b. Furnish and install condensate drain piping from cooling related equipment such as air handlers and cooling coil drain pans.
 - c. Furnish and install firestopping systems for penetrations of fire-rated construction associated with this Contractor's work.
 - d. Complete all applicable tests, certifications, forms, and matrices.
 - 3. Air Conditioning and Ventilating Work shall include, but is not necessarily limited to:
 - a. Furnish and install package rooftop air handling units complete with curbs.
 - b. Furnish and install air-cooled condensing units and curbs.
 - c. Furnish and install complete supply air ductwork systems including all fittings, insulation, and outlets.
 - d. Furnish and install complete return air ductwork systems including all fittings, insulation, and inlets.
 - e. Furnish and install complete exhaust ductwork systems including all fittings, insulation, inlets, and fans.
 - f. Furnish and install all temperature control systems.
 - g. Furnish and install all fire dampers.
 - h. Furnish and install firestopping systems for penetrations of fire-rated construction associated with this Contractor's work.
 - i. Complete all applicable tests, certifications, forms, and matrices.

4. Temperature Control Work shall include, but is not necessarily limited to:
 - a. Furnish and install a complete temperature control system as specified in Section 230900.
 - b. Temperature control system shall consist of a full Direct Digital Control (DDC) system including all accessories, sensors, and programming.
 - c. Furnish automatic control valves and dampers for installation by others.
 - d. Furnish and install firestopping systems for penetrations of fire-rated construction associated with this Contractor's work.
5. Fire Protection Work: Refer to Section 210500 "Basic Fire Suppression Requirements".
6. Testing, Adjusting, and Balancing Work shall include, but is not necessarily limited to:
 - a. Furnish complete testing, adjusting, and balancing as specified in Section 230593, including, but not limited to, air systems, hydronic systems, plumbing systems, and verification of control systems.
 - b. Complete all applicable tests, certifications, forms, and matrices

1.3 WORK SEQUENCE

- A. All work that will produce excessive noise or interference with normal building operations, as determined by the Owner, shall be scheduled with the Owner. It may be necessary to schedule such work during unoccupied hours. The Owner reserves the right to determine when restricted construction hours will be required.

1.4 DIVISION OF WORK BETWEEN MECHANICAL, ELECTRICAL & CONTROL CONTRACTORS

A. Definitions:

1. "Mechanical Contractors" refers to the following:
 - a. Plumbing Contractor.
 - b. Heating Contractor.
 - c. Air Conditioning and Ventilating Contractor.
 - d. Temperature Control Contractor.
 - e. Fire Protection Contractor.
 - f. Testing, Adjusting, and Balancing Contractor.
2. Motor Control Wiring: The wiring associated with the remote operation of the magnetic coils of magnetic motor starters or relays, or the wiring that permits direct cycling of motors by means of devices in series with the motor power wiring. In the latter case the devices are usually single phase and are usually connected to the motor power wiring through a manual motor starter having "Manual-Off-Auto" provisions.
3. Control devices such as start-stop push buttons, thermostats, pressure switches, flow switches, relays, etc., generally represent the types of equipment associated with motor control wiring.
4. Motor control wiring is single phase and usually 120 volts. In some instances, the voltage will be the same as the motor power wiring. Generally, where the motor power wiring exceeds 120 volts, a control transformer is used to give a control voltage of 120 volts.

5. Temperature Control Wiring: The wiring associated with the operation of a motorized damper, solenoid valve or motorized valve, etc., either modulating or two-position, as opposed to wiring which directly powers or controls a motor used to drive equipment such as fans, pumps, etc.
 - a. This wiring will be from a 120 volt source and may continue as 120 volt, or be reduced in voltage (24 volt) in which case a control transformer shall be furnished as part of the temperature control wiring.
6. Control Motor: An electric device used to operate dampers, valves, etc. It may be two-position or modulating. Conventional characteristics of such a motor are 24 volts, 60 cycles, 1 phase, although other voltages may be encountered.
7. Voltage is generally specified and scheduled as distribution voltage. Motor submittals may be based on utilization voltage if it corresponds to the correct distribution voltage.

Distribution/Nominal Voltage	Utilization Voltage
120	115
208	200
240	230
277	265
480	460

B. General:

1. The purpose of these Specifications is to outline the Electrical and Mechanical Contractor's responsibilities related to electrical work required for items such as temperature controls, mechanical equipment, fans, chillers, compressors and the like. The exact wiring requirements for much of the equipment cannot be determined until the systems have been selected and submittals reviewed. Therefore, the electrical drawings show only known wiring related to such items. All wiring not shown on the electrical drawings, but required for mechanical systems, is the responsibility of the Mechanical Contractor.
2. Where the drawings require the Electrical Contractor to wire between equipment furnished by the Mechanical Contractor, such wiring shall terminate at terminals provided in the equipment. The Mechanical Contractor shall provide complete electrical power/controls wiring diagrams and supervision to the Electrical Contractor and designate the terminal numbers for correct wiring.
3. All electrical work shall conform to the National Electrical Code. All provisions of the Electrical Specifications concerning wiring, protection, etc., apply to wiring provided by the Mechanical Contractor unless noted otherwise.
4. Control low (24V) and control line (120V) voltage wiring, conduit, and related switches and relays required for the automatic control and/or interlock of motors and equipment, including final connection, are to be furnished and installed under Divisions 21, 22 and 23. Materials and installation to conform to Class 1 or 2 requirements.
5. All Contractors shall establish utility elevations prior to fabrication and shall coordinate their material and equipment with other trades. When a conflict arises, priority is as follows:
 - a. Light fixtures.
 - b. Gravity flow piping, including steam and condensate.
 - c. Electrical busduct.
 - d. Sheet metal.
 - e. Electrical cable trays, including access space.

- f. Sprinkler piping and other piping.
- g. Electrical conduits and wireway.

C. Mechanical Contractor's Responsibility:

1. Assumes responsibility for internal wiring of all equipment provided by the Mechanical Contractor, for example:
 - a. Burners.
 - b. Condensing Units.
 - c. Gas Trains.
 - d. Package Air Handling Units.
 - e. Packaged Rooftop Units.
2. Assumes all responsibility for the Temperature Control wiring, when the Temperature Control Contractor is a Subcontractor to the Mechanical Contractor.
3. Shall verify all existing equipment sizes and capacities where units are to be modified, moved or replaced. Contractor shall notify Architect/Engineer of any discrepancies prior to ordering new units or replacement parts, including replacements of equipment motors.
4. Temperature Control Subcontractor's Responsibility:
 - a. Wiring of all devices needed to make the Temperature Control System functional.
 - b. Verifying any control wiring on the electrical drawings as being by the Electrical Contractor. All wiring required for the Control System, but not shown on the electrical drawings, is the responsibility of the Temperature Control Subcontractor.
 - c. Coordinating equipment locations (such as relays, transformers, etc.) with the Electrical Contractor, where wiring of the equipment is by the Electrical Contractor.
5. This Contractor is responsible for coordination of utilities with all other Contractors. If any field coordination conflicts are found, the Contractor shall coordinate with other Contractors to determine a viable layout.

D. Electrical Contractor's Responsibility:

1. Provides all combination starters, manual starters and disconnect devices shown on the Electrical Drawings or indicated to be by the Electrical Contractor on the Mechanical Drawings or Specifications.
2. Installs and wires all remote control devices furnished by the Mechanical Contractor or Temperature Control Subcontractor when so noted on the Electrical Drawings.
3. Provides motor control and temperature control wiring, where so noted on the drawings.
4. Coordinate with the Mechanical Contractor for size of motors and/or other electrical devices involved with repair or replacement of existing equipment.
5. Furnishes, installs and connects all relays, etc., for automatic shutdown of certain fans upon actuation of the Fire Alarm System as indicated and specified in Division 28.
6. This Contractor is responsible for coordination of utilities with all other Contractors. If any field coordination conflicts are found, the Contractor shall coordinate with other Contractors to determine a viable layout.

1.5 COORDINATION DRAWINGS

A. Definitions:

1. Coordination Drawings: A compilation of the pertinent layout and system drawings that show the sizes and locations, including elevations, of system components and required access areas to ensure that no two objects will occupy the same space.
 - a. Mechanical trades shall include, but are not limited to, mechanical equipment, ductwork, fire protection systems, plumbing piping, medical gas systems, hydronic piping, steam and steam condensate piping, and any item that may impact coordination with other disciplines.
 - b. Electrical trades shall include, but are not limited to, electrical equipment, conduit 1.5" and larger, conduit racks, cable trays, pull boxes, transformers, raceway, busway, lighting, ceiling-mounted devices, and any item that may impact coordination with other disciplines.
 - c. Technology trades shall include, but are not limited to, technology equipment, racks, conduit 1.5" and larger, conduit racks, cable trays, ladder rack, pull boxes, raceway, ceiling-mounted devices, and any item that may impact coordination with other disciplines.
 - d. Maintenance clearances and code-required dedicated space shall be included.
 - e. The coordination drawings shall include all underground, underfloor, in-floor, in chase, and vertical trade items.
2. Spaces with open/cloud ceiling architecture shall indicate the overhead utilities and locate equipment as required to maintain clearance above lights. The intent for the installation is to maintain a maximum allowable vertical clearance and an organized/clean manner in the horizontal. Notify Architect/Engineer of the maximum clearance which can be maintained. Failure to comply will result in modifications with no cost to Owner.
 - a. In cloud ceiling architecture, when open cabling/wire and/or cable tray crosses gaps between ceiling clouds and/or walls, cabling is to transition to conduits to span the gaps in order to conceal cabling from below.
3. The contractors shall use the coordination process to identify the proper sequence of installation of all utilities above ceilings and in other congested areas, to ensure an orderly and coordinated end result, and to provide adequate access for service and maintenance.

B. Participation:

1. The contractors and subcontractors responsible for work defined above shall participate in the coordination drawing process.
2. One contractor shall be designated as the Coordinating Contractor for purposes of preparing a complete set of composite electronic CAD coordination drawings that include all applicable trades, and for coordinating the activities related to this process. The Coordinating Contractor for this project shall be the Mechanical Contractor.
 - a. The Coordinating Contractor shall utilize personnel familiar with requirements of this project and skilled as draftspersons/CAD operators, competent to prepare the required coordination drawings.

3. Electronic CAD drawings shall be submitted to the Coordinating Contractor for addition of work by other trades. IMEG will provide electronic file copies of applicable drawings for contractor's use if the contractor signs and returns an "Electronic File Transfer" waiver provided by IMEG. IMEG will not consider blatant reproductions of original file copies an acceptable alternative for coordination drawings.

C. Drawing Requirements:

1. The file format and file naming convention shall be coordinated with and agreed to by all contractors participating in the coordination process and the Owner.
 - a. Scale of drawings:
 - 1) General plans: 1/4 Inch = 1'-0" (minimum).
 - 2) Mechanical, electrical, communication rooms, and including the surrounding areas within 10 feet: 1/2 Inch = 1'-0" (minimum).
 - 3) Shafts and risers: 1/2 Inch = 1'-0" (minimum).
 - 4) Sections of shafts and mechanical and electrical equipment rooms: 1/4 Inch = 1'-0" (minimum).
 - 5) Sections of congested areas: 1/2 Inch = 1'-0" (minimum).
2. Ductwork layout drawings shall be the baseline system for other components. Ductwork layout drawings shall be modified to accommodate other components as the coordination process progresses.
3. There may be more drawings required for risers, top and bottom levels of mechanical rooms, and shafts.
4. The minimum quantity of drawings will be established at the first coordination meeting and sent to the Architect/Engineer for review. Additional drawings may be required if other areas of congestion are discovered during the coordination process.

D. General:

1. Coordination drawing files shall be made available to the Architect/Engineer and Owner's Representative. The Architect/Engineer will only review identified conflicts and give an opinion, but will not perform as a coordinator.
2. A plotted set of coordination drawings shall be available at the project site.
3. Coordination drawings are not shop drawings and shall not be submitted as such.
4. The contract drawings are schematic in nature and do not show every fitting and appurtenance for each utility. Each contractor is expected to have included in the bid sufficient fittings, material, and labor to allow for adjustments in routing of utilities made necessary by the coordination process and to provide a complete and functional system.
5. The contractors will not be allowed additional costs or time extensions due to participation in the coordination process.
6. The contractors will not be allowed additional costs or time extensions for additional fittings, reroutings or changes of duct size, that are essentially equivalent sizes to those shown on the drawings and determined necessary through the coordination process.
7. The Architect/Engineer reserves the right to determine space priority of equipment in the event of spatial conflicts or interference between equipment, piping, conduit, ducts, and equipment provided by the trades.
8. Changes to the contract documents that are necessary for systems installation and coordination shall be brought to the attention of the Architect/Engineer.

9. Access panels shall preferably occur only in gypsum board walls or plaster ceilings where indicated on the drawings.
 - a. Access to mechanical, electrical, technology, and other items located above the ceiling shall be through accessible lay-in ceiling tile areas.
 - b. Potential layout changes shall be made to avoid additional access panels.
 - c. Additional access panels shall not be allowed without written approval from the Architect/Engineer at the coordination drawing stage.
 - d. Providing additional access panels shall be considered after other alternatives are reviewed and discarded by the Architect/Engineer and the Owner's Representative.
 - e. When additional access panels are required, they shall be provided without additional cost to the Owner.
10. Complete the coordination drawing process and obtain sign off of the drawings by all contractors prior to installing any of the components.
11. Conflicts that result after the coordination drawings are signed off shall be the responsibility of the contractor or subcontractor who did not properly identify their work requirements, or installed their work without proper coordination.
12. Updated coordination drawings that reflect as-built conditions may be used as record documents.

1.6 QUALITY ASSURANCE

A. Contractor's Responsibility Prior to Submitting Pricing Data:

1. The Contractor is responsible for constructing complete and operating systems. The Contractor acknowledges and understands that the Contract Documents are a two-dimensional representation of a three-dimensional object, subject to human interpretation. This representation may include imperfect data, interpreted codes, utility guidelines, three-dimensional conflicts, and required field coordination items. Such deficiencies can be corrected when identified prior to ordering material and starting installation. The Contractor agrees to carefully study and compare the individual Contract Documents and report at once in writing to the Design Team any deficiencies the Contractor may discover. The Contractor further agrees to require each subcontractor to likewise study the documents and report at once any deficiencies discovered.
2. The Contractor shall resolve all reported deficiencies with the Architect/Engineer prior to awarding any subcontracts, ordering material, or starting any work with the Contractor's own employees. Any work performed prior to receipt of instructions from the Design Team will be done at the Contractor's risk.

B. Qualifications:

1. Only products of reputable manufacturers are acceptable.
2. All Contractors and subcontractors shall employ only workers skilled in their trades.

C. Compliance with Codes, Laws, Ordinances:

1. Conform to all requirements of the City of Kansas City, Kansas Codes, Laws, Ordinances and other regulations having jurisdiction.
2. Conform to all published standards of Unified Government of Wyandotte County.
3. Conform to all State Codes.
4. If there is a discrepancy between the codes and regulations and these specifications, the Architect/Engineer shall determine the method or equipment used.

-
5. If the Contractor notes, at the time of bidding, that any parts of the drawings or specifications do not comply with the codes or regulations, Contractor shall inform the Architect/Engineer in writing, requesting a clarification. If there is insufficient time for this procedure, Contractor shall submit with the proposal a separate price to make the system comply with the codes and regulations.
 6. All changes to the system made after letting of the contract, to comply with codes or requirements of Inspectors, shall be made by the Contractor without cost to the Owner.
 7. If there is a discrepancy between manufacturer's recommendations and these specifications, the manufacturer's recommendations shall govern.
 8. All rotating shafts and/or equipment shall be completely guarded from all contact. Partial guards and/or guards that do not meet all applicable OSHA standards are not acceptable. Contractor is responsible for providing this guarding if it is not provided with the equipment supplied.
- D. Permits, Fees, Taxes, Inspections:
1. Procure all applicable permits and licenses.
 2. Abide by all laws, regulations, ordinances, and other rules of the State or Political Subdivision where the work is done, or as required by any duly constituted public authority.
 3. Pay all charges for permits or licenses.
 4. Pay all fees and taxes imposed by the State, Municipal and/or other regulatory bodies.
 5. Pay all charges arising out of required inspections by an authorized body.
 6. Pay all charges arising out of required contract document reviews associated with the project and as initiated by the Owner or authorized agency/consultant.
 7. Where applicable, all fixtures, equipment and materials shall be listed by Underwriters' Laboratories, Inc. and approved by FM Global.
- E. Examination of Drawings:
1. The drawings for the mechanical work are completely diagrammatic, intended to convey the scope of the work and to indicate the general arrangements and locations of equipment, outlets, etc., and the approximate sizes of equipment.
 2. Contractor shall determine the exact locations of equipment and rough-ins, and the exact routing of pipes and ducts to best fit the layout of the job.
 3. Scaling of the drawings is not sufficient or accurate for determining these locations.
 4. Where job conditions require reasonable changes in indicated arrangements and locations, such changes shall be made by the Contractor at no additional cost to the Owner.
 5. Because of the scale of the drawings, certain basic items, such as fittings, boxes, valves, unions, etc., may not be shown, but where required by other sections of the specifications or required for proper installation of the work, such items shall be furnished and installed.
 6. If an item is either on the drawings or in the specifications, it shall be included in this contract.
 7. Determination of quantities of material and equipment required shall be made by the Contractor from the documents. Where discrepancies arise between drawings, schedules and/or specifications, the greater number shall govern.
 8. Where used in mechanical documents, the word "furnish" shall mean supply for use, the word "install" shall mean connect complete and ready for operation, and the word "provide" shall mean to supply for use and connect complete and ready for operation.
 - a. Any item listed as furnished shall also be installed, unless otherwise noted.
 - b. Any item listed as installed shall also be furnished, unless otherwise noted.

F. Field Measurements:

1. Verify all pertinent dimensions at the job site before ordering any materials or fabricating any supports, pipes or ducts.

G. Electronic Media/Files:

1. Construction drawings for this project have been prepared utilizing Revit.
2. Contractors and Subcontractors may request electronic media files of the contract drawings and/or copies of the specifications. Specifications will be provided in PDF format.
3. Upon request for electronic media, the Contractor shall complete and return a signed "Electronic File Transmittal" form provided by IMEG.
4. If the information requested includes floor plans prepared by others, the Contractor will be responsible for obtaining approval from the appropriate Design Professional for use of that part of the document.
5. The electronic contract documents can be used for preparation of shop drawings and as-built drawings only. The information may not be used in whole or in part for any other project.
6. The drawings prepared by IMEG for bidding purposes may not be used directly for ductwork layout drawings or coordination drawings.
7. The use of these CAD documents by the Contractor does not relieve them from their responsibility for coordination of work with other trades and verification of space available for the installation.
8. The information is provided to expedite the project and assist the Contractor with no guarantee by IMEG as to the accuracy or correctness of the information provided. IMEG accepts no responsibility or liability for the Contractor's use of these documents.

1.7 WEB-BASED PROJECT SOFTWARE

- A. The General Contractor shall provide a web-based project software site for the purpose of hosting and managing project communication and documentation until completion of the warranty phase.
- B. The web-based project software shall include, at a minimum, the following features: construction schedule, submittals, RFIs, ASIs, construction change directives, change orders, drawing management, specification management, payment applications, contract modifications, meeting minutes, construction progress photos.
- C. Provide web-based project software user licenses for use by the Architect/Engineer. Access will be provided from the start of the project through the completion of the warranty phase.
- D. At project completion, provide digital archive of entire project in format that is readable by common desktop software applications in format acceptable to Architect/Engineer. Provide data in locked format to prevent further changes.

1.8 SUBMITTALS

- A. Submittals shall be required for the following items, and for additional items where required elsewhere in the specifications or on the drawings.

1. Submittals List:

Referenced Specification	Submittal Item
Section	
230500	Owner Training Agenda
230503	Fire Seal Systems
230513	Motors
230529	Hangers and Supports
230529	Prefabricated Curbs
230548	Vibration Isolation Equipment
230553	HVAC Identification
230593	Testing, Adjusting, and Balancing
230713	Duct Insulation
230719	HVAC Pipe Insulation
230900	Controls
232200	Steam and Condensate Piping Systems and Valves
232218	Traps and Condensate Return Equipment
232300	Refrigeration Piping and Specialties
233100	Ductwork
233100	Ductwork Layout Drawings
233100	Duct Specialties (such as Turning Vanes)
233300	Fire Dampers
233300	Smoke Dampers
233300	Combination Fire Smoke Dampers
233423	Power Ventilators
233423	Prefabricated Curbs
233700	Grilles, Registers, and Diffusers
233700	Louvers
234000	Filters and Filter Systems
237200	Energy Recovery Devices
237416.14	Packaged Rooftop Air Conditioning Units - High OA
238126	Split System Air Conditioning Units

- B. General Submittal Procedures: In addition to the provisions of Division 01, the following are required:

1. Transmittal: Each transmittal shall include the following:

- Date
- Project title and number
- Contractor's name and address
- Division of work (e.g., plumbing, heating, ventilating, etc.)
- Description of items submitted and relevant specification number
- Notations of deviations from the contract documents
- Other pertinent data

2. Submittal Cover Sheet: Each submittal shall include a cover sheet containing:

- Date
- Project title and number

-
- c. Architect/Engineer
 - d. Contractor and subcontractors' names and addresses
 - e. Supplier and manufacturer's names and addresses
 - f. Division of work (e.g., plumbing, heating, ventilating, etc.)
 - g. Description of item submitted (using project nomenclature) and relevant specification number
 - h. Notations of deviations from the contract documents
 - i. Other pertinent data
 - j. Provide space for Contractor's review stamps
3. Composition:
- a. Submittals shall be submitted using specification sections and the project nomenclature for each item.
 - b. Individual submittal packages shall be prepared for items in each specification section. All items within a single specification section shall be packaged together where possible. An individual submittal may contain items from multiple specifications sections if the items are intimately linked (e.g., pumps and motors).
 - c. All sets shall contain an index of the items enclosed with a general topic description on the cover.
4. Content: Submittals shall include all fabrication, erection, layout, and setting drawings; manufacturers' standard drawings; schedules; descriptive literature, catalogs and brochures; performance and test data; electrical power criteria (e.g., voltage, phase, amps, horsepower, kW, etc.) wiring and control diagrams; Short Circuit Current Rating (SCCR); dimensions; shipping and operating weights; shipping splits; service clearances; and all other drawings and descriptive data of materials of construction as may be required to show that the materials, equipment or systems and the location thereof conform to the requirements of the contract documents.
5. Contractor's Approval Stamp:
- a. The Contractor shall thoroughly review and approve all shop drawings before submitting them to the Architect/Engineer. The Contractor shall stamp, date and sign each submittal certifying it has been reviewed.
 - b. Unstamped submittals will be rejected.
 - c. The Contractor's review shall include, but not be limited to, verification of the following:
 - 1) Only approved manufacturers are used.
 - 2) Addenda items have been incorporated.
 - 3) Catalog numbers and options match those specified.
 - 4) Performance data matches that specified.
 - 5) Electrical characteristics and loads match those specified.
 - 6) Equipment connection locations, sizes, capacities, etc. have been coordinated with other affected trades.
 - 7) Dimensions and service clearances are suitable for the intended location.
 - 8) Equipment dimensions are coordinated with support steel, housekeeping pads, openings, etc.
 - 9) Constructability issues are resolved (e.g., weights and dimensions are suitable for getting the item into the building and into place, sinks fit into countertops, etc.).
 - d. The Contractor shall review, stamp and approve all subcontractors' submittals as described above.

-
- e. The Contractor's approval stamp is required on all submittals. Approval will indicate the Contractor's review of all material and a complete understanding of exactly what is to be furnished. Contractor shall clearly mark all deviations from the contract documents on all submittals. If deviations are not marked by the Contractor, then the item shall be required to meet all drawing and specification requirements.
 - 6. Submittal Identification and Markings:
 - a. The Contractor shall clearly mark each item with the same nomenclature applied on the drawings or in the specifications.
 - b. The Contractor shall clearly indicate the size, finish, material, etc.
 - c. Where more than one model is shown on a manufacturer's sheet, the Contractor shall clearly indicate exactly which item and which data is intended.
 - d. All marks and identifications on the submittals shall be unambiguous.
 - 7. Schedule submittals to expedite the project. Coordinate submission of related items.
 - 8. Identify variations from the contract documents and product or system limitations that may be detrimental to the successful performance of the completed work.
 - 9. Reproduction of contract documents alone is not acceptable for submittals.
 - 10. Incomplete submittals will be rejected without review. Partial submittals will only be reviewed with prior approval from the Architect/Engineer.
 - 11. Submittals not required by the contract documents may be returned without review.
 - 12. The Architect/Engineer's responsibility shall be to review one set of shop drawing submittals for each product. If the first submittal is incomplete or does not comply with the drawings and/or specifications, the Contractor shall be responsible to bear the cost for the Architect/Engineer to recheck and handle the additional shop drawing submittals.
 - 13. Submittals shall be reviewed and approved by the Architect/Engineer before releasing any equipment for manufacture or shipment.
 - 14. Contractor's responsibility for errors, omissions, or deviation from the contract documents in submittals is not relieved by the Architect/Engineer's approval.
 - 15. Schedule shall allow for adequate time to perform orderly and proper review of submittals, including time for consultants and Owner if required, and resubmittals by Contractor if necessary, and to cause no delay in Work or in activities of Owner or other contractors.
 - a. Allow at least two weeks for Architect's/Engineer's review and processing of each submittal.
 - 16. Architect/Engineer reserves the right to withhold action on a submittal which, in the Architect/Engineer's opinion, requires coordination with other submittals until related submittals are received. The Architect/Engineer will notify the Contractor, in writing, when they exercise this right.

C. Electronic Submittal Procedures:

- 1. Distribution: Email submittals as attachments to all parties designated by the Architect/Engineer, unless a web-based submittal program is used.
- 2. Transmittals: Each submittal shall include an individual electronic letter of transmittal.
- 3. Format: Electronic submittals shall be in PDF format only. Scanned copies, in PDF format, of paper originals are acceptable. Submittals that are not legible will be rejected. Do not set any permission restrictions on files; protected, locked, or secured documents will be rejected.

4. File Names: Electronic submittal file names shall include the relevant specification section number followed by a description of the item submitted, as follows. Where possible, include the transmittal as the first page of the PDF instead of using multiple electronic files.
 - a. Submittal file name: 23XXXX.description.YYYYMMDD
 - b. Transmittal file name: 23XXXX.description.YYYYMMDD
5. File Size: Files shall be transmitted via a pre-approved method. Larger files may require an alternative transfer method, which shall also be pre-approved.

1.9 EQUIPMENT SUPPLIERS' INSPECTION

- A. The following equipment shall not be placed in operation until a competent installation and service representative of the manufacturer has inspected the installation and certified that the equipment is properly installed, adjusted and lubricated; that preliminary operating instructions have been given; and that the equipment is ready for operation:
 1. Air Cooled Condensers
 2. Condensing Units
 3. Gas Fired Makeup Air Units
 4. Fire Seal Systems
- B. Contractor shall arrange for and obtain supplier's on-site inspection(s) at proper time(s) to assure each phase of equipment installation and/or connection is in accordance with the manufacturer's instructions.
- C. Submit copies of start-up reports to the Architect/Engineer and include copies of Owner's Operation and Maintenance Manuals.

1.10 PRODUCT DELIVERY, STORAGE, HANDLING & MAINTENANCE

- A. Exercise care in transporting and handling to avoid damage to materials. Store materials on the site to prevent damage. Keep materials clean, dry and free from harmful conditions. Immediately remove any materials that become wet or that are suspected of becoming contaminated with mold or other organisms.
- B. Protect equipment, components, and openings with airtight covers and exercise care at every stage of storage, handling, and installation of equipment to prevent airborne dust and dirt from entering or fouling equipment to include, but not limited to:
 1. Motor windings and ventilation openings.
 2. Bearings.
 3. Equipment Pipe and Accessories connections openings. (e.g. boiler connections, coil connections, etc.)
 4. Equipment Duct and Accessories connections openings. (e.g. AHU/RTU duct connections; Terminal Air Boxes, etc.)
 5. Starter and control cabinets.
 6. Heat transfer coils.
 7. Pump Seals.
 8. Combustion burner and blower equipment (e.g. combustion air intake, combustion vent/flue, etc.)

- C. Equipment and components that are visibly damaged or have been subject to environmental conditions prior to building turnover to Owner that could shorten the life of the component (for example, water damage, humidity, dust and debris, excessive hot or cold storage location, etc.) shall be repaired or replaced with new equipment or components without additional cost to the building owner.
- D. Keep all bearings properly lubricated and all belts properly tensioned and aligned.
- E. Coordinate the installation of heavy and large equipment with the General Contractor and/or Owner. If the Mechanical Contractor does not have prior documented experience in rigging and lifting similar equipment, he/she shall contract with a qualified lifting and rigging service that has similar documented experience. Follow all equipment lifting and support guidelines for handling and moving.
- F. Contractor is responsible for moving equipment into the building and/or site. Contractor shall review site prior to bid for path locations and any required building modifications to allow movement of equipment. Contractor shall coordinate the work with other trades.

1.11 NETWORK / INTERNET CONNECTED EQUIPMENT

- A. These specifications may require certain equipment or systems to have network, Internet and/or remote access capability ("Network Capability"). Any requirement for Network Capability shall be interpreted only as a functional capability and is not to be construed as authority to connect or enable any Network Capability. Network Capability may only be connected or enabled with the express written consent of the Owner.

1.12 WARRANTY

- A. Provide one-year warranty, unless otherwise noted, to the Owner for all fixtures, equipment, materials, and workmanship.
- B. The warranty period for all work in this Division of the specifications shall commence on the date of final acceptance, unless a whole or partial system or any separate piece of equipment or component is put into use for the benefit of any party other than the installing contractor with prior written authorization. In this instance, the warranty period shall commence on the date when such whole system, partial system or separate piece of equipment or component is placed in operation and accepted in writing by the Owner.
- C. Warranty requirements shall extend to correction, without cost to the Owner, of all Work found to be defective or nonconforming to the contract documents. The Contractor shall bear the cost of correcting all damage resulting from defects or nonconformance with contract documents.

1.13 INSURANCE

- A. Contractor shall maintain insurance coverage as set forth in Division 0 of these specifications.

1.14 MATERIAL SUBSTITUTION

- A. Where several manufacturers' names are given, the scheduled manufacturer is the basis for job design and establishes the quality required.

- B. Equivalent equipment manufactured by the other listed manufacturers may be used. Contractor shall ensure that all items submitted by these other manufacturers meet all requirements of the drawings and specifications and fits in the allocated space. When using other listed manufacturers, the Contractor shall assume responsibility for any and all modifications necessary (including, but not limited to structural supports, electrical connections, piping and ductwork connections and arrangement, plumbing connections and rough-in, and regulatory agency approval, etc.) and coordinate such with other contractors.
- C. Any material, article or equipment of other unnamed manufacturers which will adequately perform the services and duties imposed by the design and is of a quality equal to or better than the material, article or equipment identified by the drawings and specifications may be used if approval is secured in writing from the Architect/Engineer not later than ten days prior to the bid opening.
- D. This Contractor assumes all costs incurred as a result of using the offered material, article or equipment, on the Contractors part or on the part of other Contractors whose work is affected.
- E. This Contractor may list voluntary add or deduct prices for alternate materials on the bid form. These items will not be used in determining the low bidder.
- F. All material substitutions requested later than ten (10) days prior to bid opening must be listed as voluntary changes on the bid form.

1.15 PROJECT COMMISSIONING

- A. The Contractor shall work with the Commissioning Agent (CxA) as described in Section 01 91 00 and 23 08 00 and provide all services as described in the Commissioning Plan.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION

3.1 JOBSITE SAFETY

- A. Neither the professional activities of the Architect/Engineer, nor the presence of the Architect/Engineer or the employees and subconsultants at a construction site, shall relieve the Contractor and other entity of their obligations, duties and responsibilities including, but not limited to, construction means, methods, sequence, techniques or procedures necessary for performing, superintending or coordinating all portions of the work of construction in accordance with the contract documents and any health or safety precautions required by any regulatory agencies. The Architect/Engineer and personnel have no authority to exercise any control over any construction contractor or other entity or their employees in connection with their work or any health or safety precautions. The Contractor is solely responsible for jobsite safety. The Architect/Engineer and the Architect/Engineer's consultants shall be indemnified and shall be made additional insureds under the Contractor's general liability insurance policy.

3.2 ARCHITECT/ENGINEER OBSERVATION OF WORK

- A. The Contractor shall provide seven (7) calendar days' notice to the Architect/Engineer prior to:
 - 1. Placing fill over underground and underslab utilities.

-
2. Covering exterior walls, interior partitions and chases.
 3. Installing hard or suspended ceilings and soffits.
- B. The Architect/Engineer will have the opportunity to review the installation and provide a written report noting deficiencies requiring correction. The Contractor's schedule shall account for these reviews and show them as line items in the approved schedule.
- C. Above-Ceiling Final Observation
1. All work above the ceilings must be complete prior to the Architect/Engineer's review. This includes, but is not limited to:
 - a. Pipe insulation is installed and fully sealed.
 - b. Pipe and duct wall penetrations are sealed.
 - c. Pipe identification and valve tags are installed.
 - d. Main, branch and flexible ducts are installed.
 - e. Diffusers, registers and grilles are installed and connected to ductwork.
 - f. Terminal air box reheat coil piping or wiring is complete.
 - g. Terminal air box control wiring is complete and all control boxes are closed.
 2. In order to prevent the Above-Ceiling Final Observation from occurring too early, the Contractor shall review the status of the work and certify, in writing, that the work is ready for the Above-Ceiling Final Observation.
 3. It is understood that if the Architect/Engineer finds the ceilings have been installed prior to this review and prior to 7 days elapsing, the Architect/Engineer may not recommend further payments to the contractor until such time as full access has been provided.

3.3 PROJECT CLOSEOUT

- A. The following paragraphs supplement the requirements of Division 01.
- B. Final Jobsite Observation:
1. In order to prevent the Final Jobsite Observation from occurring too early, the Contractor is required to review the completion status of the project and certify that the job is ready for the final jobsite observation.
 2. Attached to the end of this section is a typical list of items that represent the degree of job completeness expected prior to requesting a review.
 3. Upon Contractor certification that the project is complete and ready for a final observation, the Contractor shall sign the attached certification and return it to the Architect/Engineer so that the final observation can be scheduled.
 4. It is understood that if the Architect/Engineer finds the job not ready for the final observation and that additional trips and observations are required to bring the project to completion, the costs incurred by the Architect/Engineer's additional time and expenses will be deducted from the Contractor's contract retainage prior to final payment at the completion of the job.
- C. Before final payment is authorized, this Contractor must submit the following:
1. Operation and maintenance manuals with copies of approved shop drawings.
 2. Record documents including marked-up or reproducible drawings and specifications.

3. A report documenting the instructions given to the Owner's representatives complete with the number of hours spent in the instruction. The report shall bear the signature of an authorized agent of This Contractor and shall be signed by the Owner's representatives.
4. Start-up reports on all equipment requiring a factory installation inspection or start-up.
5. Provide spare parts, maintenance, and extra materials in quantities specified in individual specification sections. Deliver to project site and place in location as directed; receipt by Architect/Engineer required prior to final payment approval.

3.4 OPERATION AND MAINTENANCE MANUALS

A. General:

1. Provide an electronic copy of the O&M manuals as described below for Architect/Engineer's review and approval. The electronic copy shall be corrected as required to address the Architect/Engineer's comments. Once corrected, electronic copies and paper copies shall be distributed as directed by the Architect/Engineer.
2. Approved O&M manuals shall be completed and in the Owner's possession prior to Owner's acceptance and at least 10 days prior to instruction of operating personnel.

B. Electronic Submittal Procedures:

1. Distribution: Email the O&M manual as attachments to all parties designated by the Architect/Engineer.
2. Transmittals: Each submittal shall include an individual electronic letter of transmittal.
3. Format: Electronic submittals shall be in PDF format only. Scanned copies, in PDF format, of paper originals are acceptable. Submittals that are not legible will be rejected. Do not set any permission restrictions on files; protected, locked, or secured documents will be rejected.
4. File Names: Electronic submittal file names shall include the relevant specification section number followed by a description of the item submitted, as follows. Where possible, include the transmittal as the first page of the PDF instead of using multiple electronic files.
 - a. O&M file name: O&M.div23.contractor.YYYYMMDD
 - b. Transmittal file name: O&Mtransmittal.div23.contractor.YYYYMMDD
5. File Size: Files shall be transmitted via a pre-approved method. Larger files may require an alternative transfer method, which shall also be pre-approved.
6. Provide the Owner with an approved copy of the O&M manual on compact discs (CD), digital video discs (DVD), or flash drives with a permanently affixed label, printed with the title "Operation and Maintenance Instructions", title of the project and subject matter of disc/flash drive when multiple disc/flash drives are required.
7. All text shall be searchable.
8. Bookmarks shall be used, dividing information first by specification section, then systems, major equipment and finally individual items. All bookmark titles shall include the nomenclature used in the construction documents and shall be an active link to the first page of the section being referenced.

C. Operation and Maintenance Instructions shall include:

1. Title Page: Include title page with project title, Architect, Engineer, Contractor, all subcontractors, and major equipment suppliers, with addresses, telephone numbers, website addresses, email addresses and point of contacts. Website URLs and email addresses shall be active links in the electronic submittal.

2. Table of Contents: Include a table of contents describing specification section, systems, major equipment, and individual items.
3. Copies of all final approved shop drawings and submittals. Include Architect's/Engineer's shop drawing review comments. Insert the individual shop drawing directly after the Operation and Maintenance information for the item(s) in the review form.
4. Refer to Section 230900 for additional requirements for Temperature Control submittals.
5. Copy of final approved test and balance reports.
6. Copies of all factory inspections and/or equipment startup reports.
7. Copies of warranties.
8. Schematic electrical power/controls wiring diagrams of the equipment that have been updated for field conditions. Field wiring shall have label numbers to match drawings.
9. Dimensional drawings of equipment.
10. Capacities and utility consumption of equipment.
11. Detailed parts lists with lists of suppliers.
12. Operating procedures for each system.
13. Maintenance schedule and procedures. Include a chart listing maintenance requirements and frequency.
14. Repair procedures for major components.
15. List of lubricants in all equipment and recommended frequency of lubrication.
16. Instruction books, cards, and manuals furnished with the equipment.

3.5 INSTRUCTING THE OWNER'S REPRESENTATIVES

- A. Adequately instruct the Owner's designated representatives in the maintenance, care, and operation of all systems installed under this contract.
- B. Provide verbal and written instructions to the Owner's representatives by FACTORY PERSONNEL in the care, maintenance, and operation of the equipment and systems.
- C. Contractor shall make a DVD video recording of instructions to the Owner while explaining the system so additional personnel may view the instructions at a later date. The video recording shall be the property of the Owner.
- D. The instructions shall include:
 1. Explanation of all system flow diagrams.
 2. Explanation of all air handling systems.
 3. Temperature control system operation including calibration, adjustment and proper operating conditions of all sensors.
 4. Maintenance of equipment.
 5. Start-up procedures for all major equipment.
 6. Explanation of seasonal system changes.
- E. Notify the Architect/Engineer of the time and place for the verbal instructions to be given to the Owner's representative so a representative can attend if desired.
- F. Minimum hours of instruction for each item shall be:
 1. Refrigeration System - 2 hours.
 2. Air Handling System(s) - 8 hours.
 3. Heat Pump System - 4 hours.
 4. Exhaust System(s) - 2 hours.
 5. Temperature Controls - As defined in Section 230900.

- G. The Contractor shall prepare a detailed, written training agenda and submit it to the Architect/Engineer a minimum of two weeks prior to the formal training for approval. The written agenda shall include specific training points within the items described above. For example: how to adjust setpoints, troubleshooting, proper start-up, proper shut-down, seasonal changes, draining, venting, changing filters, changing belts, etc. Failure to provide and follow an approved training agenda may result in additional training required at the expense of the Contractor.
- H. Operating Instructions:
 - 1. Contractor is responsible for all instructions to the Owner's representatives for the mechanical and control systems.
 - 2. If the Contractor does not have staff that can adequately provide the required instructions the Contractor shall include in the bid an adequate amount to reimburse the Owner for the Architect/Engineer to perform these services.

3.6 SYSTEM STARTING AND ADJUSTING

- A. The mechanical systems shall be complete and operating. System startup, testing, adjusting, and balancing to obtain satisfactory system performance is the responsibility of the Contractor. This includes calibration and adjustments of all controls, noise level adjustments and final comfort adjustments as required.
- B. Complete all manufacturer-recommended startup procedures and checklists to verify proper motor rotation, electrical power voltage is within equipment limitations, equipment controls maintain pressures and temperatures within acceptable ranges, all filters and protective guards are in-place, acceptable access is provided for maintenance and servicing, and equipment operation does not pose a danger to personnel or property.
- C. Operate all HVAC systems continuously for at least one week prior to occupancy to bring construction materials to suitable moisture levels. Areas with mechanical cooling shall be maintained below 60% RH.
- D. Contractor shall adjust the mechanical systems and controls at season changes during the one year warranty period, as required, to provide satisfactory operation and to prove performance of all systems in all seasons.
- E. All operating conditions and control sequences shall be tested during the start-up period. Test all interlocks, safety shutdowns, controls, and alarms.
- F. The Contractor, subcontractors, and equipment suppliers shall have skilled technicians to ensure that all systems perform properly. If the Architect/Engineer is requested to visit the job site for trouble shooting, assisting in start-up, obtaining satisfactory equipment operation, resolving installation and/or workmanship problems, equipment substitution issues or unsatisfactory system performance, including call backs during the warranty period, through no fault of the design; the Contractor shall reimburse the Owner on a time and materials basis for services rendered at the Architect/Engineer's standard hourly rates in effect when the services are requested. The Contractor shall pay the Owner for services required that are product, installation or workmanship related. Payment is due within 30 days after services are rendered.

3.7 RECORD DOCUMENTS

- A. The following paragraphs supplement Division 01 requirements.

- B. Maintain at the job site a separate and complete set of mechanical drawings and specifications with all changes made to the systems clearly and permanently marked in complete detail.
- C. Mark drawings to indicate revisions to piping and ductwork, size and location, both exterior and interior; including locations of coils, dampers, other control devices, filters, and other units requiring periodic maintenance or repair; actual equipment locations, dimensioned from column lines; actual inverts and locations of underground piping; concealed equipment, dimensioned from column lines; mains and branches of piping systems, with valves and control devices located and numbered, concealed unions located, and with items requiring maintenance located (e.g., traps, strainers, expansion compensators, tanks, etc.); Change Orders; concealed control system devices.
- D. Refer to Section 230900 for additional requirements for Temperature Control documents.
- E. Before completion of the project, a set of reproducible mechanical drawings will be given to the Contractor for transfer of all as-built conditions from the paper set maintained at the job site. All marks on reproducibles shall be clear and permanent.
- F. Mark specifications to show approved substitutions; Change Orders, and actual equipment and materials used.
- G. Record changes daily and keep the marked drawings available for the Architect/Engineer's examination at any normal work time.
- H. Upon completing the job, and before final payment is made, give the marked-up drawings to the Architect/Engineer.

3.8 PAINTING

- A. This Contractor shall paint the following items:
 - 1. Piping exposed in kitchen
- B. Paint all equipment that is marred or damaged prior to the Owner's acceptance. Paint and color shall match original equipment paint and shall be obtained from the equipment supplier if available.
- C. Equipment in finished areas that will be painted to match the room decor will be painted by others. Should this Contractor install equipment in a finished area after the area has been painted, the Contractor shall have the equipment and all its supports, hangers, etc., painted to match the room decor.
- D. Equipment cabinets, casings, covers, metal jackets, etc., in equipment rooms or concealed spaces, shall be furnished in standard or prime finish, free from scratches, abrasions, chips, etc.
- E. Equipment in occupied spaces, or if standard to the unit, shall have a baked primer with baked enamel finish coat free from scratches, abrasions, chips, etc. If color option is specified or is standard to the unit, this Contractor shall, before ordering, verify with the Architect/Engineer the color preference and furnish this color.
- F. Paint all outdoor uninsulated steel piping the color selected by Owner or Architect/Engineer.

- G. After surfaces have been thoroughly cleaned and are free of oil, dirt, and other foreign matter; paint all pipes and equipment with the following:
1. Bare Metal Surfaces - Apply one coat of primer suitable for the metal being painted. Finish with two coats of Alkyd base enamel paint.
 2. Insulated Surfaces - Paint insulation jackets with two coats of semi-gloss acrylic latex paint.
 3. Color of paint shall be as follows:
 - a. All piping in mechanical room:
 - b. Piping exposed in kitchen:
 - 1) All Piping: White

3.9 ADJUST AND CLEAN

- A. Thoroughly clean all equipment and systems prior to the Owner's final acceptance of the project. Clean all foreign paint, grease, oil, dirt, labels, stickers, and other foreign material from all equipment.
- B. Clean all drain pans and areas where moisture is present. Immediately report any mold, biological growth, or water damage.
- C. Remove all rust, scale, dirt, oils, stickers and thoroughly clean exterior of all exposed bare metal ductwork, piping, hangers, and accessories.
- D. Remove all rubbish, debris, etc., accumulated during construction from the premises.

3.10 SPECIAL REQUIREMENTS

- A. Contractor shall coordinate the installation of all equipment, valves, dampers, operators, etc., with other trades to maintain clear access area for servicing.
- B. All equipment shall be installed in such a way to maximize access to parts needing service or maintenance. Review the final field location, placement, and orientation of equipment with the Owner's designated representative prior to setting equipment.
- C. Installation of equipment or devices without regard to coordination of access requirements and confirmation with the Owner's designated representative will result in removal and reinstallation of the equipment at the Contractor's expense.

3.11 IAQ MAINTENANCE FOR OCCUPIED FACILITIES UNDER CONSTRUCTION

- A. Contractors shall make all reasonable efforts to prevent construction activities from affecting the air quality of the occupied areas of the building or outdoor areas near the building. These measures shall include, but not be limited to:
 1. All contractors shall endeavor to minimize the amount of contaminants generated during construction. Methods to be employed shall include, but not be limited to:
 - a. Minimizing the amount of dust generated.
 - b. Reducing solvent fumes and VOC emissions.

- c. Maintain good housekeeping practices, including sweeping and periodic dust and debris removal. There should be no visible haze in the air.
 - d. Protect stored on-site and installed absorptive materials from moisture damage.
2. Request that the Owner designate an IAQ representative.
 3. Review and receive approval from the Owner's IAQ representative for all IAQ-related construction activities and negative pressure containment plans.
 4. Inform the IAQ representative of all conditions that could adversely impact IAQ, including operations that will produce higher than normal dust production or odors.
 5. Schedule activities that may cause IAQ conditions that are not acceptable to the Owner's IAQ representative during unoccupied periods.
 6. Request copies of and follow all of the Owner's IAQ and infection control policies.
 7. Unless no other access is possible, the entrance to construction site shall not be through the existing facility.
 8. To minimize growth of infectious organisms, do not permit damp areas in or near the construction area to remain for over 24 hours.
 9. In addition to the criteria above, provide measures as recommended in the SMACNA "IAQ Guidelines for Occupied Buildings Under Construction".
 10. If permanently installed air handlers are used to serve both construction and occupied areas, all return grilles throughout construction areas shall be sealed to prevent air from construction areas being supplied to occupied areas.
 11. If permanently installed air handlers are used during construction to serve only construction areas and do not supply air to adjacent occupied areas, MERV 8 filtration media shall be used to protect each return air grille or opening. The intent of this will be to prevent construction dust and debris from entering any return or supply air ductwork in the facility. All filtration media shall be replaced immediately prior to occupancy.

3.12 MAINTAINING CLEAN DUCTWORK THROUGHOUT CONSTRUCTION

- A. Throughout the duration of construction, all ductwork shall be capped or sealed with sheet metal caps, polyethylene film, or other airtight protective to keep dust, dirt, and construction debris out of ducts. Similar means shall be used to seal air-side connections of HVAC equipment to include, but not limited to, air handling units, fans, terminal air boxes, fan coil units, cabinet heaters, blower coils, and the like.
- B. When air terminal devices are installed, contractors shall seal all supply, return, and exhaust grilles with polyethylene film or other airtight protective to keep dust, dirt, and construction debris out of ducts.
- C. Should HVAC equipment be started during construction, Contractor shall remove airtight protectives and shall install one-inch thick MERV 8 filter media over all return and exhaust grilles to prevent dust, dirt, and construction debris from entering ductwork. Filter media shall cover the entire grille face and shall be secured such that air cannot bypass filter media.
- D. Should filter media become laden with dust and dirt, Contractor shall replace filter media with new media to prevent damage to air distribution system and equipment.
- E. The following steps shall be taken during testing, adjusting, and balancing of each air system:
 1. All construction activities in all spaces served by the air system shall stop.
 2. All airtight protectives and temporary filter media shall be removed from all portions of the air system.
 3. Testing, adjusting, and balancing work shall not commence until all construction activity is stopped and all airtight protectives and temporary filter media is removed.

4. Once testing, adjusting, and balancing work is complete for the air system, airtight protectives or temporary filter media shall be installed over all ductwork openings and air terminals on the air system prior to resuming construction activities in any spaces served by the air system.
- F. The Owner shall agree the building is sufficiently clean prior to the removal of any filtration media and airtight protectives from air terminal devices.

READINESS CERTIFICATION PRIOR TO FINAL JOBSITE OBSERVATION

To prevent the final job observation from occurring too early, we require that the Contractor review the completion status of the project and, by copy of this document, certify that the job is indeed ready for the final job observation. The following is a typical list of items that represent the degree of job completeness expected prior to your requesting a final job observation.

1. Penetrations fire sealed and labeled in accordance with specifications.
2. All air handling units operating and balanced.
3. All fans shall be operating and balanced.
4. All miscellaneous mechanical systems (unit heaters, fan coil units, cabinet heaters, etc.) operating.
5. All temperature control systems operating, programmed and calibrated.
6. Pipe insulation complete, pipes labeled and valves tagged.
7. Fire damper and fire/smoke damper access doors labeled in accordance with specifications.

Accepted by:

Prime Contractor _____

By _____ Date _____

Upon Contractor certification that the project is complete and ready for a final job observation, we require the Contractor to sign this agreement and return it to the Architect/Engineer so that the final observation can be scheduled.

It is understood that if the Architect/Engineer finds the job not ready for the final observation and that additional trips and observations are required to bring the project to completion, the costs incurred by the Architect/Engineers for additional time and expenses will be deducted from the Contractor's contract retainage prior to final payment at the completion of the job.

END OF SECTION 230500

SECTION 230503 - THROUGH PENETRATION FIRESTOPPING

PART 1 - GENERAL

1.1 SECTION INCLUDES

- A. Through-Penetration Firestopping.

1.2 QUALITY ASSURANCE

- A. Manufacturer: Company specializing in manufacturing products specified in this Section.
- B. Installer: Individuals performing work shall be certified by the manufacturer of the system selected for installation.

1.3 REFERENCES

- A. UL 263 - Fire Tests of Building Construction and Materials
- B. UL 723 - Surface Burning Characteristics of Building Materials
- C. ANSI/UL 1479 - Fire Tests of Through Penetration Firestops
- D. UL 2079 - Tests for Fire Resistance of Building Joint Systems
- E. UL Fire Resistance Directory Through Penetration Firestop Systems (XHEZ)
- F. Intertek / Warnock Hersey - Directory of Listed Products
- G. ASTM E84 - Standard Test Method for Surface Burning Characteristics of Building Materials
- H. ASTM E814 - Standard Test Method for Fire Tests of Through-Penetration Firestops
- I. The Building Officials and Code Administrators National Building Code
- J. 1997 Uniform Building Code
- K. 2018 International Building Code
- L. NFPA 5000 - Building Construction Safety Code

1.4 SUBMITTALS

- A. Submit under provisions of Section 230500.
- B. Submit Firestopping Installers Certification for all installers on the project.
- C. Shop Drawings: Submit for each condition requiring firestopping. Include descriptions of the specific penetrating item, actual wall/floor construction, manufacturer's installation instructions, and UL or Intertek / Warnock Hersey Assembly number.

- D. Through-Penetration Firestop System Schedule: Indicate locations of each through-penetration firestop system, along with the following information:
1. Types of penetrating items.
 2. Types of constructions penetrated, including fire-resistance ratings and, where applicable, thicknesses of construction penetrated.
 3. Through-penetration firestop systems for each location identified by firestop design designation of qualified testing and inspecting agency.
 4. F ratings for each firestop system.
- E. Maintain a notebook on the job site at all times that contains copies of approved submittals for all through penetration firestopping to be installed. Notebook shall be made available to the Authority Having Jurisdiction at their request and turned over to the Owner at the end of construction as part of the O&M Manuals.

1.5 DELIVERY, STORAGE, AND HANDLING

- A. Store, protect and handle products on site. Accept material on site in factory containers and packing. Inspect for damage. Protect from deterioration or damage due to moisture, temperature changes, contaminants, or other causes. Follow manufacturer's instructions for storage.
- B. Install material prior to expiration of product shelf life.

1.6 PERFORMANCE REQUIREMENTS

- A. General: For penetrations through the following fire-resistance-rated constructions, including both empty openings and openings containing penetrating items, provide through-penetration firestop systems that are produced and installed to resist spread of fire according to requirements indicated, resist passage of smoke and other gases, and maintain original fire-resistance rating of construction penetrated.
1. Fire-resistance-rated walls including fire partitions, fire barriers, and smoke barriers.
 2. Fire-resistance-rated horizontal assemblies including floors, floor/ceiling assemblies, and ceiling membranes of roof/ceiling assemblies.
- B. Rated Systems: Provide through-penetration firestop systems with the following ratings determined per UL 1479:
1. F-Rated Systems: Provide through-penetration firestop systems with F-ratings indicated, but not less than that equaling or exceeding fire-resistance rating of constructions penetrated.
 2. L-Rated Systems: Provide through-penetration firestop systems with L-ratings of not more than 5.0 CFM/sq. ft at both ambient temperature and 400F for smoke barriers.
- C. For through-penetration firestop systems exposed to light, traffic, moisture, or physical damage, provide products that, after curing, do not deteriorate when exposed to these conditions both during and after construction.
- D. For through-penetration firestop systems exposed to view, provide products with flame-spread and smoke-developed indexes of less than 25 and 450, respectively, as determined per ASTM E 84.

- E. For through-penetration firestop systems in air plenums, provide products with flame-spread and smoke-developed indexes of less than 25 and 50, respectively, as determined per ASTM E 84.

1.7 MEETINGS

- A. Pre-installation meeting: A pre-installation meeting shall be scheduled and shall include the , General Contractor, all Subcontractors associated with the installation of systems penetrating fire barriers, Firestopping Manufacturer's Representative, and the Owner.
 - 1. Review foreseeable methods related to firestopping work.
 - 2. Tour representative areas where firestopping is to be installed; inspect and discuss each type of condition and each type of substrate that will be encountered, and preparation to be performed by other trades.

1.8 WARRANTY

- A. Provide one year warranty on parts and labor.
- B. Warranty shall cover repair or replacement of firestop systems which fail in joint adhesion, cohesion, abrasion resistance, weather resistance, extrusion resistance, migration resistance, stain resistance, general durability, or appear to deteriorate in any manner not clearly specified by the manufacturer as an inherent quality of the material.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. Products: Subject to compliance with requirements, provide one of the through-penetration firestop systems indicated for each application that are produced by one of the following manufacturers. All firestopping systems installed shall be provided by a single manufacturer.
 - 1. 3M; Fire Protection Products Division.
 - 2. Hilti, Inc.
 - 3. RectorSeal Corporation, Metacaulk.
 - 4. Tremco; Sealant/Weatherproofing Division.
 - 5. Johns-Manville.
 - 6. Specified Technologies Inc. (S.T.I.)
 - 7. Spec Seal Firestop Products
 - 8. Dow Corning Corp.

2.2 THROUGH PENETRATION FIRESTOP SYSTEMS

- A. Provide materials and systems classified by or listed by Intertek / Warnock Hersey to provide firestopping equal to time rating of construction being penetrated.
- B. All firestopping materials shall be free of asbestos, lead, PCB's, and other materials that would require hazardous waste removal.
- C. Firestopping shall be flexible to allow for normal penetrating item movement due to expansion and contraction.

- D. Firestopping systems for plumbing and wet pipe sprinkler piping shall be moisture resistant.
- E. Provide firestopping systems capable of supporting floor loads where systems are exposed to possible floor loading or traffic.
- F. Provide firestopping systems allowing continuous insulation for all insulated pipes.
- G. Provide firestopping systems classified by UL or listed by Intertek / Warnock Hersey for penetrations through all fire rated construction. Firestopping systems shall be selected from the UL or listed by Intertek / Warnock Hersey Fire Resistance Directory Category XHEZ based on substrate construction and penetrating item size and material and shall fall within the range of numbers listed:

1. Non-Combustible Framed Walls - 1 or 2 Hour Rated:

- a. F Rating = Wall Rating
- b. L Rating = Penetrations in Smoke Barriers

Penetrating Item	UL System No.
No Penetrating Item	WL 0000-0999*
Metallic Pipe or Conduit	WL 1000-1999
Non-Metallic Pipe or Conduit	WL 2000-2999
Electrical Cables	WL 3000-3999
Cable Trays	WL 4000-4999
Insulated Pipes	WL 5000-5999
Bus Duct and Misc. Electrical	WL 6000-6999
Duct without Damper and Misc. Mechanical	WL 7000-7999
Multiple Penetrations	WL 8000-8999

*Alternate method of firestopping is patching opening to match original rated construction.

2. Concrete or Masonry Floors and Walls - 1 or 2 Hour Rated:

- a. F Rating = Wall/Floor Rating
- b. L Rating = Penetrations in Smoke Barriers

Penetrating Item	UL System No.
No Penetrating Item	CAJ 0000-0999*
Metallic Pipe or Conduit	CAJ 1000-1999
Non-Metallic Pipe or Conduit	CAJ 2000-2999
Electrical Cables	CAJ 3000-3999
Cable Trays	CAJ 4000-4999
Insulated Pipes	CAJ 5000-5999
Bus Duct and Misc. Electrical	CAJ 6000-6999
Duct without Damper and Misc. Mechanical	CAJ 7000-7999
Multiple Penetrations	CAJ 8000-8999

*Alternate method of firestopping is patching opening to match original rated construction.

- H. Any opening in walls or floors not covered by the listed series of numbers shall be coordinated with the firestopping manufacturer.

- I. Any openings in floors or walls not described in the UL or listed by Intertek / Warnock Hersey Fire Resistance Directory, or outlined in manufacturer's information shall be sealed in a manner agreed upon by the Firestopping Manufacturer, Owner, and the Authority Having Jurisdiction.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Ensure all surfaces that contact seal materials are free of dirt, dust, grease, oil, rust, or loose materials. Clean and repair surfaces as required. Remove laitance and form-release agents from concrete.
- B. Ensure substrate and penetrating items have been permanently installed prior to installing firestopping systems. Ensure penetrating items have been properly spaced and have proper clearance prior to installing firestopping systems.
- C. Surfaces to which sealing materials are to be installed must meet the selected UL or Intertek / Warnock Hersey system substrate criteria.
- D. Prime substrates where recommended in writing by through-penetration firestop system manufacturer. Confine primer to area of bond.

3.2 INSTALLATION

- A. In existing construction, provide firestopping of openings prior to and after installation of penetrating items. Remove any existing coatings on surfaces prior to firestopping installation. Temporary firestopping shall consist of packing openings with fire resistant mineral wool for the full thickness of substrate, or an alternate method approved by the Authority Having Jurisdiction. All openings shall be temporarily firestopped immediately upon their installation and shall remain so until the permanent UL or listed by Intertek / Warnock Hersey listed firestopping system is installed.
- B. Install penetration seal materials in accordance with printed instructions of the UL or Intertek / Warnock Hersey Fire Resistance Directory and with the manufacturer's printed application instructions.
- C. Install dams as required to properly contain firestopping materials within openings and as required to achieve required fire resistance rating. Remove combustible damming after appropriate curing.

3.3 CLEANING AND PROTECTING

- A. Clean excess fill materials adjacent to openings as Work progresses by methods and with cleaning materials that are approved in writing by through-penetration firestop system manufacturers and that do not cause damage.
- B. Provide final protection and maintain conditions during and after installation that ensure that through-penetration firestop systems are without damage or deterioration at time of Substantial Completion. If, despite such protection, damage or deterioration occurs, remove damaged or deteriorated through-penetration firestop systems immediately and install new materials to produce systems complying with specified requirements.

3.4 INSPECTION

- A. All penetrations shall be inspected by the manufacturer's representative to ensure proper installation.
- B. Access to firestop systems shall be maintained for examination by the Authority Having Jurisdiction at their request.
- C. Proceed with enclosing through-penetration firestop system with other construction only after inspection reports are issued and firestop installations comply with requirements.
- D. The Contractor shall allow for visual destructive review of 5% of installed firestop systems (minimum of one) to prove compliance with specifications and manufacturer's instructions and details. Destructive system removal shall be performed by the Contractor and witnessed by the Architect/Engineer and manufacturer's factory representative. The Architect/Engineer shall have sole discretion of which firestop system installations will be reviewed. The Contractor is responsible for all costs associated with this requirement including labor and material for removing and replacing the installed firestop system. If any firestop system is found to not be installed per manufacturer's specific instructions and details, all firestop systems are subject to destructive review and replacement at the Architect/Engineer's discretion and the Contractor's expense.

END OF SECTION 230503

SECTION 230505 - HVAC DEMOLITION FOR REMODELING

PART 1 - GENERAL

1.1 SECTION INCLUDES

- A. Mechanical demolition.
- B. Cutting and Patching.

PART 2 - PRODUCTS

2.1 MATERIALS AND EQUIPMENT

- A. Materials and equipment shall be as specified in individual Sections.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. THE DRAWINGS ARE INTENDED TO INDICATE THE GENERAL SCOPE OF WORK AND DO NOT SHOW EVERY PIPE, DUCT, OR PIECE OF EQUIPMENT THAT MUST BE REMOVED. THE CONTRACTOR SHALL VISIT THE SITE AND VERIFY CONDITIONS PRIOR TO SUBMITTING A BID.
- B. Where walls, ceilings, etc., are shown as being removed on general drawings, the Contractor shall remove all mechanical equipment, devices, fixtures, piping, ducts, systems, etc., from the removed area.
- C. Where ceilings, walls, partitions, etc., are temporarily removed and replaced by others, This Contractor shall remove, store, and replace equipment, devices, fixtures, pipes, ducts, systems, etc.
- D. Verify that abandoned utilities serve only abandoned equipment or facilities. Extend services to facilities or equipment that shall remain in operation following demolition.
- E. Coordinate work with all other Contractors and the Owner. Schedule removal of equipment to avoid conflicts.
- F. This Contractor shall verify all existing equipment sizes and capacities where equipment is scheduled to be replaced or modified, prior to ordering new equipment.
- G. Bid submittal shall mean the Contractor has visited the project site and verified existing conditions and scope of work.

3.2 PREPARATION

- A. Disconnect mechanical systems in walls, floors, and ceilings scheduled for removal.

- B. Provide temporary connections to maintain existing systems in service during construction. When work must be performed on operating equipment, use personnel experienced in such operations.
- C. Existing Heating System: Maintain existing system in service until new system is complete and ready for service. Drain system only to make switchovers and connections. Obtain permission from the Owner at least 48 hours before partially or completely draining system. Minimize outage duration.

3.3 DEMOLITION AND EXTENSION OF EXISTING MECHANICAL WORK

- A. Demolish and extend existing mechanical work under provisions of Division 2 and this Section.
- B. Remove, relocate, and extend existing installations to accommodate new construction.
- C. Remove abandoned ducts and piping to source of supply and/or main lines.
- D. Remove exposed abandoned pipes and ducts, including abandoned pipes and ducts above accessible ceilings. Cut ducts flush with walls and floors, cap duct that remains, and patch surfaces. Cut pipes above ceilings, below floors and behind walls. Cap remaining lines. Repair building construction to match original. Remove all clamps, hangers, supports, etc. associated with pipe and duct removal.
- E. Disconnect and remove mechanical devices and equipment serving equipment that has been removed.
- F. Repair adjacent construction and finishes damaged during demolition and extension work.
- G. Maintain access to existing mechanical installations which remain. Modify installation or provide access panels as appropriate.
- H. Remove unused sections of supply and return air ductwork back to mains. Patch opening with sheet metal and seal airtight. Patch existing insulation to match existing. Where existing ductwork is to be capped and reused, locate the end cap within 6" of the last branch. End caps shall be 3" pressure class and seal class "A".
- I. Extend existing installations using materials and methods compatible with existing installations, or as specified.

3.4 CUTTING AND PATCHING

- A. This Contractor is responsible for all penetrations of existing construction required to complete the work of this project. Refer to Section 230529 for additional requirements.
- B. Penetrations in existing construction should be reviewed carefully prior to proceeding with any work.
- C. Penetrations shall be neat and clean with smooth and/or finished edges. Core drill where possible for clean opening.
- D. Repair existing construction as required after penetration is complete to restore to original condition. Use similar materials and match adjacent construction unless otherwise noted or agreed to by the Architect/Engineer prior to start of work.

- E. Floor slabs may contain conduit systems. This Contractor is responsible for taking any measures required to ensure no conduits or other services are damaged. This includes X-ray or similar non-destructive means.
- F. This Contractor is responsible for all costs incurred in repair, relocations, or replacement of any cables, conduits, or other services if damaged without proper investigation.

3.5 CLEANING AND REPAIR

- A. Clean and repair existing materials and equipment which remain or are to be reused.
- B. Clean all systems adjacent to project which are affected by the dust and debris caused by this construction.
- C. MECHANICAL ITEMS REMOVED AND NOT RELOCATED REMAIN THE PROPERTY OF THE OWNER. CONTRACTOR SHALL PLACE ITEMS RETAINED BY THE OWNER IN A LOCATION COORDINATED WITH THE OWNER. THE CONTRACTOR SHALL DISPOSE OF MATERIAL THE OWNER DOES NOT WANT TO REUSE OR RETAIN FOR MAINTENANCE PURPOSES.

3.6 SPECIAL REQUIREMENTS

- A. Install temporary filter media over outside air intakes which are within 100 feet of the limits of construction. This Contractor shall complete any cleaning required for existing systems which are affected by construction dust and debris.
- B. Review locations of all new penetrations in existing floor slabs or walls. Determine construction type and review for possible interferences. Bring all concerns to the attention of the Architect/Engineer before proceeding.

END OF SECTION 230505

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 230513 - MOTORS

PART 1 - GENERAL

1.1 SECTION INCLUDES

- A. Single Phase and Three Phase Electric Motors.

1.2 REFERENCES

- A. AFBMA 9 - Load Ratings and Fatigue Life for Ball Bearings.
- B. AFBMA 11 - Load Ratings and Fatigue Life for Roller Bearings.
- C. ANSI/ASHRAE/IES Standard 90.1 (latest published edition) - Energy Standard for Buildings Except Low-Rise Residential Buildings.
- D. ANSI/IEEE 112 - Test Procedure for Polyphase Induction Motors and Generators.
- E. ANSI/NEMA MG 1 - Motors and Generators.
- F. ANSI/NFPA 70 - National Electrical Code.
- G. Energy Independence and Security Act of 2007.

1.3 SUBMITTALS

- A. Submit shop drawings under provisions of Section 230500. Include nominal efficiency and power factor for all premium efficiency motors. Efficiencies must meet or exceed the nominal energy efficiency levels presented below.
- B. Submit shop drawings for all three phase motors.
- C. Submit motor data with equipment when motor is installed by the manufacturer at the factory.
- D. Submit shaft grounding rings or brushes or ceramic bearings for all motors as required.

1.4 DELIVERY, STORAGE, AND HANDLING

- A. Protect motors stored on site from weather and moisture by maintaining factory covers and suitable weatherproof coverings. For extended outdoor storage, follow manufacturer's recommendations for equipment and motor.

1.5 OPERATION AND MAINTENANCE DATA

- A. Submit operation and maintenance data including assembly drawings, bearing data including replacement sizes, and lubrication instructions.

1.6 QUALIFICATIONS

- A. Manufacturer: Company specializing in the manufacture of commercial and industrial motors and accessories, with a minimum of three years documented manufacturing experience.

PART 2 - PRODUCTS

2.1 MOTORS - GENERAL CONSTRUCTION AND REQUIREMENTS

- A. Refer to the drawings for required electrical characteristics. Voltage is generally specified and scheduled as distribution voltage. Motor submittals may be based on utilization voltage if it corresponds to the correct distribution voltage.

Distribution/Nominal Voltage	Utilization Voltage
120	115
208	200
240	230
277	265
480	460

- B. Design motors for continuous operation in 40°C environment, and for temperature rise in accordance with ANSI/NEMA MG 1 limits for insulation class, service factor, and motor enclosure type.
- C. Visible Nameplate: Indicating horsepower, voltage, phase, hertz, RPM, full load amps, locked rotor amps, frame size, manufacturer's name and model number, service factor, power factor, insulation class.
- D. Electrical Connection: Boxes, threaded for conduit. For fractional horsepower motors where connection is made directly, provide conduit connection in end frame.
- E. Unless otherwise indicated, motors 3/4 HP and smaller shall be single phase, 60 hertz, open drip-proof or totally enclosed fan-cooled type.
- F. Unless otherwise indicated, motors 1 HP and larger shall be three phase, 60 hertz, squirrel cage type, NEMA Design Code B (low current in-rush, normal starting torque), open drip-proof or totally enclosed fan-cooled type.
- G. Each contractor shall set all motors furnished by him.
- H. All motors shall have a minimum service factor of 1.15.
- I. All motors shall have ball or roller bearings with a minimum L-10 fatigue life of 150,000 hours in direct-coupled applications and 50,000 hours for belted applications. Belted rating shall be based on radial loads and pulley sizes called out in NEMA MG1-14.43.
- J. Bearings shall be sealed type for 10 HP and smaller motors. Bearings shall be regreasable type for larger motors.
- K. Aluminum end housings are not permitted on motors 15 HP or larger.

L. Motor Driven Equipment:

1. No equipment shall be selected or operate above 90% of its motor nameplate rating. Motor size may not be increased to compensate for equipment with efficiency lower than that specified.
2. If a larger motor than specified is required on equipment, the contractor supplying the equipment is responsible for all additional costs due to larger starters, wiring, etc.

M. Provide all belted motors with a means of moving and securing the motor to tighten belts. Motors over 2 HP shall have screw type tension adjustment. Motors over 40 HP shall have dual screw adjusters. Slide bases shall conform to NEMA standards.

N. Motors for fans and pumps 1/12 HP or greater and less than 1 HP shall be electronically-commutated motors or shall have a minimum motor efficiency of 70% when rated in accordance with DOE 10 CFR 431. These motors shall also have the means to adjust motor speed for either balancing or remote control. Belt-driven fans may use sheave adjustments for airflow balancing in lieu of varying motor speed.

2.2 ELECTRONICALLY COMMUTATED MOTORS (ECM)

- A. Motor shall be variable speed, constant torque, brushless DC motor for direct-drive applications. Electronics shall be encapsulated for moisture protection and shall integral surge protection. Motor shall be pre-wired for specific voltage and phase.
- B. Motor frame shall be NEMA 48; UL recognized components shall be provided for the motor construction.
- C. All EC motors shall be a minimum of 85% efficient at all speeds.
- D. Motors shall be permanently lubricated; utilize ball bearings to match with the connected driven equipment.
- E. Provide motor with on-board motor control module. Motor speed shall be limited to provide electronic over current protection. Starter shall provide soft start to reduce inrush current and shall be controllable from 20% to 100% of full rated speed.
- F. Operational mode shall be as scheduled and shall be one of the following:
 1. Constant Flow
 2. Constant Temperature
 3. Constant Pressure

2.3 PREMIUM EFFICIENCY MOTORS (INCLUDING MOST 3-PHASE GENERAL PURPOSE MOTORS)

- A. All motors, unless exempted by EPCa legislation that became federal law on December 19, 2010, shall comply with the efficiencies listed in that standard, which are reprinted below. These match the 2010 NEMA premium efficiency ratings. All ratings listed are nominal full load efficiencies, verified in accordance with IEEE Standard 112, Test Method B. Average expected (not guaranteed minimum) power factors shall also be at least the following:

HP	Full-Load Efficiencies %			Totally Enclosed Fan Cooled		
	Open Drip-Proof					
	1200 rpm	1800 rpm	3600 rpm	1200 rpm	1800 rpm	3600 rpm
1.0	82.5	85.5	77.0	82.5	85.5	77.0
1.5	86.5	86.5	84.0	87.5	86.5	84.0
2.0	87.5	86.5	85.5	88.5	86.5	85.5
3.0	88.5	89.5	85.5	89.5	89.5	86.5
5.0	89.5	89.5	86.5	89.5	89.5	88.5
7.5	90.2	91.0	88.5	91.0	91.7	89.5
10.0	91.7	91.7	89.5	91.0	91.7	90.2
15.0	91.7	93.0	90.2	91.7	92.4	91.0
20.0	92.4	93.0	91.0	91.7	93.0	91.0
25.0	93.0	93.6	91.7	93.0	93.6	91.7
30.0	93.6	94.1	91.7	93.0	93.6	91.7
40.0	94.1	94.1	92.4	94.1	94.1	92.4
50.0	94.1	94.5	93.0	94.1	94.5	93.0
60.0	94.5	95.0	93.6	94.5	95.0	93.6
75.0	94.5	95.0	93.6	94.5	95.4	93.6
100.0	95.0	95.4	93.6	95.0	95.4	94.1
125.0	95.0	95.4	94.1	95.0	95.4	95.0
150.0	95.4	95.8	94.1	95.8	95.8	95.0
200.0	95.4	95.8	95.0	95.8	96.2	95.4
250.0	95.4	95.8	95.0	95.8	96.2	95.8
300.0	95.4	95.8	95.4	95.8	96.2	95.8
350.0	95.4	95.8	95.4	95.8	96.2	95.8
400.0	95.8	95.8	95.8	95.8	96.2	95.8
450.0	96.2	96.2	95.8	95.8	96.2	95.8
500.0	96.2	96.2	95.8	95.8	96.2	95.8

- B. Motor nameplate shall be noted with the above ratings.

2.4 MOTORS ON VARIABLE FREQUENCY DRIVES

- A. All motors driven by VFDs shall be premium efficiency type.
- B. Motors shall be designed for use with VFDs in variable torque applications with 1.15 service factor. Motors shall not be equipped with auxiliary blowers.
- C. Motors driven by VFDs shall have Class F or H insulation and be designated by the motor manufacturer to be suitable for inverter duty service in accordance with NEMA MG 1 Section IV, "Performance Standards Applying to All Machines," Part 31 "Definite-Purpose Inverter-Fed Polyphase Motors.
- D. All 480 volt motors driven by VFDs shall be provided with shaft grounding rings or grounding brushes or ceramic bearings as a means to protect bearings from adverse shaft currents.
- Providing grounding rings internal to the motor housing is an acceptable solution, provided the motor is affixed with a label clearly indicating the presence of a grounding assembly. The grounding ring shall be listed for 40,000 hours of motor service and shall be accessible via the drive endplate.
 - Motor shafts 2" and larger require shaft grounding on the drive end and the non-drive end. This Contractor shall ensure (via field observation and measurement) that the shaft is effectively grounded upon startup.

2.5 SHEAVES

- A. All sheaves shall conform to NEMA Standard MG1-14.42, which lists minimum diameters and maximum overhangs. Locate motors to minimize overhang.
- B. When replacing sheaves, use sheaves of at least the originally supplied sizes.
- C. Contractor responsible for motor shall also be responsible for replacement sheaves. Coordinate with testing and balancing of the equipment.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. All rotating shafts and/or equipment shall be completely guarded from all contact. Partial guards and/or guards that do not meet all applicable OSHA standards are not acceptable. Contractor is responsible for providing this guarding if it is not provided with the equipment supplied.
- B. For flexible coupled drive motors, mount coupling to the shafts in accordance with the coupling manufacturer's recommendations. Align shafts to manufacturer's requirements or within 0.002 inch per inch diameter of coupling hub.
- C. For belt drive motors, mount sheaves on the appropriate shafts per manufacturer's instructions. Use a straight edge to check alignment of the sheaves. Reposition sheaves as necessary so the straight edge contacts both sheave faces squarely. After sheaves are aligned, loosen the adjustable motor base so the belt(s) can be added, and tighten the base so the belt tension is in accordance with the drive manufacturer's recommendations. Frequently check belt tension and adjust if necessary during the first day of operation and again after 80 hours of operation.

END OF SECTION 230513

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 230529 - HVAC SUPPORTS AND ANCHORS

PART 1 - GENERAL

1.1 SECTION INCLUDES

- A. Hangers, Supports, and Associated Anchors.
- B. Flashing and Sealing of Equipment and Pipe Stacks.
- C. Cutting of Openings.
- D. Escutcheon Plates and Trim.

1.2 REFERENCES

- A. ANSI/ASME B31.1 - Power Piping.
- B. MSS SP-58 - Pipe Hangers and Supports - Materials, Design, Manufacture, Selection, Application, and Installation.
- C. MSS SP 69 - Pipe Hangers and Supports - Selection and Application.
- D. MSS SP 89 - Pipe Hangers and Supports - Fabrication and Installation Practices.
- E. MSS SP-127 - Bracing for Piping Systems Seismic-Wind-Dynamic Design, Selection, Application

1.3 SUBMITTALS

- A. Submit shop drawings and product data under provisions of Section 230500. Include plastic pipe manufacturers' support spacing requirements.

1.4 WORK FURNISHED BUT INSTALLED UNDER OTHER SECTIONS

- A. Furnish sleeves and hanger inserts to General Contractor for placement into formwork.

PART 2 - PRODUCTS

2.1 HANGER RODS

- A. Hanger rods for single rod hangers shall conform to the following:
 - 1. Steel Pipe:
 - a. Hanger Rod Diameter:
 - 1) 2-1/2" and smaller: 3/8"
 - 2) 3" through 3-5/8": 3/8"
 - 3) 4" through 6": 1/2"
 - 4) 8": 5/8"

- 5) 10": 3/4"
- 6) 12": 7/8"
- 7) 14" and 16": 1"
- 8) 18" and 24": 1-1/4"

2. Copper, Plastic and Fiberglass Reinforced Pipe:

a. Hanger Rod Diameter:

- 1) 2-1/2" and smaller: 3/8"
- 2) 3") through 3-5/8": 3/8"
- 3) 4") through 6": 1/2"
- 4) 8": 5/8"
- 5) 10": 3/4"
- 6) 12": 7/8"
- 7) 14" and 16": 1"
- 8) 18" and 24": 1-1/4"

- B. Rods for double rod hangers may be reduced one size. Minimum rod diameter is 3/8 inches.
- C. Hanger rods and accessories used in mechanical spaces or otherwise dry areas shall have ASTM B633 electro-plated zinc finish.
- D. All hanger rods, nuts, washers, clevises, etc., in damp areas shall have ASTM A123 hot-dip galvanized finish applied after fabrication. This applies to the following areas:

1. Exterior.

2.2 PIPE AND STRUCTURAL SUPPORTS

A. General:

1. Pipe hangers, clamps, and supports shall conform to Manufacturers Standardization Society MSS SP-58, 69, 89, and 127 (where applicable).
2. On all insulated piping, provide at each support an insert of same thickness and contour as adjoining insulation, between the pipe and insulation jacket, to prevent insulation from sagging and crushing. Refer to insulation specifications for materials and additional information.

B. Vertical Supports:

1. Support and laterally brace vertical pipes at every floor level in multi-story structures, unless otherwise noted by applicable codes, but never at intervals over 15 feet. Support vertical pipes with riser clamps installed below hubs, couplings, or lugs. Provide sufficient flexibility to accommodate expansion and contraction to avoid compromising fire barrier penetrations or stressing piping at fixed takeoff locations.

a. Products:

- 1) Eaton Fig B3373 Series
- 2) nVent 510 Series
- 3) Anvil Fig. 90

2. Cold Pipe: Place restrained neoprene mounts beneath vertical pipe riser clamps to prevent sweating of cold pipes. Select neoprene mounts based on the weight of the pipe to be supported. Insulate over mounts.

a. Products:

- 1) Mason RBA, RCA or RDA
- 2) Mason BR

3. Cold Pipe Alternative: Insulated pipe riser clamp with no thermal bridging between clamp and pipe; water repellant calcium silicate insulation material adhered inside the clamp; ASTM A653 galvanized steel clamp.

a. Products:

- 1) Pipeshields E100

4. Wall supports shall be used where vertical height of structure exceeds minimum spacing requirements. Install wall supports at same spacing as hangers or strut supports along vertical length of pipe runs. Wall supports shall be coordinated with the Structural Engineer.
5. Masonry Anchors: Fasten to concrete masonry units with expansion anchors or self-tapping masonry screws. For expansion anchors into hollow concrete block, use sleeve-type anchors designed for the specific application. Do not fasten in masonry joints. Do not use powder actuated fasteners, wooden plugs, or plastic inserts.

C. Hangers and Clamps:

1. Oversize all hangers, clamps, and supports on insulated piping to allow insulation and jacket to pass through unbroken. This applies to both hot and cold pipes.
2. Hangers in direct contact with bare copper pipe shall include plastic pipe insert similar to Unistrut Cush-A-Clamp, Hydra-Zorb, nVent Cushion Clamp or Eaton Vibra-Clamp within their temperature limits of -65°F to +275°F.
3. On all insulated piping, provide a semi-cylindrical metallic shield and vapor barrier jacket.
4. Ferrous hot piping 4 inches and larger shall have steel saddles tack welded to the pipe at each support with a depth not less than specified for the insulation. Factory fabricated inserts may be used.

a. Products:

- 1) Anvil Fig. 160, 161, 162, 163, 164, 165
- 2) Eaton Fig. 3160, 3161, 3162, 3163, 3164, 3165
- 3) nVent Model 630, 631, 632, 633, 634, 635

5. Unless otherwise indicated, hangers shall be as follows:

a. Clevis Type: Service: Bare Metal Pipe, Rigid Plastic Pipe, Insulated Cold Pipe, Insulated Hot Pipe - 3 inches and Smaller:

- 1) Products: Bare Steel, Plastic or Insulated Pipe:
 - a) Anvil Fig. 260

-
- b) Eaton Fig. 3100
 - c) nVent Model 400
 - 2) Products: Bare Copper Pipe:
 - a) Eaton Fig. B3104F or B3100CTC
 - b) Anvil Fig. CT65
 - c) nVent Fig. 402
 - b. Continuous Channel with Clevis Type: Service: Plastic Tubing, Flexible Hose, Soft Copper Tubing:
 - 1) Products:
 - a) Eaton Fig. B3106, with Fig. B3106V
 - b) nVent Model 104, with Model 104V
 - c) Anvil Fig. 1V
 - 6. Support may be fabricated from U-channel strut or similar shapes. Piping less than 4" in diameter shall be secured to strut with clamps of proper design and capacity as required to maintain spacing and alignment. Strut shall be independently supported from hanger drops or building structure. Size and support shall be per manufacturer's installation requirements for structural support of piping. Clamps shall not interrupt piping insulation.
 - a. Strut used in mechanical spaces or otherwise dry areas shall have ASTM B633 electro-plated zinc finish.
 - b. Strut used in damp areas listed in hanger rods shall have ASTM A123 hot-dip galvanized finish applied after fabrication.
 - 7. Unless otherwise indicated, pipe supports for use with struts shall be as follows:
 - a. Clamp Type: Service: Bare Metal Pipe, Rigid Plastic Pipe, Insulated Cold Pipe, Insulated Hot Pipe - 3 inches and smaller:
 - 1) Clamps in direct contact with copper pipe shall include plastic pipe insert similar to Unistrut Cush-A-Clamp, Hydra-Zorb, nVent Cushion Clamp or Eaton Vibra-Clamp.
 - 2) Pipes subject to expansion and contraction shall have clamps oversized to allow limited pipe movement.
 - 3) Products: Bare Steel, Plastic or Insulated Pipe:
 - a) Unistrut Fig. P1100 or P2500
 - b) Eaton Fig. B2000 or B2400
 - c) Anvil Fig. AS1200
 - d) nVent USC
 - 4) Products: Bare Copper Pipe:
 - a) Eaton Fig. BVT
 - b) nVent CADDY Cushion Clamp

D. Upper (Structural) Attachments:

1. Unless otherwise shown, upper attachments for hanger rods or support struts shall be as follows:
 - a. Concrete Anchors: Fasten to concrete using cast-in or post-installed anchors designed per the requirements of Appendix D of ACI 318-17. Post-installed anchors shall be qualified for use in cracked concrete by ACI-355.2.
 - b. Masonry Anchors: Fasten to concrete masonry units with expansion anchors or self-tapping masonry screws. For expansion anchors into hollow concrete block, use sleeve-type anchors designed for the specific application. Do not fasten in masonry joints. Do not use powder actuated fasteners, wooden plugs, or plastic inserts.
 - c. Steel Structure Welding:
 - 1) Unless otherwise noted, hangers, clips, and auxiliary support steel may be welded in lieu of bolting, clamping, or riveting to the building structural frame. Take adequate precautions during all welding operations for fire prevention and protecting walls and ceilings from smoke damage.

2.3 OPENINGS IN FLOORS, WALLS AND CEILINGS

- A. Exact locations of all openings for the installation of materials shall be determined by the Contractor and given to the General Contractor for installation or construction as the structure is built.
- B. Coordinate all openings with other Contractors.
- C. Hire the proper tradesman and furnish all labor, material and equipment to cut openings in or through existing structures, or openings in new structures that were not installed, or additional openings. Repair all spalling and damage to the satisfaction of the Architect/Engineer. Make saw cuts before breaking out concrete to ensure even and uniform opening edges.
- D. Said cutting shall be at the complete expense of each Contractor. Failure to coordinate openings with other Contractors shall not exempt the Contractor from providing openings at Contractor's expense.
- E. Do not cut structural members without written approval of the Architect or Structural Engineer.
- F. Exposed Housing Penetrations: Seal pipes with surface temperature below 150°F, penetrating housings with conical stepped, white silicone, EPDM or neoprene pipe flashings and stainless steel clamps equal to Portals Plus Pipe Boots or Pipetite.

2.4 ROOF PENETRATIONS

- A. Roof Curb Enclosure: Provide weatherproof roof curb and enclosure for duct penetrations. Refer to drawings for details.
- B. Conical Pipe Boot: Seal pipes with surface temperature below 150°F penetrating single-ply roofs with conical stepped, UV-resistant silicone, EPDM or neoprene pipe flashings and stainless steel clamps equal to Portals Plus Pipe Boots or Pipetite. Color: Black shall match roofing material.

- C. Break insulation only at the clamp for pipes between 60°F and 150°F. Seal outdoor insulation edges watertight.

2.5 ESCUTCHEON PLATES AND TRIM

- A. Fit escutcheons to all insulated or uninsulated exposed pipes passing through walls, floors, or ceilings of finished rooms.
- B. Escutcheons shall be heavy gauge, cold rolled steel, copper coated under a chromium plated finish, heavy spring clip, rigid hinge and latch.
- C. Install galvanized steel (unless otherwise indicated) trim strip to cover vacant space and raw construction edges of all rectangular openings in finished rooms. This includes pipe openings.

2.6 PIPE PENETRATIONS

- A. Seal all pipe penetrations. Seal non-rated walls and floor penetrations with grout or caulk. Backing material may be used.
- B. Seal fire rated wall and floor penetrations with fire seal system as specified.

2.7 PIPE ANCHORS

- A. Provide all items needed to allow adequate expansion and contraction of all piping. All piping shall be supported, guided, aligned, and anchored as required.
- B. Repair all piping leaks and associated damage. Pipes shall not rub on any part of the building.

2.8 FINISH

- A. Prime coat exposed steel hangers and supports. Hangers and supports in crawl spaces, pipe shafts, and suspended ceiling spaces are not considered exposed.

PART 3 - EXECUTION

3.1 HVAC SUPPORTS AND ANCHORS

- A. General Installation Requirements:
 - 1. Install all items per manufacturer's instructions.
 - 2. Coordinate the location and method of support of piping systems with all installations under other Divisions and Sections of the Specifications.
 - 3. Where pipe support members are welded to structural building framing, scrape, brush clean, and apply one coat of zinc rich primer to welding.
 - 4. Supports shall extend directly to building structure. Do not support piping from duct hangers unless coordinated with Sheet Metal Contractor prior to installation. Do not allow lighting or ceiling supports to be hung from piping supports.

B. Supports Requirements:

1. Where building structural steel is fireproofed, all hangers, clamps, auxiliary steel, etc., which attach to it shall be installed prior to application of fireproofing. Repair all fireproofing damaged during pipe installation.
2. Set all concrete inserts in place before pouring concrete.
3. Furnish, install and prime all auxiliary structural steel for support of piping systems that are not shown on the Drawings as being by others.
4. Install hangers and supports complete with lock nuts, clamps, rods, bolts, couplings, swivels, inserts and required accessories.
5. Hangers for horizontal piping shall have adequate means of vertical adjustment for alignment.

C. Pipe Requirements:

1. Support all piping and equipment, including valves, strainers, traps and other specialties and accessories to avoid objectionable or excessive stress, deflection, swaying, sagging or vibration in the piping or building structure during erection, cleaning, testing and normal operation of the systems.
2. Do not, however, restrain piping to cause it to snake or buckle between supports or to prevent proper movement due to expansion and contraction.
3. Support piping at equipment and valves so they can be disconnected and removed without further supporting the piping.
4. Piping shall not introduce strains or distortion to connected equipment.
5. Parallel horizontal pipes may be supported on trapeze hangers made of structural shapes and hanger rods; otherwise, pipes shall be supported with individual hangers.
6. Trapeze hangers may be used where ducts interfere with normal pipe hanging.
7. Provide additional supports where pipe changes direction, adjacent to flanged valves and strainers, at equipment connections and heavy fittings.
8. Provide at least one hanger adjacent to each joint in grooved end steel pipe with mechanical couplings.

D. Provided the installation complies with all loading requirements of truss and joist manufacturers, the following practices are acceptable:

1. Loads of 100 lbs. or less may be attached anywhere along the top or bottom chords of trusses or joists with a minimum 3' spacing between loads.
2. Loads greater than 100 lbs. must be hung concentrically and may be hung from top or bottom chord, provided one of the following conditions is met:
 - a. The hanger is attached within 6" from a web/chord joint.
 - b. Additional L2x2x1/4 web reinforcement is installed per manufacturer's requirements.
3. It is prohibited to cantilever a load using an angle or other structural component that is attached to a truss or joist in such a fashion that a torsional force is applied to that structural member.
4. If conditions cannot be met, coordinate installation with truss or joist manufacturer and contact Architect/Engineer.

E. After piping and insulation installation are complete, cut hanger rods back at trapeze supports so they do not extend more than 3/4" below bottom face of lowest fastener and blunt any sharp edges.

-
- F. Do not exceed 25 lbs. per hanger and a minimum spacing of 2'-0" on center when attaching to metal roof decking (limitation not required with concrete on metal deck). This 25 lbs. load and 2'-0" spacing include adjacent electrical and architectural items hanging from deck. If the hanger restrictions cannot be achieved, supplemental framing off steel framing will need to be added.
- G. Do not exceed the manufacturer's recommended maximum load for any hanger or support.
- H. Steel/Concrete Structure: Spacing of hangers shall not exceed the compressive strength of the insulation inserts, and in no case shall exceed the following:
1. Steel and Fiberglass (Std. Weight or Heavier - Liquid Service):
 - a. Maximum Spacing:
 - 1) 1-1/4" & under: 7'-0"
 - 2) 1-1/2": 9'-0"
 - 3) 2": 10'-0"
 - 4) 2-1/2": 11'-0"
 - 5) 3": 12'-0"
 - 6) 4" & larger: 12'-0"
 2. Steel (Std. Weight or Heavier - Vapor Service):
 - a. Maximum Spacing:
 - 1) 1-1/4" and under: 9'-0"
 - 2) 1-1/2": 12'-0"
 - 3) 2" & larger: 12'-0"
 3. Hard Drawn Copper & Brass (Liquid Service):
 - a. Maximum Spacing:
 - 1) 3/4" and under: 5'-0"
 - 2) 1": 6'-0"
 - 3) 1-1/4": 7'-0"
 - 4) 1-1/2": 8'-0"
 - 5) 2": 8'-0"
 - 6) 2-1/2": 9'-0"
 - 7) 3": 10'-0"
 - 8) 4": 12'-0"
 - 9) 6": 12'-0"
 4. Hard Drawn Copper & Brass (Vapor Service):
 - a. Maximum Spacing:
 - 1) 3/4" & under: 7'-0"
 - 2) 1": 8'-0"
 - 3) 1-1/4": 9'-0"

- 4) 1-1/2": 10'-0"
- 5) 2": 11'-0"
- 6) 2-1/2" & larger: 12'-0"

5. Ultra-Flexible Pipe, Flexible Hose, and Soft Copper Tubing:

a. Continuous channel with hangers maximum 8'-0" OC.

I. Installation of hangers shall conform to MSS SP-58, 69, and 89.

END OF SECTION 230529

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 230530 - ROOF SUPPORT AND WIND BRACING

PART 1 - GENERAL

1.1 SECTION INCLUDES

- A. Wind Restraint of Rooftop Equipment
- B. Rooftop Duct Support
- C. Rooftop Pipe Support
- D. Rooftop Equipment Support

1.2 QUALITY ASSURANCE

- A. General:
 - 1. The Contractor shall retain a specialty consultant or equipment manufacturer to develop a wind restraint and support system and perform wind restraint calculations in accordance with these specifications, state, and local codes.
 - 2. These requirements are beyond those listed in Section 230550 of these specifications. Where a conflict arises between the wind restraint of this section and any other section, the Architect/Engineer shall be immediately notified for direction to proceed.
- B. Manufacturer:
 - 1. System Supports/Restraints: Company specializing in the manufacture of products specified in this section.
 - 2. Equipment: Each company providing equipment that must meet wind restraint requirements shall provide certification included in project submittals that the equipment supplied for the project meets or exceeds the wind restraint of the project.
- C. Installer: Installed by Contractor.

1.3 REFERENCES

- A. International Building Code 2018
- B. HCAI - Health Care Access and Information (California)
- C. ASCE 7-16, Chapter 29

1.4 SUBMITTALS

- A. Submit under provisions of Section 230500.

B. Shop Drawings:

1. Calculations, restraint selections, and installation details shall be designed and sealed by a Professional Engineer licensed in the state where the project is located and experienced in wind restraint design and installation.
2. Coordination Drawings: Plans and sections drawn to scale, coordinating wind restraint bracing of mechanical components with other systems and equipment in the vicinity, including other wind restraint restraints.
3. Manufacturer's Certifications: Professional Engineer licensed in the state where the project is located shall review and approve manufacturer's certifications of compliance.
4. System Supports/Restraints - Submit for each condition requiring wind restraint bracing:
 - a. Calculations for each wind restraint brace and detail used on the project.
 - b. Plan drawings showing locations and types of wind restraint braces on contractor fabrication/installation drawings.
 - c. Cross-reference between details and plan drawings to indicate exactly which brace is being installed at each location. Details provided are to clearly indicate attachments to structure, correctly representing the fastening requirements of bracing.
 - d. Clear indication of brace design forces and maximum potential component forces at attachment points to building structure for confirmation of acceptability by the Structural Engineer of Record.
5. Equipment - Submit for each piece of equipment supplied:
 - a. Certification that the equipment supplied for the project meets or exceeds the wind restraint requirements specified.
 - b. Specific details of wind restraint design features of equipment and maximum wind restraint loads imparted to the structural support.
 - c. Engineering calculations and details for equipment anchorage and support structure.

- C. A wind restraint designer shall be provided whether or not exceptions listed in the applicable building code are met. If wind restraint restraints are not provided for a system that requires wind restraint bracing, the wind restraint designer shall submit a signed and sealed letter to the Architect/Engineer and Authorities Having Jurisdiction stating the exceptions, along with code reference, used for each item. Wind restraint designer shall review system installation for general conformance to the exception requirements stated in the code and document, in writing, the system has been installed in accordance with the exception.

1.5 TESTING AND INSPECTION

1.6 DELIVERY, STORAGE AND HANDLING

- A. Deliver, store, protect and handle products to site. Accept material on site in factory containers and packing. Inspect for damage. Protect from damage and contamination by maintaining factory packaging until installation. Follow manufacturer's instructions for storage.

1.7 DESIGN REQUIREMENTS

- A. This project is subject to the wind loading requirements of the International Building Code 2012/2018 edition.

- B. The total height of the structure and the height of the system to be restrained within the structure shall be determined in coordination with architectural plans and the General Contractor.

1.8 COORDINATION

- A. Coordinate layout and installation of anchoring with building structural systems and architectural features, and with mechanical, fire-protection, electrical and other building features in the vicinity.

1.9 WARRANTY

- A. Provide one-year warranty on parts and labor for manufacturer defects and installation workmanship.

PART 2 - PRODUCTS

2.1 SUPPLIERS

- A. Miro Industries

2.2 DESIGN CRITERIA

- A. The following design criteria applies to all equipment noted below.

- B. General Information:

- 1. Adopted Building Code: IBC-2018
 - 2. Building Occupancy Risk Category: [IV][III][II][I]

- C. Wind Design Criteria:

- 1. Mean Roof Height: 42 feet
 - 2. Basic Wind Speed: <Insert> MPH @ 3-second gust
 - 3. Exposure Category: [B][C][D]

2.3 ROOF DUCT SUPPORTS

- A. Roof duct support manufacturer shall provide ASCE-7 code-compliant sealed submittal to support and restrain rooftop duct system for uplift and lateral loading.
- B. Refer to drawings for duct size, layout, structural framing, roofing material, and wind loading information.
- C. Provide adjustable pre-fabricated roof duct supports for all duct installed on the roof. Supports include a combination of non-penetrating pillow block duct supports and stanchioned supports anchored to the roof structure.
- D. Supports shall be constructed from hot dipped galvanized steel minimum 12-gauge channel or tube steel. Manufacturer shall determine final design.

- E. Pillow block base shall be UV resistant polycarbonate rounded to prevent damage to the roof, and drainage holes shall prevent ponding of water in the support.

- F. Acceptable Manufacturer:

- 1. Miro Industries DS and Stanchioned DS

2.4 ROOF PIPING SUPPORTS

- A. Non-Penetrating Pillow Block Supports:

- 1. Provide pre-fabricated non-penetrating pillow block roof pipe supports for all piping installed on the roof.
 - 2. Pillow block base shall be UV resistant polycarbonate rounded to prevent damage to the roof, and drainage holes shall prevent ponding of water in the support.
 - 3. Acceptable Products:
 - a. Anvil International HBS-Base Series
 - b. Cooper B-Line Dura-Blok
 - c. Erico Caddy Pyramid 50, 150, 300, or 600 (to match load)
 - d. Miro Industries 1.5, 3-R, 4-R or 5-R (to match pipe)

2.5 ROOF EQUIPMENT SUPPORTS

- A. Premanufactured Equipment Roof Support Frames:

- 1. Roof equipment support manufacturer shall provide ASCE-7 code-compliant sealed submittal to support and restrain rooftop equipment for uplift and lateral loading.
 - 2. Refer to drawings for equipment size, layout, structural framing, roofing material, and wind speed.
 - 3. Provide adjustable prefabricated roof equipment supports for all equipment installed on the roof. Supports include stanchioned supports anchored to the roof structure.
 - 4. Frame: Support frame shall be hot dipped galvanized steel minimum 12 gauge channel or tube steel. Manufacturer shall determine final design.
 - 5. Decking: Support decking shall be minimum 1" thick, non-slip hot dipped galvanized bar grating.
 - 6. Equipment requiring support frames is as follows:
 - a. Split system outdoor units
 - 7. Minimum clear height above roof shall be 24 inches .
 - 8. Acceptable Manufacturer:
 - a. Miro Industries LD/HD

- B. Equipment Roof Curbs and Rails:

- 1. Equipment requiring curbs or rails with this section is as follows:
 - a. Condensing units
 - b. Exhaust Duct

-
2. Provide prefabricated curbs or rails as follows:
 - a. Roof Mounting Curb: Curb height as shown on drawings, minimum 14 gauge galvanized steel, one-piece construction, insulated, all welded, wood nailer.
 - b. 14 or 18 gauge galvanized sheet metal, as required for the equipment weight.
 - c. Internal reinforcing.
 - d. Pressure treated wood nailer.
 - e. 18 gauge counter flashing completely covering nailer.
 - f. Factory insulated with rigid fiberglass.
 3. Refer to drawings for curb and rail heights.
 4. Match units to the building roof with either a raised cant to match roof insulation (for built-up roofs) or with no cant (for single-ply roofs).
 5. Where legs of equipment rest on rails, provide 1/4" bent plates 18" long.
 6. Manufacturers:
 - a. Thy
 - b. Pate
 - c. United
 - d. Roof Products Systems
- C. Rooftop Air Handling Units:
1. Standard Curb: Rooftop equipment such as packaged air handling units shall be provided with curbs by the unit manufacturer. Refer to individual equipment sections for curb description.
 2. No rigid connections between equipment and the building structure shall be made that degrade the noise and vibration-isolation system specified.
 3. This section shall provide anchoring such as Z-clip wind restraint brackets, guy wires, tethers or straps to limit wind disruption.
 4. Roof equipment support manufacturer shall provide ASCE-7 code-compliant sealed submittal to support and restrain rooftop equipment for uplift and lateral loading.
- D. Exhaust Fans, Roof Hoods, Etc.:
1. Curb provided with equipment. Rooftop equipment such as roof hoods and rooftop exhaust fans shall be provided with curbs by the unit manufacturer. Refer to individual equipment sections for curb description.
 2. This section shall provide anchoring such as guy wires, tethers, or straps to limit wind disruption.
 3. Roof equipment support manufacturer shall provide ASCE-7 code-compliant sealed submittal to support and restrain rooftop equipment for uplift and lateral loading.

PART 3 - EXECUTION

3.1 GENERAL

- A. Install all items per manufacturer's instructions.
- B. All wind restraint systems shall be installed in strict accordance with the manufacturer's written instructions and all certified submittal data.

-
- C. Installation of wind restraints shall not cause any change in position of equipment, piping, or ductwork resulting in stresses or misalignment.
 - D. Prior to installation, bring to the Architect/Engineer's attention any discrepancies between the specifications and the field conditions, or changes required due to specific equipment selection.
 - E. Bracing may occur from flanges of structural beams, upper truss cords of bar joists, cast-in-place inserts.
 - F. Cable restraints shall be installed slightly slack to avoid short-circuiting the isolated suspended equipment, ductwork, piping, or conduit. Cable assemblies shall be installed taut on non-isolated systems. Solid braces may be used in place of cables on rigidly attached systems only. Do not install cables over sharp corners.
 - G. Provide reinforced clevis bolts when required.
 - H. The vibration isolation manufacturer shall furnish integral structural steel bases as required. Independent steel rails are not acceptable.
 - I. Piping crossing building seismic or expansion joints, passing from building to building, or supported from different portions of the building shall be installed to allow differential support displacements without damaging the pipe, equipment connections, or support connections. Pipe offsets, loops, anchors, and guides shall be installed as required to provide required motion capability and limit motion of adjacent piping.
 - J. Positively attach all roof-mounted equipment to roof curbs. Positively attach all roof curbs to building structure.
 - K. Where pipe support members are welded to structural building framing, scrape, brush clean, and apply one coat of zinc rich primer to welding.
 - L. Supports shall extend directly to building structure.
 - M. Furnish, install and prime all auxiliary structural steel for support of piping systems that are not shown on the drawings as being by others.
 - N. Install hangers and supports complete with lock nuts, clamps, rods, bolts, couplings, swivels, inserts and required accessories.
 - O. Roof Supports: Install per manufacturer's requirements. Coordinate with Roofing Contractor.

3.2 ROOF PIPING SUPPORTS

- A. Roof Supports: Install per manufacturer's requirements. Coordinate with Roofing Contractor.
- B. Install roof pipe supports to resist wind movement per manufacturer's recommendations. Method of securing base to roof shall be compatible with roofing materials.
- C. Hangers for horizontal piping shall have adequate means of vertical adjustment for alignment.

- D. Support all piping and equipment, including valves, strainers, traps and other specialties and accessories, to avoid objectionable or excessive stress, deflection, swaying, sagging or vibration in the piping or building structure during erection, cleaning, testing and normal operation of the systems.
- E. Do not, however, restrain piping to cause it to snake or buckle between supports or to prevent proper movement due to expansion and contraction.
- F. Support piping at equipment and valves so it can be disconnected and removed without further supporting the piping.
- G. Piping shall not introduce strains or distortion to connected equipment.
- H. Provide additional supports where pipe changes direction, adjacent to flanged valves and strainers, and at equipment connections and heavy fittings.
- I. Provide at least one hanger adjacent to each joint in grooved end steel pipe with mechanical couplings.
- J. Spacing: Refer to Supports and Anchors section for pipe spacing requirements.

3.3 INSPECTION

- A. Special inspection and testing shall be done in accordance with Chapter 17 of the International Building Code.
- B. The Owner shall employ a Special Inspection Agency to perform the duties and responsibilities specified in Section 1704 and 1705.
- C. Work performed on the premises of a fabricator approved by the building official need not be tested and inspected. The fabricator shall submit a certificate of compliance that the work has been performed in accordance with the approved plans and specifications to the building official and the Architect and Engineer of Record.
- D. The Special Inspection Agency shall furnish inspection reports to the building official, the Owner, the Architect, the Engineer of Record, and the General Contractor. The reports shall be completed and furnished within 48 hours of inspected work. A final signed report stating whether the work requiring special inspection was, to the best of the Special Inspection Agency's knowledge, in conformance with the approved plans and specifications shall be submitted.

END OF SECTION 230530

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 230548 - HVAC VIBRATION ISOLATION

PART 1 - GENERAL

1.1 SECTION INCLUDES

- A. Vibration Isolation.
- B. Flexible Connectors.

1.2 SUBMITTALS

- A. Submit shop drawings per Section 230500 and the Vibration Isolation Submittal Form at the end of this section.
- B. Vibration isolation submittals may be included with equipment being isolated, but must comply with this section.
- C. Base submittals shall include equipment served, construction, coatings, weights, and dimensions.
- D. Isolator submittals shall include:
 - 1. Equipment served
 - 2. Type of Isolator
 - 3. Load in Pounds per Isolator
 - 4. Recommended Maximum Load for Isolator
 - 5. Spring Constants of Isolators (for Spring Isolators)
 - 6. Load vs. Deflection Curves (for Neoprene Isolators)
 - 7. Specified Deflection
 - 8. Deflection to Solid (at least 150% of calculated deflection)
 - 9. Loaded (Operating) Deflection
 - 10. Free Height
 - 11. Loaded Height
 - 12. Kx/Ky (horizontal to vertical stiffness ratio - for spring isolators)
 - 13. Materials and Coatings
 - 14. Spring Diameters
- E. Make separate calculations for each isolator on equipment where the load is not equally distributed.
- F. Flexible connector shop drawings shall include overall face-to-face length and all specified properties.

PART 2 - PRODUCTS

2.1 BASIC CONSTRUCTION AND REQUIREMENT

- A. Vibration isolators shall have either known undeflected heights or other markings so deflection under load can be verified.

- B. All isolators shall operate in the linear portion of their load versus deflection curve. The linear portion of the deflection curve of all spring isolators shall extend 50% beyond the calculated operating deflection (e.g., 3" for 2" calculated deflection). The point of 50% additional deflection shall not exceed the recommended load rating of the isolator.
- C. The lateral to vertical stiffness ratio (K_x/K_y) of spring isolators shall be between 0.8 and 2.0.
- D. All neoprene shall have UV resistance sufficient for 20 years of outdoor service.
- E. All isolators shall be designed or treated for corrosion resistance. Steel bases shall be cleaned of welding slag and primed for interior use, and hot dip galvanized after fabrication for exterior use. All bolts and washers over 3/8" diameter located outdoors shall be hot dip galvanized per ASTM A153. All other bolts, nuts and washers shall be zinc electroplated. All ferrous portions of isolators, other than springs, for exterior use shall be hot dip galvanized after fabrication. Outdoor springs shall be neoprene dipped or hot dip galvanized. All damage to coatings shall be field repaired with two coats of zinc rich coating.
- F. Equip all mountings used with structural steel bases with height-saving brackets. Bottoms of the brackets shall be 1-1/2" to 2-1/2" above the floor or housekeeping pad, unless shown otherwise on the drawings. Steel bases shall have at least four points of support.
- G. Provide motor slide rails for belt-driven equipment per Section 230513.
- H. All isolators, except M1, shall have provision for leveling.

2.2 MOUNTINGS

- A. Type M1:
 - 1. 0.75" thick waffled neoprene pad with minimum static deflection of 0.07" at calculated load and 0.11" at maximum load. For loads less than 15 pounds, the deflection at calculated load requirement is waived, but the isolator must have a maximum stiffness of the ratio of 45#/0.35".
 - 2. Units need not be bolted down unless called for or needed to prevent movement. If bolted down, prevent short circuiting with neoprene bushings and washers between bolts and isolators.
 - 3. Manufacturers:
 - a. Mason "Super W"
 - b. Kinetics "NGS"
 - c. VMC/Amber-Booth "SPNR"
 - d. Vibration Eliminator Co. "400N"
- B. Type M2:
 - 1. Double deflection neoprene with minimum static deflection of 0.15" at calculated load and 0.35" at maximum rated load.
 - a. All metal shall be neoprene covered. Mounting shall have friction pads both top and bottom.
 - 2. All units shall have bolt holes and be bolted down.

3. Use steel rails above the mountings to compensate for the overhang of equipment such as small vent sets and close coupled pumps.
4. Manufacturers:
 - a. Mason Industries "ND" or "DNR"
 - b. VMC/Amber-Booth "RVD"
 - c. Kinetics "RD"
 - d. Vibration Mountings and Controls "RD"
 - e. Vibration Eliminator Co. "T22" or "T44"

C. Type M3:

1. Free standing, laterally stable spring isolators without housings and complete with 1/4" neoprene friction pads.
2. Units shall have bolt holes but need not be bolted down unless called for or needed to prevent movement. If bolted down, prevent short circuiting with neoprene bushings and washers between bolts and isolators. Bolt holes shall not be within the springs.
3. All mountings shall have leveling bolts.
4. Manufacturers:
 - a. Mason "SLFH"
 - b. Kinetics "FDS"
 - c. VMC/Amber-Booth SW-3 [4"][, 5"][, or] [6"]
 - d. Vibration Eliminator Co. "OST"

D. Type M4:

1. Use restrained spring mountings for equipment with operating weight different from the installed weight such as chillers and boilers, and equipment exposed to the wind such as cooling towers.
2. Spring isolators shall be free-standing with 1/4" neoprene acoustical friction pads.
3. All units shall have bolt holes and be bolted down. Prevent short circuiting with neoprene bushings and washers between bolts and isolators.
4. All mountings shall have leveling bolts.
5. Housings with vertical resilient limit stops shall prevent spring extension when weight is removed. Housings shall serve as blocking during erection and the installed and operating heights shall be the same.
6. Maintain a minimum clearance of 1/2" around restraining bolts and between the housings and the springs so as not to interfere with the spring action.
7. Limit stops shall be out of contact during normal operation.
8. Select isolators for equipment subjected to wind loads in conformance with ASCE 7-02.
9. Manufacturers:
 - a. Mason "SLRS"
 - b. Kinetics "FLS"
 - c. Aeroflex "AWRS"
 - d. Vibration Eliminator Co. "KW"

2.3 HANGERS

A. Type H1:

1. Vibration hangers shall consist of a double-deflection neoprene element with a projecting bushing or oversized opening to prevent steel-to-steel contact.

2. Static deflection shall be at least 0.15" at calculated load and 0.35" at maximum rated load.
3. Provide hangers with end connections as required for hanging ductwork or piping.
4. Manufacturers:
 - a. Mason "HD"
 - b. Kinetics "RH"
 - c. Vibration Eliminator Co. "IC/3C/3CTD"
 - d. Vibro Acoustics "RH"

B. Type H2:

1. Vibration hangers shall contain a steel spring in a neoprene cup with a grommet to prevent short circuiting the hanger rod.
2. The cup shall have a steel washer to distribute load on the neoprene and prevent its extrusion.
3. Spring diameters and hanger box lower hole sizes shall be large enough to permit the hanger rod to swing through a 30° arc before contacting the grommet and short circuiting the spring.
4. Provide end connections for hanging ductwork or piping.
5. Manufacturers:
 - a. Mason "30"
 - b. Kinetics "SRH"
 - c. VMC/Amber-Booth "BSRA"
 - d. Vibration Eliminator Co. "SNC"
 - e. Vibro Acoustics "SH/SHC"

2.4 FLEXIBLE CONNECTORS (NOISE AND VIBRATION ELIMINATORS)

A. Type FC1:

1. Spherical flexible connectors with multiple plies of nylon tire cord fabric and either EPDM or molded and cured neoprene. Outdoor units shall be EPDM.
2. Steel aircraft cables or threaded steel rods shall be used to prevent excess elongation.
3. All straight through connections shall be made with twin-spheres properly pre-extended as recommended by the manufacturer.
4. Connectors up to 2" size may have threaded ends.
5. Connectors 2-1/2" and over shall have floating steel flanges recessed to lock raised face neoprene flanges.
6. All connectors shall be rated for a minimum working pressure of 150 psi at 200°F.
7. Manufacturer:
 - a. Metraflex "Double Cable-Sphere"
 - b. Mercer "200 Series"
 - c. Twin City Hose "MS2".

B. Type FC2:

1. Stainless steel flexible connectors with corrugated stainless steel hose body and stainless steel braided casing.
2. Rated for minimum working pressures of 150 psi at 70°F and 100 psi at 800°F.
3. Sizes 2" and under shall have steel threaded connections.
4. Sizes 2-1/2" and over shall have 150 lb. steel flanges.

5. Suitable for 1/2" permanent misalignment.
6. Manufacturers:
 - a. Mason or Mercer "BSS-GU"
 - b. Metraflex "ML"
 - c. Twin City Hose "TCHS"

PART 3 - EXECUTION

3.1 GENERAL INSTALLATION

- A. Install all products per manufacturer's recommendations.
- B. Provide vibration isolation as indicated on the drawings and as described herein.
- C. Clean the surface below all mountings that are not bolted down and apply adhesive cement equal to Mason Type WG between mounting and floor. If movement occurs, bolt mountings down. Isolate bolts from baseplates with neoprene washers and bushings.
- D. All static deflections listed in the drawings and specifications are the minimum acceptable actual deflection of the isolator under the weight of the installed equipment - not the maximum rated deflection of the isolator.
- E. Support equipment to be mounted on structural steel frames with isolators under the frames or under brackets welded to the frames. Where frames are not needed, fasten isolators directly to the equipment.
- F. Where a specific quantity of hangers is noted in these specifications, it shall mean hanger pairs for support points that require multiple hangers, such as rectangular ducts or pipes supported on a strut rack.

3.2 PIPE ISOLATION

- A. The first three hangers from vibration-isolated equipment shall be type H1.
- B. Install flexible connectors in all piping connected to vibration producing equipment. This includes all fans, base-mounted pumps, compressors, etc. Absence of flexible connectors on piping diagrams does not imply that they are not required.
- C. Use Type FC1 where pressures are lower than 150 psi, temperatures are below 220°F, and the fluid handled is compatible with neoprene and EPDM.
- D. Use Type FC2 for all other services. FC2 shall be installed parallel with equipment shafts.
- E. Provide sufficient piping flexibility for vibrating refrigerant equipment, or furnish flexible connectors with appropriate temperature and pressure ratings.
- F. Support piping to prevent extension of flexible connectors.

3.3 VIBRATION ISOLATION SCHEDULE

A. Packaged HVAC Unit (less than 10 HP):

1. Base Type: NA
2. Isolator Type: H2
3. Static Deflection: 0.75"
4. Flexible Connections: Per Section 233300

B. Condensing Unit (Roof Mounted):

1. Base Type: NA
2. Isolator Type: M4
3. Static Deflection: 0.75"
4. Flexible Connections: NA

END OF SECTION 230548

SECTION 230553 - HVAC IDENTIFICATION

PART 1 - GENERAL

1.1 SECTION INCLUDES

- A. Identification of products installed under Division 23.

1.2 REFERENCES

- A. ANSI/ASME A13.1 - Scheme for the Identification of Piping Systems.
- B. ASTM B-1, B-3, and B-8 for copper conductors.
- C. ASTM D-1248 for Polyethylene Extrusion Materials, ICEA S-70-547 Weatherproof Resistant Polyethylene Conductors, ICEA S-61-402/NEMA WC5 Thermoplastic Insulated Wire & Cable, ICEA S-95-658/NEMA WC70 Non-Shielded 0 - 2kV Cables.
- D. CGA Pamphlet C-9, Standard Color-Marking of Compressed Gas Cylinders for Medical Use.
- E. NFPA-99 - Health Care Facilities.
- F. UL 1581 Standard for Electrical Wires, Cables, and Flexible Cords.

1.3 SUBMITTALS

- A. Submit shop drawings under provisions of Section 230500. Include list of items identified, wording, letter sizes, and color coding.
- B. Include valve chart and schedule listing valve tag number, location, function, and valve manufacturer's name and model number.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. 3M
- B. Bunting
- C. Craftmark
- D. Emedco
- E. Kolbi Industries
- F. Seton
- G. W.H. Brady

H. Marking Services.

2.2 MATERIALS

A. General:

1. Plastic Nameplates: Laminated three-layer phenolic with engraved black, 1/4" minimum letters on light contrasting background.
2. Brass Tags: Brass background with engraved black letters. Tag size minimum 1-1/2" square or 1-1/2" round.

B. Pipe Markers:

1. All pipe markers shall conform to ANSI A13.1. Marker lengths and letter sizes shall be at least the following:

OD of Pipe or Insulation	Marker Length	Size of Letters
Up to and including 1-1/4"	8"	1/2"
1-1/2" to 2"	8"	3/4"
2-1/2" to 6"	12"	1-1/4"
8" to 10"	24"	2-1/2"
Over 10"	32"	3-1/2"

Plastic tags may be used for outside diameters under 3/4"

2. Plastic Pipe Markers: Semi-rigid plastic, preformed to fit around pipe or pipe covering; indicating flow direction and fluid conveyed.
3. Vinyl Pipe Markers: Colored vinyl with permanent pressure sensitive adhesive backing.
4. Stencil Painted Pipe Markers: Use industrial enamel spray paint per ANSI Standard A13.1. Indicate fluid conveyed and flow direction.

C. Ductwork Markers:

1. Ductwork systems shall be provided with preprinted, color-coded lettering indicating service, equipment serving, and arrow showing flow direction. Refer to Part 3 for installation information.
2. Self-Adhesive Vinyl Duct Labels: Colored vinyl with permanent Contact-type permanent pressure-sensitive adhesive backing suitable for indoor and outdoor application compatible with label and with substrate. Stencil painted markers are not permitted on ductwork systems.
3. Maximum Temperature: Able to withstand temperatures up to 160°F.
4. Minimum Label Size: Length and width vary for required label content, but not less than 2-1/2 inch by 3/4 inch.
5. Minimum Letter Size: 1/4 inch for name of units if viewing distance is less than 24 inches, 1/2 inch for viewing distances up to 72 inches, and 1-1/2 inches high beyond 72 inches viewing distance. Include secondary lettering two-thirds to three-fourths the size of principal lettering.
6. Flow-Direction Arrows: Integral with duct system service lettering to accommodate both directions or as separate unit on each duct label to indicate flow direction.
7. Ductwork systems containing hazardous materials shall be provided with minimum 2" x 4" ANSI Z535.2 biohazard warning labels with custom labeling describing hazard. Refer to Part 3 for system and label description.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Install all products per manufacturer's recommendations.
- B. Degrease and clean surfaces to receive adhesive for identification materials.
- C. Valves:
 - 1. All valves (except shutoff valves at equipment) shall have numbered tags.
 - 2. Provide or replace numbered tags on all existing valves that are connected to new systems or that have been revised.
 - 3. Provide all existing valves used to extend utilities to this project with numbered tags. Review tag numbering sequence with the Owner prior to ordering tags.
 - 4. Secure tags with heavy duty key chain and brass "S" link or with mechanically fastened plastic straps.
 - 5. Attach to handwheel or around valve stem.
 - 6. Number all tags and show the service of the pipe.
 - 7. Provide two sets of laminated 8-1/2" x 11" (letter size) copies of a valve directory listing all valves, with respective tag numbers, uses, and locations. The directory shall be reviewed by the Owner and Architect/Engineer prior to laminating final copies. Laminated copies shall have brass eyelet in at least one corner for easy hanging.
- D. Pipe Markers:
 - 1. Adhesive Backed Markers: Use Brady Style 1, 2, or 3 on pipes 3" diameter and larger. Use Brady Style 4, 6, or 8 on pipes under 3" diameter. Similar styles by other listed manufacturers are acceptable. Secure all markers at both ends with a wrap of pressure sensitive tape completely around the pipe.
 - 2. Snap-on Markers: Use Seton "Setmark" on pipes up to 5-7/8" OD. Use Seton "Setmark" with nylon or Velcro ties for pipes 6" OD and over. Similar styles by other listed manufacturers are acceptable.
 - 3. Stencil Painted Pipe Markers:
 - a. Remove rust, grease, dirt, and all foreign substances from the pipe surface.
 - b. Apply primer on non-insulated pipes before painting.
 - c. Use background and letter colors as scheduled later in this section.
 - 4. Apply markers and arrows in the following locations where clearly visible:
 - a. At each valve.
 - b. On both sides of walls that pipes penetrate.
 - c. At least every 20 feet along all pipes.
 - d. On each riser and each leg of each "T" joint.
 - e. At least once in every room and each story traversed.
- E. Ductwork Markers:
 - 1. Apply ductwork markers on ductwork systems in the following locations where clearly visible:
 - a. On both sides of walls that ducts penetrate.

- b. At least every 20 feet along all ducts.
- c. On each riser and each leg of each branch connection.
- d. At least once in every room and each story traversed.
- e. At all ductwork access doors.
- f. At all fans and equipment serving ductwork system. Markers shall be clearly visible from the normal maintenance access path to the equipment. Coordinate placement location with Owner.

F. Equipment:

- 1. All equipment not easily identifiable such as controls, relays, gauges, etc.; and all equipment in an area remote from its function such as air handling units, exhaust fans, filters, reheat coils, dampers, etc.; shall have nameplates or plastic tags listing name, function, and drawing symbol. Do not label exposed equipment in public areas.
- 2. Fasten nameplates or plastic tags with stainless steel self-tapping screws or permanently bonding cement.
- 3. Mechanical equipment that is not covered by the U.S. National Appliance Energy Conservation Act (NAECA) of 1987 shall carry a permanent label installed by the manufacturer stating that the equipment complies with the requirements of ASHRAE 90.1.

G. Miscellaneous:

- 1. Attach self-adhesive vinyl labels at all duct access doors used to reset fusible links or actuators on fire, fire/smoke, or smoke dampers. Lettering shall be a minimum of 1/2" high. Labels shall indicate damper type.
- 2. Provide engraved plastic tags at all hydronic or steam system make-up water meters.

3.2 SCHEDULE

A. Pipes to be marked shall be labeled with text as follows, regardless of which method or material is used:

- 1. STEAM - 15 PSI: Black lettering; yellow background
- 2. LOW PRESSURE CONDENSATE: Black lettering; yellow background
- 3. CONDENSATE DRAIN: White lettering; green background
- 4. REFRIGERANT LIQUID: White lettering; purple background
- 5. REFRIGERANT SUCTION: White lettering; purple background
- 6. REFRIGERANT HOT GAS: White lettering; purple background

B. Steam pipe markers shall include operating steam pressure within pipes shown above.

- C. Ductwork and Fan Systems: All fans, filters housings, and access doors shall be labeled with text as follows:
1. KITCHEN EXHAUST: Black lettering; yellow background
 2. SUPPLY AIR: White lettering; green background
 3. RETURN AIR: White lettering; green background
 4. GENERAL EXHAUST AIR: Black lettering; yellow background
 5. VENTILATION AIR: White lettering; green background
 6. RELIEF Black lettering; yellow background

END OF SECTION 230553

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 230593 - TESTING, ADJUSTING, AND BALANCING

PART 1 - GENERAL

1.1 SECTION INCLUDES

- A. Testing, adjusting, and balancing of air systems.
- B. Testing, adjusting, and balancing of heating systems.
- C. Testing, adjusting, and balancing of cooling systems.
- D. Testing, adjusting, and balancing of energy recovery systems.
- E. Measurement of final operating condition of HVAC systems.

1.2 QUALITY ASSURANCE

- A. Agency shall be a company specializing in the adjusting and balancing of systems specified in this section with minimum three years' experience. Perform work under supervision of AABC Certified Test and Balance Engineer, NEBB Certified Testing, Balancing and Adjusting Supervisor, or TABB Certified Supervisor.
- B. Work shall be performed in accordance with the requirements of the references listed at the start of this section.

1.3 REFERENCES

- A. AABC - National Standards for Total System Balance, Seventh Edition.
- B. ADC - Test Code for Grilles, Registers, and Diffusers.
- C. AMCA - Publication 203-90; Field Performance Measurement of Fan Systems.
- D. ASHRAE - 2019 HVAC Applications Handbook; Chapter 39, Testing, Adjusting and Balancing.
- E. ASHRAE/ANSI - Standard 111-2008; Practices for Measurement, Testing, Adjusting and Balancing of Building HVAC&R Systems.
- F. NEBB - Procedural Standards for Testing, Adjusting and Balancing of Environmental Systems, Ninth Edition, 2019.
- G. SMACNA - HVAC Systems; Testing, Adjusting and Balancing (latest edition).
- H. TABB - International Standards for Environmental Systems Balance.

1.4 SUBMITTALS

- A. Submit copies of report forms, balancing procedures, and the name and qualifications of testing and balancing agency for approval within 30 days after award of Contract.

B. Electronic Copies:

1. Submit a certified copy of test reports to the Architect/Engineer for approval. Electronic copies shall be in PDF format only. Scanned copies, in PDF format, of paper originals are acceptable. Copies that are not legible will be returned to the Contractor for resubmittal. Do not set any permission restrictions on files; protected, locked, or secured documents will be rejected.
2. Electronic file size shall be limited to a maximum of 10MB. Larger files shall be divided into files that are clearly labeled as "1 of 2", "2 of 2", etc.
3. All text shall be searchable.
4. Bookmarks shall be used. All bookmark titles shall be an active link to the index page and index tabs.

1.5 REPORT FORMS

- A. Submit reports on AABC, SMACNA or NEBB forms. Use custom forms approved by the Architect/Engineer when needed to supply specified information.
- B. Include in the final report a schematic drawing showing each system component, including balancing devices, for each system. Each drawing shall be included with the test reports required for that system. The schematic drawings shall identify all testing points and cross-reference these points to the report forms and procedures.
- C. Refer to PART 4 for required reports.

1.6 WARRANTY/GUARANTEE

- A. The TAB Contractor shall include an extended warranty of 90 days after owner receipt of a completed balancing report, during which time the Owner may request a recheck of terminals, or resetting of any outlet, coil, or device listed in the test report. This warranty shall provide a minimum of 24 manhours of onsite service time. If it is determined that the new test results are not within the design criteria, the balancer shall rebalance the system according to design criteria.
- B. Warranty/Guarantee must meet one of the following programs: TABB International Quality Assurance Program, AABC National Project Performance Guarantee, NEBB's Conformance Certification.

1.7 SCHEDULING

- A. Coordinate schedule with other trades. Provide a minimum of seven days' notice to all trades and the Architect/Engineer prior to performing each test.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION

3.1 GENERAL REQUIREMENTS

- A. All procedures must conform to a published standard listed in the References article of this section. All equipment shall be adjusted in accordance with the manufacturer's recommendations. Any system not listed in this specification but installed under the contract documents shall be balanced using a procedure from a published standard listed in the References article.
- B. The Balancing Contractor shall incorporate all pertinent documented construction changes (e.g. submittals/shop drawings, change orders, RFIs, ASIs, etc.) and include in the balancing report.
- C. Recorded data shall represent actual measured or observed conditions.
- D. Cut insulation, ducts, pipes, and equipment cabinets for installation of test probes to the minimum extent necessary to allow adequate performance of procedures. After testing and balancing is complete, close probe holes and patch insulation with new materials as specified. Restore vapor barrier and finish as specified.
- E. Permanently mark setting of valves, dampers, and other adjustment devices allowing for settings to be restored. Set and lock memory stops.
- F. Leave systems in proper working order, replacing belt guards, closing access doors, closing doors to electrical switch boxes, plugging test holes, and restoring thermostats to specified settings.
- G. Installations with systems consisting of multiple components shall be balanced with all system components operating.

3.2 EXAMINATION

- A. Before beginning work, verify that systems are complete and operable. Ensure the following:
 - 1. General Equipment Requirements:
 - a. Equipment is safe to operate and in normal condition.
 - b. Equipment with moving parts is properly lubricated.
 - c. Temperature control systems are complete and operable.
 - d. Proper thermal overload protection is in place for electrical equipment.
 - e. Direction of rotation of all fans and pumps is correct.
 - f. Access doors are closed and end caps are in place.
 - 2. Duct System Requirements:
 - a. All filters are clean and in place. If required, install temporary media.
 - b. Duct systems are clean and free of debris.
 - c. Fire/smoke and manual volume dampers are in place, functional and open.
 - d. Air outlets are installed and connected.
 - e. Duct system leakage has been minimized.

3. Pipe System Requirements:

- a. Coil fins have been cleaned and combed.
- b. Strainer screens are clean and in place.
- c. Shutoff, throttling and balancing valves are open.

- B. Report any defects or deficiencies to Architect/Engineer.
- C. Promptly report items that are abnormal or prevent proper balancing.
- D. If, for design reasons, system cannot be properly balanced, report as soon as observed.
- E. Beginning of work means acceptance of existing conditions.

3.3 PREPARATION

- A. Provide instruments required for testing, adjusting, and balancing operations. Make instruments available to the Architect/Engineer for spot checks during testing.
- B. Instruments shall be calibrated within six months of testing performed for project, or more recently if recommended by the instrument manufacturer.

3.4 INSTALLATION TOLERANCES

- A. $\pm 10\%$ of scheduled values:
 - 1. Adjust air inlets and outlets to $\pm 10\%$ of scheduled values.
- B. $+ 5\%$ of scheduled values
 - 1. Adjust outdoor air intakes to within $+ 5\%$ of scheduled values.
 - 2. Adjust exhaust air through energy recovery equipment to within $+5\%$ of scheduled values.
- C. Adjust supply, return, and exhaust air-handling systems to $+10\%$ / -5% of scheduled values.

3.5 ADJUSTING

- A. After adjustment, take measurements to verify balance has not been disrupted or that disruption has been rectified.
- B. Once balancing of systems is complete, at least one damper or valve must be 100% open.
- C. After testing, adjusting and balancing are complete, operate each system and randomly check measurements to verify system is operating as reported in the report. Document any discrepancies.
- D. Contractor responsible for each motor shall also be responsible for replacement sheaves. Coordinate with contractor.

3.6 SUBMISSION OF REPORTS

- A. Fill in test results on appropriate forms.

PART 4 - SYSTEMS TO BE TESTED, ADJUSTED AND BALANCED

4.1 GENERAL REQUIREMENTS

A. Title Page:

1. Project name.
2. Project location.
3. Project Architect.
4. Project Engineer (IMEG Corp.).
5. Project General Contractor.
6. TAB Company name, address, phone number.
7. TAB Supervisor's name and certification number.
8. TAB Supervisor's signature and date.
9. Report date.

B. Report Index

C. General Information:

1. Test conditions.
2. Nomenclature used throughout report.
3. Notable system characteristics/discrepancies from design.
4. Test standards followed.
5. Any deficiencies noted.
6. Quality assurance statement.

D. Instrument List:

1. Instrument.
2. Manufacturer, model, and serial number.
3. Range.
4. Calibration date.

4.2 AIR SYSTEMS

A. Duct Leakage Test:

1. Air system and fan.
2. Leakage class.
3. Test pressure.
4. Construction pressure.
5. Flow rate (cfm): specified and actual.
6. Leakage (refer to Section 233100 in the specifications): specified and actual.
7. Statement that fire dampers, reheat coils and other accessories were included in the test.
8. Pass or Fail.
9. Test performed by.
10. Test witnessed by.

B. Air Moving Equipment:

1. General Requirements:

- a. Drawing symbol.
- b. Location.
- c. Manufacturer, model, arrangement, class, discharge.
- d. Fan RPM.
- e. Multiple RPM fan curve with operating point marked. (Obtain from equipment supplier).
- f. Final frequency of motor at maximum flow rate (on fans driven by VFD).

2. Flow Rate:

- a. Supply flow rate (cfm): specified and actual.
- b. Return flow rate (cfm): specified and actual.
- c. Outside flow rate (cfm): specified and actual.
- d. Exhaust flow rate (cfm): specified and actual.

3. Pressure Drop and Pressure:

- a. Filter pressure drop: specified and actual.
- b. Total static pressure: specified and actual. (Indicate if across fan or external to unit).
- c. Inlet pressure.
- d. Discharge pressure.

C. Fan Data:

1. Drawing symbol.
2. Location.
3. Manufacturer and model.
4. Flow rate (cfm): specified and actual.
5. Total static pressure: specified and actual. (Indicate measurement locations).
6. Inlet pressure.
7. Discharge pressure.
8. Fan RPM.

D. Electric Motors:

1. Drawing symbol of equipment served.
2. Manufacturer, Model, Frame.
3. Nameplate: HP, phase, service factor, RPM, operating amps, efficiency.
4. Measured: Amps in each phase.

E. Duct Traverse:

1. System zone/branch/location.
2. Duct size.
3. Free area.
4. Velocity: specified and actual.
5. Flow rate (cfm): specified and actual.
6. Duct static pressure.

7. Air temperature.
8. Air correction factor.

F. Air Terminal (Inlet or Outlet):

1. Drawing symbol.
2. Room number/location.
3. Terminal type and size.
4. Velocity: specified and actual.
5. Flow rate (cfm): specified and actual.
6. Percent of design flow rate.

4.3 HEATING SYSTEMS

A. Heating Coils:

1. General Requirements:
 - a. Drawing symbol.
 - b. Service.
 - c. Location.
 - d. Manufacturer and model.
 - e. Size.
2. Flow Rate:
 - a. Flow rate (cfm): specified and actual.
3. Temperature:
 - a. Entering air temperature: specified and actual.
 - b. Leaving air temperature: specified and actual.
4. Pressure Drop and Pressure:
 - a. Air pressure drop: specified and actual.
5. Energy:
 - a. Air Btuh (cfm x temp rise x 1.09).

B. Terminal Heat Transfer Units:

1. General Requirement:
 - a. Drawing symbol.
 - b. Location.
 - c. Manufacturer and model.
 - d. Include air data only for forced air units.
2. Flow Rate:
 - a. Flow rate (cfm): specified and actual.

- 3. Temperature:
 - a. Entering air temperature: specified and actual.
 - b. Leaving air temperature: specified and actual.

- 4. Energy:
 - a. Air Btuh (cfm x temperature rise x 1.09).

4.4 COOLING SYSTEMS

A. Cooling Coils:

- 1. General Requirements:
 - a. Drawing symbol.
 - b. Service.
 - c. Location.
 - d. Size.
 - e. Manufacturer and model.
- 2. Temperature:
 - a. Entering air DB temperature: specified and actual.
 - b. Entering air WB temperature: specified and actual.
 - c. Leaving air DB temperature: specified and actual.
 - d. Leaving air WB temperature: specified and actual.
- 3. Flow Rate:
 - a. Flow rate (cfm): specified and actual.
- 4. Pressure Drop and Pressure:
 - a. Air pressure drop: specified and actual.
- 5. Energy:
 - a. Air Btuh (cfm x enthalpy change x 4.5).

B. Terminal Heat Transfer Units:

- 1. General Requirements:
 - a. Drawing symbol.
 - b. Location.
 - c. Manufacturer and model.
 - d. Include air data only for forced air units.
- 2. Temperature:
 - a. Entering air DB temperature: specified and actual.
 - b. Leaving air DB temperature: specified and actual.

- 3. Flow rate:
 - a. Flow rate (cfm): specified and actual.

- 4. Energy:
 - a. Air Btuh (cfm x temperature rise x 1.09).

4.5 ENERGY RECOVERY SYSTEMS

- A. Air Systems - Air energy recovery devices shall be tested at ambient temperatures of less than 40°F or greater than 85°F.

- 1. Energy Recovery Wheel:
 - a. General Requirements:
 - 1) Drawing Symbol.
 - 2) Location.
 - 3) Wheel RPM.
 - b. Primary Air:
 - 1) Primary Entering Air Temperature.
 - 2) Primary Leaving Air Temperature.
 - 3) Primary Air Pressure Drop.
 - 4) Primary Air Flow Rate (cfm).
 - c. Secondary Air:
 - 1) Secondary Entering Air Temperature.
 - 2) Secondary Leaving Air Temperature.
 - 3) Secondary Air Pressure Drop.
 - 4) Secondary Air Flow Rate (cfm).
- 2. Air to Air Plate Exchanger:
 - a. General Requirements:
 - 1) Drawing Symbol
 - 2) Location.
 - b. Primary Air:
 - 1) Primary Entering Air Temperature.
 - 2) Primary Leaving Air Temperature.
 - 3) Primary Air Flow Rate (cfm).
 - 4) Primary Air Pressure Drop.

c. Secondary Air:

- 1) Secondary Entering Air Temperature.
- 2) Secondary Leaving Air Temperature.
- 3) Secondary Air Flow Rate (cfm).
- 4) Secondary Air Pressure Drop.

END OF SECTION 230593

SECTION 230713 - DUCTWORK INSULATION

PART 1 - GENERAL

1.1 SECTION INCLUDES

- A. Ductwork Insulation.
- B. Insulation Jackets.

1.2 QUALITY ASSURANCE

- A. Applicator: Company specializing in ductwork insulation application with five years minimum experience. When requested, installer shall submit manufacturer's certificate indicating qualifications.
- B. Materials:
 - 1. Listed and labeled for flame spread/smoke developed rating of no more than 25/50 when tested per ASTM E84 or UL 723 as required by code.
 - 2. Fungal Resistance: No growth when tested in accordance with ASTM G21 (antifungal test).
 - 3. Rated velocity on coated air side for air erosion in accordance with UL 181 at 5,000 fpm minimum.
 - 4. UL listed in Category HNKT.
- C. Adhesives: UL listed, meeting NFPA 90A/90B requirements.

1.3 REFERENCES

- A. ANSI/ASHRAE/IES Standard 90.1 (latest published edition) - Energy Standard for Buildings Except Low-Rise Residential Buildings.
- B. ANSI/ASTM C553 - Mineral Fiber Blanket and Felt Insulation.
- C. ANSI/ASTM C612 - Mineral Fiber Block and Board Thermal Insulation.
- D. ASTM E84 - Surface Burning Characteristics of Building Materials.
- E. ASTM E136 - Standard Test Method for the Behavior of Materials in a Vertical Tube Furnace at 750°C.
- F. ASTM E814 - Fire Tests of Through Penetrations Firestops.
- G. ASTM E2336-04 - Standard Test Methods for Fire Resistive Grease Duct Enclosure Systems.
- H. ASTM G21 - Standard Practice for Determining Resistance of Synthetic Polymeric Materials to Fungi.

-
- I. National Commercial & Industrial Insulation Standards - 1999 Edition - as published by Midwest Insulation Contractors Association and endorsed by National Insulation Contractors Association.
 - J. NFPA 96 - Standard for the Installation of Equipment for Removal of Smoke and Grease-Laden Vapors from Commercial Cooking Equipment.
 - K. NFPA 255 - Surface Burning Characteristics of Building Materials.
 - L. UL - XHEZ - Through Penetration Firestop Systems.
 - M. UL 181 - Standard for Factory-Made Air Ducts and Air Connectors.
 - N. UL 263 - Full Scale External Fire Tests with Hose Stream.
 - O. UL 723 - Surface Burning Characteristics of Building Materials.
 - P. UL 1479 - Fire Tests of Through Penetrations Firestops.
- 1.4 SUBMITTALS
- A. Submit shop drawings per Section 230500. Include product description, list of materials and thickness for each service, and location.

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Type A: Flexible Fiberglass - Outside Wrap; ANSI/ASTM C553; commercial grade; 0.28 / 0.26 (Out-Of-Package/Installed-Compressed 25%) maximum 'K' value at 75°F; foil scrim Kraft facing, 1.0 lb./cu. ft. density. Submit both "Out of Package" and "Installed-Compressed 25%" K and R-values.
- B. Type B: Semi-rigid Fiberglass Board Wrap - Outside Application; ANSI/ASTM C612, Class 1; 0.25 maximum 'K' value at 75°F; foil scrim Kraft facing, 3 lb./cu. ft. density.
- C. Type C: Flexible Fiberglass Liner; ANSI/ASTM C1071; 0.28 maximum 'K' value at 75°F; 1.5 lb/cu ft minimum density; coated air side for 5000 fpm air velocity.
- D. Type D: Rigid Fiberglass Liner; 0.23 maximum 'K' value at 75°F; smooth coated mat facing laminated to the insulation, suitable for 5000 fpm air side velocity.
- E. Type F: Flexible High Temperature Wrap; ASTM E2336 rating as 2-hour separation with zero clearance to combustible materials over the full length. Material to be totally scrim encapsulated. Material to be a minimum 1-1/2" thick with a minimum core density of 6 pcf. Wrap system should offer zero clearance to combustibles per ASTM E2336 at all locations, comply with all applicable codes, and be approved by AHJ. If system is not rated for zero clearance per ASTM E2336 at all locations with single layer, a two-layer system shall be provided with zero clearance per ASTM E2336 at all locations. Material must be tested and listed for installation on grease ducts and installed per listed design. Refer to Section 233300 for prefabricated, pre-insulated access doors required for grease duct systems.

2.2 JACKETS

- A. Vapor Barrier Jackets: Kraft reinforced foil scrim vapor barrier with self-sealing adhesive joints. Beach puncture resistance ratio of at least 25 units. Tensile strength: 35 psi minimum. Single, self-seal acrylic adhesive on longitudinal jacket laps and butt strips.

2.3 JACKET COVERINGS

- A. Aluminum Jackets: ASTM B209; 0.016" thick; smooth or embossed stucco finish with Z edge seams and aluminum bands for outdoor use. Where colored jacket covers are called for, provide factory-applied hard film acrylic paint in color selected by Architect.
- B. Laminated flexible aluminum, self-adhering, protective jacketing, vapor barrier and weather proofing membrane with having high-performance adhesive capable of installation with no additional mechanical attachment. Owner/Architect shall select from manufacturer's standard finishes.

- 1. Acceptable Manufacturers:

- a. VentureClad 1577CW
 - b. Polyguard Alumaguard

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Install materials in accordance with manufacturer's instructions, codes, and industry standards.
- B. Install materials after ductwork has been tested.
- C. Clean surfaces for adhesives.
- D. Provide insulation with vapor barrier when air conveyed may be below ambient temperature.
- E. Exterior Duct Wrap - Flexible, Type A:
 - 1. Apply with edges tightly butted.
 - 2. Cut slightly longer than perimeter of duct to insure full thickness at corners. Do not wrap excessively tight.
 - 3. Seal joints with adhesive backed tape.
 - 4. Apply so insulation conforms uniformly and firmly to duct.
 - 5. Seal all penetrations of the vapor barrier by strap hangers or slip cable hangers with adhesive backed tape.
 - 6. Provide high-density insulation inserts on rectangular ducts at trapeze duct hangers to prevent crushing of insulation. Provide high-density insulation inserts with clamp-on round ducts requiring two (2) rods or straps to prevent crushing of insulation. Maintain continuous vapor barrier through the hanger.
 - 7. Tape all joints with Royal Tapes #RT 350 (216-439-7229), Venture Tape 1525CW, or Compac Type FSK. No substitutions will be accepted without written permission from the Architect/Engineer.
 - 8. Press tape tightly to the duct covering with a squeegee for a tight continuous seal. Fish mouths and loose tape edges are not acceptable.

9. Staples may be used, but must be covered with tape.
10. Vapor barrier must be continuous.
11. Mechanically fasten on 12" centers at bottom of ducts over 24" wide and on all sides of vertical ducts.

F. Semi Rigid Fiberglass Board Wrap - Type B (Indoor Use):

1. Impale on pins welded to the duct and secured with speed clips. Clip pins off close to speed clips.
2. Space pins as needed to hold insulation firmly against duct, but not less than one pin per square foot. Pins must be long enough to avoid compressing the insulation.
3. Seal all joints and speed clips with glass fabric set in adhesive or a 3" wide strip of Royal Tapes #RT 350 (216-439-7229), Venture Tape 1525CW, or Compac Type FSK facing tape.
4. For small areas, secure insulation with adhesive over the entire surface of the duct. Use adhesive in addition to pins as needed to prevent sagging on horizontal surfaces.

G. Semi Rigid Fiberglass Board Wrap - Type B (Outdoor Use):

1. Impale on pins welded to the duct and secured with speed clips. Clip pins off close to speed clips.
2. Space pins as required to hold insulation firmly against duct, but not less than one pin per square foot. Pins must be long enough to avoid compressing the insulation.
3. Seal all joints and speed clips with glass fabric set in adhesive or a 3" wide strip of the same facing tape with adhesive.
4. For small areas, secure insulation with adhesive over the entire surface of the duct. Use adhesive in addition to pins as needed to prevent sagging on horizontal surfaces.
5. Install vapor barrier jacket. Cover with aluminum jacket covering with seams on the bottom of horizontal ductwork.
6. Seal all butt joints with metal draw bands screwed to jacket and filled with sealant. Seal all joints watertight.
7. Provide positive slope on top of all horizontal surfaces to prevent ponding of water.

H. Interior Insulation - Flexible Duct Liner, Type C:

1. Observation of Duct Lining:
 - a. After installation of ductwork, Architect/Engineer may select random observation points in each system.
 - 1) At each observation point, cut and remove an 18" x 18" section of ductwork and liner for verification of installation.
 - 2) Random observation points based on one opening per 75 lineal ft. of total duct run.
 - b. When any of the observation points shows non-compliance, additional points will be designated by the Architect/Engineer, and observation repeated.
 - c. If 20% of points observed do not comply, remove and replace all lined ducts and repeat tests. Where replacement is not required, correct all non-compliances.
 - d. At end of observation, repair all duct lining and observation holes by installing standard, insulated, hinged access doors per Section 233300.
 - e. Paint or finish to match adjacent duct surfaces.

-
2. Impale on spindle anchors welded or mechanically fastened to the duct. Adhesive or glue fastened anchors are not acceptable. Maximum anchor spacing per SMACNA Duct Construction Standards or manufacturer's recommendations, whichever is more restrictive. Locate pins less than 3" from corners and at intervals not over 6" around the perimeter at leading and trailing edges. Locate pins within 3" of transverse joints and at intervals not over 16" long the length of the duct. Pins must be long enough to prevent compressing the insulation.
 3. In addition to anchors, secure liner with UL listed adhesive covering over 90% of the duct surface.
 4. Install per the latest edition of the SMACNA Manual.
 5. Leading edges shall be covered as follows:
 - a. For duct velocities below 3000 fpm, coat leading edges with adhesive. Neatly butt liner without gaps at transverse joints. Cut liner flush with end of the duct section for tight joints with no exposed duct. If adhesive is shop installed, field apply additional adhesive to the end of each duct section for complete adhesion of the liner. Protect edges from dirt and debris.
 - b. For duct velocities above 3000 fpm, cover leading edges with metal nosing. Use nosing on upstream edges of each section of duct. If the duct can be installed in either direction, provide nosing on each end or clearly mark the duct to allow visual verification after installation. Verify duct velocities based on the scheduled air flow rates and determine where metal nosing is required.
 - c. Install metal nosing in the following locations (regardless of velocity):
 - 1) The first three fittings downstream of all fans.
 - 2) At all duct liner interruptions. This includes fire dampers, access doors, branch connections, and all other locations where the edge of the liner is exposed.
 - 3) Trailing edges of transverse joints do not require metal nosings.
 6. Overlap liner at longitudinal joints. Make longitudinal joints at corners of the duct unless the duct size does not allow this. Coat longitudinal joints with adhesive at velocities over 2500 fpm.
 7. Seal all damaged duct liner with adhesive and glass cloth. Do not damage duct liner surface coatings.
 8. Duct dimensions given are net inside dimensions. Increase sheet metal to allow for insulation thickness.
- I. Plenum Walls - Type D:
1. Brush apply adhesive to the wall before installing insulation. Provide 100% coverage.
 2. Apply pins to the wall with adhesive. Locate pins 15" O.C. maximum and within 2" of all insulation edges.
 3. Secure insulation to pins with speed clips and cut all pins off close to the clips. Cover raw ends of pins with glass fabric set in adhesive.
 4. Cover all joints with 3" wide strips of glass fabric set in adhesive.
 5. Protect all door openings with sheet metal angles.
- J. Exterior Fire Protection, Flexible Type - Type F:
1. Cut and secure duct wrap around ductwork, support angles, and hangers per manufacturer's recommendations.
 2. Seal all joints as required to maintain enclosure rating.

- 3. Installation shall be rated for 2 hours, unless otherwise noted.
- 4. Provide manufacturer's recommended assembly to protect all access doors to maintain enclosure rating and to permit easy replacement of insulation.

- K. Continue insulation with vapor barrier through penetrations unless code prohibits.

- L. Provide 2" wide, 24" high, 26 gauge, galvanized sheet metal corner protection angles for all externally insulated ductwork extending to a floor or curb.

- 3.2 SCHEDULE

- A. Refer to Section 233100 for scheduling of insulation.

END OF SECTION 230713

SECTION 230719 - HVAC PIPING INSULATION

PART 1 - GENERAL

1.1 SECTION INCLUDES

- A. Piping Insulation.
- B. Insulation Jackets.

1.2 QUALITY ASSURANCE

- A. Applicator: Company specializing in piping insulation application with five years minimum experience.
- B. Materials: Listed and labeled for flame spread/smoke developed rating of no more than 25/50 when tested per ASTM E84 or UL 723 as required by code. Factory label insulation and jacket materials and adhesive, mastic, tapes, and cement material containers with appropriate markings of applicable testing agency.
- C. Products shall not contain asbestos, lead, mercury, or mercury compounds.
- D. Products that come in contact with stainless steel shall have a leachable chloride content of less than 50 ppm when tested according to ASTM C 871. Insulation materials for use on austenitic stainless steel shall be qualified as acceptable according to ASTM C 795.
- E. Foam insulation materials shall not use CFC or HCFC blowing agents in the manufacturing process.

1.3 REFERENCES

- A. ANSI/ASHRAE/IES Standard 90.1 (latest published edition) - Energy Standard for Buildings Except Low-Rise Residential Buildings.
- B. ANSI/ASTM C195 - Mineral Fiber Thermal Insulation Cement.
- C. ANSI/ASTM C533 - Calcium Silicate Block and Pipe Thermal Insulation.
- D. ANSI/ASTM C534 - Elastomeric Foam Insulation.
- E. ANSI/ASTM C547 - Mineral Fiber Preformed Pipe Insulation.
- F. ANSI/ASTM C552 - Cellular Glass Block and Pipe Thermal Insulation.
- G. ASTM C449 - Mineral Fiber Hydraulic-setting Thermal Insulating and Finishing Cement.
- H. ASTM C591 - Unfaced Preformed Rigid Cellular Polyisocyanurate Insulation.
- I. ASTM C578 - Preformed Cellular Polystyrene Thermal Insulation.

- J. ASTM C1126 - Standard Specification for Faced or Unfaced Rigid Cellular Phenolic Thermal Insulation.
- K. ASTM C1729 - Standard Specification for Aluminum Jacketing for Insulation.
- L. ASTM C1767 - Standard Specification for Stainless Steel Jacketing for Insulation.
- M. ASTM E84 - Surface Burning Characteristics of Building Materials.
- N. NFPA 255 - Surface Burning Characteristics of Building Materials.
- O. UL 723 - Surface Burning Characteristics of Building Materials.
- P. National Commercial & Industrial Insulation Standards - 1999 Edition - as published by Midwest Insulation Contractors Association and endorsed by National Insulation Contractors Association.

1.4 SUBMITTALS

- A. Submit shop drawings per Section 230500. Include product description, list of materials and thickness for each service, and locations.

PART 2 - PRODUCTS

2.1 INSULATION

- A. Type A: Glass fiber; ANSI/ASTM C547; 0.24 maximum 'K' value at 75°F; non-combustible. All-purpose polymer or polypropylene service jacket, listed and labeled at no more than 25/50 when tested per ASTM E84 or UL 723 as required by code.
- B. Type B: Flexible elastomeric foam insulation; closed-cell, sponge or expanded rubber (polyethylene type is not permitted); ANSI/ASTM C534, Grade 1 Type I for tubular materials; flexible plastic; 0.25 maximum 'K' value at 75°F, listed and labeled at no more than 25/50 when tested per ASTM E84 or UL 723 as required by code. Maximum 1" thick per layer where multiple layers are specified.
- C. Type C: Molded rigid cellular glass; ANSI/ASTM C-552; 0.29 maximum 'K' value at 75°F; density 7.3lb/ft; minimum compressive strength 90 psi parallel to rise; moisture resistant, non-combustible; suitable for -100°F to +900°F. For below grade installations use asphaltic mastic paper vapor barrier jacket. Use self-seal all-purpose polymer or polypropylene service jacket for above grade installations.
- D. Type D: Hydrous Calcium Silicate; ASTM C533; rigid molded pipe insulation; asbestos free; 0.40 'K' value at 300°F; 1200°F maximum service temperature; 16 gauge stainless steel tie wires on maximum 12" centers.

2.2 VAPOR BARRIER JACKETS

- A. All-purpose polymer or polypropylene service jacket vapor barrier with self-sealing adhesive joints. Beach puncture resistance ratio of at least 50 units. Tensile strength: 35 psi minimum. Single, self-seal acrylic adhesive on longitudinal jacket laps and butt strips.

2.3 JACKET COVERINGS

- A. Aluminum Jackets: ASTM C1729; 0.016" thick (thicker where required by ASTM C1729); stucco embossed finish with Z edge seams and aluminum bands for outdoor use. Where colored jacket covers are called for, provide factory-applied hard film acrylic paint in color selected by Architect.
- B. Plastic Jackets and Fitting Covers: High impact, glossy white, 0.030" thick, self-extinguishing plastic. Suitable for use indoors or outdoors with ultraviolet inhibitors. Suitable for -40°F to 150°F. Listed and labeled at no more than 25/50 when tested per ASTM E84 or UL 723 as required by code.

PART 3 - EXECUTION

3.1 PREPARATION

- A. Install insulation after piping has been tested. Pipe shall be clean, dry and free of rust before applying insulation.
- B. Patch and repair torn insulation. Paint to match adjacent insulation surface.

3.2 INSTALLATION

- A. General Installation Requirements:
 - 1. Install materials per manufacturer's instructions, building codes and industry standards.
 - 2. Continue insulation with vapor barrier through penetrations. This applies to all insulated piping. Maintain fire rating of all penetrations.
 - 3. All piping and insulation that does not meet 25/50 that is in an air plenum shall have written approval from the Authority Having Jurisdiction and the local fire department for authorization and materials approval. If approval has been allowed, the non-rated material shall be wrapped with a product that has been listed and labeled having a flame spread index of not more than 25 and a smoke-developed index of not more than 50 when tested as a composite in accordance with ASTM E84 or UL 723.
 - 4. On 1" and smaller piping routed through metal wall studs, provide a plastic grommet to protect the piping. The piping shall be insulated between the wall studs, and the insulation shall butt up to each stud.
- B. Insulated Piping Operating Below 60°F:
 - 1. Insulate fittings, valves, unions, flanges, flexible connections, flexible hoses, and expansion joints. Seal all penetrations of vapor barrier.
 - 2. On piping operating below 60°F in locations that are not mechanically cooled (e.g., penthouses, mechanical rooms, tunnels, chases at exterior walls, etc.), Type B insulation shall be used.
 - 3. All balance valves and strainers with fluid operating below 60°F shall be insulated with a removable plug wrapped with vapor barrier tape to allow access for reading and adjusting of the balancing valve and cleaning and servicing of the balancing valve.

C. Insulated Piping Operating Between 60°F and 140°F:

1. Do not insulate flanges and unions, but bevel and seal ends of insulation at such locations. Insulate all fittings, valves and strainers.

D. Insulated Piping Operating Above 140°F:

1. Insulate fittings, valves, flanges, float & thermostatic steam traps, and strainers. On gate valves, the insulation shall be extended to cover the entire valve bonnet, leaving only the portion of the stem that is above the bonnet and valve operator exposed.
2. All balance valves with fluid operating above 140°F shall be insulated and an opening shall be left in the insulation to allow for reading and adjusting the valve.
3. The use of removable insulation jackets is acceptable for insulating large and non-cylindrical shaped piping components (e.g., check valves, pressure regulating valves, calibrated balance valves, gate valve bonnets, F&T traps, strainers, line sets, and the like).

E. Refrigerant Piping:

1. On refrigerant piping (25°F and above) and not required to meet the 25/50 flame/smoke, provide at each strut or clevis support an insulation coupling to support pipe and to accept insulation thickness of adjoining insulation, to prevent insulation from sagging and crushing. The coupling shall be suitable for planned temperatures, use with specified pipe material, and shall be a 360°, one-piece cylindrical segment. Use mechanical fasteners where coupling cannot be installed on pipe during installation. Contractor shall apply adhesive to ends of insulation entering insulation coupling to maintain vapor barrier.

F. Exposed Piping:

1. Locate and cover seams in least visible locations.
2. Where exposed insulated piping extends above the floor, provide a sheet metal guard around the insulation extending 12" above the floor. Guard shall be 0.016" cylindrical smooth or stucco aluminum and shall fit tightly to the insulation.

3.3 SUPPORT PROTECTION

A. Provide a shield on all insulated piping at each support between the insulation jacket and the support.

B. On all insulated piping greater than 1-1/2", provide shield with insulation insert of same thickness and contour as adjoining insulation at each support, between the pipe and insulation jacket, to prevent insulation from sagging and crushing. Inserts shall be as follows:

1. The insert shall be suitable for planned temperatures, be suitable for use with specific pipe material, and shall be a minimum 180° cylindrical segment the same length as metal shields. Inserts shall be:
 - a. Cellular glass (Type C) (for all temperature ranges) with a minimum compressive strength of 90 psi is acceptable for pipe sizes 14" and below. For pipe sizes larger than 14, provide rolled steel plate in addition to the shield.

- b. Molded hydrous calcium silicate (Type D) (only use for pipes with operating temperatures above 90°F, with a minimum compressive strength of 100 psi is acceptable for pipe sizes 14" and below. For pipe sizes larger than 14", provide rolled steel plate in addition to the shield.
- c. As an alternative to separate pipe insulation insert and saddle, properly sized manufactured integral rigid insulation insert and shield assemblies may be used.
 - 1) Products:
 - a) Buckaroo CoolDry
 - b) Cooper/B-Line Fig. B3380 through B3384
 - c) Pipe Shields A1000, A2000
- d. Insulation Couplings:
 - 1) Molded thermoplastic slip coupling, -65°F to 275°F, sizes up to 4-1/8" OD, and receive insulation thickness up to 1". Suitable for use indoors or outdoors with UV stabilizers. Vertical insulation riser clamps shall have a 1,000lb vertical load rating. On cold pipes operating below 60°F, cover joint and coupling with vapor barrier mastic to ensure continuous vapor barrier.
 - 2) PET thermoplastic foam load bearing core with elastomeric foam ends and lap-seal jacket.
 - 3) Horizontal Strut Mounted Insulated Pipe Manufacturers:
 - a) Klo-Shure or equal
 - b) Armafix Ecolight
 - 4) Vertical Manufacturers:
 - a) Manufacturers: Klo-Shure Titan or equal
- e. Rectangular blocks, plugs, or wood material are not acceptable.
- f. Temporary wood blocking may be used by the Piping Contractor for proper height; however, these must be removed and replaced with proper inserts by the Insulation Contractor. Refer to Supports and Anchors specification section for additional information.

C. Neatly finish insulation at supports, protrusions, and interruptions.

D. Install metal shields between all hangers or supports and the pipe insulation. Shields shall be galvanized sheet metal, half-round with flared edges. Adhere shields to insulation. On cold piping, seal the shields vapor-tight to the insulation as required to maintain the vapor barrier, or add separate vapor barrier jacket.

E. Shields shall be at least the following lengths and gauges:

Pipe Size	Shield Size
1/2" to 3-1/2"	12" long x 18 gauge
4"	12" long x 16 gauge
5" to 6"	18" long x 16 gauge
8" to 14"	24" long x 14 gauge
16" to 24"	24" long x 12 gauge

- F. Elastomeric foam insulation shields/saddle; molded thermoplastic rigid pipe saddle sized for insulation outside diameter. Length as indicated above.
- G. Ferrous hot piping 4 inches (100 mm) and larger, provide steel saddle at rollers as described in Section 230529 "HVAC Supports and Anchors".
- H. Minimum 1/4" rolled galvanized steel plates shall be provided in addition to the sleeves as reinforcement on large pipes to reduce point loading on roller, trapeze hanger and strut support locations depending on insulation compressive strength. Refer to section above for exact locations.

3.4 INSULATION

A. Type A Insulation:

- 1. All Service Jackets: Seal all longitudinal joints with self-seal laps using a single pressure sensitive adhesive system. Do not staple.
- 2. Insulation without self-seal lap may be used if installed with Benjamin Foster 85-20 or equivalent Chicago Mastic, 3M or Childers lap adhesive.
- 3. Apply insulation with laps on top of pipe.
- 4. Fittings, Valve Bodies and Flanges: For 4" and smaller pipes, insulate with 1 lb. density insulation wrapped under compression to a thickness equal to the adjacent pipe insulation. For pipes over 4", use mitered segments of pipe insulation. Finish with preformed plastic fitting covers. Secure fitting covers with pressure sensitive tape at each end. Overlap tape at least 2" on itself. For pipes operating below 60°F, seal fitting covers with vapor retarder mastic in addition to tape.

B. Type B Insulation:

- 1. Install per manufacturer's instructions or ASTM C1710.
- 2. Elastomeric Cellular Foam: Where possible, slip insulation over the open end of pipe without slitting. Seal all butt ends, longitudinal seams, and fittings with adhesive. At elbows and tees, use mitered connections. Do not compress or crush insulation at cemented joints. Joints shall be sealed completely and not pucker or wrinkle. Exterior installations shall contain factory applied polymeric, moisture, and UV resistant covering with ends sealed with adhesive and similar cover; or Contractor shall paint the outside of outdoor insulation with two coats of latex enamel paint recommended by the manufacturer.
- 3. Insulation Installation on Straight Pipes and Tubes:
 - a. Seal longitudinal seams and end joints with manufacturer's recommended adhesive to eliminate openings in insulation that allow passage of air to surface being insulated.
 - b. Insulation must be installed in compression to allow for expansion and contraction. Insulation shall be pushed onto the pipe, never pulled. Stretching of insulation may result in open seams and joints.
- 4. Insulation Installation on Valves and Pipe Specialties:
 - a. Install preformed sections of same material as straight segments of pipe insulation when available.

- b. When preformed sections are not available, install mitered sections of pipe insulation to valve body.
- c. Arrange insulation to permit access to packing and to allow valve operation without disturbing insulation.

C. Type C Insulation:

- 1. Seal all longitudinal joints with manufacturer approved adhesive. Secure butt joint strips in a similar manner.
- 2. Insulate fittings with prefabricated fittings.

D. Type D Insulation:

- 1. Use pre-molded half sections. Butt longitudinal and circumferential joints tightly. Wire in place with 16 gauge stainless steel wire on maximum 12" centers.
- 2. Apply in two layers. Stagger all joints between layers. Wire each layer individually.

3.5 JACKET COVER INSTALLATION

A. Metal Covering:

- 1. Provide vapor barrier as specified for insulation type. Cover with aluminum jacket covering with seams located on the bottom of horizontal piping. Include fittings, joints and valves.
- 2. Seal all interior and exterior butt joints with metal draw bands and sealant. Seal all exterior joints watertight.
- 3. Interior joints do not need to be sealed.
- 4. Use metal covering on the following pipes:
 - a. All Type D insulation.

B. Plastic Covering:

- 1. Provide vapor barrier as specified for insulation type. Cover with plastic jacket covering. Position seams to shed water.
- 2. Solvent weld all joints with manufacturer recommended cement.
- 3. Overlap all laps and butt joints 1-1/2" minimum. Repair any loose ends that do not seal securely. Solvent weld all fitting covers in the same manner. Final installation shall be watertight.
- 4. All joints in areas noted shall meet USDA standards for Totally Sealed Systems, including overlaps of 1" on circumferential and 1.5" to 2" on longitudinal seams.
- 5. Use plastic insulation covering on all exposed pipes including, but not limited to:
 - a. All exposed piping in finished spaces unless noted otherwise on the drawings.
 - b. All exposed piping in kitchen areas.
 - c. All exposed piping adjacent to cloud ceilings.
 - d. All exposed piping in unfinished areas as noted on drawings (e.g., storage rooms, janitor's closets, utility rooms, etc.).
 - e. All exposed piping in mechanical or equipment rooms below 8'-0" above floor.
 - f. All exposed piping in mechanical rooms that is subject to damage from normal operations. (Example: Piping that must be stepped over routinely.)

3.6 SCHEDULE

- A. Refer to drawings for insulation schedule.

END OF SECTION 230719

SECTION 230800 - COMMISSIONING OF HVAC

PART 1 - GENERAL

1.1 SECTION INCLUDES

- A. Description
- B. Responsibilities
- C. Related Work
- D. Test Equipment

1.2 DESCRIPTION

- A. The purpose of this section is to specify Division 23 responsibilities in the commissioning process.
- B. The systems to be commissioned are listed in Section 019100.
- C. Commissioning requires the participation of the Division 23 Contractor to ensure that all systems are operating in a manner consistent with the Contract Documents. The general commissioning requirements and coordination are detailed in Section 019100. Division 23 Contractor shall be familiar with all parts of Section 019100 and shall execute all commissioning responsibilities assigned to them in the Contract Documents.

1.3 RESPONSIBILITIES

- A. Refer to Section 019100.

1.4 RELATED WORK

- A. Specific commissioning requirements are given in the following sections of these specifications. All the following sections apply to the Work of this section.
 - 1. Section 017823 - Operations and Maintenance
 - 2. Section 017900 - Demonstration and Training
 - 3. Section 019100 - Commissioning
 - 4. Section 220800 - Commissioning of Plumbing
 - 5. Section 260800 - Commissioning of Electrical
 - 6. Section 270800 - Commissioning of Communications

PART 2 - PRODUCTS

2.1 TEST EQUIPMENT

- A. The Contractor shall provide all test equipment necessary to fulfill the testing requirements of this Division. This equipment includes, but is not limited to, the following:
 - 1. Handheld temperature and relative humidity meter.
 - 2. Infrared thermometer gun.
 - 3. Analog differential pressure gauge and associated tubing.
 - 4. Portable computer with access to the building automation system.
- B. All testing equipment shall be of sufficient quality and accuracy to test and/or measure system performance with the tolerances specified in the related specifications. If not otherwise noted, the following minimum requirements apply:
 - 1. Temperature sensors and digital thermometers shall have a certified calibration within the past year to an accuracy of 0.5°F and a resolution of +/- 0.1°F.
 - 2. Pressure sensors shall have an accuracy of +/- 2.0% of the value range being measured (not full range of meter) and have been calibrated within the last year.
 - 3. All equipment shall be calibrated according to the manufacturer's recommended intervals and when dropped or damaged. Calibration tags shall be affixed or certificates readily available.
- C. Refer to Section 019100 for additional Division 23 requirements.

PART 3 - EXECUTION

- A. Refer to Section 019100.

END OF SECTION 230800

SECTION 230900 - CONTROLS

PART 1 - GENERAL

1.1 SECTION INCLUDES

- A. Complete System of Automatic Controls.
- B. Control Devices, Components, Wiring and Material.
- C. Instructions for Owners.
- D. Remodeling.

1.2 QUALITY ASSURANCE

- A. Manufacturer: Company specializing in manufacturing the products specified in this Section with minimum five years' experience.
- B. TCC: Company specializing in the work of this section with minimum five years temperature control experience.
- C. Technician: Minimum five years' experience installing commercial temperature control systems.
- D. TCCs are limited to firms regularly employing a minimum of five full-time temperature control technicians within 100 miles of the job site.

1.3 REFERENCES

- A. AMCA 500 - Test Methods for Louvers, Dampers and Shutters.
- B. ANSI/ASHRAE/IES Standard 90.1 (latest published edition) - Energy Standard for Buildings Except Low-Rise Residential Buildings.
- C. ANSI/ASHRAE Standard 135-2020: BACnet® - A Data Communication Protocol for Building Automation and Control Networks, including all amendments.
- D. ANSI/NEMA 250 - Enclosures for Electrical Equipment (1000 volts Maximum).
- E. ANSI/NFPA 70 - National Electrical Code.
- F. ANSI/NFPA 90A - Installation of Air-Conditioning and Ventilation Systems.
- G. ASHRAE 62.1 - Ventilation for Acceptable Indoor Air Quality.
- H. ASHRAE 85 - Automatic Control Terminology for Heating, Ventilating, Air Conditioning.

1.4 SUBMITTALS

A. Equipment Coordination:

1. The Controls Contractor shall obtain approved equipment submittals from other contractors to determine equipment wiring connections, to choose appropriate controllers, and to provide programming.
2. Control valve selections shall be based on flow rates shown in approved shop drawings.
3. Coordinate the control interface of all equipment with the equipment manufacturers prior to submittal submission.

B. Shop Drawings:

1. Submit shop drawings per Section 230500. In addition, submit an electronic copy of the shop drawings in Adobe Acrobat (.pdf) format to the Owner for review.
2. Cross-reference all control components and point names in a single table located at the beginning of the submittal with the identical nomenclature used in this section.
3. Submittal shall also include a trunk cable schematic diagram depicting operator workstations, control panel locations and a description of the communication type, media and protocol.
4. System Architecture: Provide riser diagrams of wiring between central control unit and all control panels. This shall include specific protocols associated with each level within the architecture. Identify all interface equipment between CPU and control panels. The architecture shall include interface requirements with other systems including, but not limited to, security systems, lighting control, fire alarm, elevator status, and power monitoring system.
5. Diagrams shall include:
 - a. Wiring diagrams and layouts for each control panel showing all termination numbers.
 - b. Schematic diagrams for all control, communication, and power wiring. Provide a schematic drawing of the central system installation. Label all cables and ports with computer manufacturers' model numbers and functions. Show all interface wiring to the control system.
 - c. Identification of all control components connected to emergency power.
 - d. Schematic diagrams for all field sensors and controllers.
 - e. A schematic diagram of each controlled system. The schematics shall have all control points labeled. The schematics shall graphically show the location of all control elements in the system.
 - f. A schematic wiring diagram for each controlled system. Each schematic shall have all elements labeled. Where a control element is the same as that shown on the control system schematic, label it with the same name. Label all terminals.
 - g. A tabular instrumentation list for each controlled system. The table shall show element name, type of device, manufacturer, model number and product data sheet number.
 - h. All installation details and any other details required to demonstrate that the system will function properly.
 - i. All interface requirements with other systems.
6. The network infrastructure shall conform to the published guidelines for wire type, length, number of nodes per channel, termination, and other relevant wiring and infrastructure criteria as published. The number of nodes per channel shall be no more than 80% of the defined segment (logical or physical) limit in order to provide future system enhancement with minimal infrastructure modifications.

-
7. Sequences: Submit a complete description of the operation of the control system, including sequences of operation. The description shall include and reference a schematic diagram of the controlled system. The wording of the control sequences in the submittal shall match verbatim that included in the construction documents to ensure there are no sequence deviations from that intended by the Architect/Engineer. Clearly highlight any deviations from the specified sequences on the submittals.
 8. Points List Schedule: Submit a complete points list of all points to be connected to the TCS and FMCS. The points list for each system controller shall include both inputs and outputs (I/O), point number, the controlled device associated with the I/O point, the location of the I/O device, and reference drawings. Where a control point is the same as that shown on the control system schematic, label it with the same name. Points list shall specifically identify alarms, trends, event history, archive, totalization, graphic points, and all mapped points from other systems (security systems, lighting control, fire alarm, etc.). Provide points lists, point naming convention, and factory support information for systems provided and integrated into the FMCS.
 9. Damper Schedule: Schedule shall include a separate line for each damper and a column for each of the damper attributes:
 - a. Damper Identification Tag.
 - b. Location.
 - c. Damper Type.
 - d. Damper Size.
 - e. Duct Size.
 - f. Arrangement.
 - g. Blade Type.
 - h. Velocity.
 - i. Pressure Drop.
 - j. Fail Position.
 - k. Actuator Identification Tag.
 - l. Actuator Type.
 - m. Mounting.
 10. Valve Schedule: Valve manufacturer shall size valves and create a valve schedule. Schedule shall include a separate line for each valve and a column for each of the valve attributes:
 - a. Valve Identification Tag.
 - b. Location.
 - c. Valve Type.
 - d. Valve Size.
 - e. Pipe Size.
 - f. Configuration.
 - g. Flow Characteristics.
 - h. Capacity.
 - i. Valve C_v.
 - j. Design Pressure Drop.
 - k. Pressure Drop at Design Flow.
 - l. Fail Position.
 - m. Close-off Pressure.
 - n. Valve and Actuator Model Number and Type.

11. Indoor modular air handling units (Section 237313) and mixed flow return air fans (Section 233413) provided under this project will have piezometer type sensors mounted at fan inlets by fan manufacturer. Fan manufacturer will provide fan specific flow coefficients and equations that can be used to calculate fan airflow based on measured pressure differential at fan inlet. TCC shall provide the following:
 - a. Quantity of pressure transducers so that each individual fan is served by a dedicated pressure transducer. Each pressure transducer shall have a range that is selected based on scheduled maximum airflow for each fan. TCC shall submit a schedule that shows the following calculations for each fan/pressure transducer:
 - 1) Pressure drop at maximum scheduled airflow for each fan using fan manufacturer's flow coefficient.
 - 2) Recommended transducer range.
 - b. Pneumatic tubing as required to interconnect all piezometer type sensors and pressure transducer. **Note: Where UV lamps are installed upstream of supply fan inlets, only copper tubing shall be used.**
 - c. Fasteners and supports as required to securely attached tubing, pressure transducers, conduits, wiring, and the like for a complete installation.
12. Product Data Sheets: Required for each component that includes: unique identification tag that is consistent throughout the submittal, manufacturer's description, technical data, performance curves, installation/maintenance instructions, and other relevant items. When manufacturer's literature applies to a product series rather than a specific product, the data specifically applicable to the project shall be highlighted or clearly indicated by other means. Each submitted piece of literature and drawings shall clearly reference the specification and/or drawing that the submittal is to cover. General catalogs shall not be accepted as cutsheets to fulfill submittal requirements.
13. Provide PICS files indicating the BACnet functionality and configuration of each device.
14. Provide documentation of submitted products that have been tested and listed by the BACnet Testing Laboratory (BTL), or provide a letter on the manufacturer's company letterhead indicating the anticipated date by which testing is expected to be completed. If, for any reason, BTL testing and listing has not been completed, a written commitment to upgrade installed controls to a version that meets BTL testing and listing requirements if problems are found during BTL testing is required.
15. Graphic Display: Include a sample graphic of each system and component identified in the points list with a flowchart (site map) indicating how the graphics are to be linked to each other for system navigation.
16. Control System Demonstration and Acceptance: Provide a description of the proposed process, along with all reports and checklists to be used.
17. Clearly identify work by others in the submittal.
18. Quantities of items submitted may be reviewed but are the responsibility of the Contractor to verify.

C. Operation and Maintenance Manual:

1. In addition to the requirements of Section 230500, submit an electronic copy of the O&M manuals in PDF format.
2. Provide three complete sets of manuals.
3. Each O&M manual shall include:
 - a. Table of contents with indexed tabs dividing information as outlined below.
 - b. Definitions: List of all abbreviations and technical terms with definitions.

- c. Warranty Contacts: Names, addresses, and 24-hour telephone numbers of contractors installing equipment and controls and service representatives of each.
- d. Licenses, Guarantees, and Warranties: Provide documentation for all equipment and systems.
- e. System Components: Alphabetical list of all system components, with the name, address, and telephone number of the vendor.
- f. Operating Procedures: Include procedures for operating the control systems; logging on/off; enabling, assigning, and reporting alarms; generating reports; collection, displaying, and archiving of trended data; overriding computer control; event scheduling; backing up software and data files; and changing setpoints and other variables.
- g. Programming: Description of the programming language (including syntax), statement descriptions (including algorithms and calculations used), point database creation and modification, program creation and modification, and use of the editor.
- h. Engineering, Installation, and Maintenance: Explain how to design and install new points, panels, and other hardware; recommended preventive maintenance procedures for all system components, including a schedule of tasks (inspection, cleaning, calibration, etc.), time between tasks, and task descriptions; how to debug hardware problems; and how to repair or replace hardware. A list of recommended spare parts.
- i. Software: One set of CDs containing an executable copy of all custom software created using the programming language, including the setpoints, tuning parameters, and object database.
- j. Graphics: A glossary or icon symbol library detailing the function of each graphic icon and graphics creation and modification. One set of CDs containing files of all color graphic screens created for the project.

D. Training Manual:

- 1. Provide a course outline and training manuals for each training class.

E. Record Documents:

- 1. Submit record documentation per Section 230500.
- 2. Provide a complete set of "as-built" drawings and application software on CDs. Provide drawings as AutoCAD™ or Visio™ compatible files. Provide two copies of the "as-built" drawings with revisions clearly indicated in addition to the documents on compact disk. All as-built drawings shall also be installed on the FMCS server in a dedicated directory. Provide all product data sheets in PDF format.
- 3. Submit two hard copies and one electronic copy of as-built versions of the shop drawings, including product data and record drawings with revisions clearly indicated. Provide floor plans showing actual locations of control components including panels, thermostats, sensors, and hardware.
- 4. Provide all completed testing and commissioning reports and checklists, along with all trend logs for each system identified in the points lists.
- 5. Submit printouts of all graphic screens with current values (temperatures, pressures, etc.) to the Architect/Engineer verifying completion and proper operation of all points.

1.5 DELIVERY, STORAGE AND HANDLING

- A. Provide factory-shipping cartons for each piece of equipment and control device. Maintain cartons through shipping, storage, and handling as required to prevent equipment damage. Store equipment and materials inside and protected from weather.

- B. Factory-Mounted Components: Where control devices specified in this section are indicated to be factory mounted on equipment, arrange for shipping control devices to unit manufacturer.

1.6 PRODUCTS FURNISHED BUT NOT INSTALLED UNDER THIS SECTION

- A. Flow Switches.
- B. Automatic Dampers.

1.7 AGENCY AND CODE APPROVALS

- A. All products shall have the following agency approvals. Provide verification that the approvals exist for all submitted products with the submittal package.
 - 1. UL-916; Energy Management Systems.
 - 2. C-UL listed to Canadian Standards Association C22.2 No. 205-M1983 "Signal Equipment."
 - 3. EMC Directive 89/336/EEC (European CE Mark).
 - 4. FCC, Part 15, Subpart J, Class A Computing Devices.

1.8 ACRONYMS

- A. Acronyms used in this specification are as follows:
 - 1. B-AAC BACnet Advanced Application Controller
 - 2. B-ASC BACnet Application Specific Controller
 - 3. BTL BACnet Testing Laboratories
 - 4. DDC Direct Digital Controls
 - 5. FMCS Facility Management and Control System
 - 6. GUI Graphic User Interface
 - 7. IBC Interoperable BACnet Controller
 - 8. IDC Interoperable Digital Controller
 - 9. LAN Local Area Network
 - 10. NAC Network Area Controller
 - 11. ODBC Open DataBase Connectivity
 - 12. OOT Object Oriented Technology
 - 13. OPC Open Connectivity via Open Standards
 - 14. PICS Product Interoperability Compliance Statement
 - 15. PMI Power Measurement Interface
 - 16. POT Portable Operator's Terminal
 - 17. TCC Temperature Control Contractor
 - 18. TCS Temperature Control System
 - 19. WAN Wide Area Network
 - 20. WBI Web Browser Interface

1.9 SUMMARY

- A. Extend Existing System:
 - 1. Extend the existing FMCS for this project.
 - 2. All controllers and accessories shall interface with the existing FMCS.

- B. TCC shall furnish all labor, materials, equipment, and service necessary for a complete and operating Temperature Control System (TCS) and Facility Management and Control System (FMCS) using Direct Digital Controls as shown on the drawings and as described herein.
- C. All labor, material, equipment and software not specifically referred to herein or on the plans that is required to meet the intent of this specification shall be provided without additional cost to the Owner.
- D. The Owner shall be the named license holder of all software associated with any and all incremental work on the project.

1.10 SYSTEM DESCRIPTION

- A. The entire TCS shall be comprised of a network of interoperable, standalone digital controllers communicating via the following protocol to an NAC. Temperature Control System products shall be as specified below.
- B. The FMCS shall include Network Area Controller or Controllers (NAC) within each facility. The NAC shall connect to the Owner's local or wide area network, depending on configuration. Provide access to the system, either locally in each building or remotely from a central site or sites, through standard Web browsers, via the Internet, and/or via local area network.
- C. Provide materials and labor necessary to connect factory supplied control components.
- D. Provide central and remote hardware, software, and interconnecting wire and conduit.
- E. The FMCS shall include automated alarming software capable of calling e-mail compatible cellular telephones and pagers. The e-mail alarm paging system shall be able to segregate users, time schedules, and equipment and be capable of being programmed by the Owner.
- F. For the dedicated configuration tool provided, it is preferable that it be launched from within the applicable Network Management Software. If not, include any software required for controller configuration as a leave-behind tool with enough license capability to support the installation.
- G. For each operator workstation provided, furnish one legal copy of all software tools, configuration tools, management tools, and utilities used during system commissioning and installation. All tools shall be readily available in the market. Contractor shall convey to the Owner all software tools and their legal licenses at project closeout.
- H. Connection:
 - 1. Wireless control systems/functions are acceptable.
 - a. Wireless System Architecture:
 - 1) The system communications between the network controller(s) and the thermostats shall be a wireless mesh network architecture.
 - 2) The wireless mesh network configuration must adhere to the IEEE 802.15.4 specification and operate in the band of 2.4GHz as a frequency hopping, spread spectrum network.
 - 3) The wireless mesh network shall constitute a wireless communications path between the wireless coordinator(s) and wireless thermostat backplates.

- 4) The line of site (LOS) range from a wireless coordinator and the wireless thermostat backplate shall be specified at 3,000 feet or greater, and the LOS range from backplate to backplate shall be specified at 1,000 ft.
- 5) Each wireless thermostat backplate shall incorporate wireless mesh network 'hopping' technology, allowing the communications to 'hop' from one backplate to the next.
- 6) The wireless mesh network configuration must be 'self-healing', attempting to finding alternate paths to the end destination of the communications in the event a known primary path is unavailable.
- 7) Contractor is responsible to add all equipment necessary (e.g., repeaters) to make system complete and operating. Wireless repeaters shall extend the range of the mesh network and shall provide multiple data routes. Repeaters shall have 15 user-selectable channels. Wireless repeaters shall support up to 15 devices. Power requirements shall be 110 VAC standard outlet (converted to 3.3 VDC by repeater internal adaptor) or 5-30 VDC external DC power supply. Operating frequency band shall be 2.4 GHz ISM Band. Repeaters shall be equipped with omni-directional dipole antennas at 2.4 to 2.5 GHz. Units shall operate at 32degF to 122degF conditions.

b. Components allowed for wireless:

- 1) Room sensors (e.g., thermostats, RH, CO2).

c. Battery shall be replaceable with expected operating life of 15 years based on 30-second transmission frequency.

d. Wireless Testing: The Contractor shall conduct all system testing. This shall include all calibration and adjustments of equipment controls, troubleshooting, and final adjustments or corrective action that may be required to provide a complete system that provides the specified performance and all required system features and functions listed herein and as further detailed on the drawings.

- 1) At a minimum, the installer shall perform the following inspections and tests of the installed wireless controls system:
 - a) Verify that all features and functionality are operating properly.
 - b) Verify that the system receives signal from source and synchronizes all devices as specified. If not, Contractor is responsible to add all equipment necessary (e.g., repeaters) to make system complete and operating.
 - c) Verify that each device receives proper signals.
 - d) Verify that all controls are properly labeled and interconnecting wires and terminals are identified.

1.11 JOB CONDITIONS

- A. Cooperation with Other Trades: Coordinate the Work of this section with that of other sections to ensure that the Work will be carried out in an orderly fashion. It is this Contractor's responsibility to check the Contract Documents for possible conflicts between the Work of this section and that of other crafts in equipment location; pipe, duct and conduit runs; electrical outlets and fixtures; air diffusers; and structural and architectural features.

1.12 WARRANTY

- A. Refer to Section 230500 for warranty requirements.

- B. Within the warranty period, any defects in the work provided under this section due to faulty materials, methods of installation or workmanship shall be promptly (within 48 hours after receipt of notice) repaired or replaced by this Contractor at no expense to the Owner.
- C. Warranty requirements include furnishing and installing all FMCS software upgrades issued by the manufacturer during the one-year warranty period.
- D. Update all software and back-ups during warranty period and all user documentation on the Owner's archived software disks.

1.13 WARRANTY ACCESS

- A. The Owner shall grant to this Contractor reasonable access to the TCS and FMCS during the warranty period.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. BACnet Protocol:
 - 1. Automated Logic: WebCTRL
 - 2. Honeywell
 - 3. Johnson Controls: Metasys Extended Architecture
 - 4. Siemens Building Technologies: DESIGO
 - 5. Schneider Electric - EcoStruxure Building Operation

2.2 SYSTEM ARCHITECTURE

- A. General:
 - 1. The Temperature Control System (TCS) and Facility Management Control System (FMCS) shall consist of a network of interoperable, standalone digital controllers, a computer system, graphic user interface software, printers, network devices, valves, dampers, sensors, and other devices as specified herein.
 - 2. The installed system shall provide secure password access to all features, functions and data contained in the overall FMCS.
- B. Open, Interoperable, Integrated Architectures:
 - 1. All components and controllers supplied under this Division shall be true "peer-to-peer" communicating devices. Components or controllers requiring "polling" by a host to pass data are not acceptable.
 - 2. The supplied system must be able to access all data using standard Web browsers without requiring proprietary operator interface and configuration programs. An Open DataBase Connectivity (ODBC) or Structured Query Language (SQL) compliant server database is required for all system database parameter storage. This data shall reside on a supplier-installed server for all database access. Systems requiring proprietary database and user interface programs are not acceptable.

3. Hierarchical or "flat" topologies are required to have system response times as indicated below and to manage the flow and sharing of data without unduly burdening the customer's internal intranet network.
 - a. Maximum acceptable response time from any alarm occurrence (at the point of origin) to the point of annunciation shall not exceed 5 seconds for network connected user interfaces.
 - b. Maximum acceptable response time from any alarm occurrence (at the point of origin) to the point of annunciation shall not exceed 60 seconds for remote or dial-up connected user interfaces.

2.3 NETWORKS

- A. The Local Area Network (LAN) shall be a 100 megabits/sec Ethernet network supporting BACnet, Java, XML, HTTP, and SOAP. Provide support for multiple Network Area Controllers (NACs), user workstations and, if specified, a local server.
- B. Local area network minimum physical and media access requirements:
 1. Ethernet; IEEE Standard 802.3.
 2. Cable; 100 Base-T, UTP-8 wire, Category 6.
 3. Minimum throughput; 100 Mbps.
- C. Communication conduits shall not be installed closer than six feet from 110VAC or higher transformers or run parallel within six feet of electrical high-power cables. Route the cable as far from interference generating devices as possible. Where communication wire must cross 110VAC or higher wire, it must do so at right angles.
- D. Ground all shields (earth ground) at one point only to eliminate ground loops. Provide all shield grounding at the controller location, with the shield at the sensor/device end of the applicable wire being left long and "safed" off in an appropriate manner.
- E. There shall be no power wiring more than 30 VAC rms run in conduit with communications wiring. In cases where signal wiring is run in conduit with communication wiring, run all communication wiring and signal wiring using separate twisted pairs (24awg) in accordance with the manufacturer's wiring practices.

2.4 NETWORK AREA CONTROLLER (NAC)

- A. The TCC shall supply one or more Network Area Controllers (NAC) as part of this contract. Number of NACs required depends on the type and quantity of devices provided under Divisions 23 and 26. The TCC shall determine the quantity and type of devices.
- B. Each NAC shall provide the interface between the LAN or WAN and the field control devices and shall provide global supervisory control functions over the control devices connected to the NAC. It shall execute application control programs to provide:
 1. Calendar functions.
 2. Scheduling.
 3. Trending.
 4. Alarm monitoring and routing.
 5. Time synchronization.

-
6. Integration of all controller data.
 7. Network Management functions.
- C. The Network Area Controller shall provide the following hardware features as a minimum:
1. One Ethernet Port - 10/100 Mbps.
 2. One RS-232 port.
 3. One RS-485 port.
 4. Battery backup.
 5. Flash memory for long-term data backup. (If battery backup or flash memory is not supplied, the controller shall contain a hard disk with at least 1 gigabyte storage capacity.)
 6. The NAC must be capable of operation over a temperature range of 32°F to 122°F.
 7. The NAC must be capable of withstanding storage temperatures of between 0°F and 158°F.
 8. The NAC must be capable of operation over a humidity range of 5% RH to 95% RH, non-condensing.
- D. The NAC shall provide multiple user access to the system and support for ODBC or SQL. Databases resident on the NAC shall be ODBC-compliant or must provide an ODBC data access mechanism to read and write data stored within it.
- E. The NAC shall support standard Web browser access via the Internet or an intranet and a minimum of five (5) simultaneous users.
- F. Event Alarm Notification and Actions:
1. The NAC shall provide alarm recognition, storage; routing, management, and analysis to supplement distributed capabilities of equipment or application specific controllers.
 2. The NAC shall be able to route any alarm condition to any defined user location whether connected to a LAN, remote via dial-up telephone connection, or WAN.
 3. Alarm generation shall be selectable for annunciation type and acknowledgement requirements including, but not limited to:
 - a. Alarm
 - b. Normal
 4. Provide for the creation of a minimum of eight alarm classes with different routing and acknowledgement properties, e.g. security, HVAC, Fire, etc.
 5. Provide timed (scheduled) routing of alarms by class, object, group, or node.
 6. Provide alarm generation from binary object "runtime" and/or event counts for equipment maintenance. The user shall be able to reset runtime or event count values with appropriate password control.
- G. Treat control equipment and network failures as alarms and annunciated.
- H. Annunciate alarms in any of the following manners as defined by the user:
1. Screen message text.
 2. E-mail of the complete alarm message to multiple recipients. Provide the ability to route and e-mail alarms based on:
 - a. Day of week.

- b. Time of day.
 - c. Recipient.
 - 3. Pagers via paging services that initiate a page on receipt of e-mail message.
 - 4. Graphic with flashing alarm object(s).
 - 5. Printed message, routed directly to a dedicated alarm printer.
 - I. The FMCS shall record the following for each alarm:
 - 1. Time and date.
 - 2. Location (building, floor, zone, office number, etc.).
 - 3. Equipment tag.
 - 4. Acknowledge time, date, and user who issued acknowledgement.
 - 5. Number of occurrences since last acknowledgement.
 - J. Give defined users proper access to acknowledge any alarm.
 - K. A log of all alarms shall be maintained by the NAC and/or a server (if configured in the system) and shall be available for review by the user.
 - L. Provide a "query" feature to allow review of specific alarms by user-defined parameters.
 - M. A separate log for system alerts (controller failures, network failures, etc.) shall be provided and available for review by the user.
 - N. An error log to record invalid property changes or commands shall be provided and available for review by the user.
- 2.5 BACNET FMCS
- A. The intent of this specification is to provide a peer-to-peer networked, standalone, distributed control system with the capability to integrate ANSI/ASHRAE Standard 135-2001 BACnet, MODBUS, OPC, and other open and proprietary communication protocols in one open, interoperable system.
 - B. The supplied computer software shall employ object-oriented technology (OOT) for representation of all data and control devices in the system. Adherence to industry standards including the latest ANSI/ASHRAE Standard 135 (BACnet) to assure interoperability between all system components is required. For each BACnet device, the device supplier must provide a PICS document showing the installed device's compliance level. Minimum compliance is Level 3; with the ability to support data read and write functionality. Physical connection of BACnet devices shall be via Ethernet (BACnet Ethernet/IP) and/or RS-485 (BACnet MSTP).
 - C. Interoperable BACnet Controller (IBC):
 - 1. Controls shall be microprocessor based Interoperable BACnet Controllers (IBC) in accordance with the latest ANSI/ASHRAE Standard 135. Provide IBCs for unit ventilators, fan coils, heat pumps, terminal air boxes (TAB) and other applications. The application control program shall reside in the same enclosure as the input/output circuitry that translates the sensor signals. Provide a PICS document showing the installed system's compliance level to ANSI/ASHRAE Standard 135. Minimum compliance is Level 3.

-
2. The IBCs shall be listed by the BACnet Testing Laboratory (BTL) as follows:
 - a. BACnet Building Controller(s) (B-BC).
 - b. BACnet Advanced Application Controller(s) (B-AAC).
 - c. BACnet Application Specific Controller(s) (B-ASC).
 3. The IBCs shall communicate with the NAC.
 4. Each IBC sensor shall connect directly to the IBC and shall not use any of the I/O points of the controller. The IBC Sensor shall provide a two-wire connection to the controller that is polarity and wire type insensitive. The IBC sensor shall provide a communications jack for connection to the BACnet communication trunk to which the IBC controller is connected. The IBC sensor, the connected controller, and all other devices on the BACnet bus shall be accessible by the POT.
 5. All IBCs shall be fully application programmable and shall at all times maintain their BACnet Level 3 compliance. Controllers offering application selection only (non-programmable) require a 10% spare point capacity to be provided for all applications. Store all control sequences within or programmed into the IBC in non-volatile memory that does not depend on a battery to be retained.
 6. The Contractor supplying the IBCs shall provide documentation for each device, with the following information at a minimum:
 - a. BACnet Device; MAC address, name, type and instance number.
 - b. BACnet Objects; name, type and instance number.
 7. It is the responsibility of the Contractor to ensure that the proper BACnet objects are provided in each IBC.
- D. Object Libraries:
1. A standard library of objects shall be included for development and setup of application logic, user interface displays, system services, and communication networks.
 2. The objects in this library shall be capable of being copied and pasted into the user's database and shall be organized according to their function. In addition, the user shall have the capability to group objects created in their application and store the new instances of these objects in a user-defined library.
 3. In addition to the standard libraries specified here, the system supplier shall maintain an on-line accessible (over the Internet) library, available to all registered users, to provide new or updated objects and applications as they are developed.
 4. All control objects shall conform to the control objects specified in the BACnet specification.
 5. The library shall include applications or objects for the following functions, at a minimum:
 - a. Scheduling Object: The schedule must conform to the schedule object as defined in the BACnet specification, providing seven-day plus holiday and temporary scheduling features and a minimum of 10 on/off events per day. Data entry to be by graphic sliders to speed creation and selection of on-off events.
 - b. Calendar Object: The calendar must conform to the calendar object as defined in the BACnet specification, providing 12-month calendar features to allow for holiday or special event data entry. Data entry to be by graphic "point-and-click" selection. This object must be "linkable" to any or all scheduling objects for effective event control.
 - c. Override Object: Provide override object that is capable of restarting equipment turned off by other energy saving programs to maintain occupant comfort or for equipment protection.

- d. Start-Stop Time Optimization Object: Provide a start-stop time optimization object to start equipment just early enough to bring space conditions to desired conditions by the scheduled occupancy time. Also, allow equipment to be stopped before the scheduled unoccupied time just far enough ahead to take advantage of the building's "flywheel" effect for energy savings. Provide automatic tuning of all start-stop time object properties based on historical performance.
 - e. Demand Limiting Object: Provide a demand-limiting object that is capable of controlling demand for any selected energy utility (electric, oil, gas, etc.). The object shall be able to monitor a demand value and predict (using a sliding window prediction algorithm) the demand at the end of the user-defined interval period (1 to 60 minutes). This object shall also accommodate a utility meter time sync pulse for fixed interval demand control. Upon a prediction that will exceed the user-defined demand limit (supply a minimum of 6 per day), the demand limiting object shall issue shed commands to either turn off user specified loads or modify equipment setpoints to provide the desired energy reduction. If the list of sheddable equipment is not enough to reduce the demand to below the setpoint, display a message on the user's screen (as an alarm) instructing the user to take manual actions to maintain the desired demand. The shed lists are specified by the user and shall be selectable to be shed in either a fixed or rotating order to control which equipment is shed the most often. Upon suitable reductions in demand, the demand-limiting object shall restore the equipment that was shed in the reverse order in which it was shed. Each sheddable object shall have a minimum and maximum shed time property to provide both equipment protection and occupant comfort.
 6. The library shall include control objects for the following functions:
 - a. Analog Input Object: Minimum requirement is to comply with the BACnet standard for data sharing. Allow high, low and failure limits to be assigned for alarming. Also, provide a time delay filter property to prevent nuisance alarms caused by temporary excursions above or below the user defined alarm limits.
 - b. Analog Output Object: Minimum requirement is to comply with the BACnet standard for data sharing.
 - c. Binary Input Object: Minimum requirement is to comply with the BACnet standard for data sharing. The user must be able to specify either input condition for alarming. This object must also include the capability to record equipment runtime by counting the amount of time the hardware input is in an "on" condition. The user must be able to specify either input condition as the "on" condition.
 - d. Binary Output Object: Minimum requirement is to comply with the BACnet standard for data sharing. Properties to enable minimum on and off times for equipment protection as well as start-to-start delay must be provided. Incorporate the BACnet Command Prioritization priority scheme to allow multiple control applications to execute commands on this object with the highest priority command being invoked. Provide 16 levels of priority as a minimum. Systems not employing the BACnet method of contention resolution are not acceptable.
 - e. PID Control Loop Object: Minimum requirement is to comply with the BACnet standard for data sharing. Each individual property must be adjustable to allow proportional control only, or proportional with integral control, or proportional, integral and derivative control.
 - f. Comparison Object: Allow a minimum of two analog objects to be compared to select either the highest, lowest, or equality between the two linked inputs. Also, allow limits to be applied to the output value for alarm generation.
 - g. Math Object: Allow a minimum of four analog objects to be tested for the minimum or maximum, or the sum, difference, or average of linked objects. Also, allow limits to be applied to the output value for alarm generation.

-
- h. Custom Programming Objects: Provide a blank object template for the creation of new custom objects to meet specific user application requirements. This object must provide a simple BASIC-like programming language that is used to define object behavior. Provide a library of functions including, but not limited to, math and logic functions and string manipulation. Also, provide a comprehensive on-line debug tool to allow complete testing of the new object. Allow new objects to be stored in the library for reuse.
 - i. Interlock Object: Provide an interlock object that provides a means of coordination of objects within a piece of equipment, such as an air handler or other similar types of equipment. An example is to link the return fan to the supply fan such that, when the supply fan is started, the return fan object is also started automatically without the user having to issue separate commands or to link each object to a schedule object. In addition, the control loops, damper objects, and alarm monitoring (such as return air, supply air, and mixed air temperature objects) will be inhibited from alarming during a user-defined period after startup to allow for stabilization. When the air handler is stopped, the interlocked return fan is also stopped, the outside air damper is closed, and other related objects within the air handler unit are inhibited from alarming, thereby eliminating nuisance alarms during the off period.
 - j. Temperature Override Object: Provide an object whose purpose is to override a binary output to an "on" state in the event a user-specified high or low limit value is exceeded. Link this object to the desired binary output object as well as to an analog object for temperature monitoring to cause the override to be enabled. This object will execute a start command at the Temperature Override level of start/stop command priority, unless changed by the user.
 - k. Composite Object: Provide a container object that allows a collection of objects representing an application to be encapsulated to protect the application from tampering or to more easily represent large applications. This object must have the ability to allow the user to select the appropriate parameters of the "contained" application that are represented on the graphic shell of this container.
7. The object library shall include objects to support the integration of devices connected to the Network Area Controller (NAC). Provide the following as part of the standard library included with the programming software:
- a. LonMark/LonWorks Devices: These devices shall include, but not be limited to, devices for control of HVAC, lighting, access, and metering. Provide LonMark manufacturer-specific objects to facilitate simple integration of these devices. Support all network variables defined in the LonMark profile. The device manufacturer shall provide information (type and function) regarding network variables not defined in the LonMark profile.
 - b. For devices not conforming to the LonMark standard, provide a dynamic object that can be assigned to the device based on network variable information provided by the device manufacturer. Device manufacturer shall provide an XIF file, resource file, and documentation for the device to facilitate device integration.
 - c. For BACnet devices, provide the following objects:
 - 1) Analog In.
 - 2) Analog Out.
 - 3) Analog Value.
 - 4) Binary.
 - 5) Binary In.
 - 6) Binary Out.
 - 7) Binary Value.
 - 8) Multi-State In.

- 9) Multi-State Out.
- 10) Multi-State Value.
- 11) Schedule Export.
- 12) Calendar Export.
- 13) Trend Export.
- 14) Device.

- d. For each BACnet object, provide the ability to assign the object a BACnet device and object instance number.
- e. For BACnet devices, provide the following support at a minimum:

- 1) Segmentation.
- 2) Segmented Request.
- 3) Segmented Response.
- 4) Application Services.
- 5) Read Property.
- 6) Read Property Multiple.
- 7) Write Property.
- 8) Write Property Multiple.
- 9) Confirmed Event Notification.
- 10) Unconfirmed Event Notification.
- 11) Acknowledge Alarm.
- 12) Get Alarm Summary.
- 13) Who-has.
- 14) I-have.
- 15) Who-is.
- 16) I-am.
- 17) Subscribe COV.
- 18) Confirmed COV notification.
- 19) Unconfirmed COV notification.
- 20) Media Types.
- 21) Ethernet.
- 22) BACnet IP Annex J.
- 23) MSTP.
- 24) BACnet Broadcast Management Device (BBMD) function.
- 25) Routing.

2.6 DATA COLLECTION AND STORAGE (TRENDING REQUIREMENTS)

- A. The NAC shall be able to collect data for any property of any object and store resident in the NAC that shall have, at a minimum, the following configurable properties:
 1. Designating the log as interval or deviation.
 2. For interval logs, configure the object for time of day, day of week and the sample collection interval.
 3. For deviation logs, configure the object for the deviation of a variable to a fixed value. This value, when reached, will initiate logging of the object.
 4. For all logs, provide the ability to set the maximum number of data stores for the log and to set whether the log will stop collecting when full or rollover the data on a first-in, first-out basis.
 5. Each log shall have the ability to have its data cleared on a time-based event or by a user-defined event or action.

- B. Store all log data in a relational database in the NAC that is accessible from a server (if the system is so configured) or a standard Web browser.
- C. All log data, when accessed from a server, shall be capable of being manipulated using standard SQL statements.
- D. All log data shall be available to the user in ALL the following data formats:
 - 1. HTML.
 - 2. XML.
 - 3. Plain text.
 - 4. Comma or tab separated values.
- E. The NAC shall archive its log data either locally (to itself) or remotely to a server or other NAC on the network. Provide the ability to configure the following archiving properties:
 - 1. Archive on time of day.
 - 2. Archive on user-defined number of data stores in the log (buffer size).
 - 3. Archive when log has reached its user-defined capacity of data stores.
 - 4. Provide ability to clear logs once archived.

2.7 AUDIT LOG

- A. Provide and maintain an audit log that tracks all activities performed on the NAC. Provide the ability to specify a buffer size for the log and the ability to archive log based on time or when the log has reached its user-defined buffer size. Provide the ability to archive the log locally (to the NAC), to another NAC on the network, or to a server. For each log entry, provide the following data:
 - 1. Time and date.
 - 2. User ID.
 - 3. Change or activity: i.e., change setpoint, add or delete objects, commands, etc.

2.8 DATABASE BACKUP AND STORAGE

- A. The NAC shall automatically backup its database on a user-defined time interval.
- B. Store copies of the current database and, at the most, the recently saved database in the NAC. The age of the most recently saved database shall depend on the user-defined database save interval.
- C. Store the NAC database in XML format to allow viewing and editing. Other formats are acceptable as long as XML format is supported.

2.9 UNINTERRUPTIBLE POWER SUPPLY (UPS)

- A. A UPS shall be provided for each of the following:
 - 1. Network area controllers.

- B. Provide a 120-volt 60 Hz line-interactive uninterruptible power supply with backup battery capacity for two (2) minutes at 100% load. UPS shall have hot swappable batteries, automatic battery self-test and start-on-battery capabilities. Batteries shall be valve regulated, sealed lead acid type. UPS shall have sine wave shape output waveform. UPS shall be UL 1778 list and comply with FCC Part 15, Class A.
- C. Manufacturers:
 - 1. Sola/Hevi-Duty
 - 2. Eaton Powerware
 - 3. APC

2.10 SYSTEM PROGRAMMING

- A. The GUI software shall perform system programming and graphic display engineering. Access to the GUI software shall be through password access as assigned by the system administrator.
- B. Provide a library of control, application, and graphic objects to enable creation of all applications and user interface screens. Applications shall be created by selecting the control objects from the library, dragging or pasting them on the screen, and linking them together using a built-in graphic connection tool. Completed applications may be stored in the library for future use. GUI screens shall be created in the same fashion. Data for the user displays shall be obtained by graphically linking the user display objects to the application objects to provide "real-time" data updates. Any real-time data value or object property may be connected to display its current value on a user display. Provide all software tools or processes to create applications and user interface displays.
- C. Programming Methods:
 - 1. Provide the capability to copy objects from the supplied libraries or from a user-defined library to the user's application. Link objects with a graphic linking scheme by dragging a link from one object to another. Object links will support one-to-one, many-to-one, or one-to-many relationships. Linked objects shall maintain their connections to other objects regardless of where they are positioned on the page and shall show link identification for links to objects on other pages for easy identification. Links will vary in color depending on the type of link; e.g., internal, external, hardware, etc.
 - 2. Configuration of each object shall be done through the object's property sheet using fill-in-the-blank fields, list boxes, and selection buttons. Use of custom programming, scripting language, or a manufacturer-specific procedural language for configuration is not acceptable.
 - 3. The software shall provide the ability to view the logic in a monitor mode. When on-line, the monitor mode shall provide the ability to view the logic in real time for easy diagnosis of the logic execution. When off-line (debug), the monitor mode shall allow the user to set values to inputs and monitor the logic for diagnosing execution before it is applied to the system.
 - 4. All programming shall be done in real time. Systems requiring the uploading, editing, and downloading of database objects are not allowed.
 - 5. The system shall support object duplication in a customer's database. An application, once configured, can be copied and pasted for easy reuse and duplication. All links, other than to the hardware, shall be maintained during duplication.

2.11 MODBUS SYSTEM INTEGRATION

- A. The NAC shall support integration of device data from Modbus RTU, ASCII, and TCP control system devices. Connect to the Modbus system via an RS-232, RS485, or Ethernet IP as required by the device.
- B. Provide the required objects in the library included with the GUI programming software to support the integration of the Modbus system data into the FMCS. Objects provided shall include, at a minimum:
 - 1. Read/Write Modbus AI Registers.
 - 2. Read/Write Modbus AO Registers.
 - 3. Read/Write Modbus BI Registers.
 - 4. Read/Write Modbus BO Registers.
- C. The NAC shall perform all scheduling, alarming, logging and global supervisory control functions of the Modbus system devices.
- D. The FMCS supplier shall provide a Modbus system communications driver. The equipment system vendor that provided the equipment using Modbus shall provide documentation of the system's Modbus interface and shall provide factory support at no charge during system commissioning.

2.12 CONTROL DAMPERS

- A. Rectangular Control Dampers - Standard Construction:
 - 1. Shall be licensed to bear the AMCA Certified Rating Seal.
 - 2. Test leakage and pressure drop per AMCA 500.
 - 3. Frame: Hat-shaped channel, minimum 12 gauge extruded aluminum, and minimum 4" deep. Caulk or weld seams to prevent leakage.
 - 4. Blades: Minimum 12 gauge extruded aluminum airfoil design, minimum 6" wide, and overlapping blades and blade seals (overlapping blade seals only is unacceptable).
 - 5. Shaft: Non-cylindrical, solid aluminum or zinc plated steel with opening in blade to match profile of shaft. Shaft shall be securely fastened to the blade and of sufficient length to mount direct-coupled actuator. Damper manufacturer shall provide drive pin extensions and outboard bearing support brackets as required.
 - 6. Bearings: Acetal (Delrin/Celcon) inner bearing fixed to an aluminum shaft, rotating within a polycarbonate outer bearing inserted in the frame. Provide thrust bearings for vertical damper applications.
 - 7. Blade Seals: Extruded silicone gaskets secured in an integral slot within the blade.
 - 8. Side Seals: Stainless steel compression type or extruded silicone gasket secured in an integral slot within the frame.
 - 9. Linkage: Shall be concealed in the frame, constructed of aluminum or corrosion-resistant zinc plated steel, and securely fastened to shaft. Blades linked for opposed operation, unless noted otherwise on the drawings. Blades shall close evenly. Use one direct-coupled actuator per damper section. Jack-shafting is not acceptable.
 - 10. Size Limits: 48" maximum horizontal blade length, 24 square foot maximum area per damper. Total cross-sectional area of dampers in ducts shall be at least as large as the duct without the use of blank-off sections.
 - 11. Maximum Leakage: Class 1A at 1" w.c. pressure differential for a 24" x 24" damper.

12. Maximum Pressure Drop for Opposed Blade Damper: 0.15" for 8,000 CFM through a 24" x 24" damper (2000 fpm).
13. Maximum Pressure Drop for Parallel Blade Damper: 0.08" for 8,000 CFM through a 24" x 24" damper (2000 fpm).

2.13 DAMPER ACTUATORS

A. Damper Actuators - Electronic:

1. Actuator shall be UL 873 or 60730 listed and provided with NEMA housing for applicable environment, electronic overload protection to prevent actuator damage due to over-rotation. Mount actuator by means of a V-bolt dual nut clamp with a V-shaped toothed cradle, directly couple and mount to the valve bonnet stem, or ISO-style direct-coupled mounting pad. Actuators shall be capable of being mechanically and electrically paralleled to increase torque, if required.
2. Actuators shall be warranted for a period of five (5) years from the date of production, with the first two (2) years unconditional.
3. Proportional actuator position shall be proportional to analog or pulse width modulating signal from electronic control system.
4. Fail-Safe Dampers: Where shown on the drawings or sequences, fail-safe mechanism shall operate the damper to the fail position following power interruption.
 - a. Mechanical/Spring: Mechanical spring return mechanism to drive controlled drive to an end position (open or close) on loss of power.
 - b. Electronic: Electronic fail-safe shall incorporate an active balancing circuit to maintain equal charging rates among the capacitors. The power fail position shall be proportionally adjustable between 0 to 100% in 10 percent increments with a 2 second operational delay.
5. Feedback: Where shown on drawings or sequences, provide analog feedback signal for positive position indication.
6. Damper End Switches: Where shown on the drawings or sequences, provide end switches to prove damper reaches open/closed position.

2.14 CONTROL INSTRUMENTATION

A. Temperature Sensors:

1. Duct Temperature Sensor:
 - a. RTD type averaging sensor. 1000 ohm platinum RTD; accuracy: minimum +/- 1.2°F; range -40°F-220°F.
 - b. Sensing element shall have a minimum of 1 foot of sensor length for each 2 square feet of duct or coil area. Sensor shall be arranged evenly across the duct or coil such that no point in the duct or coil is more than 1 foot away from the sensor.
 - c. Probe type thermistors are acceptable in VAV box duct applications downstream of reheat coils.

B. Current Measuring Devices:

1. Current Switches for Constant Speed Motors:

- a. Digital device rated for amperage load of motor or device with split core design, adjustable high and low trip points, 600 VAC rms isolation, induced power from the monitored load, LED indicator lamps for output status and sensor power. The device shall sense overloading, belt-loss, and power failure with a single signal.

2. Current Switches for Motors Controlled by VFD:

- a. Digital device rated for amperage load of motor or device with split core design, factory programmed to detect motor undercurrent conditions on variable or constant volume loads, self-calibrating, positive status indication, LED indicator lamps, 600 VAC rms isolation, induced power from the monitored load with NO output. The current sensor shall store the motor current operating parameters in non-volatile memory and have a pushbutton reset to clear the memory if the operating parameters change or the sensor is moved to another load. The device shall sense overloading, belt-loss, and power failure with a single signal. The sensor shall be mounted on the load side of variable frequency drives.

C. Miscellaneous Devices:

1. Application Specific Controller Power Supply:

- a. For use with damper actuators.
- b. Provide multiple enclosures with the following accessories and components as required to provide 24VAC power to terminal air boxes, differential pressure monitors, damper actuators, valve actuators, and other components and devices as required.
- c. NEMA-1 steel enclosures (12"x12"x6") with separate high and low voltage compartments and separate access covers.
- d. Either one 300 VA power supply with three 100 VA Class 2 outputs, or one 500 VA power supply with five 100 VA Class 2 outputs.
- e. Primary side shall receive 480/277/240/120 input to 24 VAC ungrounded, isolated output on the secondary side.
- f. Each secondary output shall include a 4 amp breaker, on/off switch, and LED indicator. Terminal blocks shall accept 16-22 AWG wire.
- g. Acceptable Manufacturer:

- 1) RIB Functional Devices Model MSH300A-LVC or PSH500A-LVC

2. Control Relays:

- a. Form "C" contacts rated for the application with "push-to-test" contact transfer feature and an integral LED to indicate coil energization.
- b. Mount all relays and power supplies in a NEMA 1 enclosure beside the FMCS panel or controlled device and clearly label their functions.

D. Outdoor Weather Station:

- 1. Outdoor rated ventilated plastic enclosure, off-white color, radiation shield including the following parameters.

2. Measured Parameters:

- a. Temperature Sensor: Thermistor sensing element or resistance temperature device (RTD).

- 1) Operating Range: -40°F to 140°F
- 2) Accuracy: $\pm 0.54^{\circ}\text{F}$ at 68°F

- b. Humidity Sensors: Fully electronic with no moving parts or parts requiring periodic service.

- 1) Measurement Range: 0-100% RH
- 2) Accuracy:

- a) $\pm 3\%$ of reading from 0%-90% RH at 50°F to 86°F
- b) $\pm 5\%$ of reading from 0%-90% RH at -4°F to 50°F and 86°F to 140°F.

3. Calculated Parameters:

- a. Dew Point Temperature in °F
- b. Wet Bulb Temperature in °F
- c. Enthalpy. Enthalpy sensor shall output a 4-20 ma signal input to the controller upon a varying enthalpy (total heat) to enable economizer modes of operation when outside air enthalpy is suitable for free cooling.

2.15 CONDUIT AND BOXES

- A. Conduit and Boxes: Refer to Electrical Section 260533 for materials, sizing, and other requirements

- B. Conduit and Box Identification (Color and Labeling):

1. Refer to the Temperature Control Contractor notes located on the mechanical cover sheet for raceway and box color requirements.
2. Refer to Electrical Section 260553 for raceway and box labeling requirements.

2.16 WIRE AND CABLE

- A. Wire and Cable: Refer to Electrical Section 260513 for wire and cable materials.

1. Wire and Cable Color: Refer to the Temperature Control Contractor notes located on the mechanical cover sheet for wire and cable color requirements.

PART 3 - EXECUTION

3.1 GENERAL INSTALLATION

- A. Verify that systems are ready to receive work. Beginning of installation means installer accepts existing conditions.
- B. Install system and materials in accordance with manufacturer's instructions.

-
- C. Drawings of the TCS and FMCS network are diagrammatic only. Any apparatus not shown but required to meet the intent of the project documents shall be furnished and installed without additional cost.
 - D. Install all operators, sensors, and control devices where accessible for service, adjustment, calibration, and repair. Do not install devices where blocked by piping or ductwork. Devices with manual reset or limit adjustments shall be installed below 6'-0" if practical to allow inspection without using a ladder.
 - E. Verify locations of wall-mounted devices (such as thermostats, temperature and humidity sensors, and other exposed sensors) with drawings and room details before installation. Coordinate mounting heights to be consistent with other wall-mounted devices. Maximum height above finished floor shall not exceed ADA mounting requirements.
 - F. Mount control panels adjacent to associated equipment on vibration-free walls or freestanding angle iron supports. One cabinet may accommodate more than one system in same equipment room.
 - G. After completion of installation, test and adjust control equipment.
 - H. Check calibration of instruments. Recalibrate or replace.
 - I. Furnish and install conduit, wire, and cable per the National Electric Code, unless noted otherwise in this section.
 - J. All hardware, software, equipment, accessories, wiring (power and sensor), piping, relays, sensors, power supplies, transformers, and instrumentation required for a complete and operational FMCS system, but not shown on the electrical drawings, are the responsibility of the TCC.
 - K. Remodeling:
 - 1. All room devices as indicated on the drawings shall be removed by this Contractor. The Contractor shall also prepare the wall for finishes. Preparing the wall shall include patching old anchor holes (after the anchoring device has been removed) and sanding the wall to remove old paint outlines remaining from original devices. The wall shall be painted to match the existing wall prior to the installation of the new room device. If wall covering requires patching, the Contractor shall furnish new wall covering to match existing. If new wall covering is not available to match existing, the Contractor shall furnish a white acrylic or Plexiglas plate, 1/4" thick and sized to cover the void.
 - L. Labels For Control Devices:
 - 1. Provide labels indicating service of all control devices in panels and other locations.
 - 2. Labels may be made with permanent marking pen in the control panels if clearly legible.
 - 3. Use engraved labels for items outside panel such as outside air thermostats.
 - 4. Labels are not required for room thermostats, damper actuators and other items where their function is obvious.

3.2 GRAPHIC DISPLAY

- A. Create a customized graphic for each piece of equipment indicated on the itemized points list.

-
- B. Components shall be arranged on graphic as installed in the field.
 - C. Include each graphic point listed in the itemized points list using real time data.
 - D. Provide a graphic representation of the following:
 - 1. Where there are multiple buildings, color code the campus map by the systems serving that building. The building graphic shall be linked to the graphic for that building's systems.
 - 2. Where there are multiple floors, provide color codes/designations for the areas served by each AHU and TAB by floor.
 - 3. Where multiple AHUs serve one floor, color code the areas served by each AHU. The area shall be linked to the graphic for that area's AHU.
 - 4. Provide an overall floor plan of each floor of the building color coded by zone linked to the TAB for that zone. The zone shall be linked to the graphic for that zone's TAB graphic.
 - 5. Show the location of each thermostat on the floor plan.
 - 6. Provide separate graphics showing the chilled and heating water system flow diagram. Show temperatures and flows on the flow diagram. Each piece of equipment shown on the flow diagram shall be linked to the graphic for that piece of equipment.
 - 7. Provide a graphic showing the steam system flow diagram. Show pressures and flows on the flow diagram. Each piece of equipment shown on the flow diagram shall be linked to the graphic for that piece of equipment.
 - E. The FMCS shall include full graphic operator interface to display the following graphics as a minimum:
 - 1. Home page to include a minimum of six critical points: Outside Air Temperature, Outside Air Relative Humidity, Enthalpy, KWH, KW, etc.
 - 2. Graphic floor plans accurately depicting rooms, walls, hallways, and showing accurate locations of space sensors and major mechanical equipment.
 - 3. Detailed graphics for each mechanical system including AHUs, ERUs, EFs, chillers, and boilers, as a minimum.
 - 4. Access corresponding system drawings, technical literature, and sequences of operations directly from each system graphic.
 - F. The FMCS shall include individual graphical buttons to access the following data stored in PDF format:
 - 1. Project control as-built documentation including all TCS drawings, diagrams and sequences of operation.
 - 2. TCS Bill of Material for each system, e.g. AHU, RTU, FCU, boiler, etc.
 - 3. Technical literature specification data sheets for all components listed in the TCS Bill of Material.

3.3 CONDUIT AND BOXES INSTALLATION

- A. Conduit and Box Installation: Refer to Electrical Section 260533 for execution and installation.
- B. Conduit and Box Identification (color and labeling) installation. Refer to Electrical Section 260553 for raceway and box identification installation.

C. Outlet Box Schedule: Thermostat/temperature sensor:

1. Dry Interior Locations: Provide 4" square galvanized steel with raised cover to fit flush with finished wall line. When located in concrete block walls, provide square edge title cover of sufficient depth to extend out to face of block or masonry boxes.
2. Other Conditions: Refer to Electrical Section 260533 for requirements.

3.4 WIRE AND CABLE INSTALLATION

A. Wire and Cable Installation: Refer to Electrical Section 260513 for execution and installation.

B. Field Quality Control:

1. Inspect wire and cable for physical damage and proper connection.
2. Torque test conductor connections and terminations to manufacturer's recommended values.
3. Perform continuity test on all conductors.
4. Protection of cable from foreign materials:
 - a. It is the Contractor's responsibility to provide adequate physical protection to prevent foreign material application or contact with any cable type. Foreign material is defined as any material that would negatively impact the validity of the manufacturer's performance warranty. This includes, but is not limited, to overspray of paint (accidental or otherwise), drywall compound, or any other surface chemical, liquid or compound that could come in contact with the cable, cable jacket or cable termination components.
 - b. Overspray of paint on any cable, cable jacket or cable termination component will not be accepted. It shall be the Contractor's responsibility to replace any component containing overspray, in its entirety, at no additional cost to the project. Cleaning of the cables with harsh chemicals is not allowed. This requirement is regardless of the PASS/FAIL test results of the cable containing overspray. Should the manufacturer and warrantor of the structured cabling system desire to physically inspect the installed condition and certify the validity of the structured cabling system (via a signed and dated statement by an authorized representative of the structured cabling manufacturer), the Owner may, at their sole discretion, agree to accept said warranty in lieu of having the affected cables replaced. In the case of plenum cabling, in addition to the statement from the manufacturer, the Contractor shall also present to the Owner a letter from the local Authority Having Jurisdiction stating that they consider the plenum rating of the cable to be intact and acceptable.

C. Installation Schedule:

1. Conduit terminations to all devices installed in applications with rotating equipment, expansion/contraction or vibration shall be made with flexible metallic conduit, unless noted otherwise. Final terminations to exterior devices installed in damp or wet locations shall be made with liquidtight flexible metallic conduit. Terminations in hazardous areas, as defined in the National Electrical Code, shall be made with flexible conduit rated for the environment.

3.5 COMMISSIONING

- A. Upon completion of the installation, this Contractor shall load all system software and start up the system. This Contractor shall perform all necessary calibration, testing and de-bugging and perform all required operational checks to ensure that the system is functioning in full accordance with these specifications.
- B. This Contractor shall perform tests to verify proper performance of components, routines, and points. Repeat tests until proper performance results. This testing shall include a point-by-point log to validate 100% of the input and output points of the FMCS system operation.
- C. This Contractor shall prove that the controls network is functioning correctly and within acceptable bandwidth criteria and shall test the system with an approved protocol analysis tool. Provide a log and statistics summary showing that each channel is within acceptable parameters. Each channel shall be shown to have at least 25% spare capacity for future expansion.
- D. Upon completion of the performance tests described above, repeat these tests, point by point, as described in the validation log above in the presence of Owner's Representative, as required. Properly schedule these tests so testing is complete at a time directed by the Owner's Representative. Do not delay tests so as to prevent delay of occupancy permits or building occupancy.
- E. System Acceptance: Satisfactory completion is when this Contractor has performed successfully all the required testing to show performance compliance with the requirements of the Contract Documents to the satisfaction of the Owner's Representative. System acceptance shall be contingent upon completion and review of all corrected deficiencies.

3.6 PREPARATION FOR BALANCING

- A. Verify that all dampers are in the position indicated by the controller (e.g., open, closed or modulating).
- B. Check the calibration and setpoints of all controllers.
- C. Check the locations of all thermostats and humidistats for potential erratic operation from outside influences such as sunlight, drafts, or cold walls.
- D. Check that all sequences operate as specified. Verify that no simultaneous heating and cooling occurs, unless specified. Observe that heating cannot begin at TAB reheat terminals until the unit is at the minimum CFM.
- E. Verify the operation of all interlock systems.

3.7 TEST AND BALANCE COORDINATION

- A. The Contractor shall furnish a single set of all tools necessary to interface to the control system for test and balance purposes.
- B. The Contractor shall provide a minimum of four (4) hours training for the Balancing Contractor in the use of these tools.

- C. In addition, the Contractor shall provide a qualified technician to assist in the test and balance process until the first 20 terminal units are balanced.
- D. The tools used during the test and balance process shall be returned at the completion of the testing and balancing.

3.8 DEMONSTRATION AND ACCEPTANCE

- A. At completion of installation, provide two days minimum instruction for operators. Demonstrate operation of all controls and systems. Describe the normal operation of all equipment.

3.9 TRAINING

- A. On-Site:
 - 1. After completion of commissioning, the manufacturer shall provide 8 hours of training on consecutive days for 4 Owner's representatives. The training course shall enable the Owner's representatives to perform Day-to-Day Operations as defined herein. A factory-trained instructor with experience in presenting the training material and the system programmer for this project shall perform the training.
- B. Day-to-Day Operations - Training Description:
 - 1. Proficiently operate the system.
 - 2. Understand control system architecture and configuration.
 - 3. Understand FMCS systems components.
 - 4. Understand system operation, including FMCS system control and optimizing routines (algorithms).
 - 5. Operate the workstation and peripherals.
 - 6. Log-on and off the system.
 - 7. Access graphics, point reports, and logs.
 - 8. Adjust and change system setpoints, time schedules, and holiday schedules.
 - 9. Recognize malfunctions of the system by observation of the printed copy and graphic visual signals.
 - 10. Understand system drawings and Operation and Maintenance manual.
 - 11. Understand the job layout and location of control components.
 - 12. Access data from FMCS controllers and ASCs.
 - 13. Operate portable operator's terminals.
- C. Provide course outline and materials in accordance with the "SUBMITTALS" article in Part 1 of this section. The instructor(s) shall provide one copy of training material per student.

3.10 INSTALLATION OF SENSORS

- A. Install sensors in accordance with the manufacturer's recommendations.
- B. Mount sensors rigidly and adequately for the environment within which the sensor operates.
- C. All wires attached to sensors shall be air sealed in their raceways or in the wall to stop air transmitted from other areas affecting sensor readings.

- D. Averaging sensors and low limits shall be installed at the top of the assembly with the element on a slight downward incline away from the sensor making a serpentine pattern over the cross-sectional area with elements spaced not over 12" apart and within 6" of the top and bottom of the area.
- E. All pipe-mounted temperature sensors shall be installed in immersion wells. Install all liquid temperature sensors with heat-conducting fluid in thermal wells.
- F. Install outdoor air temperature sensors on exterior of north wall, complete with sun shield at designated location approved by Architect/Engineer. TCC shall prime and paint the device enclosure. Color selection by Architect.

END OF SECTION 230900

SECTION 232200 - STEAM AND STEAM CONDENSATE PIPING

PART 1 - GENERAL

1.1 SECTION INCLUDES

- A. Pipe and Pipe Fittings.
- B. Valves.
- C. Steam Piping System.
- D. Condensate Piping System.

1.2 QUALITY ASSURANCE

- A. Valves: Manufacturer's name and pressure rating marked on valve body. Remanufactured valves are not acceptable.
- B. Welding Materials and Procedures: Conform to ANSI/ASME SEC 9.

1.3 REFERENCES

- A. ANSI/ASME SEC 9 - Welding and Brazing Qualifications.
- B. ANSI/ASME B16.3 - Malleable Iron Threaded Fittings Class 150 and 300.
- C. ANSI/ASME B16.5 - Pipe Flanges and Flanged Fittings.
- D. ANSI/ASME B16.9 - Factory Made Wrought Steel Butt Welding Fittings.
- E. ANSI/ASME B31.1 - Code for Power Piping.
- F. ANSI/ASME B31.9 - Building Services Piping.
- G. ANSI/AWS D1.1 - Structural Welding Code.
- H. ASTM A53 - Pipe, Steel, Black and Hot-Dipped Zinc Coated, Welded and Seamless.
- I. ASTM A234 - Pipe Fittings of Wrought Carbon Steel and Alloy Steel for Moderate and Elevated Temperatures.
- J. ASTM E90-02 - Standard Test Method for Laboratory Measurement of Airborne Sound Transmission Loss of Building Partitions
- K. ASTM E413-87 - Classification for Rating Sound Insulation.

1.4 SUBMITTALS

- A. Submit product data under provisions of Section 230500. Include data on pipe fittings, valves and accessories.

- B. Include certification of compliance with ANSI/AWS D1.1 for all welders.

1.5 DELIVERY, STORAGE, AND HANDLING

- A. Store and protect piping to prevent corrosion and entrance of foreign matter.
- B. Deliver and store valves in shipping containers with labeling in place.

1.6 REGULATORY REQUIREMENTS

- A. Conform to ANSI/ASME B31.9 for the following pipe systems:
 - 1. Boiler external pipe systems that operate up to 15 psi.
 - 2. Non-boiler external pipe systems that operate up to 150 psi.
- B. Conform to ANSI/ASME B31.1 for boiler external pipe systems that operate above 15 psi.
- C. Refer to ANSI/ASME B31.1 and ANSI/ASME B31.9 for "boiler external piping" and "non-boiler external piping" definitions.

1.7 COORDINATION DRAWINGS

- A. Reference Coordination Drawings article in Section 230500 for required steam and steam condensate piping systems electronic CAD drawings to be provided to Coordinating Contractor for inclusion into composite coordination drawings.

PART 2 - PRODUCTS

2.1 STEEL PIPING (0 TO 125 PSIG)

- A. Steel Pipe; 0 to 125psig; Standard Weight; Threaded Joints:
 - 1. Design Pressure: 125 psig. Maximum Design Temperature: 353°F.
 - 2. Pipe: Standard weight black steel, threaded and coupled, ASTM A53.
 - 3. Joints: Screwed.
 - 4. Fittings: 125 psi S - 175 psi. WOG, cast iron, ASTM A126, ANSI B16.4.
 - 5. Unions: 250 psi S - 500 psi. WOG, black malleable iron, ground joint with brass seat.
- B. Steel Pipe; 0 to 125psig; Standard Weight; Flanged Joints or Welded Joints:
 - 1. Design Pressure: 125 psig. Maximum Design Temperature: 353°F.
 - 2. Pipe: Standard weight black steel, beveled ends, ASTM A53.
 - 3. Joints: Butt welded or flanged.
 - 4. Fittings: Standard weight seamless steel, butt welded type, ASTM A234, Grade WPB, ANSI B16.9.
 - 5. Flanges: 150 lb. forged steel, welding neck or slip-on, ASTM A181, Grade I, ANSI B16.5. Flange face seal weld (backweld) is required for slip-on flanges.
- C. Steel Pipe; 0 to 125 psig; Extra Strong; Threaded Joints:
 - 1. Design Pressure: 125 psig. Maximum Design Temperature: 353°F.
 - 2. Pipe: Extra strong black steel, threaded and coupled, ASTM A53.

3. Joints: Screwed.
4. Fittings: 125 psi S - 175 psi WOG, cast iron, ASTM A126, ANSI B16.4.
5. Unions: 250 psi S - 500 psi WOG, black malleable iron, ground joint with brass seat.

D. Steel Pipe; 0 to 125psig; Extra Strong; Flanged Joints or Welded Joints:

1. Design Pressure: 125 psig. Maximum Design Temperature: 353°F.
2. Pipe: Extra strong black steel, beveled ends, ASTM A53.
3. Joints: Butt welded or flanged.
4. Fittings: Extra strong seamless steel, butt weld type, ASTM A234, Grade WPB, ANSI B16.9.
5. Flanges: 150 lb. forged steel, welding neck or slip-on, ASTM A181, Grade I, ANSI B16.5. Welding neck type shall be used wherever possible and shall have bore to match pipe. Flange face seal weld (backweld) is required for slip-on flanges.

2.2 VALVES

A. Boiler/Shutoff Valves:

1. Gate Valves:

- a. GA-1 (0 to 125 psig): 2" and under, 125 psi S @ 353°F, 300 psi WOG @ 150°F, screwed, bronze, rising stem, screwed bonnet. Crane #431, Hammond #IB641, Stockham #B122, Walworth #56, Milwaukee #1150, Watts #B-3210, NIBCO #T-131, Jomar T-351G.
- b. GA-2 (0 to 125 psig): 2-1/2" thru 12", 125 psi S @ 353°F, 200 psi WOG @ 150°F, flanged, iron body, bronze mounted, OS&Y. Crane #465-1/2, Hammond, Stockham #G623, Walworth, Milwaukee #F2885, Watts #F-503, NIBCO F-617-O.

B. Shutoff Valves:

1. BA-1: 3" and under, 125 psi saturated steam, 600 psi WOG, full port, screwed or solder ends (acceptable only if rated for soldering in line with 470°F melting point of lead-free solder), bronze body of a copper alloy containing less than 15% zinc, stainless steel ball and trim, Teflon seats and seals.
 - a. Body: Bronze
 - 1) Manufacturers: Apollo #77C-140, Stockham #S-206 BR1-R, Milwaukee #BA-400, Watts, Nibco #585-70-66, National Utilities Co., RUB, Jomar T/S-200CSS.

2.3 CHECK VALVES

- A. CK-1 (0 to 125 psig): 2" and under, 125 psi S @ 353°F, 200 psi WOG @ 150°F, screwed, bronze, horizontal swing. Crane #37, Hammond #IB904, Stockham #B319, Walworth #3406, Milwaukee #509, NIBCO T-413-Y, Jomar T-511G.
- B. CK-6 (0 to 125 psig): 2-1/2" thru 12", 125 psi S @ 353°F, 200 psi WOG @ 150°F, flanged, all iron, horizontal swing. Crane #373-1/2, Hammond #IR1126, Stockham #G933, Walworth #8928-1/2F, Milwaukee #F2971, Watts #F-511-R, NIBCO F-918-Ng.

2.4 STRAINERS

- A. ST-1 (0 to 125 psig): Cast iron body, screwed ends, screwed cover, 250# steam @ 406°F, 400# WOG @ 150°F. Armstrong #CA1SC, Metraflex #TS, Mueller Steam Specialty Co. #11M, Sarco #IT, Watts #77S, NIBCO T-751. Bronze body strainer 125# may be used as contractor option.
- B. ST-2 (0 to 125 psig): Cast iron body, 125 lb. flanged ends, bolted cover, 125 psi S @ 353°F, 175 psi WOG @ 150°F. Armstrong #A1FL, Metraflex #TF, Mueller Steam Specialty Co. #758, Sarco #CI-125, Watts #77F, NIBCO F-721.
- C. Unless otherwise indicated, strainers shall have stainless steel screens with perforations as follows:
 - 1. Steam All Sizes: 1/32"
 - 2. Condensate All Sizes: 3/64"
- D. Furnish pipe nipple with gate valve and threaded cap to blow down all strainer screens.

PART 3 - EXECUTION

3.1 PREPARATION

- A. Ream pipe and tube ends, remove burrs, bevel plain end ferrous pipe.
- B. Remove scale and dirt on inside and outside before assembly.
- C. Remove all scale, rust, dirt, oils, stickers and thoroughly clean exterior of all bare metal exposed piping, hangers, and accessories in preparation to be painted.
- D. Make connections to equipment with flanges or unions.
- E. After completion, fill, clean, and treat systems.

3.2 PIPING SCHEDULE

- A. Steam (0 to 125 psig):
 - 1. Steel Pipe; 0 to 125 psig; Standard Weight; Threaded Joints: 2" and Under
 - 2. Steel Pipe; 0 to 125 psig; Standard Weight; Flanged Joints or Welded Joints: 2-1/2" and Over
 - 3. Shutoff Valves: GA-1, GA-2, BA-1 Check Valves: CK-1, CK-6
 - 4. Strainers: ST-1, ST-2
- B. Condensate Piping (0 to 125 psig):
 - 1. Steel Pipe; 0 to 125 psig; Extra Strong; Threaded Joints: 2" and Under
 - 2. Steel Pipe; 0 to 125 psig; Extra Strong; Flanged Joints or Welded Joints: 2-1/2" and Over
 - 3. Shutoff Valves: GA-1, GA-2, BA-1 Check Valves: CK-1, CK-6
 - 4. Strainers: ST-1, ST-2

3.3 TESTING PIPING

- A. Complete all testing of pipes underground, or in chases and walls, before piping is concealed.
- B. Complete all testing before insulation is applied, or if insulation is applied before the pipe is tested and a leak develops which ruins the insulation, the pipe installing contractor shall arrange and pay for replacing the damaged insulation.
- C. Test piping with water at 150% of the maximum operating pressure.
- D. Hold pressure for at least two hours.
- E. Test to be witnessed by the Architect/Engineer or their representative, if requested by the Architect/Engineer.

3.4 CLEANING PIPING

- A. Assembly:
 - 1. Prior to assembly of pipe and piping components, all loose dirt, scale, oil and other foreign matter on internal or external surfaces shall be removed by means consistent with good piping practice subject to the approval of the Architect/Engineer's representative. Chips and burrs from machinery or thread cutting operation shall be blown out of pipe before assembly. Cutting oil shall be wiped from internal and external surfaces.
 - 2. During fabrication and assembly, remove slag and weld spatter from both internal and external pipe joints by peening, chipping and wire brushing.
 - 3. Notify the Architect/Engineer's representative prior to starting any post erection cleaning operation in sufficient time to allow witnessing the operation. Consult with and obtain approval from the Architect/Engineer's representative regarding specific procedures and scheduling. Arrange for proper disposal of cleaning and flushing fluids.
 - 4. When system clean, remove, clean and replace all strainer screens (blowing down strainer without removing and cleaning screen is not acceptable).
 - 5. When the system is started up for the first time, discharge the condensate to drain per the boiler manufacturer's recommendations or for 24 hours, whichever is more restrictive. Add domestic cold water to the drain at a sufficient rate to reduce the condensate temperature to a maximum of 140°F.

3.5 INSTALLATION

- A. General Installation Requirements:
 - 1. Route piping in orderly manner, plumb and parallel to building structure, and maintain gradient.
 - 2. Install piping to conserve building space and not interfere with use of space, other work, or equipment.
 - 3. Install piping to allow for expansion and contraction without stressing pipe, joints, or connected equipment.
 - 4. Slope steam piping 0.25" in 10 feet in direction of flow. Use eccentric reducers to maintain bottom of pipe level.
 - 5. Slope steam condensate piping 0.5" in 10 feet.
 - 6. Where pipe supports are welded to structural building framing, scrape, brush clean, and apply zinc rich primer to welds.

B. Installation Requirements in Electrical Rooms:

1. Do not install piping or other equipment above electrical switchboards or panelboards. This includes a dedicated space extending 25 feet from the floor to the structural ceiling with width and depth equal to the equipment.

C. Valves/Fittings and Accessories:

1. Provide clearance for installation of insulation and access to valves and fittings.
2. Provide access doors where valves and fittings are not exposed.
3. Provide drip trap assembly at low points and before control valves and pressure reducing valves.
4. Provide loop vents over trapped sections.
5. Prepare pipe, fittings, supports, and accessories for finish painting.
6. Provide drip legs as shown on the drawings, at low points, traps, and the base of all risers in steam, and condensate pipes. Unless otherwise shown, drip legs shall be full pipe size on pipes through 4" and at least 4", but not less than half line size over 4". Drip legs shall be 12" minimum length, with a reducer and a 3/4" shutoff valve.
7. Install valves with stems upright or horizontal, not inverted.
8. Provide shutoff valves in supply and return to all equipment.
9. Install strainers in steam piping with the "wye" of the strainer to the side of the pipe in the horizontal plane to avoid pooling of condensate.

3.6 PIPE ERECTION AND LAYING

- A. Carefully inspect all pipe, fittings, valves, equipment and accessories before installation. Any items that are unsuitable, cracked or otherwise defective shall be rejected and removed from the job immediately.
- B. All pipe, fittings, valves, equipment and accessories shall have factory applied identification sufficient to determine conformance with specified requirements.
- C. Exercise care at every stage of storage, handling, laying and erecting to prevent entry of foreign matter into piping, fittings, valves, equipment and accessories. Do not erect or install any item that is not clean.
- D. During construction, until system is fully operational, keep all openings in piping and equipment closed except when actual work is being performed on that item of system. Use plugs, caps, blind flanges or other items designed for this purpose.
- E. Run pipe straight and true, parallel to building lines with minimum use of offsets and couplings. Provide only offsets required for needed headroom or clearance and to provide needed flexibility in piping.
- F. Change direction of pipes only with fittings or pipe bends. Change size only with fittings. Do not use miter fittings, face or flush bushings, or street elbows. All fittings shall be long radius type, unless otherwise noted.
- G. Provide flanges or unions at all connections to equipment traps and valves to facilitate dismantling.
- H. Arrange piping and connections so equipment served may be serviced or totally removed without disturbing piping beyond final connections and associated shutoff valves.

- I. Use full and double lengths of pipe wherever possible.
- J. Unless otherwise indicated, install all inlet and outlet piping, including shutoff valves and strainers, to coils, pumps and other equipment at line size with reduction in size made only at control valve, pump, or trap.
- K. Cut all pipe to exact measurement and install without springing or forcing.
- L. Avoid creating, even temporarily, undue loads, forces or strains on valves, equipment or building elements with piping connections or supports.
- M. Unless otherwise indicated, branch takeoffs shall be from top of mains or headers at either a 45° or 90° angle from the horizontal plane for steam pipes.
- N. Branch takeoffs shall be from the top, side (if branch is two sizes smaller than main), or any angle from the horizontal plane to the top of piping for liquids.

3.7 BRANCH CONNECTIONS

- A. Make branch connections with standard tee or cross fittings of the type required for the service unless otherwise indicated.
- B. Reducers are generally not shown. Where pipe sizes change at tee, the tee shall be the size of the largest pipe shown connecting to it.
- C. Branch connections from mains may be cut into black steel pipe using forged weld-on fittings:
 - 1. Steam.
 - 2. Condensate.
- D. Use of forged weld-on fittings is further limited as follows:
 - 1. Must have at least same pressure rating as the main.
 - 2. Header or main must be 2-1/2" or over.
 - 3. Branch pipe is at least two sizes under main size.

3.8 JOINING OF PIPE

- A. Threaded Joints (Steel Pipe):
 - 1. Screw threads shall conform to ANSI B2.1 "Pipe Threads".
 - 2. Ream pipe ends and remove all burrs and chips formed in cutting and threading.
 - 3. Protect plated pipe and valve bodies from wrench marks.
 - 4. Apply high temperature, anti-seize thread lubricant to male threads.
- B. Flanged Joints (Steel Pipe):
 - 1. Steel flanges shall conform to ANSI B16.5 "Steel Pipe Flanges and Flanged Fittings". Cast iron flanges shall conform to ANSI B16.1 "Cast Iron Flanged and Flanged Fittings". Steel flanges shall be raised face except when bolted to flat face cast iron flange.

-
2. Bolting for services up to 399°F shall be ASTM A307, Grade B bolts and heavy hexagonal nuts. Bolting for services from 400°F to 790°F shall be ASTM A193, Grade B-7 with Grade 24 hexagonal nuts. Bolts and nuts shall conform to ANSI B18.2.1 "Square and Hex Bolts" or B18.2.2 "Square and Hex Nuts".
 3. Set flange bolts beyond finger tightness with an indicating torque wrench to insure equal tension in all bolts. Tighten bolts so those directly opposite are torqued in sequence.
 4. Gaskets for flat face flanges shall be full face type. Gaskets for raised faced flanges shall conform to requirements for "Group I Gaskets" in ANSI B16.5. Unless otherwise specified gaskets shall meet the following requirements:
 - a. Gasket material and thickness approved by manufacturer for intended service, chemical compatibility, pipe system test pressure, and operating temperature range.
 - b. Gaskets used in piping systems for saturated steam service shall be approved by manufacturer for use in saturated steam applications up to and including 150 psig.
 - c. Gaskets used for superheated steam applications and for saturated steam systems with operating pressures greater than 150 psig saturated steam shall be of the spiral wound "chevron" metallic type with flexible graphite filler by the following manufacturers:
 - 1) Flexitallic (LS Style CG)
 - 2) TEADIT (Style 913)
 - 3) Garlock (Flexseal Style RW)
 - 4) Lamons (SpiraSeal Style WR)
 - 5) Leader (Style LG-13)
 - d. Gaskets used for steam condensate service including, but not limited to, condensate return, boiler feedwater, and condensate transfer piping systems shall meet the following requirements:
 - 1) Maximum pressure rating of at least 2,000 psig.
 - 2) Maximum continuous temperature rating of at least 650°F.
- C. Welded Joints (Steel Pipe, Conduit System, Stainless Steel Pipe):
1. Welding of all pipe joints, both as to procedures and qualification of welders, shall be in accordance with Section IX, ASME "Boiler & Pressure Vessel Code" unless local codes take precedence.
 2. Furnish to the Owner's Representative prior to start of work certificates qualifying each welder.
 3. The Owner's Representative reserves the right to require qualifying demonstration, at the Contractor's expense, of any welders assigned to the job.
 4. Ends of pipe and fittings to be joined by butt welding shall be beveled, cleaned to bare metal and internal diameters aligned before tack welding.

END OF SECTION 232200

SECTION 232218 - STEAM AND STEAM CONDENSATE SPECIALTIES

PART 1 - GENERAL

1.1 SECTION INCLUDES

- A. Steam Traps

1.2 QUALITY ASSURANCE

- A. Manufacturer: For each product specified, provide components by same manufacturer throughout.
- B. Traps: Remanufactured traps are not acceptable.

1.3 REFERENCES

- A. ANSI/ASTM - Boilers and Pressure Vessels Code.
- B. ANSI/NFPA 70 - National Electrical Code.
- C. AHRI 460 - Standard for Commercial and Industrial Humidifiers.
- D. ASTM A105 - Forgings, Carbon Steel, for Piping Components.
- E. ASTM A126 - Gray Iron Castings for Valves, Flanges, and Pipe Fittings.

1.4 SUBMITTALS

- A. Submit product data under provisions of Section 230500. Include product description, model, dimensions, component sizes, rough-in requirements, service sizes, and finishes.
- B. Submit schedule indicating manufacturer, model number, size, location, rated capacity, and features for each specialty.
- C. Submit electrical power/controls wiring diagrams and product data indicating general assembly, components, safety controls, and service connections.
- D. Submit manufacturer's installation instructions.
- E. Submit operation and maintenance data.

PART 2 - PRODUCTS

2.1 STEAM TRAPS

- A. Type T-1: Inverted bucket type with thermic vent, 250 psig rated, cast iron body, side inlet and outlet, and all internal components constructed of stainless steel and renewable in-line.
 - 1. Manufacturers (0-250 psig):

-
- a. Armstrong Machine Works Series 800T
 - b. Spirax/Sarco Co., Inc. Type B
 - c. Hoffman Industrial Specialties Co. Series 600 T
 - B. Type T-2: Thermostatic type with body and cap of cast brass, bronze bellows, stainless steel valve head and seat.
 - 1. Manufacturers: (0-25 psig):
 - a. Spirax/Sarco Co., Inc. Type TD
 - b. Hoffman Industrial Specialties Co. Type C
 - C. Type T-3: Float and thermostatic type, 125 psig rated, cast iron body; balanced pressure thermostatic air vent; stainless steel valve seat, float, brass valve mechanism, and side inlet and outlet.
 - 1. Manufacturers: (0-125 psig):
 - a. Armstrong Machine Works Type A
 - b. Hoffman Industrial Specialties Co. Series H, C, or X
 - c. Spirax/Sarco Co., Inc. Type FT
- 2.2 LOCK OUT TRIM
- A. Provide lock out trim for all quarter turn valves opening to atmosphere installed in steam, condensate, boiler feed water piping, and as indicated on the drawings.
- PART 3 - EXECUTION
- 3.1 INSTALLATION AND APPLICATION
- A. General Installation Requirements:
 - 1. Install specialties in accordance with manufacturer's instructions.
 - 2. Size traps to handle minimum of two and one-half times maximum condensate load of apparatus served, unless noted otherwise.
 - 3. All traps shall be minimum 3/4" size.
 - 4. Install traps with unions or flanges at both ends.
 - 5. Provide shutoff valve and strainer at inlet, and check valve and shutoff valve at discharge of traps.
 - 6. Provide minimum 10" long dirt pocket of same size as apparatus return connection between apparatus and trap, unless noted otherwise on drawings.
 - 7. Remove thermostatic elements from traps during temporary and trial usage, and until system has been operated and dirt pockets cleaned of sediment and scale.
 - B. Insulate steam and steam condensate specialties in accordance with Section 230716 - HVAC Equipment Insulation and Section 230719 - HVAC Piping Insulation.

END OF SECTION 232218

SECTION 232300 - REFRIGERATION PIPING AND SPECIALTIES

PART 1 - GENERAL

1.1 SECTION INCLUDES

- A. Piping and Pipe Fittings
- B. Check Valves

1.2 QUALITY ASSURANCE

- A. Remanufactured specialties are not acceptable.

1.3 REFERENCES

- A. ANSI/ASME SEC 8D - Boilers and Pressure Vessels Code, Rules for Construction of Pressure Vessels.
- B. ANSI/ASME SEC 9 - Boilers and Pressure Vessels Code, Welding and Brazing Qualifications.
- C. ANSI/ASME B16.22 - Wrought Copper and Copper Alloy Solder Joint Pressure Fittings.
- D. ANSI/ASME B31.5 - Refrigeration Piping.
- E. ANSI/ASTM B32 - Solder Metal.
- F. ANSI/ASTM B88 - Seamless Copper Water Tube.
- G. ANSI/AWS A5.8 - Brazing Filler Metal.
- H. ASTM B280 - Seamless Copper Tube for Air Conditioning and Refrigeration Field Service.

1.4 SUBMITTALS

- A. Submit shop drawings under provisions of Section 230500.
- B. Submit product data for specialties, including manufacturers catalog information.
- C. Submit manufacturer's installation instructions.

1.5 DELIVERY, STORAGE, AND HANDLING

- A. Deliver and store piping and specialties in shipping containers with labels in place.
- B. Protect piping and specialties from entry of foreign material by leaving caps and plugs in place until installation.

PART 2 - PRODUCTS

2.1 PIPING

- A. Design Pressure: 450 psig.
 - 1. Maximum Design Temperature: 250°F.
- B. Piping - 4" and under; Brazed Joint:
 - 1. Tubing: Type ACR hard drawn seamless copper tube, ASTM B280. Sizes indicated are nominal designation.
 - 2. Joints: Brazed with silver solder.
 - 3. Fittings: Wrought copper solder joint, ANSI B16.22.
 - 4. Special Requirements: All tubing shall be cleaned, dehydrated, pressurized with dry nitrogen, plugged and tagged by manufacturer "for refrigeration service". During brazing operations, continuously purge the interior of the pipe with nitrogen to prevent oxide formation.

2.2 VALVES

- A. BA-14: Refrigerant Ball Valve: 3/8" thru 3-1/8", 500 psi, -40°F to +300°F, full-port up to 2-1/8" size, blow-out proof, PTFE seals, brass ball with equalizing orifice, visible position indication, seal cap, extended copper connections, replaceable stem seals, compatible with all CFC, HCFC, and HFC refrigerants.
 - 1. Manufacturers:
 - a. Henry Valve Company
 - b. Superior Valve
 - c. Alco Valve

2.3 CHECK VALVES

- A. CK-10: 1/4" thru 3-5/8", 500 psi, globe or angle pattern, brazed, brass body, cleaned-dried-plugged and tagged at factory for refrigerant service.
 - 1. Manufacturers:
 - a. Henry Valve Company
 - b. Mueller
 - c. Wolf-Linde

PART 3 - EXECUTION

3.1 PREPARATION

- A. Ream pipe and tube ends. Remove burrs.
- B. Remove scale and dirt on inside and outside before assembly.

- C. Remove all scale, rust, dirt, oils, stickers and thoroughly clean exterior of all bare metal exposed piping, hangers, and accessories in preparation to be painted.

3.2 INSTALLATION

- A. Install specialties in accordance with manufacturer's instructions.
- B. Reducers are generally not shown. Where pipe sizes change at tee, the tee shall be the size of the largest pipe shown connecting to it.
- C. Route piping in orderly manner, parallel to building structure, and maintain gradient.
- D. Install piping to conserve building space and not interfere with use of space.
- E. Do not install piping or other equipment above electrical switchboards or panelboards. This includes a dedicated space extending 25 feet from the floor to the structural ceiling with width and depth equal to the equipment.
- F. Group piping whenever practical at common elevations and locations. Slope piping 1% in direction of oil return.
- G. Install piping to allow for expansion and contraction without stressing pipe, joints, or connected equipment.
- H. Provide clearance for installation of insulation and access to valves and fittings.
- I. Provide access doors for concealed valves and specialties.
- J. Where pipe support members are welded to structural building frame, brush clean, and apply zinc rich primer to welding.
- K. Insulate piping and equipment; per Section 230719 and Section 230716.
- L. Provide external equalizer piping on expansion valves, and locate expansion valve sensing bulb immediately downstream of evaporator on suction line. Connect distributor to expansion valve outlet.
- M. Install flexible connectors parallel to the shafts of compressors.
- N. Fully charge system with refrigerant after testing.

3.3 PIPE ERECTION AND LAYING

- A. Carefully inspect all pipe, fittings, valves, equipment and accessories before installation. Any items that are unsuitable, cracked or otherwise defective shall be rejected and removed from the job immediately.
- B. All pipe, fittings, valves, equipment and accessories shall have factory applied identification sufficient to determine their conformance with specified requirements.
- C. Exercise care at all times to prevent entry of foreign matter into piping, fittings, valves, equipment and accessories. Do not erect or install any item that is not clean.

- D. During construction, until system is fully operational, keep all openings in piping and equipment closed except when actual work is being performed on that item or system. Closures shall be plugs, caps, blind flanges or other items designed for this purpose.
- E. Change direction of pipes only with fittings or pipe bends. Change size only with fittings.
- F. Cut all pipe to exact measurement and install without springing or forcing.

3.4 APPLICATION

- A. Provide refrigerant charging valve connections.

3.5 JOINING OF PIPE

- A. Brazed Joints:
 - 1. Make up joints with brazing filler metal conforming to ANSI/AWS A5.8. Cut copper tubing ends perfectly square and remove all burrs inside and outside. Thoroughly clean sockets of fittings and ends of tubing to remove all oxide, dirt, and grease just prior to brazing. Apply flux evenly, but sparingly, to all surfaces to be joined. Brazing filler metal with a flux coating may also be used. Heat joints uniformly to proper brazing temperature so braze filler metal flows to all mated surfaces. Wipe excess braze filler metal, leaving a uniform fillet around cup of fitting.
 - 2. Flux shall conform to ANSI/AWS A5.31.
 - 3. Remove composition discs and all seals during brazing if not suitable for a minimum of 840°F or greater than the melting temperature of the brazing filler metal, whichever is greater.

3.6 FIELD QUALITY CONTROL

- A. Test piping system with nitrogen at 300 psig for at least 8 hours without loss of pressure.
- B. Comply with ASHRAE Standard 147 for refrigerant system integrity testing.
- C. After pressure testing, evacuate all refrigerant piping to at least 28" of mercury for 24 hours without loss of vacuum. Ensure moisture does not enter the piping prior to and during the tests.

END OF SECTION 232300

SECTION 233100 - DUCTWORK

PART 1 - GENERAL

1.1 SECTION INCLUDES

- A. Galvanized Ductwork
- B. Stainless Steel Ductwork
- C. Carbon Steel Ductwork
- D. Ductwork Reinforcement
- E. Ductwork Sealants
- F. Rectangular Ductwork
- G. Round and Flat Oval Ductwork
- H. Exposed Ductwork (Rectangular, Round, or Oval)
- I. Flexible Duct
- J. Grease Exhaust Duct
- K. Leakage Testing
- L. Ductwork Penetrations
- M. Painting

1.2 REFERENCES: Conform to all applicable requirements of the following publications:

- A. ADC Flexible Duct Performance and Installation Standards, 3rd Edition 1996.
- B. ANSI/ASHRAE/IES Standard 90.1 (latest published edition) - Energy Standard for Buildings Except Low-Rise Residential Buildings.
- C. ANSI/AWS A5.11M (1997) - Specification for Nickel and Nickel Alloy Welding Electrodes for Shielded Metal Arc Welding.
- D. ASHRAE - Handbook 2020 Systems and Equipment; Chapter 19 - Duct Construction.
- E. ASHRAE - Handbook 2021 Fundamentals; Chapter 21 - Duct Design.
- F. ASHRAE 170 (latest published edition) - Ventilation of Health Care Facilities.
- G. ASTM A90 - Standard Test Method for Weight (Mass) of Coating on Iron and Steel Articles with Zinc or Zinc-Alloy Coatings.

Unified Government Memorial Hall Kitchen & Audio/Visual Renovations

Unified Government of Wyandotte County & Kansas City, KS

ISSUED FOR BID

-
- H. ASTM A167- Stainless & Heat-Resisting Chromium-Nickel Steel Plate, Sheet, & Strip.
 - I. ASTM A653 - Steel Sheet, Zinc-Coated (Galvanized) or zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process.
 - J. ASTM A924 - Specification for General Requirements for Steel Sheet, Metallic-Coated by the Hot-Dip Process.
 - K. ASTM B209 - Specification for Aluminum and Aluminum-Alloy Sheet and Plate.
 - L. ASTM E90-02 - Standard Test Method for Laboratory Measurement of Airborne Sound Transmission Loss of Building Partitions.
 - M. ASTM E413-87 - Classification for Rating Sound Insulation.
 - N. AWS A5.14M (1997) - Specification for Nickel and Nickel Alloy Bare Welding Electrodes and Rods.
 - O. AWS D9.1M/D9.1 - Sheet Metal Welding Code.
 - P. IECC - International Energy Conservation Code (latest published edition)
 - Q. NADCA ACR 2002 - Assessment, Cleaning, and Restoration of HVAC Systems.
 - R. NADCA Standard 05 1997 - Requirements for the Installation of Service Openings in HVAC Systems.
 - S. NFPA 90A - Installation of Air-Conditioning and Ventilating Systems.
 - T. NFPA 90B - Installation of Warm Air Heating and Air- Conditioning Systems.
 - U. NFPA 96 - Ventilation Control and Fire Protection of Commercial Cooking Equipment.
 - V. SMACNA - Air Duct Leakage Test Manual.
 - W. SMACNA - HVAC Duct Construction Standards.
 - X. SMACNA - Phenolic Duct Construction Standard 022.
 - Y. SMACNA - Round Industrial Duct Construction Standards - 1999 Edition.
 - Z. UL 181 - Factory-Made Air Ducts and Air Connectors.
 - AA. UL 181A - Closure Systems for Use with Rigid Air Ducts and Air Connectors
 - BB. UL 181B - Closure Systems for Use with Flexible Air Ducts and Air Connectors.
 - CC. UL 1978 - Standard for Grease Ducts.
 - DD. UL 2221 - Standard for Tests of Fire Resistive Grease Duct Enclosure Assemblies.

1.3 SUBMITTALS

- A. Submit shop drawings per Section 230500.
- B. Submit duct fabrication standards in compliance with SMACNA and these specifications. Clearly indicate metal gauges, reinforcement, and joining methods intended for use for each pressure classification. Furnish details of all common duct fittings and joint connections to be used on this project.
- C. The Architect/Engineer may require field verification of sheet metal gauges and reinforcing to verify compliance with these specifications. At the request of the Architect/Engineer, the contractor shall remove a sample of the duct for verification. The contractor shall repair as needed.
- D. Duct Layout Drawings: Submit detailed duct layout drawings at 1/4" minimum scale complete with the following information:
 - 1. Actual duct routing, ductwork fittings, actual sheet metal dimensions including insulation liner and wrap, duct hanger and support types, ductwork accessories, etc. with lengths and weights noted.
 - 2. Differentiate ducts that are wrapped. Include insulation thickness, type of insulation, and acoustical lagging.
 - 3. Room names and numbers, ceiling types, and ceiling heights.
 - 4. Indicate location of all beams, bar joists, etc. along with bottom of steel elevations for each member.
 - 5. Verify clearances and interferences with other trades prior to preparing drawings. IMEG will provide electronic copies of ventilation drawings for contractor's use if the contractor signs and returns the "Electronic File Transfer" waiver. IMEG will not consider blatant reproductions of original file copies an acceptable alternative for this submittal. Refer also to Section 230500.
- E. Duct Leakage Test Summary Report: Upon completion of the pressure test described in Part 3, the Contractor shall submit an air duct leakage test summary report as outlined in the SMACNA HVAC Duct Leakage Test Manual.

1.4 DEFINITIONS

- A. Duct Sizes shown on drawings are inside clear dimensions. Maintain clear dimensions inside any lining.
- B. Transitions are generally not shown in single-line ductwork. Where sizes change at a divided flow fitting, the larger size shall continue through the fitting.
- C. Exterior Duct: Ductwork located outside the conditioned envelope including exposed ductwork above the roof, outside exterior walls, in attics above insulated ceilings, inside parking garages, and crawl spaces.
- D. Interior Duct: Ductwork located within the conditioned envelope including return air plenums and indirectly conditioned spaces.

1.5 COORDINATION DRAWINGS

- A. Reference Coordination Drawings article in Section 230500 for required duct systems electronic CAD drawings to be provided to Coordinating Contractor for inclusion into composite coordination drawings.
- B. Duct drawings shall be at 1/4" minimum scale complete with the following information:
 - 1. Actual duct routing, ductwork fittings, actual sheet metal dimensions including insulation liner and wrap, duct hanger and support types, ductwork accessories, etc. with lengths and weights noted.
 - 2. Differentiate ducts that are lined or wrapped. Include insulation thickness, type of insulation, and acoustical lagging.
 - 3. Location and size of all duct access doors.
 - 4. Room names and numbers, ceiling types, and ceiling heights.
 - 5. Indicate location of all beams, bar joists, etc. along with bottom of steel elevations for each member.
 - 6. IMEG will provide electronic file copies of ventilation drawings for contractor's use if the contractor signs and returns an "Electronic File Transfer" waiver provided by IMEG. IMEG will not consider blatant reproductions of original file copies an acceptable alternative for coordination drawings. Architectural plans will need to be obtained from the Architect.

PART 2 - PRODUCTS

2.1 GENERAL REQUIREMENTS AND SUPPORTS

- A. Rectangular Duct - Single Wall:
 - 1. General Requirements:
 - a. All ductwork gauges and reinforcements shall be as listed in SMACNA Duct Construction Standards Chapter 2. Where necessary to fit in confined spaces, furnish heaviest duct gauge and least space consuming reinforcement.
 - b. Transitions shall not exceed the angles in Figure 4-7.
 - 2. Exceptions and modifications to the 2005 HVAC Duct Construction Standards are:
 - a. All ducts shall be cross-broken or beaded.
 - b. Snap lock seams are not permitted.
 - c. Turning vanes shall be used in all 90° mitered elbows, unless clearly noted otherwise on the drawings. Vanes shall be as follows:
 - 1) Type 1:
 - a) Description: Single wall type with 22-gauge (0.029") or heavier vanes, 3-1/4" blade spacing, and 4" to 4-1/2" radius. Vanes hemmed if recommended by runner manufacturer. Runners shall have extra-long locking tabs. C-value independently tested at below 0.26. EZ Rail II by Sheet Metal Connectors or equal.
 - b) Usage: Limited to 3,000 fpm and vane lengths 36" and under.

- 2) Type 2:
 - a) Description: Double wall type with 3-1/4" blade spacing, 4-1/2" radius, 24-gauge minimum, and SMACNA Type 1 runners. C-value below 0.27.
 - b) Usage: No limits other than imposed by the manufacturer. Provide intermediate support for vanes over 48" long.
 - 3) Type 3 (acoustical - where acoustical lagging is located or as noted on drawings):
 - a) Description: Same as Type 2, except filled with fiberglass and with slotted or perforated inner curve. Minimum insertion loss of 9 dB at 250 Hz and 6 dB at 1 KHz.
 - b) Usage: No limits other than imposed by the manufacturer. Provide intermediate support for vanes over 48" long.
 - 4) Turning vanes shall operate quietly. Repair or replace vanes that rattle or flutter.
 - 5) Runners must be installed at a 45° angle. Elbows with different size inlet and outlet must be radius type.
 - 6) Omitting every other vane is prohibited.
- d. Where smooth radius rectangular elbows are shown, they shall be constructed per SMACNA Figure 4-2. Type RE1 shall be constructed with a centerline duct radius R/W of 1.0. Where shown on drawings, Type RE3 elbows with 3 vanes shall be used with centerline duct radius R/W of 0.6 (SMACNA r/W=0.1). RE1 or RE3 elbows may be used where mitered elbows are shown if space permits. Mitered elbows (with or without turning vanes) may not be substituted for radius elbows. Do not make branch takeoffs within 4 duct diameters on the side of the duct downstream from the inside radius of radius elbows.
- e. Rectangular branch connections shall be 45° entry type per Figs. 4-5 and 4-6. Rectangular straight taps are not acceptable.
- f. Round taps off rectangular unlined ducts shall be 45° rectangular with transition to round (equal to Sheet Metal Connectors Inc. High Efficiency Takeoff). Duct offsets shall be constructed as shown on drawings. Additional offsets required in the field shall be formed of mitered elbows without turning vanes for offsets up to 30° maximum angle in accordance with SMACNA offset Type 2. Offsets of greater than 30° angle shall be formed of radius elbows with centerline radius R/W=1.0 or greater. SMACNA Type 1 offsets are not permitted.
- g. All lined duct shall utilize dovetail joints where round or conical taps occur. The dovetail joints shall extend past the liner before being folded over.
- h. Cushion heads are acceptable only downstream of TAB devices in ducts up to ± 2" pressure class, and must be less than 6" in length.
- i. Slide-on flanged transverse joint systems are acceptable provided they are a manufactured product that has been tested for conformance with Chapter 2 of the SMACNA HVAC Duct Construction Standards for sheet and joint deflection at the specified pressure class.
- 1) Apply sealant to all inside corners. Holes at corners are not acceptable.
 - 2) Manufacturers:
 - a) Ductmate Industries - 25/35/45
 - b) Nexus

-
- c) Mez
 - d) Other manufacturers must submit test data and fabrication standards and receive Architect/Engineer's approval before any fabrication begins.
 - j. Formed-on flanged transverse joint systems are acceptable provided they are a manufactured product that has been tested for conformance with Chapter 2 of the SMACNA HVAC Duct Construction Standards for sheet and joint deflection at the specified pressure class.
 - 1) Apply sealant to all inside corners. Holes at corners are not acceptable.
 - 2) Flanges shall be 24-gauge minimum (not 26 gauge).
 - 3) Manufacturers:
 - a) Lockformer TDC
 - b) TDF
 - c) United McGill
 - d) Sheet Metal Connectors
 - e) Other manufacturers must submit test data and fabrication standards and receive Architect/Engineer's approval before any fabrication begins.
 - B. Round and Flat Oval Spiral Seam Ductwork - Single Wall:
 - 1. Conform to applicable portions of Rectangular Duct Section. Round or flat oval ductwork may be substituted for rectangular ductwork where approved by the Architect/Engineer. The spiral seam ductwork shall meet the standards set forth in this specification. The ductwork shall meet or exceed the specified cross-sectional area and insulation requirements. The substitution shall be coordinated with all other trades prior to installation.
 - 2. Flat oval duct in negative pressure applications shall have flat sides reinforced as required for rectangular ducts of the same gauge with dimensions equal to the flat span of the oval duct.
 - 3. 90° elbows shall be smooth radius or have a minimum of five sections with mitered joints and R/D of at least 1.5.
 - 4. Duct and fittings shall meet the required minimum gauges listed in chapter 3 of the SMACNA requirements for the specified pressure class. Ribbed and lightweight duct are not permitted.
 - 5. Ductwork shall be suitable for velocities up to 5,000 fpm.
 - 6. Divided flow fittings may be made as separate fittings or factory installed taps with sound, airtight, continuous welds at intersection of fitting body and tap.
 - 7. Spot weld and bond all fitting seams in the pressure shell. Coat galvanizing damaged by welding with corrosion resistant paint to match galvanized duct color.
 - 8. Ducts with minor axis less than 22" shall be spiral seam type. Larger ducts may be rolled, longitudinal welded seam type. SMACNA seams RL-2 and RL-3 are not permitted.
 - 9. Reinforce flat oval ducts with external angles. Internal tie rods are permitted only as indicated for rectangular ductwork.
 - 10. Transverse Joint Connections:
 - a. Crimped joints are not permitted.

- b. Ducts and fittings 36" in diameter and smaller shall have slip joint connections. Size fitting ends to slip inside mating duct sections with minimum 2-inch insertion length and a stop bead. Use inside slip couplings for duct-to-duct joints, and outside slip couplings for fitting-to-fitting joints.
- c. Ducts and fittings larger than 36" shall have flanged connections.
- d. Secure all joints with at least 3 sheet metal screws before sealing.
- e. Manufacturers, Slide-on Flanges:
 - 1) Ductmate Industries - SpiralMate
 - 2) Accuflange
 - 3) Sheet Metal Connectors are acceptable.
- f. Manufacturers, Self-Sealing Duct Systems:
 - 1) Lindab
 - 2) Ward "Keating Coupling"

C. Hangers and Supports General Requirements:

- 1. Hanger and support materials shall be as defined within Materials and Application Specific section below.
- 2. Strap Hangers: Strap hanger shall be a minimum of 1 inch, 18 gauge attached to the bottom of ducts.
- 3. Cable Hangers:
 - a. Aircraft cable and slip cable hangers are acceptable for ducts up to 18" diameter. Protective sleeve tubing shall be used on the cable when supporting duct with exterior insulation. Corner saddles are required when supporting rectangular ductwork.
 - b. Manufacturers; Supports:
 - 1) Gripple
 - 2) Ductmate
 - 3) Duro Dyne
- 4. Integral Corner Connector Hanger: Integral hanger and corner assembly for use with TDC/TDF style duct flanges. Die stamped offset hanger connects to the flanged corner assembly. For use with aircraft cable or 1/4" or 3/8" diameter threaded rods. Tested to hold up to 1,400 lbs. Install per manufacturer's ratings and instructions.
 - a. Manufacturers; Supports:
 - 1) EZ Hanger

2.2 MATERIAL AND APPLICATION SPECIFIC

A. Galvanized Steel:

- 1. General Requirements:
 - a. Duct and reinforcement materials shall conform to ASTM A653 and A924.
 - b. Interior Ductwork and reinforcements: G60 galvanized (0.60 ounces per square foot total zinc coating for two sides per ASTM A90) unless noted otherwise.

-
- c. Exterior Ductwork: G90 galvanized (0.90 ounces per square foot total zinc coating for two sides per ASTM A90) unless noted otherwise. G60 is not acceptable for exterior use.
 - d. Ductwork reinforcement shall be of galvanized steel.
 - 2. Duct Hangers and Support Material:
 - a. Ductwork hangers and supports shall be of galvanized or painted steel.
 - b. All fasteners shall be galvanized or cadmium plated.
 - B. Stainless Steel Ductwork:
 - 1. General Requirements:
 - a. Ductwork shall be Type 304L stainless steel, 16 gauge minimum.
 - b. Exposed ductwork shall have a #3 finish. Concealed ductwork may have milled finish.
 - c. Ductwork reinforcement shall be of stainless steel.
 - 2. Duct Hangers and Supports Material:
 - a. Ductwork hangers and supports shall be of stainless steel. Slip cable hangers are acceptable if constructed of stainless steel.
 - b. All fasteners shall be stainless steel or cadmium plated steel.
 - C. Carbon Steel Ductwork:
 - 1. Ductwork shall be black carbon steel. Refer to Grease Exhaust Duct below for thicknesses.
 - D. Duct Hangers and Support Material:
 - 1. Ductwork hangers and supports shall be of galvanized or painted steel.
 - 2. All fasteners shall be galvanized or cadmium plated.
 - E. Exposed Ductwork (Rectangular, Round, and Flat Oval):
 - 1. The following applies to all ductwork exposed in finished areas in addition to requirements noted above:
 - a. Provide extra shipping protection. Use Cardboard or other protective means to prevent dents and deformed ends.
 - b. Provide cardboard or other means of protection during field fabrication. Protect from scratches. Provide stiffeners to retain shape during fabrication.
 - c. Remove all identification stickers and thoroughly clean exterior of all ducts.
 - d. Locate fitting seams on least visible side of duct.
 - e. Provide exterior finish suitable for field painting without further oil removal.
 - f. Provide ramp-type internal joint couplings. Provide bead of sealant around the inside of the duct about 1/2" from the end of the duct.
 - g. Manufacturers, Slide-on Flanges:
 - 1) Ductmate Industries

- 2) Accuflange
 - 3) Sheet Metal Connectors
 - h. Manufacturers, Self-Sealing Duct System:
 - 1) Lindab
 - 2) Ward "Keating Koupling"
 - i. The system shall be free of visible dents and scratches when viewed from normal occupancy.
 - j. All insulation shall be internal, except at reheat coils.
2. In addition to the paragraphs above, this section applies to all ductwork specified or shown as "Architecturally Exposed":
- a. All spiral ductwork fittings shall be carbon arc welded.
 - b. Grind all welds to remove irregularities.
 - c. Conical taps shall be one piece. Taps for grilles and takeoffs shall be factory installed with a continuous weld and ground smooth.
 - d. Welds shall be ground smooth and painted.
 - e. All architecturally exposed ducts shall be round or flat oval except where not possible (grilles, reheat coils, etc.).
3. Alternate manufacturers, including shop fabricated duct, must be reviewed before installation. The following information is required:
- a. Metal gauge of duct and fittings.
 - b. Fitting type and construction.
 - c. Type and size of reinforcement.
4. Hangers for Exposed Ductwork:
- a. Round Ducts:
 - 1) Threaded rod with duct fixing bracket and metal strap. Provide single threaded rod centered on the duct. Strap hanger shall be a minimum of 1 inch, 18 gauge galvanized steel wrapping the circumference of the duct. Spacing as required by SMACNA guidelines.
 - 2) Aircraft cable with 2-point support in standard horseshoe arrangement.
 - b. Rectangular Ducts:
 - 1) Aircraft cable and slip cable hangers are acceptable for ducts up to 18" in maximum dimension. Corner saddles are required when supporting rectangular ductwork. Spacing and cable size as required by SMACNA guidelines.
 - a) Manufacturers, Supports: Gripple, Ductmate, Duro Dyne, Architect/Engineer approved.
 - 2) Aircraft cable with 2-point support in standard horseshoe arrangement. Corner saddles are required when supporting rectangular ductwork.

- c. Strut-channel and all-thread rod is not acceptable for exposed ductwork.
- d. All fasteners shall be galvanized or cadmium plated.

F. Grease Exhaust Duct:

1. Field Fabricated

- a. Exposed ductwork shall be 16 gauge minimum, Type 304L stainless steel. Concealed ductwork may be 16 gauge black steel.
- b. Concealed Ductwork:
 - 1) Range hood/grease exhaust ducts having an area of 4 sf or less shall be 16 gauge carbon steel.
 - 2) Range hood/Grease exhaust ducts having an area greater than 4 sf shall be 14 gauge carbon steel.
- c. All joints and fittings shall be continuously welded and liquid-tight.
- d. Exposed ductwork shall have a #3 finish. Concealed ductwork may have a mill finish.
- e. Do not penetrate fire rated partitions, unless protected as required by applicable codes.
- f. Provide pre-fabricated access doors and labels required by NFPA 96 on sides of duct at least 1.5" from bottom. Provide access at each change in direction and at maximum 20-foot intervals in horizontal ducts. Provide access at every floor for vertical ducts.
- g. Install grease traps in kitchen grease and dishwasher ducts at base of all vertical risers and low points in the system.
- h. Where grease ducts are 20" x 20" or larger, install access for personnel to enter duct. Duct supports must be sized to support the duct weight and an additional 800 lbs per NFPA 96.
- i. Install ducts with proper clearance to combustible and limited-combustible materials.
- j. Grease ducts installed with volume dampers shall conform to the damper specified in ductwork accessories.
- k. Grease exhaust duct doors shall be grease and airtight, UL 1978 listed, meet NFPA 96 standards, and all mechanical codes. Grease duct access doors can be sandwich type or with a weld-on frame, with/without hinge.
 - 1) Manufacturer, Duct Doors:
 - a) Ductmate Industries "Ultimate I" or "Ultimate II" Style door
 - b) Approved equal
- l. All grease duct access doors used must be accompanied by independent testing in conjunction with each manufacturer's respective wrap system for high temperature applications.
- m. Refer to Section 230713 for duct insulation material and insulated access door when required to provide proper enclosure of ductwork.

2.3 DUCTWORK REINFORCEMENT

- A. All reinforcement shall be external to the duct except that tie rods may be used with the following limitations.
 - 1. Ducts must be over 18" wide.
 - 2. Duct dimensions must be increased 2" in one dimension (h or w) for each row of tie rods installed.
 - 3. Tie rods must not exceed 1/2" diameter.
 - 4. Manufacturer of tie rod system must certify pressure classifications of various arrangements, and this must be in the shop drawings.

2.4 DUCTWORK SEALANTS

- A. One-part joint sealers shall be water-based mastic systems that meet the following requirements: maximum 48-hour cure time, service temperature of -20°F to +175°F, resistant to mold, mildew and water, flame spread rating below 25 and smoke-developed rating below 50 when tested in accordance with ASTM E84, suitable for all SMACNA seal classes and pressure classes. Mastic used to seal flexible ductwork shall be marked UL 181B-M.

2.5 FLEXIBLE DUCT

- A. Flexible duct shall be listed and labeled as UL 181 Class 1 Air Duct Material, and shall comply with NFPA 90A and 90B, and meet GSA, FHA and other U.S. Government agency standards. Flexible duct shall bear the ADC Seal of Certification.
- B. Flame Spread/Smoke Developed: Not over 25/50.
- C. Stretch all flexible duct to prevent sags and reduce air friction. Shorten and reinstall all sagging or loose flexible duct. Avoid sharp elbows. Elbows shall maintain 1.5 diameter centerline turning radius.
- D. Install per the SMACNA Flexible Duct Manual. Secure inner layer with draw band. Wrap with pressure sensitive tape for protection prior to installing draw band. Pressure sensitive tape alone is not acceptable.
- E. Acoustic:
 - 1. Flexible duct shall be acoustic rated in accordance with ASTM E477 and ADC Test Code FD 72-RI by ETL. Insertion loss values noted below are for flow velocities less than 2,500 fpm. Submittals shall include insertion losses ratings per sizes and lengths listed below regardless of sizes shown on the drawings.
 - 2. Flexible have corrosion-resistant wire helix, bonded to a nylon fabric core inner liner that prevents air from contacting the insulation, covered with minimum 1-1/2", 3/4 lb/cf density fiberglass insulation blanket, sheathed in a vapor barrier of metalized polyester film laminated to glass mesh. **[Usage: All areas unless noted otherwise]**.
 - 3. Inner liner shall be airtight and suitable for 6" WC static pressure through 16" diameter. Outer jacket shall act as a vapor barrier only with permeance not over 0.1 perm per ASTM E96, Procedure A. "R" value shall not be less than 4.0 ft²*°F*hr/Btuh. Temperature range of at least 0-180°F. Maximum velocity of 4,000 fpm. "R" value shall not be less than 4.0 ft²*°F*hr/Btuh. Ducts in unconditioned spaces and ventilated attics: "R" value shall not be less than 6.0 ft²*°F*hr/Btuh.

4. Minimum Acoustic Insertion Losses per octave band:

a. Straight Duct:

Dia	Length	63hz	125hz	250hz	500hz	1000hz	2000hz	4000hz
6" Ø	6 ft	4.0	13	15	15	16	17	16
6" Ø	3 ft	2.3	4.9	5.3	5.3	5.5	5.8	5.4
8" Ø	6 ft	5.7	14	13	15	16	18	16
8" Ø	3 ft	2.9	5.0	4.9	5.7	5.6	5.8	5.6
12" Ø	6 ft	5.5	13	12	15	15	18	13
12" Ø	3 ft	2.8	4.8	4.7	5.3	5.3	5.8	4.9

b. 90deg Elbow:

Dia	Length	63hz	125hz	250hz	500hz	1000hz	2000hz	4000hz
6" Ø	6 ft	10	15	16	17	18	17	18
6" Ø	3 ft	3.8	5.4	5.5	5.7	5.9	5.8	5.9
8" Ø	6 ft	10	15	16	17	16	18	18
8" Ø	3 ft	2.4	5.3	5.6	5.8	5.6	5.9	6.0
12" Ø	6 ft	11	14	15	16	15	16	15
12" Ø	3 ft	4.4	5.1	5.3	5.5	5.4	5.6	5.3

5. Usage:

- a. Take-offs from supply ducts to inlets of terminal air boxes. Do not exceed 36" in length.
- b. Connections to air inlets and outlets. Do not exceed 5'-0" in length.
- c. Acceptable Manufacturers:
 - 1) Flexmaster USA - Type 6
 - 2) Thermaflex M-Ke

F. Radius Forming Elbows:

1. Flexible plastic radius forming elbow for use with flexible ducts to create 90deg elbow. One size for 6" to 16" diameter ducts. UL listed for return plenum spaces.
2. Usage: All supply air terminals with flexible ductwork connection.
3. Installation: Attach to flex duct and secure draw bands without crushing flex duct to form smooth radius elbow. Suspend radius forming elbow to structure. Install per manufacturer's instructions.
4. Acceptable Manufacturers:
 - a. Hart & Cooley - Smartflow
 - b. Thermaflex - Flexflow
 - c. Titus - Flexright

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Provide openings in ducts for thermometers and controllers.
- B. Locate ducts with space around equipment for normal operation and maintenance.

-
- C. Do not install ducts or other equipment above electrical switchboards or panelboards. This includes a dedicated space extending 25 feet from the floor to the structural ceiling with width and depth equal to the electrical equipment. Unless intended to serve these rooms, do not install any ductwork or equipment in electrical rooms, transformer rooms, electrical closets, telephone rooms or elevator machine rooms.
- D. Provide temporary closures of metal or taped polyethylene on open ducts to prevent dust from entering ductwork.
- E. Supply ductwork shall be free of construction debris, and shall comply with Level "B" of the SMACNA Duct Cleanliness for New Construction Guidelines.
- F. Repair all duct insulation and liner tears.
- G. Install manual volume dampers in branch supply ducts so all outlets can be adjusted. Do not install dampers at air terminal device or in outlets, unless specifically shown.
- H. Insulate terminal air box reheat coils. Seal insulation tight to form a tight vapor barrier.
- I. Install flexible duct in accordance with the ADC Flexible Duct Performance and Installation Standards.
- J. Flexible duct shall NOT be joined to flat-oval connections. Provide sheet metal oval-to-round transitions where required, to include, but not limited to, all connections to air inlets, air outlets, and terminal air boxes.
- K. Install all exterior ductwork per SMACNA Fig. 6-3. Where drawings do not indicate otherwise, ductwork seams and joints shall be sealed watertight and pitched to shed water.
- L. Support all duct systems in accordance with the SMACNA HVAC Duct Construction Standards: Metal and Flexible and the SMACNA Seismic Restraint Manual: Guidelines for Mechanical Systems, where applicable. Refer to Section 230550 for seismic requirements.
- M. Adhesives, sealants, tapes, vapor retarders, films, and other supplementary materials added to ducts, plenums, housing panels, silencers, etc. shall have flame spread/smoke developed ratings of under 25/50 per ASTM E84, NFPA 255, or UL 723.
- N. All duct support shall extend directly to building structure. Do not support ductwork from pipe hangers unless coordinated with piping contractor prior to installation. Do not allow lighting or ceiling supports to be hung from ductwork or ductwork supports.
- O. Kitchen Grease and Dishwasher Ductwork:
1. All kitchen grease and dishwasher ductwork shall be installed with a continuous slope and liquidtight welds on all seams and joints.

3.2 DUCTWORK APPLICATION SCHEDULE

- A. Refer to Ductwork Application Schedule below for specific requirements for system, material, shape, pressure class, seal class and insulation application.

B. General:

1. Seal Class is per SMACNA HVAC Air Duct Leakage Test Manual
2. Insulation:
 - a. Refer to Section 230713 for insulation types.
 - b. Type A insulation (Flexible Fiberglass Wraps) R-values noted are based on installed values (25% compression).

C. Interior Supply Duct from Rooftop Unit to Air Terminals - Single Wall:

1. Shape:
 - a. Rectangular Duct - Single Wall
 - b. Round and Flat Oval Spiral Seam Ductwork - Single Wall
2. Material: Galvanized Steel
3. Pressure Class: +4"
4. Seal Class: A
5. Insulation:
 - a. ASHRAE 90.1-2019: 1-1/2" thick Type A (R=4.5)
 - b. IECC-2021: 1-1/2" thick Type A (R=4.5)

D. Additional Requirements: Provide 1-1/2" thick, Type B (R=6.0) where ductwork is exposed.

E. Interior Return Duct:

1. Material: Galvanized Steel
2. Pressure Class: -2"
3. Seal Class: A
4. Insulation:
 - a. ASHRAE 90.1-2019: 1-1/2" thick Type A (R= 4.5)
 - b. IECC-2021: 1-1/2" thick Type A (R=4.5)
5. Additional Requirements: Provide 1-1/2" thick Type B (R=6.0) where ductwork is exposed.

F. ERV Exhaust Duct:

1. Shape:
 - a. Rectangular Duct - Single Wall
 - b. Round and Flat Oval Spiral Seam Ductwork - Single Wall
2. Material: Galvanized Steel
3. Pressure Class: -2"
4. Seal Class: A
5. Insulation:
 - a. ASHRAE 90.1-2019: 1-1/2" thick Type A (R= 45)
 - b. IECC-2021: 1-1/2" thick Type A (R=4.5)

6. Additional Requirements: Provide 1-1/2" Type B (R= 6.0) exhaust fan where exposed.
- G. Supply Duct from Fan Coil Unit to Air Terminals:
 1. Shape:
 - a. Rectangular Duct - Single Wall
 - b. Round and Flat Oval Spiral Seam Ductwork - Single Wall
 2. Material: Galvanized Steel
 3. Pressure Class: +2"
 4. Seal Class: A
 5. Insulation:
 - a. ASHRAE 90.1-2022: 1-1/2" thick Type A (R=4.5)
 - b. IECC-2021: 1-1/2" thick Type A (R=4.5)
 6. Additional Requirements: Provide 1-1/2" thick, Type B (R=6.0) where ductwork is exposed.
- H. Combustion Air Duct:
 1. Shape:
 - a. Rectangular Duct - Single Wall
 - b. Round and Flat Oval Spiral Seam Ductwork - Single Wall
 2. Material: Galvanized Steel
 3. Pressure Class: -1"
 4. Seal Class: A
 5. ASHRAE 90.1-2022 and IECC-2021
 - a. Insulation: 1 1/2" thick Type B (R=6.0)
 6. Additional Requirements: None
- I. Outside Air Duct:
 1. Shape:
 - a. Rectangular Duct - Single Wall
 - b. Round and Flat Oval Spiral Seam Ductwork - Single Wall
 2. Material: Galvanized Steel
 3. Pressure Class: -2"
 4. Seal Class: A
 5. Insulation: 1 1/2" thick Type B (R=6.0)
- J. Transfer Ducts and Boots:
 1. Shape:
 - a. Rectangular Duct - Single Wall
 - b. Round and Flat Oval Spiral Seam Ductwork - Single Wall

2. Material: Galvanized Steel
3. Pressure Class: -1/2"
4. Seal Class: A
5. Insulation: 1" thick Type C (R=3.6)

K. Ductwork Accessories (Fabric Flex Connectors, Equipment Flanges, etc.):

1. Insulation:
 - a. ASHRAE 90.1-2019: 1-1/2" thick Type A (R=4.5)

L. IECC-2021: 1-1/2" thick Type A (R=4.5)

M. Grease Exhaust Duct:

1. Shape: Refer to "Grease Exhaust Duct"
2. Material: Field Fabricated
3. Pressure Class: -4"
4. Seal Class: A
5. Insulation: Type F where fire rating is needed

3.3 SPECIAL INSULATION REQUIREMENTS

A. Ductwork Accessories (Fabric Flex Connectors, Equipment Flanges, etc.):

1. Insulation:
 - a. ASHRAE 90.1-2022: 1-1/2" thick Type A (R=4.5)
 - b. IECC-2021: 1-1/2" thick Type A (R=4.5)

3.4 DUCTWORK SEALING

A. General Requirements:

1. Openings, such as rotating shafts, shall be sealed with bushings or similar.
2. Pressure sensitive tape shall not be used as the primary sealant unless it has been certified to comply with UL-181A or UL-181B by an independent testing laboratory and the tape is used in accordance with that certification.
3. All connections shall be sealed including, but not limited to, taps, other branch connections, access doors, access panels, and duct connections to equipment. Sealing that would void product listings is not required. Spiral lock seams need not be sealed.
4. Mastic-based duct sealants shall be applied to joints and seams in minimum 3 inch wide by 20 mil thick bands using brush, putty knife, trowel, or spray, unless manufacturer's data sheet specifies other application methods or requirements.

B. All ducts systems, regardless of pressure class, shall be Seal Class A as defined by Section 5-1 of SMACNA HVAC Air Duct Leakage Test Manual per the Energy Code, unless specifically noted otherwise. Seal Class A shall include sealing of all transverse joints, longitudinal seams, and duct wall penetrations with welds, gaskets, mastics, or fabric-embedded mastic system. Joints are inclusive of, but not limited to, girth joints, branch and sub-branch intersections, duct collar tap-ins, fitting subsections, louver and air terminal connections to ducts, access door and access panel frames and jambs, duct, plenum, and casing abutments to building structures.

C. Special Requirements for Dedicated Outside Air Systems (DOAS):

1. Apply aluminum-based adhesive sealant tape at non-flanged joints on ducts serving dedicated outside air supply (DOAS) and exhaust system in addition to Class A sealant.

3.5 TESTING

A. Interior Duct - Less than 3" WG (positive or negative):

1. Leak testing of these pressure classes is not normally required for interior ductwork (inside the building envelope). However, leak tests will be required if, in the opinion of the Architect/Engineer, the leakage appears excessive. All exterior ductwork shall be tested. If duct has outside wrap, testing shall be done before it is applied.
2. Leak test shall be at the Contractor's expense and shall require capping and sealing all openings.
3. Seal ducts to bring the air leakage into compliance.
4. Contractor shall notify the Architect/Engineer five business days prior to pressurizing ductwork for testing.

B. Interior Duct - 3" WG and Above (positive or negative):

1. A minimum of 25% of interior ductwork (inside the building envelope) shall be tested. The Owner or designated representative shall select the sections to be tested. If duct has outside wrap, testing shall be done before it is applied.
2. Leak test shall be at the Contractor's expense and shall require capping and sealing all openings.
3. Seal ducts to bring the air leakage into compliance.
4. Contractor shall notify the Architect/Engineer five business days prior to pressurizing ductwork for testing.

C. Exterior Duct - 1/2" WG and Above (positive or negative):

1. All exterior ductwork (outside the building envelope) shall be completely pressure tested. If duct has outside wrap, testing shall be done before it is applied.
2. Leak test shall be at the Contractor's expense and shall require capping and sealing all openings.
3. Seal ducts to bring the air leakage into compliance.
4. Contractor shall notify the Architect/Engineer five business days prior to pressurizing ductwork for testing.

D. Test Procedure:

1. Testing shall be as listed in the latest edition of the SMACNA HVAC Duct Leakage Manual, with the following additional requirements:
 - a. The required leakage class for Seal Class A, rectangular ducts, shall be 4; round shall be 2.
 - b. Test pressure shall be the specified duct pressure class. Testing at reduced pressures and converting the results mathematically is not acceptable. This is required to test the structural integrity of the duct system.
 - c. If any leak causes discernible noise at a distance of 3 feet, that leak shall be eliminated, regardless of whether that section of duct passed the leakage test.
 - d. All joints shall be felt by hand, and all discernible leaks shall be sealed.

- e. Totaling leakage from several tested sections and comparing them to the allowable leakage for the entire system is not acceptable. Each section must pass the test individually.
- f. Contractor shall notify the Architect/Engineer five business days prior to pressurizing ductwork for testing. Failure to notify the Architect/Engineer of pressure testing may require the contractor to repeat the duct pressure test after proper notification.
- g. Upon completion of the pressure test, the contractor shall submit an air duct leakage test summary report as outlined in the SMACNA HVAC Duct Leakage Test Manual.
- h. All access doors, taps to terminal air boxes, and other accessories and penetrations must be installed prior to testing. Including terminal air boxes in the test is not required.
- i. Positive pressure leakage testing is acceptable for negative pressure ductwork.

E. Grease Exhaust Duct:

- 1. A light test shall be performed by passing a lamp having a power rating of not less than 100 watts through the entire section of ductwork to be tested. The lamp shall be open to emit light equally in all four directions.
- 2. Testing of the entire exhaust duct system including the hood-to-duct connection shall be performed. Ductwork shall be permitted to be tested in sections provided every joint is tested.
- 3. Leakage testing shall occur prior to use or concealment of the duct system. Ducts shall be considered concealed where installed in shafts or covered by insulation or wrap that prevents ductwork from being visibly inspected on all sides. The test shall be performed in the presence of the code official.

3.6 DUCTWORK PENETRATIONS

- A. All duct penetrations of firewalls shall have fire or fire/smoke dampers where required by code.
- B. Dampers shall be compatible with fire rating of wall assembly. Verify actual rating of any wall being penetrated with Architect/Engineer.
- C. Seal all duct penetrations of walls that are not fire rated by caulking or packing with fiberglass. Install trim strip to cover vacant space and raw construction edges of all openings in finished rooms. Install escutcheon ring at all round duct openings in finished rooms. Trim strips and rings shall be same material and finish as exposed duct.

3.7 PAINTING

- A. Paint interior of ducts black within twice the largest duct dimension of inlets and outlets where interior of duct is visible.
- B. Paint bottom of ducts black within twice the largest duct dimension where a duct is routed above an unducted perforated grille and the duct is visible.

END OF SECTION 233100

SECTION 233300 - DUCTWORK ACCESSORIES

PART 1 - GENERAL

1.1 SECTION INCLUDES

- A. Manual Volume Dampers.
- B. Grease Duct Volume Dampers.
- C. Fire Dampers.
- D. Fire/Smoke Dampers.
- E. Smoke Dampers.
- F. Backdraft Dampers.
- G. Fabric Connectors.
- H. Drip Pans.
- I. Duct Access Doors.
- J. Duct Test Holes.
- K. Remote Volume Control Devices.

1.2 REFERENCES

- A. AMCA Guide for Commissioning and Periodic Performance Testing of Fire, Smoke and Other Life Safety Related Dampers.
- B. ASTM E477-20 - Standard Test Method for Measuring Acoustical and Airflow Performance of Duct Liner Materials and Prefabricated Silencers.
- C. ASTM E2336-04 - Standard Test Methods for Fire Resistive Grease Duct Enclosure Systems.
- D. NFPA 72 - National Fire Alarm and Signaling Code
- E. NFPA 80 - Standard for Fire Doors and Other Opening Protectives.
- F. NFPA 90A - Installation of Air-Conditioning and Ventilating Systems.
- G. NFPA 92 - Standard for Smoke Control Systems.
- H. NFPA 105 - Standard for Smoke Door Assemblies and Other Opening Protectives.
- I. SMACNA - HVAC Duct Construction Standards (latest edition).
- J. UL 33 - Heat Responsive Links for Fire-Protection Service.

- K. UL 555 - Fire Dampers and Ceiling Dampers.
- L. UL 555C - Ceiling Dampers.
- M. UL 555S - Leakage Rated Dampers for Use in Smoke Control Systems.
- N. UL 2043 - Fire Test for Heat and Visible Smoke Release for Discrete Products and Their Accessories Installed in Air-Handling Spaces.

1.3 SUBMITTALS

- A. Submit shop drawings under provisions of Section 230500.
- B. Submit manufacturer's installation instructions.

PART 2 - PRODUCTS

2.1 MANUAL VOLUME DAMPERS

- A. Fabricate in accordance with SMACNA Duct Construction Standards, and as indicated.
- B. Fabricate single blade dampers for duct sizes to 9-1/2 x 30 inches.
- C. Fabricate multi-blade damper of opposed blade pattern with maximum blade sizes 12" x 72". Assemble center and edge crimped blades in prime coated or galvanized channel frame with suitable hardware.
- D. Provide end bearings. On multiple blade dampers, provide molded synthetic or oil-impregnated nylon or sintered bronze bearings.
- E. Provide locking quadrant regulators on single and multi-blade dampers.
- F. On insulated ducts, mount quadrant regulators on stand-off mounting brackets, bases, or adapters.
- G. If blades are in open position and extend into the main duct, mount damper so blades are parallel to airflow.
- H. Contractor assembled modular manual dampers are acceptable as long as it contains the components listed above.

2.2 GREASE DUCT VOLUME DAMPERS

- A. Venturi style damper comprised of an adjustment regulator control rod and casing.
- B. Materials: 16 gauge galvanized steel front panel and casing, 18 gauge stainless steel balancing panels.
- C. Damper shall provide access to duct to facilitate cleaning of the ductwork.
- D. Damper shall be UL 710 listed and fabricated in compliance with NFPA 96.

2.3 DYNAMIC CURTAIN BLADE FIRE DAMPERS (FD)

- A. Furnish and install fire dampers in ducts, where shown on the drawings, at the point where they pass through a fire wall or a floor and in all other locations required by the local fire department, The National Fire Protection Association's Pamphlet No. 90A and all other applicable codes.
- B. Fire dampers shall be UL 555 listed for 1-1/2-hour fire resistance unless noted otherwise, dynamic rated with heated airflow at 2,000 fpm and 4" WC, and have all blades stacked out of the airstream (Type B).
- C. Where dampers are in aluminum or stainless steel duct, provide stainless steel dampers.
- D. Fire dampers shall be held open by a fusible link rated at 165°F unless otherwise called for on the drawings or by local codes.
- E. Dampers shall be installed in sleeves of sufficient thickness to comply with the UL555 Standard for Safety Fire Dampers listing of the damper. Where UL555 permits sleeve thickness to be the same as that of the duct gauge, such thickness shall not be less than that specified in NFPA 90A for breakaway style sleeves. If a breakaway style duct/sleeve connection is not used, the sleeve shall be a minimum of 16 gauge for dampers up to 36" wide by 24" high and 14 gauge for dampers exceeding 36" wide by 24" high. Damper sleeve shall not extend more than 6" beyond the firewall or partition unless damper is equipped with a factory installed access door. Sleeve may extend up to 16" beyond the firewall or partition on sides equipped with the factory installed access door.
- F. Maximum Curtain Damper Size (Multi-section) at less than 2,000 fpm:
 - 1. Vertical Installation: 72"w x 48"h or 48"w x 72"h or 120"w x 24"h.
 - 2. Horizontal Installation: 36"w x 48"h or 48"w x 36"h.
- G. Maximum Curtain Damper Size at greater than 2,000 fpm: Vertical or horizontal - 24"w x 24"h.
- H. Locate access door in the ductwork for visual inspection and on the latch side to replace link easily. Each access door shall have a label with letters at least 1/2" high, reading "FIRE DAMPER".

2.4 DYNAMIC MULTIPLE BLADE FIRE DAMPERS (FD)

- A. General:
 - 1. Furnish and install control/fire/smoke dampers in ducts, where shown on the drawings, at the point where they pass through a fire/smoke partition and in all other locations required by the local Fire Department, the National Fire Protection Association Pamphlet No. 90A, and all other applicable codes.
 - 2. Fire Resistance Rating: Assemblies shall be 1-1/2 hour rated under UL Standard 555 unless noted otherwise on drawings.
 - 3. Airflow Rating: Dynamic rated at 2,000 fpm and 4" WC.
 - 4. Temperature Rating: Assemblies shall be UL 555S listed for use in smoke control system with a 250°F temperature rating.
 - 5. Leakage Rating: Class II. Shall not leak over 20 CFM per square foot at 4" WC (Class II).
 - 6. Where dampers are in aluminum or stainless steel duct, provide stainless steel dampers.

B. Construction:

1. Frame: 5 inches x minimum 16 gauge roll formed, galvanized steel hat-shaped channel, reinforced at corners.
2. Sleeve: Dampers shall be installed in sleeves of sufficient thickness to comply with UL555 Standard for Safety Fire Dampers listing of the damper. Where UL555 permits sleeve thickness to be the same as that of the duct gauge, such thickness shall not be less than that specified in NFPA 90A for breakaway style sleeves. If a breakaway style duct/sleeve connection is not used, the sleeve shall be a minimum of 16 gauge for dampers up to 36" wide by 24" high and 14 gauge for dampers exceeding 36" wide by 24" high. Damper sleeve shall not extend more than 6" beyond the firewall or partition unless damper is equipped with an actuator or factory installed access door. Sleeve may extend up to 16" beyond the firewall or partition on sides equipped with the actuator or factory installed access door.
3. Blades: Opposed blade; airfoil-shaped, single piece, minimum 14 gauge double skin. Galvanized steel. Maximum 6" damper blades.
4. Seals: Blade seal shall be silicone fiberglass material to maintain smoke leakage rating to minimum of 450°F and galvanized steel for flame seal to 1,900°F. Seal to be mechanically attached to blade edge. Jam seal shall be stainless steel, flexible metal compression type.
5. Bearings: Self-lubricating stainless-steel sleeve, in extruded hole in frame.
6. Axle: Minimum 1/2" plated steel, hex shaped, mechanically attached to blade.

C. Temperature Release Device: FSD shall contain a single 165°F heat sensor capable of remote override of fire-induced closure to permit reopenable operation in a dynamic smoke management system. Controlled closing and locking of damper in 7 to 15 seconds to allow duct pressure to equalize. Wiring by Electrical Contractor.

D. Maximum Multi-Blade Size (Multiple Section) at 2,000 fpm and 4" WC:

1. Vertical Installation: 120"w x 48"h or 64"w x 96"h.
2. Horizontal Installation: 120"w x 48"h or 60"w x 96"h.

E. Access Door: Locate access door in the ductwork for visual inspection and on the latch side to replace link easily. Each access door shall have a label with letters at least 1/2" high, reading "FIRE DAMPER".

2.5 FIRE/SMOKE DAMPERS (FSD)

A. General:

1. Furnish and install fire/smoke dampers in ducts, where shown on the drawings, at the point where they pass through a fire/smoke partition and in all other locations required by the local Fire Department, the National Fire Protection Association Pamphlet No. 90A, UL 2043, and all other applicable codes.
2. Fire Resistance Rating: Assemblies shall be 1-1/2 hour rated under UL Standard 555 unless noted otherwise on drawings.
3. Airflow Rating: Dynamic rated at 2,000 fpm and 4" WC.
4. Temperature Rating: Assemblies shall be UL 555S listed for use in smoke control system with a 250°F temperature rating.
5. Leakage Rating: Class II. Shall not leak over 20 CFM per square foot at 4" WC.
6. FSD dampers shall be furnished complete with factory-mounted actuators, and the damper/operator assemblies shall meet all requirements listed below.

-
7. Where dampers are located in aluminum or stainless steel duct, provide stainless steel dampers.
 8. The complete assembly must be factory assembled, cycled and tested prior to shipment.
 9. All operators shall be located with easy access for servicing.
 10. Contractor to field verify actuator installation and clearance requirements prior to ordering. Actuator should not be taller than duct height. Rotate or turn over the actuator if this is the case.
- B. Construction:
1. Frame: 5 inches x minimum 16 gauge roll formed, galvanized steel hat-shaped channel, reinforced at corners.
 2. Sleeve: Dampers shall be installed in sleeves of sufficient thickness to comply with UL555 Standard for Safety Fire Dampers listing of the damper. Where UL555 permits sleeve thickness to be the same as that of the duct gauge, such thickness shall not be less than that specified in NFPA 90A for breakaway style sleeves. If a breakaway style duct/sleeve connection is not used, the sleeve shall be a minimum of 16 gauge for dampers up to 36" wide by 24" high and 14 gauge for dampers exceeding 36" wide by 24" high. Damper sleeve shall not extend more than 6" beyond the firewall or partition unless damper is equipped with an actuator or factory installed access door. Sleeve may extend up to 16" beyond the firewall or partition on sides equipped with the actuator or factory installed access door.
 3. Blades: Opposed blade; airfoil-shaped, single piece, minimum 14 gauge double skin. Galvanized steel. Maximum 6" damper blades.
 4. Seals: Blade seal shall be silicone fiberglass material to maintain smoke leakage rating to minimum of 450°F and galvanized steel for flame seal to 1,900°F. Seal to be mechanically attached to blade edge. Jam seal shall be stainless steel, flexible metal compression type.
 5. Bearings: Self-lubricating stainless-steel sleeve, in extruded hole in frame.
 6. Axle: Minimum 1/2" plated steel, hex shaped, mechanically attached to blade.
- C. Temperature Release Device: FSD shall contain a single 165°F heat sensor capable of remote override of fire-induced closure to permit reopenable operation in a dynamic smoke management system. Controlled closing and locking of damper in 7 to 15 seconds to allow duct pressure to equalize. Wiring by Electrical Contractor.
- D. Electric Actuator: Externally mounted, electric direct coupled. Actuator shall be 120V. Wiring by Electrical Contractor. Overload protections shall be either microprocessor or electronic-based motor controller providing burnout protection if stalled before full rotation is reached. The actuator shall electronically cut off at full open to eliminate noise generation. Actuator shall be mounted by means of a V-bolt dual nut clamp with a V-shaped toothed cradle. Aluminum clamps or setscrews are not acceptable. "Stall type" actuators are NOT acceptable. Actuator shall carry a manufacturer's 5 year warranty. Fail to closed position. Integral auxiliary switches shall be provided on all actuators as required.
- E. Remote Position Indication: Blade position indicator switches - Two position indicator switches linked directly to damper blade in order to allow remote indication of damper blade position at the remote indicator panel mounted on ceiling below respective fire smoke damper.
- F. Remote Inspection Panel: A momentary test switch with open and closed position indication lights shall be mounted ceiling mounted for code-required periodic testing. Connect to factory-supplied position indicating devices. Wiring by Electrical Contractor.

- G. Access Door: Locate access door in ductwork for visual inspection and on the latch side to replace link easily. Each access door shall have a label with letters at least 1/2" high reading "FIRE/SMOKE DAMPER".

2.6 SMOKE DAMPER (SD)

A. General:

1. Furnish and install smoke dampers in ducts, where shown on the drawings, at the point where they pass through a fire/smoke partition and in all other locations required by the local Fire Department, the National Fire Protection Association Pamphlet No. 90A, UL 2043, and all other applicable codes.
2. Fire Resistance Rating: Assemblies shall be 1-1/2 hour rated under UL Standard 555 unless noted otherwise.
3. Airflow Rating: Dynamic rated at 2,000 fpm and 4" WC.
4. Temperature Rating: Assemblies shall be UL 555S listed for use in smoke control system with a 250°F temperature rating.
5. Leakage Rating: Class II. Shall not leak over 20 CFM per square foot at 4" WC.
6. SD dampers shall be furnished complete with factory mounted actuators and the damper/operator assemblies shall meet all requirements listed below.
7. Where dampers are located in aluminum or stainless steel duct, provide stainless steel dampers.
8. The complete assembly must be factory assembled, cycled and tested prior to shipment.
9. All operators shall be located with easy access for servicing.
10. Contractor to field verify actuator installation and clearance requirements prior to ordering. Actuator should not be taller than duct height. Rotate or turn over the actuator if this is the case.

B. Construction:

1. Frame: 5 inches x minimum 16 gauge roll formed, galvanized steel hat-shaped channel, reinforced at corners.
2. Sleeve: Dampers shall be installed in sleeves of sufficient thickness to comply with UL555S Standard for Safety Fire Dampers listing of the damper. Where UL555S permits sleeve thickness to be the same as that of the duct gauge, such thickness shall not be less than that specified in NFPA 105 for breakaway style sleeves. If a breakaway style duct/sleeve connection is not used, the sleeve shall be a minimum of 16 gauge for dampers up to 36" wide by 24" high and 14 gauge for dampers exceeding 36" wide by 24" high. Damper sleeve shall not extend more than 6" beyond the firewall or partition unless damper is equipped with an actuator or factory installed access door. Sleeve may extend up to 16" beyond the firewall or partition on sides equipped with the actuator or factory installed access door.
3. Blades: Opposed blade; airfoil-shaped, single piece, minimum 14 gauge double skin. Galvanized steel. Maximum 6" damper blades.
4. Seals: Blade seal shall be silicone fiberglass material to maintain smoke leakage rating to minimum of 450°F and galvanized steel for flame seal to 1,900°F. Seal to be mechanically attached to blade edge. Jam seal shall be stainless steel, flexible metal compression type.
5. Bearings: Self-lubricating stainless-steel sleeve, in extruded hole in frame.
6. Axle: Minimum 1/2" plated steel, hex shaped, mechanically attached to blade.

- C. Electric Actuator: Externally mounted, electric direct coupled. Actuator shall be 120V. Wiring by Electrical Contractor. Overload protections shall be either microprocessor or electronic-based motor controller providing burnout protection if stalled before full rotation is reached. The actuator shall electronically cut off at full open to eliminate noise generation. Actuator shall be mounted by means of a V-bolt dual nut clamp with a V-shaped toothed cradle. Aluminum clamps or setscrews are not acceptable. "Stall type" actuators are NOT acceptable. Actuator shall carry a manufacturer's 5 year warranty. Fail to closed position. Integral auxiliary switches shall be provided on all actuators as required.
- D. Remote Position Indication: Blade position indicator switches - Two position indicator switches linked directly to damper blade in order to allow remote indication of damper blade position at the remote indicator panel mounted on ceiling below respective fire smoke damper.
- E. Remote Inspection Panel: A momentary test switch with open and closed position indication lights shall be mounted ceiling mounted for code-required periodic testing. Connect to factory-supplied position indicating devices. Wiring by Electrical Contractor.
- F. Access Door: Locate access door in ductwork for visual inspection and on the latch side to replace link easily. Each access door shall have a label with letters at least 1/2" high reading "SMOKE DAMPER".

2.7 BACKDRAFT DAMPERS

- A. Gravity backdraft dampers, size 18 inches x 18 inches or smaller, furnished with air moving equipment, may be air moving equipment manufacturer's standard construction.
- B. Fabricate multi-blade, parallel action gravity balanced backdraft dampers of extruded aluminum, with blades of maximum 6 inch width, with felt or flexible vinyl sealed edges, linked together in rattle-free manner with 90° stop, and plated steel pivot pin; adjustment device to permit setting for varying differential static pressure.
- C. Models:
 - 1. Ruskin CBD4
 - 2. Arrow 655
 - 3. Greenheck EM.

2.8 FABRIC CONNECTORS

- A. Fabric connectors shall be installed between all fans or fan units and metal ducts or casings to prevent transfer of fan or motor vibration.
- B. The fabric connectors shall be completely flexible material which shall be in folds and not drawn tight.
- C. Fabric connectors shall be of glass fabric double coated with neoprene, with UL approval. Weight = 30 oz. per square yard minimum. Fabric shall not be affected by mildew and shall be absolutely waterproof, airtight and resistant to acids, alkalis, grease and gasoline, and shall be noncombustible.
- D. Fabric connections shall not exceed 6" in length on ductwork that has a positive pressure. On ductwork that has a negative pressure, the length shall not exceed 2" in length.

- E. All corners shall be folded, sealed with mastic and stapled on 1" centers.
- F. Fabric connectors shall not be painted.
- G. Unless otherwise shown on the drawings, the fabric connection at the inlet to centrifugal fans shall be at least one duct diameter from the fan to prevent inlet turbulence.
- H. Materials:
 - 1. Durodyne MFN-4-100
 - 2. Vent Fabrics, Inc.
 - 3. "Ventglas"
 - 4. Proflex PFC3NGA
- I. Fabric connectors exposed to sunlight and weather shall be as described above, except the coating shall be hypalon in lieu of neoprene.
- J. Materials:
 - 1. Durodyne "Duralon MFD-4-100"
 - 2. Vent Fabrics, Inc.
 - 3. "Ventlon"
 - 4. Proflex PFC3HGA

2.9 DRIP PANS

- A. Install drip pans under all rooftop exhaust fans, intake hoods, exhaust hoods and other roof penetrations that do not have ductwork below them to intercept dripping water.
- B. Drip pans shall be 22 gauge minimum cross-broken or reinforced sheet metal with 2" welded upturned lips.
- C. Pans shall extend 6" in all directions beyond the opening and shall have the top of the lip located 25% of the maximum throat dimension below the opening.
- D. Insulate interior of drip pan with 1" thick elastomeric foam insulation. Adhere foam to drip pan with standard foam adhesive.

2.10 DUCT ACCESS DOORS

- A. Fabricate per Fig. 7-2 and 7-3 of the SMACNA HVAC Duct Construction Standards and as indicated.
- B. Review locations prior to fabrication. Install access doors at fire dampers, smoke dampers, motorized dampers, fan bearings, filters, automatic controls, humidifiers, louvers, duct coils and other equipment requiring service inside the duct.
- C. Construction shall be suitable for the pressure class of the duct. Fabricate rigid, airtight, and close-fitting doors of materials identical to adjacent ductwork with sealing gaskets butt or piano hinges, and quick fastening locking devices. For insulated ductwork, install minimum one inch thick insulation with sheet metal cover.
- D. Access doors with sheet metal screw fasteners are not acceptable.

- E. Minimum size for access doors shall be 24" x 16" or full duct size, whichever is less.
- F. Provide duct access door in all horizontal return ductwork at 20 foot intervals per NFPA 90A.
- G. Fire Damper, Fire/Smoke Damper Access Provide quantity of access doors such that two hands can fit inside ductwork to manually reset fire dampers. For ducts larger than 12x12, provide one access door. For ducts 12" x 12" and smaller, provide one access door on bottom and one on side.

2.11 GREASE DUCT ACCESS DOORS

- A. Provide pre-fabricated and pre-insulated duct access doors by the same manufacturer as the fire resistive duct wrap.

2.12 DUCT TEST HOLES

- A. Cut or drill temporary test holes in ducts as required. Cap with neat patches, neoprene plugs, threaded plugs, or threaded or twist-on metal caps.

2.13 REMOTE VOLUME CONTROL DEVICES - MANUAL

- A. Remote volume control balancing damper shall be supplied with either miter gears or right angle worm gears. Provide all damper shafts, gearboxes, couplings, U-joints, bearings, shafts, offsets, adapters, and adjustable concealed covers as required.
- B. When distances, angles, or offsets prevent installing solid rods, the mechanical cable control system may be utilized. Provide all damper shafts, rack and pinion gear operator, cables and sleeves, and adjustable ceiling mounting cups.
- C. Manufacturers:
 - 1. Young Regulator Company
 - 2. Metropolitan Air Technology

PART 3 - EXECUTION

3.1 INSTALLATION

- A. General Installation Requirements:
 - 1. Install accessories in accordance with manufacturer's instructions.
 - 2. Where duct access doors are located above inaccessible ceilings, provide ceiling access doors. Coordinate location with the Architect/Engineer.
 - 3. Coordinate and install access doors provided by others.
 - 4. Provide access doors for all equipment requiring maintenance or adjustment above an inaccessible ceiling. Minimum size shall be 24" x 24".
 - 5. Grease duct access doors shall be installed per approvals from manufacturer's ICC-ES Evaluation Report.
 - 6. Provide duct test holes where indicated and as required for testing and balancing purposes.

B. Manual Volume Damper:

1. Provide manual volume dampers at points on low pressure supply, return, and exhaust systems where branches are taken from larger ducts where indicated on drawings and as required for air balancing. Use splitter dampers only where indicated.
2. Provide ceiling access doors for manual volume dampers. When manual volume dampers are located above an inaccessible ceiling and an access door cannot be installed, provide a remote-controlled volume control device for operation of the damper. Coordinate location with the Architect/Engineer.
3. Grease duct volume dampers shall be continuously welded to duct and/or hoods so that system is liquidtight.

C. Fire Damper, Fire Smoke Damper, Smoke Damper:

1. Installation:

- a. Provide fire dampers, combination fire and smoke dampers, and smoke dampers at locations indicated, where ducts and outlets pass through fire rated components, and where required by authorities having jurisdiction. Install with required perimeter mounting angles, sleeves and duct connections.
- b. Provide ceiling access doors for smoke and/or fire dampers. Coordinate location with the Architect/Engineer.
- c. Provide manufacturer's maintenance instructions to Owner.
- d. At fire dampers, smoke dampers and combination fire smoke damper where duct is:
 - 1) Internally insulated, exterior duct wrap shall be installed from the wall out to 1 foot from the wall. All edges shall be taped.
 - 2) Externally insulated, the exterior duct wrap shall extend up to the wall.

2. Commissioning/Testing and Acceptance:

- a. Dampers shall be tested for function in their installed condition. Cycle all dampers to ensure proper operation and signal reporting as required by the manufacturer, building codes, and NFPA, with the minimum following requirements:
 - 1) Visually inspect damper to ensure they are free from obstructions, have appropriate access, and are labeled.
 - 2) Demonstrate resetting of fire dampers to Authorities Having Jurisdiction and Owner's representative as described below.
 - 3) Fusible Link Operated Dampers:
 - a) Ensure fan is off.
 - b) With damper full-open, remove fusible link.
 - c) Ensure damper closes completely without assistance.
 - d) Return damper to full-open position and replace fusible link.
 - 4) Dampers with Position Indication Wired to Indication Lights, Control Panels or BAS:
 - a) Confirm damper is full-open using position indicator signal.
 - b) Remove power to allow spring return to close damper.
 - c) Confirm damper is full-closed using position indicator signal.

- d) Reapply power to reopen damper.
 - e) Confirm damper is full-open using position indicator signal.
 - 5) Dampers without Position Indication:
 - a) Visually confirm damper is full-open using position indicator signal.
 - b) Remove power to allow spring return to close damper.
 - c) Visually confirm damper is full-closed.
 - d) Reapply power to reopen damper.
 - e) Visually confirm damper is full-open.
- 3. Report:
 - a. Provide Commissioning/Testing and Acceptance Report documenting the following for all fire damper, fire smoke damper, smoke dampers.
 - b. A copy of the report shall be filed with the fire code official and an identical copy shall be maintained in an approved location at the building.
 - c. Report shall include the following:
 - 1) Damper ID#
 - 2) System identification (e.g. AHU-#)
 - 3) Type (FD, FSD, SD)
 - 4) Duct size
 - 5) UL assembly number
 - 6) Location of damper and access door
 - 7) Location of position indicator
 - 8) Fusible link temperature rating (if applicable)
 - 9) Manufacturer and model
 - 10) Commissioning testing and acceptance operation: Pass/Fail/Reset
- D. Drain Pan:
 - 1. Drain pans shall be installed per ASHRAE 62.1.
 - a. All drain pans shall be field tested under normal operating conditions to ensure proper drainage.
 - b. Field testing of drain pans is not required if units with factory installed drain pans have been certified (attested in writing) by the manufacturer for proper operation when installed as recommended.

END OF SECTION 233300

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 233423 - POWER VENTILATORS

PART 1 - GENERAL

1.1 SECTION INCLUDES

- A. Rooftop Kitchen Exhaust Fan - Vertical Discharge .

1.2 QUALITY ASSURANCE

- A. Performance Ratings: Conform to AMCA 210 and bear AMCA Certified Rating Seal.
- B. Sound Ratings: AMCA 301, tested to AMCA 300.
- C. Fabrication: Conform to AMCA 99.
- D. Fan Energy Index (FEI): Fans shall meet or exceed the minimum FEI scheduled at the specified airflow, pressure, and air density (duty point). In no case shall the FEI at the specified duty point fall below 1.0.

1.3 REFERENCES

- A. AMCA 99 - Standards Handbook.
- B. AMCA 208 - Calculation of the Fan Energy Index (FEI).
- C. AMCA 210 - Laboratory Methods of Testing Fans for Rating Purposes.
- D. AMCA 230 - AMCA 230 - Laboratory Methods of Testing Air Circulating Fans for Rating and Certification.
- E. AMCA 300 - Test Code for Sound Rating Air Moving Devices.
- F. AMCA 301 - Method of Publishing Sound Ratings for Air Moving Devices.
- G. ANSI/AFBMA 9 - Load Ratings and Fatigue Life for Ball Bearings.
- H. ANSI/AFBMA 11 - Load Ratings and Fatigue Life for Roller Bearings.
- I. SMACNA - HVAC Duct Construction Standards (latest edition).

1.4 SUBMITTALS

- A. Submit shop drawings per Section 230500. Include data on all fans and accessories. Submit sound power levels for both fan inlet and outlet at rated capacity. Submit motor ratings and electrical characteristics, plus motor and electrical accessories. Submit multi-speed fan curves including minimum and maximum fan speed with specified operating points clearly plotted. Submit the Fan Energy Index (FEI) at the selected duty point (ceiling and HVLS fans are exempt from FEI submittal requirements).
- B. Submit manufacturer's installation instructions.

- C. Submit electrical power/controls wiring diagrams and product data indicating general assembly, components, safety controls, and service connections.
- D. Submit motor data indicating compliance with Section 230513.

PART 2 - PRODUCTS

2.1 ROOFTOP KITCHEN EXHAUST FAN - VERTICAL DISCHARGE

- A. Fan Wheel: Centrifugal type, aluminum hub and wheel with backwards inclined blades, statically and dynamically balanced.
- B. Housing: Removable, spun aluminum dome or rectangular top, with square, one piece, aluminum base and curb cap with Venturi inlet cone.
- C. Fan Shaft: Turned, ground and polished steel; keyed to wheel hub.
- D. Motor mounted outside of airstream and ventilated with outside air. Mill aluminum finish.
- E. Motor (as scheduled on drawings):
 - 1. Electronically Commutated Motor (ECM): Motor shall be variable speed, constant torque, brushless permanent magnet (PM) motor for belt-drive applications. Electronics shall be encapsulated for moisture protection and shall include integral surge protection. Motor and controller shall be pre-wired for specific voltage and phase. Motor frame shall be NEMA 48; All EC motors shall be a minimum of 85% efficient at all speeds. Provide motor with onboard motor control module. Motor speed shall be limited to provide electronic overcurrent protection. Provide non-fused, with thermal overload protection, factory mounted and wired disconnect switch mounted inside fan housing. Starter shall provide soft start to reduce inrush current and shall be controllable from 20% to 100% of full rated speed. Operational mode shall be as follows:
 - a. ECM set for constant CFM.
- F. Bearings:
 - 1. Permanently lubricated, permanently sealed, self-aligning ball bearings.
 - 2. Furnish permanently lubricated sealed ball type motor and drive shaft bearings sized for 200,000 hours life at specified operating conditions. Drives sized for 150% of rated motor horsepower. Drive assembly and wheel supported by vibration isolators.
- G. Kitchen/Grease Applications:
 - 1. All fans serving range hoods shall have extended shrouds to discharge at least 40" above roof and built-in grease trough with drain.
 - 2. Include standard base curb with separate ventilated curb extension and hinged base with restraining means.
 - 3. Fan shall be UL 705, Supplement SC listed.
 - 4. Do not include motorized dampers for fans scheduled for kitchen/grease application.
 - 5. Do not include bird screen for fans scheduled for kitchen/grease application.

H. Manufacturers:

1. Cook
2. Greenheck
3. PennBarry
4. Twin City
5. FloAire

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Install in accordance with manufacturer's instructions.
- B. Secure roof exhausters with cadmium plated lag screws to roof curb.
- C. If manufacturer has no recommendations, secure roof exhaust fans to curbs with 1/4" lag bolts on 8" maximum centers.
- D. MC shall install and wire factory provided damper to open when the fan runs if the manufacturer does not provide an option to pre-wire the damper.

END OF SECTION 233423

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 233700 - AIR INLETS AND OUTLETS

PART 1 - GENERAL

1.1 SECTION INCLUDES

- A. Grilles And Registers.
- B. Architectural Square Panel Diffusers.
- C. Louvers.

1.2 QUALITY ASSURANCE

- A. Test and rate performance of air inlets and outlets per ASHRAE 70.
- B. Test and rate performance of louvers per AMCA 500L-99.
- C. All air handling and distribution equipment mounted outdoors shall be designed to prevent rain intrusion into the airstream when tested at design airflow and with no airflow, using the rain test apparatus described in Section 58 of UL 1995.

1.3 REFERENCES

- A. AMCA 500-L-12 - Laboratory Methods of Testing Louvers for Rating.
- B. ANSI/ASHRAE 70 - Method of Testing for Rating the Air Flow Performance of Inlets and Outlets.
- C. ANSI/ASHRAE/IES Standard 90.1 (latest published edition) - Energy Standard for Buildings Except Low-Rise Residential Buildings.
- D. ASHRAE 170 (latest published edition) - Ventilation of Health Care Facilities.
- E. SMACNA - Duct Construction Standards.

1.4 SUBMITTALS

- A. Submit product data under provisions of Section 230500.
- B. Submit schedule of inlets and outlets indicating type, size, location, application, and noise level.
- C. Review requirements of inlets and outlets as to size, finish, and type of mounting prior to submitting product data and schedules of inlets and outlets.
- D. Submit manufacturer's installation instructions.
- E. Submit electrical power/controls wiring diagrams and product data indicating general assembly, components, safety controls, and service connections.

1.5 REGULATORY REQUIREMENTS

- A. Conform to ANSI/NFPA 90A.
- B. Conform to ASHRAE 90.1.

PART 2 - PRODUCTS

2.1 AIR TERMINALS - GRILLES AND REGISTERS

- A. Reference to a grille means an air supply, exhaust or transfer device without a damper.
- B. Reference to a register means an air supply, exhaust or transfer device with a damper.
- C. The type of unit, margin, material, finish, etc., shall be as shown on the drawing schedule and suitable for the intended use.
- D. All margins shall be compatible with ceiling types specified (including 'Thin-Line' T-bar lay-in grid system). Any discrepancies in contract documents shall be brought to the attention of the Architect/Engineer, in writing, prior to Bid Date. Submission of Bid indicates ceiling and air inlet and outlet types have been coordinated.
- E. The capacity and size of the unit shall be as shown on the drawings.
- F. All units shall handle the indicated cfm as shown on the drawings while not exceeding an NC level of 25, referenced to 10^{-12} watts with a 10 dB room effect.
- G. Refer to the drawings for construction material, color and finish, margin style, deflection, and sizes of grilles and registers.
- H. Provide with 3/4" blade spacing. Blades shall have steel friction pivots to allow for blade adjustment, plastic pivots are not acceptable.
- I. Corners of steel grilles and registers shall be welded and ground smooth before painting. Aluminum grilles and registers shall have staked corners.
- J. Where specified to serve registers, provide opposed blade volume dampers operable from the face of the register.
- K. Screw holes for surface fasteners shall be countersunk for a neat appearance. Provide concealed fasteners for installation in lay-in ceilings and as specified on the drawings.
- L. Manufacturers:
 - 1. Tuttle & Bailey
 - 2. Titus
 - 3. Price
 - 4. Nailor
 - 5. Carnes
 - 6. Krueger

2.2 AIR TERMINALS - ARCHITECTURAL SQUARE PANEL DIFFUSERS

- A. Reference to a diffuser means an air supply device, ceiling mounted, that shall diffuse air uniformly throughout the conditioned space.
- B. The type of unit, margin, material, finish, etc., shall be as shown on the drawing schedule. Flat-oval inlets are not acceptable for connection to flexible ducts.
- C. All margins shall be compatible with ceiling types specified (including 'Thin-Line' T-bar lay-in grid system). Any discrepancies in contract documents should be brought to the attention of the Architect/Engineer, in writing, prior to Bid Date. Submission of Bid indicates ceiling and air inlet and outlet types have been coordinated.
- D. The capacity and size of the unit shall be as shown on the drawings.
- E. All units shall handle the indicated cfm as shown on the drawings while not exceeding an NC level of 25, referenced to 10^{-12} watts with a 10 dB room effect.
- F. Diffusers shall be architectural solid square panel and flush with ceiling.
- G. The exposed surface shall be smooth, flat and free of visible fasteners. The face panel shall be 22 gauge steel with a rolled edge or shall be 18 gauge with a smooth ground, uniform edge.
- H. The back pan shall be one piece 22 gauge stamped and shall include an integral inlet. (Welded inlets and corner joints are not acceptable).
- I. Diffusers with a 24x24 back pan shall have a minimum 18x18 face panel size. Diffusers with a 12x12 back pan shall have a minimum 9x9 face panel size.
- J. The face panel shall be mechanically fastened to the back panel with steel components. (Plastic fasteners are not acceptable.)
- K. Manufacturers:
 - 1. Tuttle & Bailey
 - 2. Titus
 - 3. Price
 - 4. Nailor
 - 5. Carnes
 - 6. Metalaire
 - 7. Krueger

2.3 LOUVERS - FIXED - ALUMINUM

- A. Louvers shall be minimum 4" deep and constructed of extruded aluminum. Blade, jamb and sill thickness shall be minimum 0.081". Blades shall be spaced at a maximum of 5.1" apart.
- B. Louvers shall be of the drainable blade design with water collected on the leading edge of the blade and diverted to the jamb.
- C. Louvers shall be furnished with aluminum bird screen mounted on the inside surface.
- D. Size, cfm, finish and pressure drop for louvers shall be as scheduled on the drawings.

- E. AMCA Certified performance for 48" x 48" samples with intake airflow of 8,000 cfm shall not exhibit more than 0.19" pressure drop. Maximum water penetration shall be 0.01 ounces per square foot at the scheduled intake velocity based on 15 minute test duration when subjected to a water flow rate of 0.25 gal/min as described under the Water Penetration Test in AMCA 500-L-07.
- F. Contractor shall provide the General Contractor with the correct sizes and locations of all louvers required in masonry walls.
- G. Louvers shall be sealed around perimeter to avoid moisture penetration between the louver frame and wall.
- H. Louvers shall be suitable for duct connection.
- I. Manufacturers:
 - 1. Ruskin - "ELF375DX"
 - 2. Greenheck - ESD "403"
 - 3. Pottorff - EFD

PART 3 - EXECUTION

3.1 INSTALLATION

- A. General Installation Requirements:
 - 1. Install items in accordance with manufacturers' instructions.
 - 2. Check location of inlets and outlets and make necessary adjustments in position to conform to architectural features, symmetry, and lighting arrangement.
 - 3. Install diffusers to ductwork with air tight connections.
 - 4. Flexible ducts shall NOT be joined to flat-oval connections. Provide sheet metal oval-to-round transitions where required.
 - 5. Supply grille and register blades shall be aimed in the field to provide adequate air distribution in the space. All return grilles and registers blades shall be oriented to minimize sight distance beyond installed device.
- B. Volume Damper:
 - 1. Provide manual volume dampers on duct take-off to diffusers when there are multiple connections to a common duct. Locate volume dampers as far as possible from the air inlet or outlet.
- C. Maintaining Duct Cleanliness:
 - 1. When grilles, registers, and diffusers are installed, Contractor shall prevent construction dust, dirt, and debris from entering ductwork as required by Section 230500.

END OF SECTION 233700

SECTION 234000 - AIR CLEANING

PART 1 - GENERAL

1.1 SECTION INCLUDES

- A. Filters and Filter Media.
- B. Filter Gauges.

1.2 QUALITY ASSURANCE

- A. Filter media shall be tested under ANSI/UL 900 and labeled.
- B. Provide all filters and filter banks by one manufacturer.

1.3 REFERENCES

- A. ANSI/UL 586 - Test Performance of High Efficiency Particulate, Air Filter Units.
- B. ANSI/UL 867 - Standard for Electrostatic Air Cleaners.
- C. ANSI/UL 900 - Test Performance of Air Filter Units.
- D. ANSI/UL 2998 - Environmental Claim Validation Procedure (ECVP) for Zero Ozone Emissions from Air Cleaners.
- E. ASHRAE 26 - Guideline for Field Testing of General Ventilation Devices and Systems for Removal Efficiency In-Situ by Particle Size and Resistance to Flow.
- F. ASHRAE 52.2 - Method of Testing Air Cleaning Devices Used in General Ventilation for Removing Particulate Matter.
- G. ANSI/NFPA 70 - National Electrical Code.

1.4 SUBMITTALS

- A. Submit shop drawings per Section 230500. Include data on media, performance, assembly and frames.

1.5 EXTRA STOCK

- A. Provide a total of three (3) sets of filters for all units.
 - 1. Provide clean filters in all units at time of installation.
 - 2. Provide clean filters in all units at project final completion after all interior finishes are complete.
 - 3. Provide one additional set of replacement filters for all units. Deliver to Owner at job site.

PART 2 - PRODUCTS

2.1 MERV 8 (MEDIUM EFFICIENCY) - DISPOSABLE - TYPE D

- A. Pleated media, disposable type with welded wire grid support bonded to the filter media.
- B. Heavy duty, paper board frame with diagonal support members bonded to inlet and exit sides of each pleat. Bond frame to media periphery to eliminate air bypass.
- C. 2" thick media with at least 4.6 square feet of media per square foot of face area. Maximum initial resistance of 0.30" WG at 500 fpm face velocity.
- D. MERV 8 per ASHRAE 52.2.

2.2 MERV 13 (85% EFFICIENT) RIGID FILTER - DISPOSABLE - TYPE F

- A. Pleated, rigid, disposable type with high density, fine fiberglass laminated to non-woven synthetic backing. Welded wire grid media support bonded to the filter media. Galvanized steel enclosing frame bonded to media periphery to eliminate air bypass.
- B. Maximum 12" thick cartridges with at least 14.5 square feet of media per square foot of face area.
- C. MERV 13 per ASHRAE 52.2. Maximum 0.60" WG initial resistance at 500 fpm face velocity.
- D. Manufacturers:
 - 1. Camfil
 - 2. American Air Filter

2.3 FILTER GAUGES

- A. Accessories: Static pressure tips with integral compression fittings, 1/4" plastic tubing, 2- or 3-way vent valves, indicating fluid.
- B. Differential Pressure Gauge: Diaphragm actuated, nominal 3" round dial, glass filled nylon housing, polycarbonate lens, zero adjustment, 0-2" W.G. range, 5% of full scale accuracy.
- C. Accessories: Static pressure tips with integral compression fittings and 1/8" NPT plastic tubing.
- D. Manufacturers:
 - 1. Dwyer "Minihelic II" 2-5000
 - 2. Marshalltown Instrument "Series 85C"

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Install all products per manufacturers' instructions.

- B. Seal filter media to prevent passage of unfiltered air around filters with felt, rubber, or neoprene gaskets.
- C. Do not operate fan systems without filters.
- D. Install static pressure taps upstream and downstream of filters. Mount filter gauges on outside of filter housing or filter plenum, in accessible position. Adjust and calibrate. Every filter bank, including packaged units, shall have a filter gauge.
- E. Install four (4) high efficiency filter test holes, two upstream and two downstream, at all high efficiency filter banks in air handling units and ductwork (85% efficiency and higher). Coordinate location of test holes with Owner.

END OF SECTION 234000

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 237200 - ENERGY RECOVERY DEVICES

PART 1 - GENERAL

1.1 SECTION INCLUDES

- A. Fixed Plate Energy Exchange Element.

1.2 QUALITY ASSURANCE

- A. Sound Ratings: Tested to AMCA 300.
- B. Fabrication: Conform to AMCA 99 and AHRI 430.
- C. Unit shall bear a UL or ETL label of approval.

1.3 REFERENCES

- A. ANSI/AHRI 1060 - 2011 - Rating Air-to-Air Energy Recovery Ventilation Equipment
- B. ANSI/AFBMA 11 - Load Ratings and Fatigue Life for Roller Bearings.
- C. ANSI/AFBMA 9 - Load Ratings and Fatigue Life for Ball Bearings.
- D. ANSI/ASHRAE Standard 62.1 - 2010 - Ventilation for Acceptable Indoor Air Quality
- E. ANSI/ASHRAE/IES Standard 90.1 (latest published edition) - Energy Standard for Buildings Except Low-Rise Residential Buildings.
- F. ASHRAE 84 - Method of Testing Air-to-Air Heat Exchangers
- G. NFPA 70 - National Electrical Code.
- H. NFPA 90A - Installation of Air-Conditioning and Ventilation Systems.
- I. UL 1812 - UL Standard for Safety for Ducted Heat Recovery Ventilators.

1.4 SUBMITTALS

- A. Submit shop drawings per Section 230500.
- B. Energy transfer performance shall be clearly documented through a certification program conducted in accordance with ASHRAE 84 and AHRI 1060 standards. Submit fixed plate AHRI 1060 compliance certification with reference number.
- C. Indicate ratings, flat plate performance, pressure drop, outdoor air correction factor (OACF), exhaust air transfer rate (EATR), motor electrical characteristics, gauges, material finishes, assembly, unit dimensions, weight, required clearances, construction details, and field connection details.
- D. Submit manufacturer's installation instructions.

- E. Any exceptions to the specifications must be clearly noted. Contractor is responsible for any additional expenses that may occur due to any exception made.
- F. Submit operation and maintenance data.
- G. Submit static pressure calculations showing total pressure drops.
- H. Submit electrical power/controls wiring diagrams and product data indicating general assembly, components, safety controls, and service connections.

1.5 DELIVERY, STORAGE, AND HANDLING

- A. Deliver products to site in factory-fabricated protective containers, with factory-installed shipping skids and lifting lugs.
- B. Store in clean dry place and protect from weather and construction traffic. Handle carefully to avoid damage to components, enclosures, and finish.

1.6 WARRANTY

- A. Provide manufacturer's 10-year parts **[and labor]** warranty on fixed plate energy exchange element against defects in material and workmanship.

1.7 MAINTENANCE SERVICE

- A. Include maintenance items as outlined in manufacturer's operating and maintenance data, including minimum of belt replacement, and controls checkout, adjustments and recalibrations.
- B. Submit copy of service call work order or report, and include description of work performed.

PART 2 - PRODUCTS

2.1 FIXED PLATE ENERGY EXCHANGE ELEMENT

- A. Element shall be of cross-flow type and constructed of resin-composite media allowing latent heat transfer with performance as scheduled on the drawings. Cross leakage shall be less than 1%.
- B. Exchange element to be epoxy air-dried phenolic coated for use in corrosive atmosphere.
- C. Provide insulated, stainless steel drain pan under exchange element section. Pitch drain pan to connection on side of unit closest to floor drain. Drain pan shall conform to the latest edition of ASHRAE Standard 62, including addenda.
- D. Unit shall be UL 1812 listed for ducted air-to-air heat exchangers.
- E. Unit shall be capable of transferring sensible and latent energy between airstreams. Latent energy transfer shall be accomplished by direct water vapor transfer from one airstream to the other, without exposing transfer media in succeeding cycles directly to the exhaust airstream and then to the fresh airstream.

- F. Exhaust and fresh air streams shall, at all times, travel in separate passages, and air streams shall not mix.
- G. Heat exchanger shall be equipped with face and bypass dampers to modulate effectiveness of the plate exchanger. Bypass area shall be sized for a static pressure more than the pressure drop through the face area. Face and bypass dampers shall be **[factory installed.]**
- H. Airflow through the energy exchange element shall avoid deposition of particulates on the interior of the energy plate material.
- I. Case shall be constructed of galvanized, 20-gauge steel, with lapped corners, and gasketed zinc plated screw fasteners.
- J. Manufacturers:
 - 1. Trane/Mitsubishi
 - 2. Innergytech
 - 3. RenewAire
 - 4. Heatex
- K. Dampers:
 - 1. Provide dampers as needed to allow for [100%]<insert> airflow bypass around the wheel to allow for economizer. Refer to drawings for size and location.
 - 2. Provided by unit manufacturer. Refer to Section 230900 for requirements.

2.2 CONTROLS

- A. Unit shall be equipped with an outdoor air temperature sensor and controller such that the bypass dampers can be modulated during moderate temperature periods.
- B. Unit shall be equipped with defrost controls to prevent frost from forming on the fixed plate.
- C. Refer to Specification Section 230900 for additional control information.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Install per manufacturer's instructions.
- B. Do not operate units for any purpose, temporary or permanent, until ductwork is clean, filters are in place, bearings lubricated, and fan(s) have been test run under observation.
- C. P-traps must be installed for all drain pans.

END OF SECTION 237200

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 237416.14 - PACKAGED ROOFTOP AIR CONDITIONING UNITS WITH HIGH PERCENTAGE OUTSIDE AIR

PART 1 - GENERAL

1.1 SECTION INCLUDES

- A. Packaged Rooftop Unit.
- B. Unit Controls.
- C. Roof Mounting Frame and Base.
- D. Economizers.

1.2 QUALITY ASSURANCE

- A. All insulation inside the unit and in the air stream must comply with the requirement of NFPA 90A (maximum flame spread of 25 and maximum smoke developed of 50).
- B. All units must be UL or ETL listed and must contain UL labeled components.
- C. Fans shall be tested and rated in cabinet in accordance with AMCA Standard 210. All fan assemblies shall be dynamically balanced in cabinet at final assembly.
- D. Conform to ASHRAE 90.1.
- E. All air handling and distribution equipment mounted outdoors shall be designed to prevent rain intrusion into the airstream when tested at design airflow and with no airflow, using the rain test apparatus described in Section 58 of UL 1995.

1.3 REFERENCES

- A. AHRI 210 - Unitary Air Conditioning Equipment.
- B. AHRI 240 - Air Source Unitary Heat Pump Equipment.
- C. AHRI 270 - Sound Rating of Outdoor Unitary Equipment.
- D. ASHRAE 37 - Methods of Testing for Rating Unitary Air Conditioning and Heat Pump Equipment.
- E. ANSI/ASHRAE/IES Standard 90.1 (latest published edition) - Energy Standard for Buildings Except Low-Rise Residential Buildings.
- F. NFPA 70 - National Electrical Code.
- G. NFPA 90A - Installation of Air Conditioning and Ventilating System.

- H. UL - Underwriters' Laboratory.

1.4 SUBMITTALS

- A. Submit shop drawings and product data under provisions of Section 230500.
- B. Indicate electrical service and duct connections on shop drawings or product data.
- C. Submit manufacturer's installation instructions.
- D. Submit electrical power/controls wiring diagrams and product data indicating general assembly, components, safety controls, and service connections.
- E. Submit fan curves, including minimum and maximum fan speed, with specified operating points clearly plotted.
- F. Provide 8 octave maximum sound power levels at unit discharge and return connection.

1.5 DELIVERY, STORAGE, AND HANDLING

- A. Protect units from physical damage by storing off site until roof mounting frames are in place, ready for immediate installation of units.

1.6 OPERATION AND MAINTENANCE DATA

- A. Submit operation and maintenance data.
- B. Include manufacturer's descriptive literature, installation instructions, maintenance and repair data, and parts listing.

1.7 WARRANTY

- A. Provide five (5) year manufacturer's warranty for compressors.
- B. Provide 25 year manufacturer's warranty for heat exchanger.
- C. Provide 1.5 year manufacturer's warranty for controls and electrical components (thermostats, VFD, etc.).

1.8 MAINTENANCE SERVICE

- A. Contractor shall furnish complete service and maintenance of packaged roof top units for one year from Date of Substantial Completion.
- B. Provide maintenance service with a two-month interval as maximum time period between calls. Provide 24-hour emergency service on breakdowns and malfunctions.
- C. Include maintenance items as outlined in manufacturer's operating and maintenance data, including minimum of four (quarterly) filter replacements, minimum of one fan belt replacement, and controls checkout, seasonal adjustments, and recalibrations.

- D. Submit copy of service call work order or report and include description of work performed to Owner and Architect/Engineer.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. Basis of Design: The scheduled manufacturer is the Basis of Design. The Contractor is responsible for all costs, schedule impacts, and construction coordination, including design costs and regulatory agency approvals, related to using a specified alternate product other than the Basis of Design. Refer to Section 230500 for additional information.
- B. Greenheck
- C. Trane
- D. York
- E. Captive Aire
- F. Aeon

2.2 MANUFACTURED UNITS

- A. Provide roof-mounted units having gas burner, and electric refrigeration.
- B. Unit shall be self-contained, packaged, factory assembled, pre-wired and tested, consisting of cabinet and frame, supply fan heat exchanger and burner, controls, air filters, refrigerant cooling coil and compressor, condenser coil, condenser fan, and a full refrigerant charge.
- C. Unit shall be furnished with non-fused disconnect switch, short fuse protection of all internal electrical components, and all necessary motor starters, contactors, and over-current protection.
- D. AHRI rated for direct expansion use with R-32 or R-454B.

2.3 FABRICATION

- A. Cabinet: Galvanized steel with baked enamel finish, access doors with locking doors with piano hinges. Access doors shall be provided at each section (e.g., filter section, supply fan section, etc.). All exterior access panels must be permanently labeled on the outside indicating what is behind the panel. Structural members shall be minimum 18 gauge, with access doors minimum 20 gauge.
- B. Outside Air Intakes: The outside air intakes shall be located a minimum of 15 inches above the roof mounting curb to minimize the effect of heat pickup from the roof during the natural cooling cycle and the effects of snow on the roof during winter operation. Each air intake shall be furnished with rain eliminators.
- C. Insulation: All sections shall be double wall, foam injected casings.

- D. Heat Exchangers: Stainless steel, of welded construction.
- E. Air Filters: Two inch thick glass fiber disposable media in metal frames.

2.4 ROOF MOUNTING FRAME AND BASE

- A. Roof Mounting Curb: Minimum 24 inches, minimum 14 gauge galvanized steel, one-piece construction, insulated, all welded, wood nailer.

2.5 FANS/MOTORS

- A. Fans:
 - 1. Supply Fans: Airfoil DWDI centrifugal; SWSI plenum or vane axial fan.
 - 2. All fans shall be aluminum or composite construction with fan shaft: turned, ground and polished steel; keyed to wheel hub.
 - 3. Fan and motor assemblies shall be resiliently mounted.
 - 4. Direct drive motor.
 - 5. All fan bearings must be capable of being lubricated by easily accessible grease fittings.
 - 6. All fans must be statically and dynamically balanced.

- B. Motors:
 - 1. Motors shall be open drip-proof with grease lubricated bearings.
 - 2. Motors shall be "variable frequency drive rated" when controlled by VFDs. Refer to Section 230513.
 - 3. No equipment shall be selected or operate above 90% of its motor nameplate rating.
 - 4. Motor shall have 1.15 service factor.
 - 5. ECM motors may be provided.

2.6 BURNER

- A. Gas Burner: Forced draft type burner with adjustable combustion air supply, pressure regulator, gas valves, manual shutoff, intermittent spark or glow coil ignition, flame sensing device, and automatic 100 percent shutoff pilot. Fully modulating gas valve with minimum 12:1 turndown. The burner shall operate efficiently at all firing rates. The burner shall have proven open damper low-high-low pre-purge cycle and proven low fire start. The combustion air control damper shall be in the closed position during the off cycle to reduce losses.
- B. Gas Burner Safety Controls: Energize ignition, limit time for establishment of flame, prevent opening of gas valve until pilot flame is proven, stop gas flow on ignition failure, energize blower motor, and after airflow proven and slight delay, allow gas valve to open.
- C. High Limit Control: Temperature sensor with fixed stop at maximum permissible setting, de-energize burner on excessive bonnet temperature and energize burner when temperature drops to lower safe value.
- D. Supply Fan Control: Temperature sensor sensing bonnet temperatures and independent of burner controls, or adjustable time delay relays with switch for continuous fan operation.

2.7 EVAPORATOR COIL

- A. Provide copper tube with aluminum fin coil assembly.
- B. Install a drain pan under each cooling coil meeting requirements as outlined in ASHRAE 62.1. The drain pans shall extend the entire width of each coil, including piping and header if in the air stream. The length shall be as necessary to limit water droplet carryover beyond the drain pan to 0.0044oz per ft² of face area per hour under peak sensible and peak dew point design conditions, considering both latent load and coil face velocity. Pitch drain pans in two directions towards the outlet, with a slope of at least 1/8" per foot.
- C. Provide capillary tubes or thermostatic expansion valves for units of 6 tons capacity and less, and thermostatic expansion valves and alternate row circuiting for units 7.5 tons cooling capacity and larger.
- D. Provide insulation on liquid refrigerant and suction piping between compressor and evaporator coil where not protected by drain pans. Insulation shall be elastomeric cellular foam; ANSI/ASTM C534; flexible plastic; 0.27 maximum 'K' value at 75°F, 25/50 flame spread/smoke developed rating when tested in accordance with ASTM E84 (UL 723). Maximum 1" thick per layer where multiple layers are specified.
- E. Drain Pan Condensate Overflow Switch: Float with integral magnet overflow switch conforming to UL508. Factory installed in drain pan and wired to shut the rooftop unit down with a fault alarm. No standby power required.

2.8 HOT GAS REHEAT COIL

- A. Provide copper tube with aluminum fin coil assembly.
- B. Valves to reroute hot refrigerant gas from the discharge line of the compressor through the reheat coil.

2.9 COMPRESSOR

- A. Provide hermetic or semi-hermetic compressors (quantity as scheduled on drawings), 3600 rev/min maximum, resiliently mounted with positive lubrication, crankcase heater for operation down to 0°F, high and low pressure safety controls, motor overload protection, suction and discharge service valves and gauge ports, and filter drier.
- B. Provide capacity control by inverter duty scroll compressors.
- C. Five minute timed off circuit shall delay compressor start.
- D. The use of hydrochlorofluorocarbon (HCFC) or chlorofluorocarbon (CFC) based refrigerants is prohibited.

2.10 CONDENSER

- A. Condenser shall provide design capacity between the minimum and maximum ambient conditions scheduled on the drawings.

- B. Condenser Coil:
 - 1. Round Copper Tube and Aluminum Fins: Construct condenser coils of aluminum fins mechanically bonded to seamless copper tubing. Air test under water to 450 psig (3100 kPa gauge).
 - 2. Microchannel: All aluminum brazed fin construction. The maximum allowable working pressure of the condenser is 450 psig (3100 kPa gauge). Air test under water to 450 psig (3100 kPa gauge).
- C. Condenser Fans: Provide direct drive low noise blade design propeller fans, resiliently mounted with fan guard, motor overload protection, wired to operate with compressor. Fan blade design shall be a dynamic profile for low tip speed. Fan blade shall be aluminum or composite material.
- D. Condenser Motors: Fan motors shall be an ECM type motor for proportional control. The motor shall include thermal overload protection and protect the motor in the case of excessive motor temperatures. The motor shall have phase failure protection and prevent the motor from operation in the event of a loss of phase.
- E. Entire fan assembly shall be statically and dynamically balanced.
- F. Provide refrigerant pressure switches to cycle condenser fans.
- G. Provide hail guards on all condenser coils.
- H. Liquid and discharge isolation valves with staged and digital scrolls.

2.11 MIXING SECTION

- A. Dampers: Provide outside, return, and relief dampers with damper operator and control package to automatically vary outside air quantity. Outside air damper shall fail to closed position. Relief dampers may be gravity balanced.
- B. Gaskets: Provide tight fitting dampers with edge gaskets. Gaskets must be mechanically fastened (use of adhesive alone shall not be acceptable). Damper blades shall be gasketed with side seals to provide an air leakage rate of Class 1A at 1" w.c. pressure differential for a 24"x 24" damper. A barometric exhaust damper shall be provided to exhaust air out the back of the unit. A bird screen shall be provided to prevent infiltration of rain and foreign materials. Exhaust damper blades shall be lined with vinyl gasketing on contact edges. Damper Actuator: 24 volt with gear train sealed in oil, with spring return on units 7.5 tons cooling capacity and larger.

2.12 ECONOMIZERS

- A. Factory installed by approved rooftop unit manufacturer with fully modulating motorized outside air and return air dampers.
- B. To be controlled by differential enthalpy with fixed dry-bulb controller with minimum position setting.
- C. Shall be capable of introducing up to 100% outside air.

-
- D. Shall maintain minimum airflow into the building during occupied period and provide design ventilation rate for full occupancy.
- E. Dampers shall be capable of completely closing when unit is in unoccupied mode.
- F. Outside air damper normally closed and return air damper normally open.
- G. Provide factory installed and tested, outdoor air monitor that controls outdoor air $\pm 15\%$ accuracy down to 40 CFM per ton.
- H. Economizer Fault Detection and Diagnostics (FDD):
1. Air-cooled unitary direct-expansion units that are equipped with an economizer shall include a fault detection and diagnostics system complying with the following:
 - a. The following temperature sensors shall be permanently installed to monitor system operation:
 - 1) Outside air.
 - 2) Supply air.
 - 3) Return air.
 - b. Temperature sensors shall have an accuracy of $\pm 2^{\circ}\text{F}$ over the range of 40°F to 80°F .
 - c. Refrigerant pressure sensors, where used, shall have an accuracy of ± 3 percent of full scale.
 - d. The unit controller shall be configured to provide system status by indicating the following:
 - 1) Free cooling available.
 - 2) Economizer enabled.
 - 3) Compressor enabled.
 - 4) Heating enabled.
 - 5) Mixed air low limit cycle active.
 - 6) The current value of each sensor.
 - e. The unit controller shall be capable of manually initiating each operating mode so that the operation of compressors, economizers, fans, and the heating system can be independently tested and verified.
 - f. The fault detection and diagnostics system shall be configured to detect the following faults:
 - 1) Air temperature sensor failure/fault.
 - 2) Not economizing when the unit should be economizing.
 - 3) Economizing when the unit should not be economizing.
 - 4) Damper not modulating.
 - 5) Excess outdoor air.
 - g. The unit shall be configured to report faults to a fault management application available for access by day-to-day operating or service personnel or annunciated locally on zone thermostats.

2.13 ELECTRICAL

- A. Provide with single point power connection to service all controls, dampers, outlet, and fans, complete with non-fused disconnect switch, short circuit protection of all internal electrical components, and all necessary motor starters, contactors, and over-current protection, transformer, and convenience outlet. All units must be so constructed that when the electrical section access panel is opened, all electrical power to the unit (with the exception of the 120 volt duplex convenience outlet) is disconnected by means of a single disconnect.
- B. All wiring must be labeled, numbered, and terminate in "spade clips". All terminal strips must be keyed to the wiring numbers. Each control device must be permanently labeled to indicate its function.
- C. Wiring diagrams for all circuits must be permanently affixed to the inside of the electrical section access panel. The markings of terminal strips and wiring must agree with the numbering on the wiring diagrams.
- D. All units shall include a transformer for controls and convenience outlet.
- E. Only one power cable connection to the unit shall be necessary.
- F. Motor shall include phase failure protection and prevent the motor from operation in the event of phase loss.

2.14 OPERATING CONTROLS - SINGLE ZONE UNITS

- A. When ECMs are applied:
 - 1. Single Zone VAV: The unit controller shall proportionally control the ECM motors on the supply fan based on space temperature. The unit controller shall increase/decrease the speed of the supply fan in order to maintain the space temperature within its setpoint and deadband. The unit controller shall provide discharge air temperature control with the compressor modulation.
- B. When variable speed drives are applied:
 - 1. Single Zone VAV: An electronic variable frequency drive shall be provided for the supply air fan. Each drive shall be factory installed out of the airstream in a conditioned cabinet. Drives shall meet UL Standard 95-5V. The completed unit assembly shall be listed by a recognized safety agency, such as ETL. Drives are to be accessible through a hinged door assembly. Mounting arrangements that expose drives to high temperature unfiltered ambient air are not acceptable.
- C. Room thermostat shall incorporate:
 - 1. Automatic switching from heating to cooling.
 - 2. Preferential rate control to minimize overshoot and deviation from setpoint.
 - 3. Set-up for four separate temperatures per day.
 - 4. Instant override of setpoint for continuous or timed period from one hour to 31 days.
 - 5. Short cycle protection.

6. Programming based on weekdays, Saturday and Sunday.
7. Switch selection features including imperial or metric display, 12 or 24 hour clock, keyboard disable, remote sensor, fan on-auto.

D. Room thermostat display shall include:

1. Time of day.
2. Actual room temperature.
3. Programmed temperature.
4. Programmed time.
5. Duration of timed override.
6. Day of week.
7. System model indication: heating, cooling, auto, off, fan auto, fan on.
8. Stage (heating or cooling) operation.

E. Provide low limit sequence to close outside air dampers and stop supply fan.

F. Mixed Air Controls: Maintain selected supply air temperature and revert dampers to minimum outside air position on a call for heating and above 75°F ambient, when ambient air enthalpy exceeds return air enthalpy.

G. Dehumidification Controls: Maintain the relative humidity setpoint with the hot refrigerant gas reheat coil.

2.15 DDC TEMPERATURE CONTROLS

- A. Install standalone control module providing communication between unit controls and packaged DDC temperature control system.
- B. Control module shall be compatible with temperature control system specified in Section 230900. Provide BACnet gateway for communication.

2.16 ACOUSTICS

A. Maximum Sound Power Levels at Unit Discharge and Return/Exhaust Inlet:

Octave Band Center Frequency (Hz) (dB re: 10- 12W)	1 63	2 125	3 250	4 500	5 1000	6 2000	7 4000	8 8000
Discharge								
Inlet								

B. Manufacturer shall submit calculated sound power levels.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Verify that roof is ready to receive work and opening dimensions are as indicated on shop drawings and illustrated by the manufacturer.
- B. Verify that proper power supply is available.

3.2 INSTALLATION

- A. Install in accordance with manufacturer's instructions.
- B. Mount units on factory built roof mounting curb and provide watertight enclosure to protect ductwork and utility services. Install unit level.
- C. All field wiring shall be in accordance with the National Electrical Code.
- D. P-traps must be provided for all drain pans.
- E. Comb all coils to repair bent fins.

3.3 MANUFACTURER'S FIELD SERVICES

- A. Provide initial start-up and shutdown during first year of operation.

END OF SECTION 237416.14

SECTION 238126 - SPLIT SYSTEM AIR CONDITIONING UNITS

PART 1 - GENERAL

1.1 SECTION INCLUDES

- A. Split system air conditioning wall units.

1.2 REFERENCES

- A. ARI 210 - Unitary Air Conditioning Equipment
- B. ARI 240 - Air Source Unitary Heat Pump Equipment
- C. ANSI NFPA 90A - Installation of Air Conditioning and Ventilation Systems.
- D. ANSI/ASHRAE 62.1 - Ventilation for Acceptable Indoor Air Quality.
- E. ANSI/ASHRAE/IES Standard 90.1 (latest published edition) - Energy Standard for Buildings Except Low-Rise Residential Buildings.
- F. ANSI/NEMA 250 - Enclosures for Electrical Equipment (1000 Volts Maximum).
- G. ASHRAE 52 - Air Cleaning Devices Used in General Ventilation for Removing Particulate Matter.
- H. ASTM B1003 - Standard Specification for Seamless Copper Tube for Linesets.
- I. FS TT-C-490 - Cleaning Method and Pretreatment of Ferrous Surfaces for Organic Coatings.
- J. UL - Underwriters' Laboratories.

1.3 SUBMITTALS

- A. Submit shop drawings under provisions of Section 230500.
- B. Indicate drain, electrical, and refrigeration rough-in connections on shop drawings or product data.
- C. Submit manufacturer's installation instructions.

1.4 DELIVERY, STORAGE, AND HANDLING

- A. Accept units and components on site in factory protective containers, with factory shipping skids and lifting lugs. Inspect for damage.
- B. Comply with manufacturer's installation instruction for rigging, unloading, and transporting units.
- C. Protect units from weather and construction traffic by storing in dry, roofed location until units are ready for immediate installation.

1.5 REGULATORY REQUIREMENTS

- A. Conform to ANSI/NFPA 90A for the installation of computer room air conditioning units.
- B. Conform to ASHRAE 90.1 (latest published edition) - Energy Standard for Buildings Except Low-Rise Residential Buildings.

1.6 OPERATION AND MAINTENANCE DATA

- A. Submit operation and maintenance data.
- B. Include manufacturer's descriptive literature, operating instructions, installation instructions, and maintenance and repair data.

1.7 WARRANTY

- A. Provide five (5) year manufacturer's warranty on all compressors.

PART 2 - PRODUCTS

2.1 SPLIT SYSTEM WALL AND CEILING-MOUNTED UNITS

A. Manufacturers:

- 1. LG
- 2. Daikin Applied
- 3. Trane/Mitsubishi

B. Manufactured Units:

- 1. Provide packaged, air-cooled, factory assembled, pre-wired and pre-piped unit consisting of cabinet, fans, filters, remote condensing unit, and controls. Wall-mounted units shall be furnished with integral wall mounting bracket and mounting hardware.
- 2. Assemble unit for wall-mounted or ceiling installation with service access required.
- 3. Performance shall be as scheduled on the drawings.
- 4. Unit shall be rated per AHRI Standards 210/240 and listed in the AHRI directory as a matched system.
- 5. Provide unit with factory-supplied cleanable air filters.
- 6. The units shall be listed by Electrical Laboratories (ETL) in accordance with UL-1995 certification and bear the ETL label.
- 7. All wiring shall be in accordance with the National Electric Code (NEC).

C. Evaporator Cabinet and Frame:

- 1. Cabinet:
 - a. Refer to schedule on drawings for mounting type (wall-mounted).
 - b. Exposed units shall have a finished appearance with concealed refrigerant piping, condensate drain piping, and wiring connections.

D. Evaporator Fans and Motors:

1. Fans:

- a. The evaporator fan shall be direct drive with a single motor having permanently lubricated bearings.
- b. The fan shall be statically and dynamically balanced.
- c. The indoor fan shall have at least three speeds.

2. Motor:

- a. Direct driven, digitally controlled with multiple speeds. Permanently lubricated with internal overload protection.

E. Evaporator Coils (Direct Expansion):

1. Direct expansion cooling coil of seamless copper tubes expanded into aluminum fins.
2. Single refrigeration circuit with externally equalized expansion valve.
3. Coils shall be pressure tested at the factory.
4. A sloped, corrosion-resistant condensate pan with drain shall be provided under the coil.

F. Electrical Panel:

1. Service Connections, Wiring, and Disconnect Requirements: Conform to the National Electrical Code and local electrical codes.

G. Control:

1. The unit shall have a hard-wired 7-day programmable remote controller to operate the system. Provide wall mounting bracket for controller.
2. Remote controller shall have "automatic", "dry" (dehumidification), and "fan only" operating modes.
3. The remote controller shall have the following features:
 - a. On/Off power switch.
 - b. Mode Selector to operate the system in auto, cool, heat, fan, or dehumidification (dry) operation.
 - c. Fan Setting to provide multiple fan speeds.
 - d. Swing Louver for adjusting supply louver discharge.
 - e. On/Off Timer for automatically switching the unit off or on.
 - f. Temperature Adjustment allows for the increase or decrease of the desired temperature.
 - g. Powerful Operation to allow quick cool down or heating up in the desired space to achieve maximum desired temperature in the shortest allowable time.
4. The remote controller shall perform fault diagnostic functions that may be system related, indoor or outdoor unit related depending on the fault code.
5. Temperature range on the remote controller shall be 64°F to 90°F in cooling mode and 50°F to 86°F in heating mode.
6. The indoor unit microprocessor shall have the capability to receive and process commands via return air temperature and indoor coil temperature sensors enabled by commands from the remote controller.

-
7. Integration: Manufacturer shall provide a BACnet interface with the building automation system in accordance with ASHRAE/ANSI Standard 135. This may be accomplished through a system integration panel or "gateway". Integration panels shall be provided as part of the split system.
- H. Outdoor Unit:
1. General:
 - a. The outdoor unit shall be specifically matched to the corresponding indoor unit size. The outdoor unit shall be completely factory assembled and pre-wired with all necessary electronic and refrigerant controls.
 2. Cabinet:
 - a. The outdoor unit shall be fabricated of galvanized steel, bonderized and coated with a baked enamel finish for corrosion protection.
 3. Fan:
 - a. The fan shall be direct drive, propeller type fan with fan guard.
 - b. Fan blades shall be statically and dynamically balanced.
 - c. The fan shall have permanently lubricated type bearings.
 - d. Motor shall be protected by internal thermal overload protection.
 - e. Airflow shall be horizontal discharge.
 4. Coil:
 - a. The outdoor coil shall be nonferrous construction with corrugated fin tube.
 - b. The coil shall be protected with an internal guard.
 - c. Refrigerant flow from the condenser shall be controlled via a metering device.
 5. Compressor:
 - a. Hermetic or scroll refrigerant compressors with resilient suspension system, inverter driven, oil strainer, sight glass/moisture indicator, internal motor protection, high pressure switch, and crankcase heater.
 - b. The outdoor unit shall have an accumulator and four-way reversing valve.
 6. Refrigerant:
 - a. Unit shall use R-32 or R-454B.
 - b. The use of chlorofluorocarbon (CFC)-based refrigerants is prohibited.
- I. Integral Condensate Pump:
1. Packaged unit matched to evaporator unit including float switch, pump, motor assembly, check valve, and reservoir.
 2. Provide alarm to indicate high level reservoir.
 3. Unit shall be powered from evaporator unit with appropriate field connections available.

2.2 PIPING

- A. Design Pressure: 450 psig; Maximum Design Temperature: 250°F
- B. Type ACR Hard Drawn Seamless Copper Tube; Brazed Joint:
 - 1. 4" and under.
 - 2. Tubing: Type ACR hard drawn seamless copper tube, ASTM B280. Sizes indicated are nominal designation.
 - 3. Joints: Brazed with silver solder.
 - 4. Fittings: Wrought copper solder joint, ANSI B16.22.
 - 5. Special Requirements: All tubing shall be cleaned, dehydrated, pressurized with dry nitrogen, plugged and tagged by manufacturer "for refrigeration service". During brazing operations, continuously purge the interior of the pipe with nitrogen to prevent oxide formation.
- C. Refrigerant linesets are not permitted.
 - 1. Provide manufacturer-packaged refrigerant linesets and accessories of sizes needed for installation. Verify lengths of piping required for installation.

2.3 INSULATION

- A. EPDM (NBR/PVC Blend is not permitted) elastomeric cellular foam; ANSI/ASTM C534; flexible plastic; 0.25 maximum 'K' value at 75°F, 25/50 flame spread/smoke developed rating when tested in accordance with ASTM E84 (UL 723). Minimum 1/2" thick for pipe sizes less than 1-1/4" and 3/4" thick for pipe sizes 1-1/4" and above.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Verify that proper power supply is available.

3.2 INSTALLATION

- A. General Installation Requirements:
 - 1. Install piping to allow for expansion and contraction without stressing pipe, joints, or connected equipment.
 - 2. Install units in accordance with manufacturer's instructions. Install all units level and plumb. Indoor units shall be installed using manufacturer's standard mounting hardware securely fastened to building structure.
 - 3. Refer to Section 230529 for roof support rails concrete base for outdoor unit.
 - 4. Coordinate the exact mounting location of all indoor and outdoor units with architectural and electrical work. Coordinate installation of ceiling-mounted units with ceiling grid layout. Provide additional ceiling grid reinforcement or modification as required and coordinate the work with the GC. Locate the indoor unit where it is readily accessible for maintenance and filter changes. Where outdoor units are located on the roof, locate at least 10' from the roof edge.

-
5. Verify locations of wall-mounted remote controllers with drawings and room details before installation. Coordinate mounting heights to be consistent with other wall-mounted devices. Height above finished floor shall not exceed 48".
 6. Maintain minimum clearances to all equipment. Maintain manufacturer's minimum maintenance, and airflow clearances, and maintain minimum spaces about electrical equipment, whichever is greater.
 - a. 120V: 36" deep x 30" wide or the width of the panel whichever is wider.
 - b. 208V: 42" deep x 30" wide or the width of the panel whichever is wider.
 - c. 480V: 42" deep x 30" wide or the width of the panel whichever is wider.
- B. Condensate Removal:
1. Install condensate piping with trap and route from drain pan to nearest drain. Discharge to nearest code-approved receptor or to a properly vented indirect waste fitting. Flush all piping before making final connections to units.
- C. Comb all coils to repair bent fins.
- D. Install new filters in the unit at Substantial Completion.
- E. A factory-authorized service agent shall assist in commissioning the unit and inspecting the installation prior to startup. Submit startup report with O&M manuals.
- 3.3 REFRIGERANT PIPING
- A. Install refrigerant piping from the indoor unit(s) to the condensing unit. Refrigerant pipe sizes, lengths, specialties and configurations shall be as recommended by the manufacturer. Evacuate refrigerant piping and fully charge system with refrigerant per manufacturer's requirements.
- B. Provide weather-tight insulated roof curb to accommodate refrigerant piping and conduit roof penetrations.
- C. Insulate all refrigerant piping. Both liquid and suction lines shall be insulated between the indoor and outdoor units.
- D. Joining of Piping:
1. Brazed Joints:
 - a. Make up joints with brazing filler metal conforming to ANSI/AWS A5.8. Cut copper tubing ends perfectly square and remove all burrs inside and outside. Thoroughly clean sockets of fittings and ends of tubing to remove all oxide, dirt, and grease just prior to brazing. Apply flux evenly, but sparingly, to all surfaces to be joined. Brazing filler metal with a flux coating may also be used. Heat joints uniformly to proper brazing temperature so braze filler metal flows to all mated surfaces. Wipe excess braze filler metal, leaving a uniform fillet around cup of fitting.
 - b. Flux shall conform to ANSI/AWS A5.31.
 - c. Remove composition discs and all seals during brazing if not suitable for a minimum of 840°F or greater than the melting temperature of the brazing filler metal, whichever is greater.

E. Insulation:

1. Insulate all refrigerant pipes between the heat pump and indoor units. This includes the liquid pipe, the suction pipe, the hot gas pipe, and the high/low pressure gas pipe. All fittings, valves, and specialty refrigerant components in the piping between the indoor and heat pump units shall also be insulated. The insulation shall have a continuous vapor barrier and shall pass through hangers and supports unbroken. All exterior insulated piping shall be painted with minimum of one (1) coat of UV resistant paint. Over size hangers and supports to allow the insulation to pass through unbroken. Following are the minimum insulation thicknesses unless noted otherwise in the manufacturer's literature or required by local AHJ:
 - a. Code/Year: IECC 2018
 - b. Refrigerant Suction (40°F & Below):
 - 1) Up to 1": 1/2"
 - 2) 1" and up: 1"
 - c. Refrigerant Suction (41°F to 60°F):
 - 1) Up to 1-1/2": 1/2"
 - 2) 1-1/2" and up: 1"
 - d. Refrigerant Liquid:
 - 1) Up to 1-1/2": 1"
 - 2) 1-1/2" and up: 1-1/2"

END OF SECTION 238126

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 260500 - BASIC ELECTRICAL REQUIREMENTS

PART 1 - GENERAL

1.1 SECTION INCLUDES

- A. Requirements applicable to all Division 26 Sections. Also refer to Division 1 - General Requirements. This section is also applicable to Interior Communications Pathways Section 270528.
- B. All materials and installation methods shall conform to the applicable standards, guidelines and codes referenced herein and within each specification section.

1.2 REFERENCES

- A. NFPA 70 - National Electrical Code (NEC)

1.3 SCOPE OF WORK

- A. This Specification and the associated drawings govern furnishing, installing, testing and placing into satisfactory operation the Electrical Systems.
- B. The Contractor shall furnish and install all new materials as indicated on the drawings, and/or in these specifications, and all items required to make the portion of the Electrical Work a finished and working system.
- C. All work will be awarded under a single General Contract. The division of work listed below is for the Contractor's convenience and lists normal breakdown of the work.
- D. Description of Systems shall be as follows:
 - 1. Electrical power system to and including luminaires, equipment, motors, devices, etc.
 - 2. Grounding system.
 - 3. Wiring system for temperature control system as shown on the drawings.
 - 4. Wiring of equipment furnished by others.
 - 5. Removal work and/or relocation and reuse of existing systems and equipment.
 - 6. Technology Systems as described in Division 27 and on the T-series documents as described in the Suggested Matrix of Scope Responsibility.
 - 7. Furnish and install firestopping systems for penetrations of fire-rated construction associated with this Contractor's work.
- E. Work Not Included:
 - 1. Telecommunications cabling will be by Division 27, in raceways and conduits furnished and installed as part of the Electrical work.
 - 2. Temperature control wiring for plumbing and HVAC equipment (unless otherwise indicated) will be by other Contractors.

1.4 WORK SEQUENCE

- A. All work that will produce excessive noise or interference with normal building operations, as determined by the Owner, shall be scheduled with the Owner. It may be necessary to schedule such work during unoccupied hours. The Owner reserves the right to determine when restricted construction hours are required.
- B. Itemize all work and list associated hours and pay scale for each item.

1.5 DIVISION OF WORK BETWEEN MECHANICAL, ELECTRICAL, and CONTROL CONTRACTORS

- A. Division of work is the responsibility of the Prime Contractor. Any scope of work described at any location on the contract document shall be sufficient for including said requirement in the project. The Prime Contractor shall be solely responsible for determining the appropriate subcontractor for the described scope. In no case shall the project be assessed an additional cost for scope that is described on the contract documents on bid day. The following division of responsibility is a guideline based on typical industry practice.
- B. Definitions:
 - 1. "Mechanical Contractors" refers to the Contractors listed in Division 21/22/23 of this Specification.
 - 2. "Technology Contractors" refers to the Contractors furnishing and installing systems listed in Division 27 of this Specification.
 - 3. Motor Power Wiring: The single phase or 3 phase wiring extending from the power source (transformer, panelboard, feeder circuits, etc.) through disconnect switches and motor controllers to, and including the connections to the terminals of the motor.
 - 4. Motor Control Wiring: The wiring associated with the remote operation of the magnetic coils of magnetic motor starters or relays, or the wiring that permits direct cycling of motors by means of devices in series with the motor power wiring. In the latter case, the devices are usually single phase, have "Manual-Off-Auto" provisions, and are usually connected into the motor power wiring through a manual motor starter.
 - 5. Control devices such as start-stop push buttons, thermostats, pressure switches, flow switches, relays, etc., generally represent the types of equipment associated with motor control wiring.
 - 6. Motor control wiring is single phase and usually 120 volts. In some instances, the voltage will be the same as the motor power wiring. When the motor power wiring exceeds 120 volts, a control transformer is usually used to give a control voltage of 120 volts.
 - 7. Temperature Control Wiring: The wiring associated with the operation of a motorized damper, solenoid valve or motorized valve, etc., either modulating or two-position, as opposed to wiring that directly powers or controls a motor used to drive equipment such as fans, pumps, etc. This wiring will be from a 120-volt source and may continue as 120 volt, or be reduced in voltage (24 volt), in which case a control transformer shall be furnished as part of the temperature control wiring.
 - 8. Control Motor: An electric device used to operate dampers, valves, etc. It may be two-position or modulating. Conventional characteristics of such a motor are 24 volts, 60 cycles, 1 phase, although other voltages may be encountered.
 - 9. Low Voltage Technology Wiring: The wiring associated with the technology systems, used for analog or digital signals between equipment.
 - 10. Telecommunications/Technology Rough-in: Relates specifically to the backboxes, necessary plaster rings and other miscellaneous hardware required for the installation or mounting of telecommunications/technology information outlets.

C. General:

1. The purpose of these Specifications is to outline the Electrical and Mechanical Contractors' responsibilities related to electrical work required for items such as temperature controls, mechanical equipment, fans, chillers, compressors, etc. The exact wiring requirements for much of the equipment cannot be determined until the systems have been selected and submittals approved. Therefore, the electrical drawings show only known wiring related to such items. All wiring not shown on the electrical drawings, but required for mechanical systems, is the responsibility of the Mechanical Contractor.
2. Where the drawings require the Electrical Contractor to wire between equipment furnished by the Mechanical Contractor, such wiring shall terminate at terminals provided in the equipment. The Mechanical Contractor shall furnish complete wiring diagrams and supervision to the Electrical Contractor and designate the terminal numbers for correct wiring.
3. Control low (24V) and control line (120V) voltage wiring, conduit, and related switches and relays required for the automatic control and/or interlock of motors and equipment, including final connection, are to be furnished and installed under Divisions 21, 22 and 23. Materials and installation to conform to Class 1 or 2 requirements.
4. The Electrical Contractor shall establish electrical utility elevations prior to fabrication and installation. The Electrical Contractor shall coordinate utility elevations with other trades. When a conflict arises, priority shall be as follows:
 - a. Luminaires.
 - b. Gravity flow piping, including steam and condensate.
 - c. Sheet metal.
 - d. Cable trays, including access space.
 - e. Other piping.
 - f. Conduits and wireway.

D. Mechanical Contractor's Responsibility:

1. Assumes responsibility for internal wiring of all equipment furnished by the Mechanical Contractor.
2. Assumes all responsibility for miscellaneous items furnished by the Mechanical Contractor that require wiring but are not shown on the electrical drawings or specified in the Electrical Specification. If items such as relays, flow switches, or interlocks are required to make the mechanical system function correctly or are required by the manufacturer, they are the responsibility of the Mechanical Contractor.
3. Assumes all responsibility for Temperature Control wiring, if the Temperature Control Contractor is a Subcontractor to the Mechanical Contractor.
4. This Contractor is responsible for coordination of utilities with all other Contractors. If any field coordination conflicts are found, the Contractor shall coordinate with other Contractors to determine a viable layout.

E. Temperature Control Contractor's or Subcontractor's Responsibility:

1. Wiring of all devices needed to make the Temperature Control System functional.
2. Verifying any control wiring on the electrical drawings as being by the Electrical Contractor. All wiring required for the Control System, but not shown on the electrical drawings, is the responsibility of the Temperature Control Contractor or Subcontractor.
3. Coordinating equipment locations (such as PE's, EP's, relays, transformers, etc.) with the Electrical Contractor, where wiring of the equipment is by the Electrical Contractor.

F. Electrical Contractor's Responsibility:

1. Furnishes and installs all combination starters, manual starters and disconnect devices shown on the Electrical Drawings or indicated to be by the Electrical Contractor in the Mechanical Drawings or Specifications.
2. Installs and wires all remote-control devices furnished by the Mechanical Contractor or Temperature Control Contractor when so noted on the Electrical Drawings.
3. Furnishes and installs motor control and temperature control wiring, when noted on the drawings.
4. Furnishes, installs, and connects all relays, etc., for automatic shutdown of certain mechanical equipment (supply fans, exhaust fans, etc.) upon actuation of the Fire Alarm System.
5. This Contractor is responsible for coordination of utilities with all other Contractors. If any field coordination conflicts are found, the Contractor shall coordinate with other Contractors to determine a viable layout.

G. General (Electrical/Technology):

1. "Electrical Contractor" as referred to herein shall be responsible for scope listed in Division 27 of this specification when the "Suggested Matrix of Scope Responsibility" indicated work shall be furnished and installed by the EC. Refer to the Contract Documents for this "Suggested Matrix of Scope Responsibility".
2. The purpose of these Specifications is to outline the Electrical and Technology Contractor's work responsibilities as related to Telecommunications Rough-in, conduit, cable tray, power wiring and Low Voltage Technology Wiring.
3. The exact wiring requirements for much of the equipment cannot be determined until the systems have been purchased and submittals approved. Therefore, only known wiring, conduits, raceways and electrical power related to such items is shown on the Technology drawings. Other wiring, conduits, raceways, junction boxes and electrical power not shown on the Technology Drawings but required for operation of the systems is the responsibility of the Technology Contractor and included in said Contractor's bid.
4. Where the Electrical Contractor is required to install conduit, conduit sleeves and/or power connections in support of Technology systems, the final installation shall not be until a coordination meeting between the Electrical Contractor and the Technology Contractor has convened to determine the exact location and requirements of the installation.
5. Where the Electrical Contractor is required to install cable tray that will contain Low Voltage Technology Wiring, installation shall not begin prior to a coordination review of the cable tray shop drawings by the Technology Contractor.

H. Technology Contractor's Responsibility:

1. Assumes all responsibility for the low voltage technology wiring of all systems, including cable support where open cable is specified.
2. Assumes all responsibility for all required backboxes, conduit and power connections not specifically shown as being furnished and installed by the Electrical Contractor on the "Suggested Matrix of Scope Responsibility".
3. Assumes all responsibility for providing and installing all ladder rack and other cable management hardware (as defined herein).

4. Responsible for providing the Electrical Contractor with the required grounding lugs or other hardware for each piece of technology equipment which is required to be bonded to the telecommunications ground bar.
5. This Contractor is responsible for coordination of utilities with all other Contractors. If any field coordination conflicts are found, the Contractor shall coordinate with other Contractors to determine a viable layout.

1.6 COORDINATION DRAWINGS

A. Definitions:

1. Coordination Drawings: A compilation of the pertinent layout and system drawings that show the sizes and locations, including elevations, of system components and required access areas to ensure that no two objects will occupy the same space.
 - a. Mechanical trades shall include, but are not limited to, mechanical equipment, ductwork, fire protection systems, plumbing piping, medical gas systems, hydronic piping, steam and steam condensate piping, and any item that may impact coordination with other disciplines.
 - b. Electrical trades shall include, but are not limited to, electrical equipment, conduit 1.5" and larger, conduit racks, cable trays, pull boxes, transformers, raceway, busway, lighting, ceiling-mounted devices, and any item that may impact coordination with other disciplines.
 - c. Technology trades shall include, but are not limited to, technology equipment, racks, conduit 1.5" and larger, conduit racks, cable trays, ladder rack, pull boxes, raceway, ceiling-mounted devices, and any item that may impact coordination with other disciplines.
 - d. Maintenance clearances and code-required dedicated space shall be included.
 - e. The coordination drawings shall include all underground, underfloor, in-floor, in chase, and vertical trade items.
2. Spaces with open/cloud ceiling architecture shall indicate the overhead utilities and locate equipment as required to maintain clearance above lights. The intent for the installation is to maintain a maximum allowable vertical clearance and an organized/clean manner in the horizontal. Notify Architect/Engineer of the maximum clearance which can be maintained. Failure to comply will result in modifications with no cost to Owner.
3. The contractors shall use the coordination process to identify the proper sequence of installation of all utilities above ceilings and in other congested areas, to ensure an orderly and coordinated end result, and to provide adequate access for service and maintenance.

B. Participation:

1. The contractors and subcontractors responsible for work defined above shall participate in the coordination drawing process.
2. One contractor shall be designated as the Coordinating Contractor for purposes of preparing a complete set of composite electronic CAD coordination drawings that include all applicable trades, and for coordinating the activities related to this process. The Coordinating Contractor for this project shall be the Mechanical Contractor.
 - a. The Coordinating Contractor shall utilize personnel familiar with requirements of this project and skilled as draftspersons/CAD operators, competent to prepare the required coordination drawings.

3. Electronic CAD drawings shall be submitted to the Coordinating Contractor for addition of work by other trades. IMEG will provide electronic file copies of ventilation drawings for contractor's use if the contractor signs and returns an "Electronic File Transfer" waiver provided by IMEG. IMEG will not consider blatant reproductions of original file copies an acceptable alternative for coordination drawings.

C. Drawing Requirements:

1. The file format and file naming convention shall be coordinated with and agreed to by all contractors participating in the coordination process and the Owner.
 - a. Scale of drawings:
 - 1) General plans: 1/4 Inch = 1'-0" (minimum).
 - 2) Mechanical, electrical, communication rooms, and including the surrounding areas within 10 feet: 1/2 Inch = 1'-0" (minimum).
 - 3) Shafts and risers: 1/2 Inch = 1'-0" (minimum).
 - 4) Sections of shafts and mechanical and electrical equipment rooms: 1/4 Inch = 1'-0" (minimum).
 - 5) Sections of congested areas: 1/2 Inch = 1'-0" (minimum).
2. Ductwork layout drawings shall be the baseline system for other components. Ductwork layout drawings shall be modified to accommodate other components as the coordination process progresses.
3. There may be more drawings required for risers, top and bottom levels of mechanical rooms, and shafts.
4. The minimum quantity of drawings will be established at the first coordination meeting and sent to the Architect/Engineer for review. Additional drawings may be required if other areas of congestion are discovered during the coordination process.

D. General:

1. Coordination drawing files shall be made available to the Architect/Engineer and Owner's Representative. The Architect/Engineer will only review identified conflicts and give an opinion, but will not perform as a coordinator.
2. A plotted set of coordination drawings shall be available at the project site.
3. Coordination drawings are not shop drawings and shall not be submitted as such.
4. The contract drawings are schematic in nature and do not show every fitting and appurtenance for each utility. Each contractor is expected to have included in the bid sufficient fittings, material, and labor to allow for adjustments in routing of utilities made necessary by the coordination process and to provide a complete and functional system.
5. The contractors will not be allowed additional costs or time extensions due to participation in the coordination process.
6. The contractors will not be allowed additional costs or time extensions for additional fittings, reroutings or changes of duct size, that are essentially equivalent sizes to those shown on the drawings and determined necessary through the coordination process.
7. The Architect/Engineer reserves the right to determine space priority of equipment in the event of spatial conflicts or interference between equipment, piping, conduit, ducts, and equipment provided by the trades.
8. Changes to the contract documents that are necessary for systems installation and coordination shall be brought to the attention of the Architect/Engineer.

9. Access panels shall preferably occur only in gypsum board walls or plaster ceilings where indicated on the drawings.
 - a. Access to mechanical, electrical, technology, and other items located above the ceiling shall be through accessible lay-in ceiling tile areas.
 - b. Potential layout changes shall be made to avoid additional access panels.
 - c. Additional access panels shall not be allowed without written approval from the Architect/Engineer at the coordination drawing stage.
 - d. Providing additional access panels shall be considered after other alternatives are reviewed and discarded by the Architect/Engineer and the Owner's Representative.
 - e. When additional access panels are required, they shall be provided without additional cost to the Owner.
10. Complete the coordination drawing process and obtain sign-off of the drawings by all contractors prior to installing any of the components.
11. Conflicts that result after the coordination drawings are signed off shall be the responsibility of the contractor or subcontractor who did not properly identify their work requirements, or installed their work without proper coordination.
12. Updated coordination drawings that reflect as-built conditions may be used as record documents.

1.7 QUALITY ASSURANCE

A. Contractor's Responsibility Prior to Submitting Pricing/Bid Data:

1. The Contractor is responsible for constructing complete and operating systems. The Contractor acknowledges and understands that the Contract Documents are a two-dimensional representation of a three-dimensional object, subject to human interpretation. This representation may include imperfect data, interpreted codes, utility guides, three-dimensional conflicts, and required field coordination items. Such deficiencies can be corrected when identified prior to ordering material and starting installation. The Contractor agrees to carefully study and compare the individual Contract Documents and report at once in writing to the Architect/Engineer any deficiencies the Contractor may discover. The Contractor further agrees to require each subcontractor to likewise study the documents and report at once any deficiencies discovered.
2. The Contractor shall resolve all reported deficiencies with the Architect/Engineer prior to awarding any subcontracts, ordering material, or starting any work with the Contractor's own employees. Any work performed prior to receipt of instructions from the Architect/Engineer will be done at the Contractor's risk.

B. Qualifications:

1. Only products of reputable manufacturers as determined by the Architect/Engineer are acceptable.
2. All Contractors and subcontractors shall employ only workmen who are skilled in their trades. At all times, the number of apprentices at the job site shall be less than or equal to the number of journeymen at the job site.

C. Compliance with Codes, Laws, Ordinances:

1. Conform to all requirements of the City of Kansas City, Kansas Codes, Laws, Ordinances and other regulations having jurisdiction.
2. If there is a discrepancy between the codes and regulations and these specifications, the Architect/Engineer shall determine the method or equipment used.

3. If the Contractor notes, at the time of bidding, that any parts of the drawings or specifications do not comply with the codes or regulations, Contractor shall inform the Architect/Engineer in writing, requesting a clarification. If there is insufficient time for this procedure, Contractor shall submit with the proposal a separate price to make the system comply with the codes and regulations.
4. All changes to the system made after the letting of the contract to comply with codes or the requirements of the Inspector, shall be made by the Contractor without cost to the Owner.
5. If there is a discrepancy between manufacturer's recommendations and these specifications, the manufacturer's recommendations shall govern.
6. If there are no local codes having jurisdiction, the current issue of the National Electrical Code shall be followed.

D. Permits, Fees, Taxes, Inspections:

1. Procure all applicable permits and licenses.
2. Abide by all laws, regulations, ordinances, and other rules of the State or Political Subdivision where the work is done, or as required by any duly constituted public authority.
3. Pay all charges for permits or licenses.
4. Pay all fees and taxes imposed by State, Municipal, and other regulatory bodies.
5. Pay all charges arising out of required inspections by an authorized body.
6. Pay all charges arising out of required contract document reviews associated with the project and as initiated by the Owner or authorized agency/consultant.
7. Where applicable, all fixtures, equipment and materials shall be listed by Underwriter's Laboratories, Inc. or a nationally recognized testing organization.
8. Pay all telephone company charges related to the service or change in service.

E. Examination of Drawings:

1. The drawings for the electrical work are completely diagrammatic, intended to convey the scope of the work and to indicate the general arrangements and locations of equipment, outlets, etc., and the approximate sizes of equipment.
2. Contractor shall determine the exact locations of equipment and rough-ins, and the exact routing of raceways to best fit the layout of the job. Conduit entry points for electrical equipment including, but not limited to, panelboards, switchboards, switchgear and unit substations, shall be determined by the Contractor unless noted in the contract documents.
3. Scaling of the drawings will not be sufficient or accurate for determining these locations.
4. Where job conditions require reasonable changes in arrangements and locations, such changes shall be made by the Contractor at no additional cost to the Owner.
5. Because of the scale of the drawings, certain basic items, such as junction boxes, pull boxes, conduit fittings, etc., may not be shown, but where required by other sections of the specifications or required for proper installation of the work, such items shall be furnished and installed.
6. If an item is either shown on the drawings or called for in the specifications, it shall be included in this contract.
7. The Contractor shall determine quantities and quality of material and equipment required from the documents. Where discrepancies arise between drawings, schedules and/or specifications, the greater and better-quality number shall govern.
8. Where used in electrical documents the word "furnish" shall mean supply for use, the word "install" shall mean connect up complete and ready for operation, and the word "provide" shall mean to supply for use and connect up complete and ready for operation.

9. Any item listed as furnished shall also be installed unless otherwise noted.
10. Any item listed as installed shall also be furnished unless otherwise noted.

F. Electronic Media/Files:

1. Construction drawings for this project have been prepared utilizing Revit.
2. Contractors and Subcontractors may request electronic media files of the contract drawings and/or copies of the specifications. Specifications will be provided in PDF format.
3. Upon request for electronic media, the Contractor shall complete and return a signed "Electronic File Transmittal" form provided by IMEG.
4. If the information requested includes floor plans prepared by others, the Contractor will be responsible for obtaining approval from the appropriate Design Professional for use of that part of the document.
5. The electronic contract documents can be used for preparation of shop drawings and as-built drawings only. The information may not be used in whole or in part for any other project.
6. The drawings prepared by IMEG for bidding purposes may not be used directly for ductwork layout drawings or coordination drawings.
7. The use of these CAD documents by the Contractor does not relieve them from their responsibility for coordination of work with other trades and verification of space available for the installation.
8. The information is provided to expedite the project and assist the Contractor with no guarantee by IMEG as to the accuracy or correctness of the information provided. IMEG accepts no responsibility or liability for the Contractor's use of these documents.

G. Field Measurements:

1. Verify all pertinent dimensions at the job site before ordering any conduit, conductors, wireways, bus duct, fittings, etc.

1.8 WEB-BASED PROJECT SOFTWARE

- A. The General Contractor shall provide a web-based project software site for the purpose of hosting and managing project communication and documentation until completion of the warranty phase.
- B. The web-based project software shall include, at a minimum, the following features: construction schedule, submittals, RFIs, ASIs, construction change directives, change orders, drawing management, specification management, payment applications, contract modifications, meeting minutes, construction progress photos.
- C. Provide web-based project software user licenses for use by the Architect/Engineer. Access will be provided from the start of the project through the completion of the warranty phase.
- D. At project completion, provide digital archive of entire project in format that is readable by common desktop software applications in format acceptable to Architect/Engineer. Provide data in locked format to prevent further changes.

1.9 SUBMITTALS

- A. Submittals shall be required for the following items, and for additional items where required elsewhere in the specifications or on the drawings.

1. Submittals list:

Referenced Specification Section	Submittal Item
260503	Through Penetration Firestopping
260513	Wire and Cable
260533	Conduit and Boxes
260933	Lighting Control System
262726	Wiring Devices
265119	LED Lighting

- B. General Submittal Procedures: In addition to the provisions of Division 1, the following are required:

1. Transmittal: Each transmittal shall include the following:

- a. Date
- b. Project title and number
- c. Contractor's name and address
- d. Division of work (e.g., electrical, plumbing, heating, ventilating, etc.)
- e. Description of items submitted and relevant specification number
- f. Notations of deviations from the contract documents
- g. Other pertinent data

2. Submittal Cover Sheet: Each submittal shall include a cover sheet containing:

- a. Date
- b. Project title and number
- c. Architect/Engineer
- d. Contractor and subcontractors' names and addresses
- e. Supplier and manufacturer's names and addresses
- f. Division of work (e.g., electrical, plumbing, heating, ventilating, etc.)
- g. Description of item submitted (using project nomenclature) and relevant specification number
- h. Notations of deviations from the contract documents
- i. Other pertinent data
- j. Provide space for Contractor's review stamps

3. Composition:

- a. Submittals shall be submitted using specification sections and the project nomenclature for each item.
- b. Individual submittal packages shall be prepared for items in each specification section. All items within a single specification section shall be packaged together where possible. An individual submittal may contain items from multiple specifications sections if the items are intimately linked (e.g., pumps and motors).
- c. All sets shall contain an index of the items enclosed with a general topic description on the cover.

-
4. Content: Submittals shall include all fabrication, erection, layout, and setting drawings; manufacturers' standard drawings; schedules; descriptive literature, catalogs and brochures; performance and test data; wiring and control diagrams; dimensions; shipping and operating weights; shipping splits; service clearances; and all other drawings and descriptive data of materials of construction as may be required to show that the materials, equipment or systems and the location thereof conform to the requirements of the contract documents.
 5. Contractor's Approval Stamp:
 - a. The Contractor shall thoroughly review and approve all shop drawings before submitting them to the Architect/Engineer. The Contractor shall stamp, date and sign each submittal certifying it has been reviewed.
 - b. Unstamped submittals will be rejected.
 - c. The Contractor's review shall include, but not be limited to, verification of the following:
 - 1) Only approved manufacturers are used.
 - 2) Addenda items have been incorporated.
 - 3) Catalog numbers and options match those specified.
 - 4) Performance data matches that specified.
 - 5) Electrical characteristics and loads match those specified.
 - 6) Equipment connection locations, sizes, capacities, etc. have been coordinated with other affected trades.
 - 7) Dimensions and service clearances are suitable for the intended location.
 - 8) Equipment dimensions are coordinated with support steel, housekeeping pads, openings, etc.
 - 9) Constructability issues are resolved (e.g., weights and dimensions are suitable for getting the item into the building and into place, sinks fit into countertops, etc.).
 - d. The Contractor shall review, stamp and approve all subcontractors' submittals as described above.
 - e. The Contractor's approval stamp is required on all submittals. Approval will indicate the Contractor's review of all material and a complete understanding of exactly what is to be furnished. Contractor shall clearly mark all deviations from the contract documents on all submittals. If deviations are not marked by the Contractor, then the item shall be required to meet all drawing and specification requirements.
 6. Submittal Identification and Markings:
 - a. The Contractor shall clearly mark each item with the same nomenclature applied on the drawings or in the specifications.
 - b. The Contractor shall clearly indicate the size, finish, material, etc.
 - c. Where more than one model is shown on a manufacturer's sheet, the Contractor shall clearly indicate exactly which item and which data is intended.
 - d. All marks and identifications on the submittals shall be unambiguous.
 7. Schedule submittals to expedite the project. Coordinate submission of related items.
 8. Identify variations from the contract documents and product or system limitations that may be detrimental to the successful performance of the completed work.
 9. Reproduction of contract documents alone is not acceptable for submittals.
 10. Incomplete submittals will be rejected without review. Partial submittals will only be reviewed with prior approval from the Architect/Engineer.

11. Submittals not required by the contract documents may be returned without review.
12. The Architect/Engineer's responsibility shall be to review one set of shop drawing submittals for each product. If the first submittal is incomplete or does not comply with the drawings and/or specifications, the Contractor shall be responsible to bear the cost for the Architect/Engineer to recheck and handle the additional shop drawing submittals.
13. Submittals shall be reviewed and approved by the Architect/Engineer before releasing any equipment for manufacture or shipment.
14. Contractor's responsibility for errors, omissions or deviation from the contract documents in submittals is not relieved by the Architect/Engineer's approval.
15. Schedule shall allow for adequate time to perform orderly and proper review of submittals, including time for consultants and Owner if required, and resubmittals by Contractor if necessary, and to cause no delay in Work or in activities of Owner or other contractors.
 - a. Allow at least two weeks for Architect/Engineer's review and processing of each submittal, excluding mailing.
16. Architect/Engineer reserves the right to withhold action on a submittal which, in the Architect/Engineer's opinion, requires coordination with other submittals until related submittals are received. The Architect/Engineer will notify the Contractor, in writing, when they exercise this right.

C. Electronic Submittal Procedures:

1. Distribution: Email submittals as attachments to all parties designated by the Architect/Engineer, unless a web-based submittal program is used.
2. Transmittals: Each submittal shall include an individual electronic letter of transmittal.
3. Format: Electronic submittals shall be in PDF format only. Scanned copies, in PDF format, of paper originals are acceptable. Submittals that are not legible will be rejected. Do not set any permission restrictions on files; protected, locked, or secured documents will be rejected.
4. File Names: Electronic submittal file names shall include the relevant specification section number followed by a description of the item submitted, as follows. Where possible, include the transmittal as the first page of the PDF instead of using multiple electronic files.
 - a. Submittal file name: 26XXXX.description.YYYYMMDD
 - b. Transmittal file name: 26XXXX.description.YYYYMMDD
5. File Size: Files shall be transmitted via a pre-approved method. Larger files may require an alternative transfer method, which shall also be pre-approved.

1.10 SCHEDULE OF VALUES

A. The requirements herein are in addition to the provisions of Division 1.

B. Format:

1. Use AIA Document Continuation Sheets G703 or another similar form approved by the Owner and Architect/Engineer.
2. Submit in Excel format.
3. Support values given with substantiating data.

C. Preparation:

1. Itemize work required by each specification section and list all providers. All work provided by subcontractors and major suppliers shall be listed on the Schedule of Values. List each subcontractor and supplier by company name.
2. Break down all costs into:
 - a. Material: Delivered cost of product with taxes paid.
 - b. Labor: Labor cost, excluding overhead and profit.
3. Itemize the cost for each of the following:
 - a. Overhead and profit.
 - b. Bonds.
 - c. Insurance.
 - d. General Requirements: Itemize all requirements.
4. For each line item having an installed cost of more than \$5,000, break down costs to list major products or operations under each item. At a minimum, provide material and labor cost line items for the following:
 - a. Each piece of equipment requiring shop drawings. Use the equipment nomenclature (SB-1, PANEL P-1, etc.) on the Schedule of Values.
 - b. Each type of small unitary equipment (e.g., FDS, FCS, CS, etc.). Multiple units of the same type can be listed together provided quantities are also listed so unit costs can be determined.
 - c. Each conduit system (medium voltage, normal, emergency, low voltage systems, etc.). In addition, for larger projects breakdown the material and labor for each conduit system based on geography (building, floor, and/or wing).
 - d. Fire alarm broken down into material and labor for the following:
 - 1) Engineering
 - 2) Controllers, devices, sensors, etc.
 - 3) Conduit
 - 4) Wiring
 - 5) Programming
 - 6) Commissioning
 - e. Site utilities (5' beyond building)
 - f. Seismic design
 - g. Testing
 - h. Commissioning
 - i. Record drawings
 - j. Punchlist and closeout

D. Update Schedule of Values when:

1. Indicated by Architect/Engineer.
2. Change of subcontractor or supplier occurs.
3. Change of product or equipment occurs.

1.11 CHANGE ORDERS

- A. A detailed material and labor takeoff shall be prepared for each change order, along with labor rates and markup percentages. Change orders shall be broken down by sheet or associated individual line item indicated in the change associated narrative, whichever provides the most detailed breakdown. Change orders with inadequate breakdown will be rejected.
- B. Itemized pricing with unit cost shall be provided from all distributors and associated subcontractors.
- C. Change order work shall not proceed until authorized.

1.12 PRODUCT DELIVERY, STORAGE, HANDLING and MAINTENANCE

- A. Exercise care in transporting and handling to avoid damage to materials. Store materials on the site to prevent damage.
- B. Protect equipment, components, and openings with airtight covers and exercise care at every stage of storage, handling, and installation of equipment to prevent airborne dust and dirt from entering or fouling equipment to include, but not limited to:
 - 1. Distribution equipment - branch panels, distribution panels, switchboards, motor control centers, etc.
 - 2. Variable frequency drives.
 - 3. Transformers, ventilated.
 - 4. Electronic equipment, UPS, harmonic filters, power factor correction.
 - 5. Lighting luminaires and lighting control systems.
- C. Equipment and components that are visibly damaged or have been subject to environmental conditions prior to building turnover to Owner that could shorten the life of the component (for example, water damage, humidity, dust and debris, excessive hot or cold storage location, etc.) shall be repaired or replaced with new equipment or components without additional cost to the building owner.
- D. Keep all materials clean, dry and free from damaging environments.
- E. Coordinate the installation of heavy and large equipment with the General Contractor and/or Owner. If the Electrical Contractor does not have prior documented experience in rigging and lifting similar equipment, he/she shall contract with a qualified lifting and rigging service that has similar documented experience. Follow all equipment lifting and support guidelines for handling and moving.
- F. Contractor is responsible for moving equipment into the building and/or site. Contractor shall review site prior to bid for path locations and any required building modifications to allow movement of equipment. Contractor shall coordinate the work with other trades.

1.13 NETWORK / INTERNET CONNECTED EQUIPMENT

- A. These specifications may require certain equipment or systems to have network, Internet and/or remote access capability ("Network Capability"). Any requirement for Network Capability shall be interpreted only as a functional capability and is not to be construed as authority to connect or enable any Network Capability. Network Capability may only be connected or enabled with the express written consent of the Owner.

B. The following network connected equipment shall be equipped with restricted access protocols:

1. Adjustable trip overcurrent protection devices
2. Power monitoring and control
3. Electrical controls
4. Lighting control system
5. Variable frequency drives
6. Package engine generator and remote annunciator
7. Transfer switch and remote annunciator
8. Static uninterruptible power supply (UPS)
9. Fire alarm and automatic detection

1.14 WARRANTY

- A. Provide one-year warranty for all fixtures, equipment, materials, and workmanship.
- B. The warranty period for all work in this specification Division shall commence on the date of Substantial Completion or successful system performance whichever occurs later. The warranty may also commence if a whole or partial system or any separate piece of equipment or component is put into use for the benefit of any party other than the installing contractor with prior written authorization of the Owner. In this instance, the warranty period shall commence on the date when such whole system, partial system or separate piece of equipment or component is placed in operation and accepted in writing by the Owner.
- C. Warranty requirements extend to correction, without cost to the Owner, of all work found to be defective or nonconforming to the contract documents. The Contractor shall bear the cost of correcting all damage due to defects or nonconformance with contract documents excluding repairs required as a result of improper maintenance or operation, or of normal wear as determined by the Architect/Engineer.

1.15 INSURANCE

- A. This Contractor shall maintain insurance coverage as set forth in Division 1 of these specifications.

1.16 MATERIAL SUBSTITUTION

- A. Where several manufacturers' names are given, the manufacturer for which a catalog number is given is the basis for job design and establishes the quality.
- B. Equivalent equipment manufactured by the other listed manufacturers may be used. Contractor shall ensure that all items submitted by these other manufacturers meet all requirements of the drawings and specifications and fits in the allocated space. When using other listed manufacturers, the Contractor shall assume responsibility for any and all modifications necessary (including, but not limited to structural supports, electrical connections and rough-in, and regulatory agency approval, etc.) and coordinate such with other contractors. The Architect/Engineer shall make the final determination of whether a product is equivalent.

- C. Any material, article or equipment of other unnamed manufacturers which will adequately perform the services and duties imposed by the design and is of a quality equal to or better than the material, article or equipment identified by the drawings and specifications may be used if approval is secured in writing from the Architect/Engineer via addendum. The Contractor assumes all costs incurred as a result of using the offered material, article or equipment, on the Contractors part or on the part of other Contractors whose work is affected.
- D. Voluntary add or deduct prices for alternate materials may be listed on the bid form. These items will not be used in determining the low bidder. This Contractor assumes all costs incurred as a result of using the offered material or equipment on the Contractors part or on the part of other Contractors whose work is affected.
- E. All material substitutions requested after the final addendum must be listed as voluntary changes on the bid form.

PART 2 - PRODUCTS

2.1 GENERAL

- A. All items of material having a similar function (e.g., safety switches, panelboards, switchboards, contactors, motor starters, dry type transformers) shall be of the same manufacturer unless specifically stated otherwise on drawings or elsewhere in specifications.

PART 3 - EXECUTION

3.1 JOBSITE SAFETY

- A. Neither the professional activities of the Architect/Engineer, nor the presence of the Architect/Engineer or the employees and subconsultants at a construction site, shall relieve the Contractor and any other entity of their obligations, duties and responsibilities including, but not limited to, construction means, methods, sequence, techniques or procedures necessary for performing, superintending or coordinating all portions of the work of construction in accordance with the contract documents and any health or safety precautions required by any regulatory agencies. The Architect/Engineer and personnel have no authority to exercise any control over any construction contractor or other entity or their employees in connection with their work or any health or safety precautions. The Contractor is solely responsible for jobsite safety. The Architect/Engineer and the Architect/Engineer's consultants shall be indemnified and shall be made additional insureds under the Contractor's general liability insurance policy.

3.2 EXCAVATION, FILL, BACKFILL, COMPACTION

- A. Fill and Backfilling:
 - 1. Dispose of the excess excavated earth as directed.

3.3 ARCHITECT/ENGINEER OBSERVATION OF WORK

- A. The contractor shall provide seven (7) calendar days' notice to the Architect/Engineer prior to:
 - 1. Placing fill over underground and underslab utilities.

2. Covering exterior walls, interior partitions and chases.
 3. Installing hard or suspended ceilings and soffits.
- B. The Architect/Engineer will review the installation and provide a written report noting deficiencies requiring correction. The contractor's schedule shall account for these reviews and show them as line items in the approved schedule.
- C. Above-Ceiling Final Observation:
1. All work above the ceilings must be complete prior to the Architect/Engineer's review. This includes, but is not limited to:
 - a. All junction boxes are closed and identified in accordance with Section 260553 Electrical Identification.
 - b. Luminaires, including ceiling-mounted exit and emergency lights, are installed and operational.
 - c. Luminaire whips are supported above the ceiling.
 - d. Conduit identification is installed in accordance with Section 260553 Electrical Identification.
 - e. Luminaires are suspended independently of the ceiling system when required by these contract documents.
 - f. All wall penetrations have been sealed.
 2. To prevent the Above-Ceiling Final Observation from occurring too early, the Contractor shall review the status of the work and certify, in writing, that the work is ready for the Above-Ceiling Final Observation.
 3. It is understood that if the Architect/Engineer finds the ceilings have been installed prior to this review and prior to seven days elapsing, the Architect/Engineer may not recommend further payments to the contractor until full access has been provided.
- 3.4 PROJECT CLOSEOUT
- A. The following paragraphs supplement the requirements of Division 1.
- B. Final Jobsite Observation:
1. To prevent the Final Jobsite Observation from occurring too early, the Contractor shall review the completion status of the project and certify that the job is ready for the final jobsite observation.
 2. Attached to the end of this section is a typical list of items that represent the degree of job completeness expected prior to requesting a review. The Contractor shall sign the attached certification and return it to the Architect/Engineer so that the final observation can be scheduled.
 3. It is understood that if the Architect/Engineer finds the job not ready for the final observation and additional trips and observations are required to bring the project to completion, the cost of the additional time and expenses incurred by the Architect/Engineer will be deducted from the Contractor's final payment.
 4. Contractor shall notify Architect/Engineer 48 hours prior to installation of ceilings or lay-in ceiling tiles.
- C. The following must be submitted before Architect/Engineer recommends final payment:
1. Operation and maintenance manuals with copies of approved shop drawings.

2. Record documents including marked-up or reproducible drawings and specifications.
3. A report documenting the instructions given to the Owner's representatives complete with the number of hours spent in the instruction. The report shall bear the signature of an authorized agent of this Contractor and shall be signed by the Owner's representatives.
4. Provide spare parts, maintenance, and extra materials in quantities specified in individual specification sections. Deliver to project site and submit receipt to Architect/Engineer.
5. Inspection and testing report by the fire alarm system manufacturer.

D. Circuit Directories:

1. Provide custom typed circuit directory for each branch circuit panelboard. Provide updated custom typed circuit directory for each existing branch circuit panelboard with new or revised circuits per the scope of work. Label shall include equipment name or final approved room name, room number, and load type for each circuit (examples: SUMP SP-1 or ROOM 101 RECEIPT). Revise directory to reflect circuit changes required to balance phase loads. Printed copies of the bid document panel schedules are not acceptable as circuit directories.

3.5 OPERATION AND MAINTENANCE MANUALS

A. General:

1. Provide an electronic copy of the O&M manuals as described below for Architect/Engineer's review and approval. The electronic copy shall be corrected as required to address the Architect/Engineer's comments. Once corrected, electronic copies and paper copies shall be distributed as directed by the Architect/Engineer.
2. Approved O&M manuals shall be completed and in the Owner's possession prior to Owner's acceptance and at least 10 days prior to instruction of operating personnel.

B. Electronic Submittal Procedures:

1. Distribution: Email the O&M manual as attachments to all parties designated by the Architect/Engineer.
2. Transmittals: Each submittal shall include an individual electronic letter of transmittal.
3. Format: Electronic submittals shall be in PDF format only. Scanned copies, in PDF format, of paper originals are acceptable. Submittals that are not legible will be rejected. Do not set any permission restrictions on files; protected, locked, or secured documents will be rejected.
4. File Names: Electronic submittal file names shall include the relevant specification section number followed by a description of the item submitted, as follows. Where possible, include the transmittal as the first page of the PDF instead of using multiple electronic files.
 - a. O&M file name: O&M.div26.contractor.YYYYMMDD
 - b. Transmittal file name: O&Mtransmittal.div26.contractor.YYYYMMDD
5. File Size: Files shall be transmitted via a pre-approved method. Larger files may require an alternative transfer method, which shall also be pre-approved.
6. Provide the Owner with an approved copy of the O&M manual on compact discs (CD), digital video discs (DVD), or flash drives with a permanently affixed label, printed with the title "Operation and Maintenance Instructions", title of the project and subject matter of disc/flash drive when multiple disc/flash drives are required.

7. All text shall be searchable.
8. Bookmarks shall be used, dividing information first by specification section, then systems, major equipment and finally individual items. All bookmark titles shall include the nomenclature used in the construction documents and shall be an active link to the first page of the section being referenced.

C. Operation and Maintenance Instructions shall include:

1. Title Page: Include title page with project title, Architect, Engineer, Contractor, all subcontractors, and major equipment suppliers, with addresses, telephone numbers, website addresses, email addresses and point of contacts. Website URLs and email addresses shall be active links in the electronic submittal.
2. Table of Contents: Include a table of contents describing specification section, systems, major equipment, and individual items.
3. Copies of all final approved shop drawings and submittals. Include Architect's/Engineer's shop drawing review comments. Insert the individual shop drawing directly after the Operation and Maintenance information for the item(s) in the review form.
4. Copies of all factory inspections and/or equipment startup reports.
5. Copies of warranties.
6. Schematic wiring diagrams of the equipment that have been updated for field conditions. Field wiring shall have label numbers to match drawings.
7. Dimensional drawings of equipment.
8. Detailed parts lists with lists of suppliers.
9. Operating procedures for each system.
10. Maintenance schedule and procedures. Include a chart listing maintenance requirements and frequency.
11. Repair procedures for major components.
12. Replacement parts and service material requirements for each system and the frequency of service required.
13. Instruction books, cards, and manuals furnished with the equipment.
14. Include record drawings of the one-line diagrams for each major system. The graphic for each piece of equipment shown on the one-line diagram shall be an active link to its associated Operation & Maintenance data.
15. Copies of all panel schedules in electronic Microsoft Excel spreadsheet (.xlsx) file. Each panelboard shall be a separate tab in the workbook.

3.6 INSTRUCTING THE OWNER'S REPRESENTATIVE

- A. Adequately instruct the Owner's designated representatives in the maintenance, care, and operation of the complete systems installed under this contract.
- B. Provide verbal and written instructions to the Owner's representatives by FACTORY PERSONNEL in the care, maintenance, and operation of the equipment and systems.
- C. The Owner has the option to make a video recording of all instructions. Coordinate schedule of instructions to facilitate this recording.
- D. The instructions shall include:
 1. Maintenance of equipment.
 2. Start-up procedures for all major equipment.
 3. Description of emergency system operation.

- E. Notify the Architect/Engineer of the time and place for the verbal instructions to be given to the Owner's representative so a representative can be present if desired.
- F. Minimum hours of instruction time for each item and/or system shall be as indicated in each individual specification section.
- G. Operating Instructions:
 - 1. Contractor is responsible for all instructions to the Owner's representatives for the electrical and specialized systems.
 - 2. If the Contractor does not have staff that can adequately provide the required instructions, the Contractor shall include in the bid an adequate amount to reimburse the Owner for the Architect/Engineer to perform these services.

3.7 RECORD DOCUMENTS

- A. The following paragraphs supplement Division 1 requirements.
- B. Maintain at the job site a separate and complete set of electrical drawings and specifications with all changes made to the systems clearly and permanently marked in complete detail.
- C. Mark drawings and specifications to indicate approved substitutions; Change Orders, and actual equipment and materials used. All Change Orders, RFI responses, Clarifications and other supplemental instructions shall be marked on the documents. Record documents that merely reference the existence of the above items are not acceptable. Should this Contractor fail to complete Record Documents as required by this contract, this Contractor shall reimburse Architect/Engineer for all costs to develop record documents that comply with this requirement. Reimbursement shall be made at the Architect/Engineer's hourly rates in effect at the time of work.
- D. Record changes daily and keep the marked drawings available for the Architect/Engineer's examination at any normal work time.
- E. Upon completing the job, and before final payment is made, give the marked-up drawings to the Architect/Engineer.
- F. Record actual routing of conduits exceeding 2 inches.

3.8 PAINTING

- A. Paint all equipment that is marred or damaged prior to the Owner's acceptance. Paint and color shall match original equipment paint and shall be obtained from the equipment supplier if available. All equipment shall have a finished coat of paint applied unless specifically allowed to be provided with a prime coat only.
- B. Equipment in finished areas that will be painted to match the room decor will be painted by others. Should this Contractor install equipment in a finished area after the area has been painted, the Contractor shall have the equipment and all its supports, hangers, etc., painted to match the room decor. Painting shall be performed as described in project specifications.
- C. Equipment in occupied spaces, or if standard to the unit, shall have a baked primer with baked enamel finish coat free from scratches, abrasions, chipping, etc. If color option is specified or is standard to the unit, verify with the Architect the color preference before ordering.

- D. Paint all equipment in unfinished areas such as boiler room, mechanical spaces, and storage rooms. Equipment furnished with a suitable factory finish need not be painted; provided the factory applied finish is not marred or spattered. If so, equipment shall be refinished with the same paint as was factory applied.
- E. All electrical conduit and equipment, fittings, hangers, structural supports, etc., in unfinished areas, such as equipment and storage room area, shall be painted two (2) coats of oil paint of colors selected by the Architect.
- F. Do NOT paint electric conduits in crawl spaces, tunnels, or spaces above suspended ceilings except that where conduit is in a damp location give exposed threads at joints two coats of sealer after joint is made up.
- G. After surfaces have been thoroughly cleaned and are free of oil, dirt or other foreign matter, paint all raceway and equipment with the following:
 - 1. Bare Metal Surfaces - Apply one coat of metal primer suitable for the metal being painted. Finish with two coats of Alkyd base enamel paint.
 - 2. Plastic Surfaces - Paint plastic surfaces with two coats of semi-gloss acrylic latex paint.

3.9 ADJUST AND CLEAN

- A. Thoroughly clean all equipment and systems prior to the Owner's final acceptance of the project.
- B. Clean all foreign paint, grease, oil, dirt, labels, stickers, etc. from all equipment.
- C. Remove all rubbish, debris, etc., accumulated during construction from the premises.

3.10 SPECIAL REQUIREMENTS

- A. Coordinate the installation of all equipment, controls, devices, etc., with other trades to maintain clear access area for servicing.
- B. Install all equipment to maximize access to parts needing service or maintenance. Review the final location, placement, and orientation of equipment with the Owner's representative prior to setting equipment.
- C. Installation of equipment or devices without regard to coordination of access requirements and confirmation with the Owner's representative will result in removal and reinstallation of the equipment at the Contractor's expense.

3.11 INDOOR AIR QUALITY (IAQ) MAINTENANCE FOR OCCUPIED FACILITIES UNDER CONSTRUCTION

- A. Within the Limits of Construction:
 - 1. The Electrical Contractor shall coordinate all work with the contractor responsible for IAQ.
 - 2. The means, methods and materials used by the Electrical Contractor shall be coordinated with the contractor responsible for IAQ and shall comply with the IAQ requirements set forth in Division 1 and Division 21/22/23 of these specifications.

B. Outside the Limits of Construction:

1. IAQ shall be the responsibility of the electrical contractor for work that is required outside the limits of construction.
2. The Electrical Contractor is responsible for the IAQ set forth in Division 1 and Division 21/22/23 of these specifications.
3. The Electrical Contractor shall review and coordinate all IAQ plans and procedures with the owner's IAQ representative.

3.12 SYSTEM STARTING AND ADJUSTING

- A. The electrical systems shall be complete and operating. System startup, testing, adjusting, and balancing to obtain satisfactory system performance is the responsibility of the Contractor. This includes all calibration and adjustment of electrical controls, balancing of loads, troubleshooting and verification of software, and final adjustments that may be needed.
- B. Complete all manufacturer-recommended startup procedures and checklists to verify proper equipment operation and does not pose a danger to personnel or property.
- C. All operating conditions and control sequences shall be tested during the start-up period. Testing all interlocks, safety shut-downs, controls, and alarms.
- D. The Contractor, subcontractors, and equipment suppliers shall have skilled technicians to ensure that all systems perform properly. If the Architect/Engineer is requested to visit the job site for trouble shooting, assisting in start-up, obtaining satisfactory equipment operation, resolving installation and/or workmanship problems, equipment substitution issues or unsatisfactory system performance, including call backs during the warranty period, through no fault of the design; the Contractor shall reimburse the Owner on a time and materials basis for services rendered at the Architect/Engineer's standard hourly rates in effect when the services are requested. The Contractor shall pay the Owner for services required that are product, installation or workmanship related. Payment is due within 30 days after services are rendered.

3.13 FIELD QUALITY CONTROL

A. General:

1. Conduct all tests required during and after construction. Submit test results in NETA format, or equivalent form, that shows the test equipment used, calibration date, tester's name, ambient test conditions, humidity, conductor length, and results corrected to 40°C.
2. Supply necessary instruments, meters, etc., for the tests. Supply competent technicians with training in the proper testing techniques.
3. All cables and wires shall be tested for shorts and grounds following installation and connection to devices. Replace shorted or grounded wires and cables.
4. Any wiring device, electrical apparatus or luminaire, if grounded or shorted on any integral "live" part, shall have all defective parts or materials replaced.
5. Test cable insulation of service and panel feeder conductors for proper insulation values. Tests shall include the cable, all splices, and all terminations. Each conductor shall be tested and shall test free of short circuits and grounds and have an insulation value not less than Electrical Code Standards. Take readings between conductors, and between conductors and ground.
6. If the results obtained in the tests are not satisfactory, make adjustments, replacements, and changes as needed. Then repeat the tests, and make additional tests, as the Architect/Engineer or authority having jurisdiction deems necessary.

- B. Ground-Fault Equipment Performance Testing:
 - 1. Test: Perform ground-fault performance testing when system is installed. The test process shall use primary current injection per manufacturer instruction and procedures. Perform test for the following:
 - a. Service disconnects
 - b. Solid state molded case circuit breakers and solid-state insulated case circuit breakers equipped with ground fault protection.
 - c. Fusible switches with ground fault relay protection.
 - d. Outside branch circuits and feeders.
 - e. Code required.
 - 2. Report: Provide copy of test result report with Operation and Maintenance manuals. Provide report to Authority Having Jurisdiction when requested.
- C. Other Equipment:
 - 1. Give other equipment furnished and installed by the Contractor all standard tests normally made to assure that the equipment is electrically sound, all connections properly made, phase rotation correct, fuses and thermal elements suitable for protection against overloads, voltage complies with equipment nameplate rating, and full load amperes are within equipment rating.
- D. If any test results are not satisfactory, make adjustments, replacements and changes as needed and repeat the tests and make additional tests as the Architect/Engineer or authority having jurisdiction deem necessary.
- E. Report shall include color printouts, in binder, of pictures taken to use as a baseline reading after building is occupied.
- F. Upon completion of the project, the Contractor shall provide amperage readings for all panelboards and switchboards and turn the results over to the Owner for "benchmark" amperages.

READINESS CERTIFICATION PRIOR TO FINAL JOBSITE OBSERVATION

To prevent the final job observation from occurring too early, we require that the Contractor review the completion status of the project and, by copy of this document, certify that the job is indeed ready for the final job observation. The following is a typical list of items that represent the degree of job completeness expected prior to your requesting a final job observation.

1. Penetrations of fire-rated construction fire sealed in accordance with specifications.
2. Electrical panels have typed circuit identification.
- 3 Per Section 260500, cable insulation test results have been submitted.
4. Operation and Maintenance manuals have been submitted as per Section 260500.
5. Report of instruction of Owner's representative has been submitted as per Section 260500.
6. Start-up reports from factory representative have been submitted as per Section 260500.

Accepted by:

Prime Contractor _____

By _____ Date _____

Upon Contractor certification that the project is complete and ready for a final job observation, we require the Contractor to sign this agreement and return it to the Architect/Engineer so that the final observation can be scheduled.

It is understood that if the Architect/Engineer finds the job not ready for the final observation and that additional trips and observations are required to bring the project to completion, the costs incurred by the Architect/Engineers for additional time and expenses will be deducted from the Contractor's contract retainage prior to final payment at the completion of the job.

END OF SECTION 260500

SECTION 260503 - THROUGH PENETRATION FIRESTOPPING

PART 1 - GENERAL

1.1 SECTION INCLUDES

- A. Through-Penetration Firestopping.

1.2 QUALITY ASSURANCE

- A. Manufacturer: Company specializing in manufacturing products specified in this Section.
- B. Installer: Individuals performing work shall be certified by the manufacturer of the system selected for installation.

1.3 REFERENCES

- A. UL 263 - Fire Tests of Building Construction and Materials
- B. UL 723 - Surface Burning Characteristics of Building Materials
- C. ANSI/UL 1479 - Fire Tests of Through Penetration Firestops
- D. UL 2079 - Tests for Fire Resistance of Building Joint Systems
- E. UL Fire Resistance Directory Through Penetration Firestop Systems (XHEZ)
- F. Intertek / Warnock Hersey - Directory of Listed Products
- G. ASTM E84 - Standard Test Method for Surface Burning Characteristics of Building Materials
- H. ASTM E814 - Standard Test Method for Fire Tests of Through-Penetration Firestops
- I. 2018 International Building Code

1.4 SUBMITTALS

- A. Submit under provisions of Section 260500.
- B. Submit Firestopping Installers Certification for all installers on the project.
- C. Shop Drawings: Submit for each condition requiring firestopping. Include descriptions of the specific penetrating item, actual wall/floor construction, manufacturer's installation instructions, and UL or Interec / Warnock Hersey Assembly number.
- D. Through-Penetration Firestop System Schedule: Indicate locations of each through-penetration firestop system, along with the following information:
 - 1. Types of penetrating items.
 - 2. Types of constructions penetrated, including fire-resistance ratings and, where applicable, thicknesses of construction penetrated.

-
- 3. Through-penetration firestop systems for each location identified by firestop design designation of qualified testing and inspecting agency.
 - 4. F ratings for each firestop system.
 - E. Maintain a notebook on the job site at all times that contains copies of approved submittals for all through penetration firestopping to be installed. Notebook shall be made available to the Authority Having Jurisdiction at their request and turned over to the Owner at the end of construction as part of the O&M Manuals.
- 1.5 DELIVERY, STORAGE, AND HANDLING
- A. Store, protect and handle products on site. Accept material on site in factory containers and packing. Inspect for damage. Protect from deterioration or damage due to moisture, temperature changes, contaminants, or other causes. Follow manufacturer's instructions for storage.
 - B. Install material prior to expiration of product shelf life.
- 1.6 PERFORMANCE REQUIREMENTS
- A. General: For penetrations through the following fire-resistance-rated constructions, including both empty openings and openings containing penetrating items, provide through-penetration firestop systems that are produced and installed to resist spread of fire according to requirements indicated, resist passage of smoke and other gases, and maintain original fire-resistance rating of construction penetrated.
 - 1. Fire-resistance-rated walls including fire partitions, fire barriers, and smoke barriers.
 - 2. Fire-resistance-rated horizontal assemblies including floors, floor/ceiling assemblies, and ceiling membranes of roof/ceiling assemblies.
 - B. Rated Systems: Provide through-penetration firestop systems with the following ratings determined per UL 1479:
 - 1. F-Rated Systems: Provide through-penetration firestop systems with F-ratings indicated, but not less than that equaling or exceeding fire-resistance rating of constructions penetrated.
 - C. For through-penetration firestop systems exposed to light, traffic, moisture, or physical damage, provide products that, after curing, do not deteriorate when exposed to these conditions both during and after construction.
 - D. For through-penetration firestop systems exposed to view, provide products with flame-spread and smoke-developed indexes of less than 25 and 450, respectively, as determined per ASTM E 84.
 - E. For through-penetration firestop systems in air plenums, provide products with flame-spread and smoke-developed indexes of less than 25 and 50, respectively, as determined per ASTM E 84.

1.7 MEETINGS

- A. Pre-installation meeting: A pre-installation meeting shall be scheduled and shall include the General Contractor, all Subcontractors associated with the installation of systems penetrating fire barriers, Firestopping Manufacturer's Representative, and the Owner.
 - 1. Review foreseeable methods related to firestopping work.
 - 2. Tour representative areas where firestopping is to be installed; inspect and discuss each type of condition and each type of substrate that will be encountered, and preparation to be performed by other trades.

1.8 WARRANTY

- A. Provide one year warranty on parts and labor.
- B. Warranty shall cover repair or replacement of firestop systems which fail in joint adhesion, cohesion, abrasion resistance, weather resistance, extrusion resistance, migration resistance, stain resistance, general durability, or appear to deteriorate in any manner not clearly specified by the manufacturer as an inherent quality of the material.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. Products: Subject to compliance with requirements, provide one of the through-penetration firestop systems indicated for each application that are produced by one of the following manufacturers. All firestopping systems installed shall be provided by a single manufacturer.
 - 1. 3M; Fire Protection Products Division
 - 2. Hilti, Inc.
 - 3. RectorSeal Corporation, Metacaulk
 - 4. Tremco; Sealant/Weatherproofing Division
 - 5. Johns-Manville
 - 6. Specified Technologies Inc. (S.T.I.)
 - 7. Spec Seal Firestop Products
 - 8. AD Firebarrier Protection Systems
 - 9. Wiremold/Legrand: FlameStopper
 - 10. Dow Corning Corp.
 - 11. Fire Trak Corp.
 - 12. International Protective Coating Corp.
 - 13. HoldRite

2.2 THROUGH PENETRATION FIRESTOP SYSTEMS

- A. Provide materials and systems classified by or listed by Intertek / Warnock Hersey to provide firestopping equal to time rating of construction being penetrated.
- B. All firestopping materials shall be free of asbestos, lead, PCB's, and other materials that would require hazardous waste removal.
- C. Firestopping shall be flexible to allow for normal penetrating item movement due to expansion and contraction.

-
- D. Provide firestopping systems capable of supporting floor loads where systems are exposed to possible floor loading or traffic.
 - E. Provide firestopping systems allowing continuous insulation for all insulated pipes.
 - F. Provide firestopping systems classified by UL or listed by Intertek / Warnock Hersey for penetrations through all fire rated construction. Firestopping systems shall be selected from the UL or listed by Intertek / Warnock Hersey Fire Resistance Directory Category XHEZ based on substrate construction and penetrating item size and material and shall fall within the range of numbers listed:
 - 1. Combustible Framed Floors and Chase Walls - 1 or 2 Hour Rated:
 - a. F Rating = Floor/Wall Rating
 - 2. Non-Combustible Framed Walls - 1 or 2 Hour Rated:
 - a. F Rating = Wall Rating
 - 3. Concrete or Masonry Floors and Walls - 1 or 2 Hour Rated:
 - a. F Rating = Wall/Floor Rating
 - G. Any opening in walls or floors not covered by the listed series of numbers shall be coordinated with the firestopping manufacturer.
 - H. Any openings in floors or walls not described in the UL or listed by Intertek / Warnock Hersey Fire Resistance Directory, or outlined in manufacturer's information shall be sealed in a manner agreed upon by the Firestopping Manufacturer, Owner, and the Authority Having Jurisdiction.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Ensure all surfaces that contact seal materials are free of dirt, dust, grease, oil, rust, or loose materials. Clean and repair surfaces as required. Remove laitance and form-release agents from concrete.
- B. Ensure substrate and penetrating items have been permanently installed prior to installing firestopping systems. Ensure penetrating items have been properly spaced and have proper clearance prior to installing firestopping systems.
- C. Surfaces to which sealing materials are to be installed must meet the selected UL or Intertek / Warnock Hersey system substrate criteria.
- D. Prime substrates where recommended in writing by through-penetration firestop system manufacturer. Confine primer to area of bond.

3.2 INSTALLATION

- A. In existing construction, provide firestopping of openings prior to and after installation of penetrating items. Remove any existing coatings on surfaces prior to firestopping installation. Temporary firestopping shall consist of packing openings with fire resistant mineral wool for the full thickness of substrate, or an alternate method approved by the Authority Having Jurisdiction. All openings shall be temporarily firestopped immediately upon their installation and shall remain so until the permanent UL or listed by Intertek / Warnock Hersey listed firestopping system is installed.
- B. Install penetration seal materials in accordance with printed instructions of the UL or Intertek / Warnock Hersey Fire Resistance Directory and with the manufacturer's printed application instructions.
- C. Install dams as required to properly contain firestopping materials within openings and as required to achieve required fire resistance rating. Remove combustible damming after appropriate curing.

3.3 CLEANING AND PROTECTING

- A. Clean excess fill materials adjacent to openings as Work progresses by methods and with cleaning materials that are approved in writing by through-penetration firestop system manufacturers and that do not cause damage.
- B. Provide final protection and maintain conditions during and after installation that ensure that through-penetration firestop systems are without damage or deterioration at time of Substantial Completion. If, despite such protection, damage or deterioration occurs, remove damaged or deteriorated through-penetration firestop systems immediately and install new materials to produce systems complying with specified requirements.

3.4 INSPECTION

- A. All penetrations shall be inspected by the manufacturer's representative to ensure proper installation.
- B. Access to firestop systems shall be maintained for examination by the Authority Having Jurisdiction at their request.
- C. Proceed with enclosing through-penetration firestop system with other construction only after inspection reports are issued and firestop installations comply with requirements.

- D. The Contractor shall allow for visual destructive review of 5% of installed firestop systems (minimum of one) to prove compliance with specifications and manufacturer's instructions and details. Destructive system removal shall be performed by the Contractor and witnessed by the Architect/Engineer and manufacturer's factory representative. The Architect/Engineer shall have sole discretion of which firestop system installations will be reviewed. The Contractor is responsible for all costs associated with this requirement including labor and material for removing and replacing the installed firestop system. If any firestop system is found to not be installed per manufacturer's specific instructions and details, all firestop systems are subject to destructive review and replacement at the Architect/Engineer's discretion and the Contractor's expense.

END OF SECTION 260503

SECTION 260505 - ELECTRICAL DEMOLITION FOR REMODELING

PART 1 - GENERAL

1.1 SECTION INCLUDES

- A. Electrical demolition

PART 2 - PRODUCTS

2.1 MATERIALS AND EQUIPMENT

- A. Materials and equipment for patching and extending work shall be as specified in individual Sections.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. THE DRAWINGS ARE INTENDED TO INDICATE THE SCOPE OF WORK REQUIRED AND DO NOT INDICATE EVERY BOX, CONDUIT, OR WIRE THAT MUST BE REMOVED. THE CONTRACTOR SHALL VISIT THE SITE PRIOR TO SUBMITTING A BID AND VERIFY EXISTING CONDITIONS.
- B. Where walls, ceilings, structures, etc., are indicated as being removed on general or electrical drawings, the Contractor shall be responsible for the removal of all electrical equipment, devices, fixtures, raceways, wiring, systems, etc., from the removed area.
- C. Where ceilings, walls, structures, etc., are temporarily removed and replaced by others, this Contractor shall be responsible for the removal, storage, and replacement of equipment, devices, fixtures, raceways, wiring, systems, etc.
- D. Where mechanical or technology equipment is indicated as being removed on electrical, mechanical, or technology drawings, the Contractor shall be responsible for disconnecting the equipment and removing all starters, VFD, controllers, electrical equipment, raceways, wiring, etc. associated with the device.
- E. Verify that abandoned wiring and equipment serve only abandoned equipment or facilities. Extend conduit and wire to facilities and equipment that will remain in operation following demolition. Extension of conduit and wire to equipment shall be compatible with the surrounding area. Extended conduit and conductors to match existing size and material.
- F. Coordinate scope of work with all other Contractors and the Owner at the project site. Schedule removal of equipment and electrical service to avoid conflicts.
- G. Bid submittal shall mean the Contractor has visited the project site and has verified existing conditions and scope of work.

3.2 PREPARATION

- A. The Contractor shall obtain approval from the Owner before turning off power to circuits, feeders, panels, etc. Coordinate all outages with Owner.
- B. Coordinate utility service outages with Utility Company.
- C. Provide temporary wiring and connections to maintain existing systems in service during construction. When work must be performed on energized equipment or circuits, use personnel experienced in such operations. Assume all equipment and systems must remain operational unless specifically noted otherwise on drawings.
- D. Disconnect electrical systems in walls, floors, structures, and ceilings scheduled for removal.
- E. Existing Electrical Service: Maintain existing system in service until new system is complete and ready for service. Disable system only to make switchovers and connections. Obtain permission from Owner at least 48 hours before partially or completely disabling system. Minimize outage duration.
- F. Existing Fire Alarm System: Maintain existing system in service until new system is accepted. Disable system only to make switchovers and connections. Obtain permission from Owner at least 48 hours before partially or completely disabling system. Minimize outage duration. Provide a watchman to make required premise observations during all outages, requirements as dictated by codes and Owner's insurance carrier.
- G. Existing Telephone System: Maintain existing system in service until new system is complete and ready for service. Disable system only to make switchovers and connections. Obtain permission from Owner at least 48 hours before partially or completely disabling system. Minimize outage duration.

3.3 DEMOLITION AND EXTENSION OF EXISTING ELECTRICAL WORK

- A. Demolish and extend existing electrical work under provisions of Division 1 of Specifications and this Section.
- B. Remove, relocate, and extend existing installations to accommodate new construction.
- C. Remove abandoned wiring and raceway to source of supply. Existing conduit in good condition may be reused in place by including an equipment ground conductor in reused conduit. Reused conduit and boxes shall have supports revised to meet current codes. Relocating conduit shall not be allowed.
- D. Remove exposed abandoned raceway, including abandoned raceway above accessible ceiling finishes. Cut raceway flush with walls and floors, and patch surfaces. Remove all associated clamps, hangers, supports, etc. associated with raceway removal.
- E. Disconnect and remove outlets and devices that are to be demolished. Remove outlet or devices' associated back box, supports, and conduit and conductors back to source. Patch opening created from removal of device to match surrounding finishes.
- F. Disconnect and remove abandoned panelboards and distribution equipment.

- G. Disconnect and remove electrical devices and equipment serving utilization equipment that has been removed.
- H. Disconnect and remove abandoned luminaires. Remove brackets, stems, hangers, and other accessories. Ballasts in light fixtures installed prior to 1980 shall be incinerated in EPA approved incinerator or disposed of in EPA certified containers and deposited in an EPA landfill certified for PCB disposal or recycled by permitted ballast recycler. Punctured or leaking ballasts must be disposed of according to Federal Regulations under the Toxic Substance Control Act. Provide Owner and Architect/Engineer with a Certificate of Destruction to verify proper disposal.
- I. Repair adjacent construction and finishes damaged during demolition and extension work. Patch openings to match existing surrounding finishes.
- J. Maintain access to existing electrical installations that remain active. Modify installation or provide junction boxes and access panel as appropriate.
- K. Extend existing installations using materials and methods compatible with existing electrical installations, or as specified. Extended conduit and conductors to match existing size and material.
- L. Regulatory Requirements: Comply with governing EPA notification regulations before beginning demolition. Comply with hauling and disposal regulations of authorities having jurisdiction.
- M. Floor slab on grade is a structural slab. All penetrations shall be X-rayed prior to cutting and/or drilling to avoid rebar or utilities encased in floor construction. Provide rebar dowels to replace damaged rebar and pin existing slab with patched slab. Refer to structural plans for additional information.
- N. This Contractor is responsible for all costs incurred in repair, relocations, or replacement of any cables, conduits, or other services if damaged without proper investigation.

3.4 EXISTING ENCLOSURES - NEW EQUIPMENT

- A. Existing enclosures may be reused to house new equipment including branch panels, industrial controls, and similar systems pending documented verification of the following provided with the applicable new equipment submittals.
 - 1. New equipment or panelboard is listed for the existing enclosure or application.
 - 2. Existing enclosure and new equipment is field evaluated by the manufacturer or nationally recognized testing laboratory for the available fault current, condition, and application.
 - 3. Authority Having Jurisdiction (AHJ) approval.

3.5 CLEANING AND REPAIR

- A. Clean and repair existing materials and equipment that remain or are to be reused.
- B. Panelboards: Clean exposed surfaces and check tightness of electrical connections. Replace damaged circuit breakers and provide closure plates for vacant positions. Provide typed circuit directory showing revised circuiting arrangement.

- C. ELECTRICAL ITEMS (E.G., LIGHTING FIXTURES, RECEPTACLES, SWITCHES, CONDUIT, WIRE, ETC.) REMOVED AND NOT RELOCATED REMAIN THE PROPERTY OF THE OWNER. CONTRACTOR SHALL PLACE ITEMS RETAINED BY THE OWNER IN A LOCATION COORDINATED WITH THE OWNER. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE DISPOSAL OF MATERIAL THE OWNER DOES NOT WANT.

3.6 INSTALLATION

- A. Install relocated materials and equipment under the provisions of Division 1 of Specifications.

END OF SECTION 260505

SECTION 260513 - WIRE AND CABLE

PART 1 - GENERAL

1.1 SECTION INCLUDES

- A. Building wire
- B. Cabling for remote control, signal, and power limited circuits
- C. Fire rated and circuit integrity (CI) cable and assemblies
- D. Healthcare facilities cable (HFC)
- E. Armored cable (AC)
- F. Metal-clad cable (MC)
- G. Nonmetallic-sheathed cable (NM)

1.2 RELATED WORK

- A. Section 260553 - Electrical Identification: Refer to electrical identification for color and identification labeling requirements.

1.3 REFERENCES

- A. NEMA WC 70 - Power Cables Rated 2,000V or Less for the Distribution of Electrical Energy
- B. NFPA 70 - National Electrical Code (NEC)
- C. CEC California Electrical Code
- D. UL 44 - Thermoset-Insulated Wires and Cables
- E. UL 83 - Thermoplastic-Insulated Wires and Cables
- F. UL 854 - Service-Entrance Cables
- G. UL 1581 - Standard for Electrical Wires, Cables, and Flexible Cords
- H. UL 2196 - Fire Resistive, Fire Resistant and Circuit Integrity Cables

1.4 SUBMITTALS

- A. Submit shop drawings and product data under the provisions of Section 260500.
- B. Submit manufacturer's installation instructions.

PART 2 - PRODUCTS

2.1 BUILDING WIRE

- A. Feeders and Branch Circuits 8 AWG and larger: Copper, stranded conductor, 600-volt insulation, THHN/THWN or XHHW-2.
- B. Feeders and Branch Circuits 10 AWG and Smaller: Copper, solid or stranded conductor, 600-volt insulation, THHN/THWN, unless otherwise noted on the drawings.
- C. Aluminum conductors are not to be used for feeds to motor loads.
- D. Each 120 and 277-volt branch circuit shall have a dedicated neutral conductor. Neutral conductors shall be considered current-carrying conductors for wire derating.

PART 3 - EXECUTION

3.1 WIRE AND CABLE INSTALLATION SCHEDULE

- A. Above Accessible Ceilings:
 - 1. Building wire shall be installed in raceway.
 - 2. Metal clad cable, Type MC, 1/2" size with minimum #12 conductors and ground, shall be allowed for flexible whips to individual luminaires on non-essential circuits. The flexible whips shall be between 18" to 72" in length per Electrical Code.
- B. All Other Locations: Building wire in raceway.
- C. Above Grade: All conductors installed above grade shall be type "THHN".
- D. Underground or In Slab: All conductors shall be type "THWN".
- E. Low Voltage Cable (less than 100 volts): Low voltage cables in ducts, plenums, and other air handling spaces shall be plenum listed. Low voltage cables in non-accessible areas shall be installed in conduit. Low voltage cable may be installed without conduit in accessible areas using the following types of cable supports. Cable support types/systems shall comply with the warranty requirements of the low voltage cable manufacturer.
 - 1. J-hooks
 - 2. Bridle rings with saddle supports
- F. Fire-Rated 2-Hour Feeders and Circuit Requiring Continuous Operation (CI): Refer to Part 2 of this section for acceptable products and assemblies. Installation shall meet UL 2196.

3.2 CONTRACTOR CHANGES

- A. The basis of design is copper conductors installed in raceway based on ambient temperature of 30°C, NEC Table 310.16 (2011 - 2017 edition 310.15(B)(16)). Service entrance conductors are based on copper conductor installed in underground electrical ducts, NEC Table B.2(7) (2011 - 2017 edition Table B310.15(B)(2)(7); 2008 or later edition B.301.7) or calculated in accordance with Annex B Application Information for Ampacity Calculation.

- B. The Contractor shall be responsible for derating and sizing conductors and conduits to equal or exceed the ampacity of the basis of design circuits, if he/she chooses to use methods or materials other than the basis of design.
- C. Underground electrical duct ampacity rating shall be in accordance with NEC Table 310.16 (2011 - 2017 edition 310.15(B)(16)) or calculated in accordance with Annex B Application Information for Ampacity Calculation. The calculations and a sketch of the proposed installation shall be submitted prior to any conduit being installed.
- D. Conductor length(s) listed on plans and schedules. The drawings are diagrammatic with intent to convey the components of the electrical distribution system. Conductor length(s) when listed on plans and schedules are for engineering calculation purposes. Conductor length(s) shall NOT be used for bidding purposes.
- E. Record drawing shall include the calculations and sketches.

3.3 GENERAL WIRING METHODS

- A. Use no wire smaller than 12 AWG for power and lighting circuits, and no smaller than 14 AWG for control wiring.
- B. Use no wire smaller than 18 AWG for low voltage control wiring below 100 volts.
- C. Use 10 AWG conductor for 20 ampere, 120-volt branch circuit home runs longer than 75 feet, and for 20 ampere, 277-volt branch circuit home runs longer than 200 feet.
- D. Use no wire smaller than 8 AWG for outdoor lighting circuits.
- E. The ampacity of multiple conductors in one conduit shall be derated per the Electrical Code. In no case shall more than 4 conductors be installed in one conduit to such loads as motors larger than 1/4 HP, panelboards, motor control centers, etc.
- F. Where installing parallel feeders, place an equal number of conductors for each phase of a circuit in same raceway or cable.
- G. Splice only in junction or outlet boxes.
- H. Neatly train and lace wiring inside boxes, equipment, and panelboards.
- I. Make conductor lengths for parallel circuits equal.
- J. All conductors shall be continuous in conduit from last outlet to their termination.
- K. Terminate all spare conductors on terminal blocks, and label the spare conductors.
- L. Cables or wires shall not be laid out on the ground before pulling.
- M. Cables or wires shall not be dragged over earth or paving.
- N. Care shall be taken so as not to subject the cable or wire to high mechanical stresses that would cause damage to the wire and cable.

- O. At least six (6)-inch loops or ends shall be left at each outlet for installation connection of luminaires or other devices.
- P. All wires in outlet boxes not connected to fixtures or other devices shall be rolled up, spliced if continuity of circuit is required, and insulated.

3.4 WIRING INSTALLATION IN RACEWAYS

- A. Pull all conductors into a raceway at the same time. Use UL listed wire pulling lubricant for pulling 4 AWG and larger wires.
- B. Install wire in raceway after interior of building has been physically protected from the weather and all mechanical work likely to injure conductors has been completed.
- C. Pulling shall be continuous without unnecessary stops and starts with wire or cable only partially through raceway.
- D. Where reels of cable or wire are used, they shall be set up on jacks close to the point where the wire or cable enters the conduit or duct so that the cable or wire may be unreel and run into the conduit or duct with a minimum of change in the direction of the bend.
- E. Conductors shall not be pulled through conduits until plastering or masonry work is completed and conduits are free from moisture. Care shall be taken so that long pulls of wire or pulls around several bends are not made where the wire may be permanently stretched and the insulation damaged.
- F. Only nylon rope shall be permitted to pull cables into conduit and ducts.
- G. Completely and thoroughly swab raceway system before installing conductors.
- H. Conductor Supports in Vertical Raceways:
 - 1. Support conductors in vertical raceways in accordance with the Electrical Code Spacing of Conductors Supports.
 - 2. Supports shall be of insulated wedge type (OZ Gedney Type S, or equal) and installed in a tapered insulated bushing fitting or a metal woven mesh with a support ring that fits inside conduit fitting installed in an accessible junction box (Hubbell Kellems support grip or equal).

3.5 CABLE INSTALLATION

- A. Provide protection for exposed cables where subject to damage.
- B. Use suitable cable fittings and connectors.
- C. Run all open cable parallel or perpendicular to walls, ceilings, and exposed structural members. Follow the routing as illustrated on the drawings as closely as possible. Cable routing on drawings scaled 1/4"=1'-0" or less shall be considered diagrammatical, unless noted otherwise. The correct routing, when shown diagrammatically, shall be chosen by the Contractor based on information in the contract documents; in accordance with the manufacturer's written instructions, applicable codes, the NECA's "Standard of Installation", recognized industry standards; and coordinated with other contractors.

- D. Open cable shall be supported by the appropriate size J-hooks or other means if called for on the drawings. Wire and cable from different systems shall not be installed in the same J-hook. J-hooks shall be sized with 20% spare capacity. J-hooks shall provide proper bend radius support for data cable and fiber cables.
- E. Open cable installed above suspended ceilings shall not rest on the suspended ceiling construction, nor utilize the ceiling support system for wire and cable support.
- F. J-hook support spans shall be based on the smaller of the manufacturer's load ratings and code requirements. In no case shall horizontal spans exceed 5 feet and vertical spans exceed 4 feet. All J-hooks shall be installed where completely accessible and not blocked by piping, ductwork, inaccessible ceilings, etc. J-hooks shall be independently rigidly attached to a structural element. J-hooks shall be installed to provide 2" horizontal separation and 6" vertical separation between systems.
- G. Open cable shall only be installed where specifically shown on the drawings, or permitted in these specifications.

3.6 FIRE-RATED CABLE AND ASSEMBLY INSTRUCTIONS

- A. Terminations of the fire-rated cable must be outside of the fire zone.
- B. Fire-rated cable shall be installed according to the manufacturer's instructions, recommendations, and UL listing.
- C. Route fire-rated cable and assemblies separate from other feeders and distribution. Install cable and assemblies in locations protected from physical damage.
- D. Refer to Electrical Identification Section 260553 for specific identification requirements.

3.7 WIRING CONNECTIONS AND TERMINATIONS

- A. Splice and tap only in accessible junction boxes.
- B. Use solderless, tin-plated copper, compression terminals (lugs) applied with circumferential crimp for conductor terminations, 8 AWG and larger.
- C. Use solderless, tin-plated, compression terminals (lugs) applied with indenter crimp for copper conductor terminations, 10 AWG and smaller.
- D. Use solderless pressure connectors with insulating covers for copper wire splices and taps, 8 AWG and smaller. For 10 AWG and smaller, use insulated spring wire connectors with plastic caps.
- E. Use compression connectors applied with circumferential crimp for conductor splices and taps, 6 AWG and larger. Tape uninsulated conductors and connectors with electrical tape to 150 percent of the insulation value of conductor.
- F. Thoroughly clean wires before installing lugs and connectors.
- G. Make splices, taps and terminations to carry full ampacity of conductors without perceptible temperature rise.

- H. Phase Sequence: All apparatus shall be connected to operate in the phase sequence A-B-C representing the time sequence in which the phase conductors so identified reach positive maximum voltage.
- I. As a general rule, applicable to switches, circuit breakers, starters, panelboards, switchgear and the like, the connections to phase conductors are intended thus:
 - 1. Facing the front and operating side of the equipment, the phase identification shall be:
 - a. Left to Right - A-B-C
 - b. Top to Bottom - A-B-C
- J. Connection revisions as required to achieve correct rotation of motors shall be made at the load terminals of the starters or disconnect switches.

3.8 AC, MC CABLE INSTALLATION

- A. AC/MC shall NOT be used for circuits serving the Essential Electrical System.
- B. Cable shall be supported by an approved means every 4.5' and within 12" of outlet boxes, junction boxes, cabinets, or fittings.
- C. Cable may be unsupported in the following conditions:
 - 1. Cable is no longer than 2' in length at terminals where flexibility is necessary.
 - 2. Cable is not more than 4.5' from the last point of support for connections within an accessible ceiling to light fixtures or equipment.
- D. Conductor ampacity shall be derated as required by the Electrical Code where more than three current carrying conductors are used.
- E. Each 120 and 277-volt circuit shall have a dedicated neutral conductor. Neutral conductors shall be considered current-carrying conductors for cable derating.
- F. Cables shall be cut using a rotary cutter as recommended by the manufacturer to eliminate nicking and cutting of the conductors.
- G. Bending radius shall comply with the requirements listed in the Electrical Code for the type and size of cable being installed, but shall not be less than 5-times the diameter of the cable in any case.
- H. At cable terminations, a fitting shall be provided to protect wires from abrasion, unless the design of the outlet boxes or fittings is such as to afford equivalent protection, and, in addition, an insulating bushing or its equivalent protection shall be provided between the conductors and the armor.
- I. All wiring devices supplied by nonmetallic-sheathed cables shall be mounted in an outlet box.

3.9 FIELD QUALITY CONTROL

- A. Field inspection and testing will be performed under provisions of Division 1.

- B. MI cable shall have the insulation resistance of each cable tested with a 500-volt dc megohmmeter prior to energizing the cables. Tabulate resistance values and submit to Architect/Engineer for acceptance.
- C. Inspect wire and cable for physical damage and proper connection.
- D. Torque test conductor connections and terminations to manufacturer's recommended values.
- E. Perform continuity test on all power and equipment branch circuit conductors. Verify proper phasing connections.
- F. [Provide documentation of the manufacturer's recommended lug torque value for][copper and aluminum conductors, the date the lugs were torqued, and installed torque readings.]Documentation indicating that the torque wrench has been calibrated not more than 30 days prior to tightening of lugs shall be provided.
- G. Protection of wire and cable from foreign materials:
 - 1. It is the Contractor's responsibility to provide adequate physical protection to prevent foreign material application or contact with any wire or cable type. Foreign material is defined as any material that would negatively impact the validity of the manufacturer's performance warranty. This includes, but is not limited to, overspray of paint (accidental or otherwise), drywall compound, or any other surface chemical, liquid, or compound that could come in contact with the cable, cable jacket, or cable termination components.
- H. Overspray of paint on any wire or cable will not be accepted. It shall be the Contractor's responsibility to replace any component containing overspray, in its entirety, at no additional cost to the project. Cleaning of the cables with harsh chemicals is not allowed.

END OF SECTION 260513

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 260533 - CONDUIT AND BOXES

PART 1 - GENERAL

1.1 SECTION INCLUDES

- A. Rigid metallic conduit and fittings (RMC)
- B. Stainless steel conduit (316SS) and fittings
- C. Intermediate metallic conduit and fittings (IMC)
- D. Electrical metallic tubing and fittings (EMT)
- E. Flexible metallic conduit and fittings (FMC)
- F. Wall and ceiling outlet boxes
- G. Electrical connection
- H. Pull and junction boxes
- I. Rough-ins

1.2 RELATED WORK

- A. Section 260553 - Electrical Identification: Refer to electrical identification for color and identification labeling requirements.

1.3 REFERENCES

- A. American National Standards Institute (ANSI):
 - 1. ANSI C80.1 - Rigid Steel Conduit, Zinc-Coated
 - 2. ANSI C80.3 - Electrical Metallic Tubing, Zinc-Coated and Fittings
 - 3. ANSI C80.4 - Fittings for Rigid Metal Conduit and Electrical Metallic Tubing
 - 4. ANSI C80.6 - Intermediate Metal Conduit, Zinc Coated
 - 5. ANSI/NEMA OS 1 - Sheet-Steel Outlet Boxes, Device Boxes, Covers and Box Supports
 - 6. ANSI/NEMA OS 2 - Nonmetallic Outlet Boxes, Device Boxes, Covers and Box Supports
- B. Federal Specifications (FS):
 - 1. A-A-50553A - Fittings for Conduit, Metal, Rigid, (Thick-Wall and Thin-Wall (EMT) Type
 - 2. A-A-55810 - Specification for Flexible Metal Conduit
- C. NECA "Standards of Installation"
- D. National Electrical Manufacturers Association (NEMA):
 - 1. ANSI/NEMA FB 1 - Fittings, Cast Metal Boxes, and Conduit Bodies for Conduit, Electrical Metallic Tubing and Cable

2. RN 1 - Polyvinyl chloride (PVC) Externally Coated Galvanized Rigid Steel Conduit, Rigid Aluminum Conduit, and Intermediate Metal Conduit
3. TC 2 - Electrical Polyvinyl Chloride (PVC) Conduit
4. TC 9 - Fittings for PVC Plastic Utilities Duct for Underground Installation

E. NFPA 70 - National Electrical Code (NEC)

F. Underwriters Laboratories (UL): Applicable Listings

1. UL 1 - Flexible Metal Conduit
2. UL 6 - Rigid Metal Conduit
3. UL 360 - Liquid Tight Flexible Steel Conduit
4. UL514-B - Conduit Tubing and Cable Fittings
5. UL651-A - Type EB and a PVC Conduit and HDPE Conduit
6. UL651-B - Continuous Length HDPE Conduit
7. UL746A - Standard for Polymeric Materials - Short Term Property Evaluations
8. UL797 - Electrical Metal Tubing
9. UL1242 - Intermediate Metal Conduit

G. Definitions:

1. Fittings: Conduit connection or coupling.
2. Body: Enlarged fittings with opening allowing access to the conductors for pulling purposes only.
3. Mechanical Spaces: Enclosed areas, usually kept separated from the general public, where the primary use is to house service equipment and to route services. These spaces generally have exposed structures, bare concrete and non-architecturally emphasized finishes.
4. Finished Spaces: Enclosed areas where the primary use is to house personnel and the general public. These spaces generally have architecturally emphasized finishes, ceilings and/or floors.
5. Concealed: Not visible by the general public. Often indicates a location either above the ceiling, in the walls, in or beneath the floor slab, in column coverings, or in the ceiling construction.
6. Above Grade: Not directly in contact with the earth. For example, an interior wall located at an elevation below the finished grade shall be considered above grade but a wall retaining earth shall be considered below grade.
7. Slab: Horizontal pour of concrete used for a floor or sub-floor.

1.4 SUBMITTALS

- A. Include fittings and conduits 1.5" and larger in coordination files. Include all in-floor and underfloor conduit in coordination files. Refer to Section 260500 for coordination drawing requirements.

PART 2 - PRODUCTS

2.1 RIGID METALLIC CONDUIT (RMC) AND FITTINGS

A. Manufacturers:

1. Atkore Allied Tube & Conduit

2. Nucor
3. Electroline
4. Wheatland Tube Co
5. or approved equal.

B. Manufacturers of RMC Conduit Fittings:

1. ABB/Thomas & Betts
2. Eaton/Crouse-Hinds
3. Electroline
4. Emerson Appleton & OZ Gedney
5. Hubbell Raco and Killark
6. NSI Bridgeport
7. Orbit Industries
8. Wesco Regal
9. or approved equal.

C. Minimum Size Galvanized Steel: 3/4 inch, unless otherwise noted.

D. Fittings and Conduit Bodies:

1. End Bell Fittings: Malleable iron, hot dip galvanized, threaded flare type with provisions for mounting to form.
2. Expansion Joints: Malleable iron and hot dip galvanized providing a minimum of 4 inches of movement. Fitting shall be watertight with an insulating bushing and a bonding jumper.
3. Expansion Joint for Concrete Encased Conduit: Neoprene sleeve with bronze end coupling, stainless steel bands and tinned copper braid bonding jumper. Fittings shall be watertight and concrete-tight.
4. Conduit End Bushings: Malleable iron type with molded-on high impact phenolic thermosetting insulation. Where required elsewhere in the contract documents, bushing shall be complete with ground conductor saddle and clamp. High impact phenolic threaded type bushings are not acceptable.
5. All other fittings and conduit bodies shall be of malleable iron construction and hot dip galvanized.

2.2 STAINLESS STEEL RIGID CONDUIT (316SS) AND FITTINGS

A. Manufacturers:

1. Gibson Stainless & Specialty
2. Atkore Calbrite
3. Eaton/Crouse-Hinds
4. ABB/Thomas & Betts
5. or approved equal.

B. All material shall be Type 316 stainless steel, meet ASTM A-321 and SA-312 standards, and be UL 6A approved.

C. All conduit shall be heavy wall Schedule 40 with standard NPT threads.

D. Minimum Size Stainless Steel: 3/4 inch, unless otherwise noted.

- E. Fittings, conduit bodies, couplings, nipples, bushings, connectors, supports, clamps, and all accessory hardware shall be made of Type 316 stainless steel.

2.3 INTERMEDIATE METALLIC CONDUIT (IMC) AND FITTINGS

- A. Minimum Size Galvanized Steel: 3/4 inch, unless otherwise noted.
- B. Manufacturers:
 - 1. Atkore Allied Tube & Conduit
 - 2. Nucor
 - 3. Electroline
 - 4. Western Tube
 - 5. Wheatland Tube Co
 - 6. or approved equal.
- C. Fittings and Conduit Bodies:
 - 1. End Bell Fittings: Malleable iron, hot dip galvanized, threaded flare type with provisions for mounting to form.
 - 2. Expansion Joints: Malleable iron and hot dip galvanized providing a minimum of 4 inches of movement. Fitting shall be watertight with an insulating bushing and a bonding jumper.
 - 3. Expansion Joint for Concrete Encased Conduit: Neoprene sleeve with bronze end coupling, stainless steel bands and tinned copper braid bonding jumper. Fittings shall be watertight and concrete-tight.
 - 4. Conduit End Bushings: Malleable iron type with molded-on high impact phenolic thermosetting insulation. Where required elsewhere in the contract documents, bushing shall be complete with ground conductor saddle and clamp. High impact phenolic threaded type bushings are not acceptable.
 - 5. All other fittings and conduit bodies shall be of malleable iron construction and hot dip galvanized.
- D. Manufacturers of IMC Conduit Fittings:
 - 1. ABB/Thomas & Betts
 - 2. Easton/Crouse-Hinds
 - 3. Electroline
 - 4. Emerson Appleton & OZ Gedney
 - 5. Hubbell Raco and Killark
 - 6. NSI Bridgeport
 - 7. Orbit Industries
 - 8. Wesco Regal
 - 9. or approved equal.

2.4 ELECTRICAL METALLIC TUBING (EMT) AND FITTINGS

- A. Minimum Size Electrical Metallic Tubing: 3/4 inch, unless otherwise noted.
- B. Manufacturers of EMT Conduit:
 - 1. Allied Tube & Conduit
 - 2. Calbond Calpipe
 - 3. Nucor

4. Electroline
5. Western Tube
6. Wheatland Tube Co
7. or approved equal.

C. Fittings and Conduit Bodies:

1. 2" Diameter or Smaller: Compression type of steel designed for their specific application.
2. Larger than 2": Compression type of steel designed for their specific application.
3. Manufacturers of EMT Conduit Fittings:
 - a. ABB/Thomas & Betts
 - b. Eaton/Crouse-Hinds
 - c. Electroline
 - d. Emerson Appleton & OZ Gedney
 - e. Hubbell Raco and Killark
 - f. NSI Bridgeport
 - g. Orbit Industries
 - h. Wesco Regal
 - i. or approved equal.

2.5 FLEXIBLE METALLIC CONDUIT (FMC) AND FITTINGS

- A. Minimum Size Galvanized Steel: 3/4 inch, unless otherwise noted. Lighting branch circuit wiring to an individual luminaire may be a manufactured, UL listed 3/8" flexible metal conduit and fittings with #14 AWG THHN conductors and an insulated ground wire. Maximum length of 3/8" FMC shall be six (6) feet.
- B. Manufacturers:
1. ABB/Thomas & Betts
 2. Anamet Electrical
 3. Atkore American Flex AFC and Flexicon
 4. Electri-Flex Co
 5. Electroline
 6. Southwire Alflex
 7. or approved equal.
- C. Construction: Flexible steel, approved for conduit ground, zinc coated, threadless type formed from a continuous length of spirally wound, interlocked zinc coated strip steel. Provide a separate equipment grounding conductor when used for equipment where flexibility is required.
- D. Fittings and Conduit Bodies:
1. Threadless hinged clamp type, galvanized zinc coated cadmium plated malleable cast iron or screw-in type, die-cast zinc.
 2. Fittings and conduit bodies shall include plastic or cast metal inserts supplied by the manufacturer to protect conductors from sharp edges.
 3. Manufacturers:
 - a. ABB/Thomas & Betts
 - b. Eaton/Crouse-Hinds
 - c. Electroline

- d. Emerson Appleton & OZ Gedney
- e. Hubbell Raco and Killark
- f. NSI Bridgeport
- g. Orbit Industries
- h. Wesco Regal
- i. or approved equal.

2.6 LIQUIDTIGHT FLEXIBLE METALLIC CONDUIT (LFMC) AND FITTINGS

A. Manufacturers:

- 1. ABB/Thomas & Betts
- 2. Anamet Electrical
- 3. Atkore American Flex AFC and Flexicon
- 4. Electri-Flex Co
- 5. Electroline
- 6. Southwire Alfex
- 7. or approved equal.

B. Construction: Flexible steel, approved for conduit ground, zinc coated, threadless type formed from a continuous length of spirally wound, interlocked zinc coated strip steel and an extruded PVC cover.

C. Fittings and Conduit Bodies:

- 1. Watertight, compression type, galvanized zinc coated cadmium plated malleable cast iron, UL listed.
- 2. Fittings and conduit bodies shall include plastic or cast metal inserts supplied by the manufacturer to protect conductors from sharp edges.
- 3. Manufacturers:
 - a. ABB/Thomas & Betts
 - b. Eaton/Crouse-Hinds
 - c. Electroline
 - d. Emerson Appleton & OZ Gedney
 - e. Hubbell Raco and Killark
 - f. NSI Bridgeport
 - g. Orbit Industries
 - h. Wesco Regal
 - i. or approved equal.

2.7 OUTLET BOXES

- A. Sheet Metal Outlet Boxes: ANSI/NEMA OS 1; galvanized steel, 16 gauge (approximately 0.0625 inches), with 1/2-inch male fixture studs where required.
- B. Nonmetallic Outlet Boxes: ANSI/NEMA OS 2.
- C. Cast Boxes: Nema FB1, Type FD, Aluminum, cast fer alloy, or stainless steel deep type, gasketed cover, threaded hubs.

- D. Outlet boxes for luminaires to be not less than 1-1/2" deep, deeper if required by the number of wires or construction. The box shall be coordinated with surface luminaires to conceal the box from view or provide a finished trim plate.
- E. Switch outlet boxes for local light control switches, dimmers and occupancy sensors shall be 4 inches square by 2-1/8 inches deep, with raised cover to fit flush with finish wall line. Multiple gang switch outlets shall consist of the required number of gang boxes appropriate to the quantity of switches comprising the gang. Where walls are plastered, provide a plaster raised cover. Where switch outlet boxes occur in exposed concrete block walls, boxes shall be installed in the block cavity with a raised square edge tile cover of sufficient depth to extend out to face of block or masonry boxes.
- F. Wall or column receptacle outlet boxes shall be 4 inches square with raised cover to fit flush with finished wall line. Boxes in concrete block walls shall be installed the same as for switch boxes in block walls.

2.8 ECONN; ELECTRICAL CONNECTION

- A. Electrical connection to equipment and motors, sized per Electrical Code. Coordinate requirements with contractor furnishing equipment or motor. Refer to specifications and general installation notes for terminations to motors.

2.9 JB; PULL AND JUNCTION BOXES

- A. Sheet Metal Boxes: ANSI/NEMA OS 1; galvanized steel.
- B. Sheet metal boxes larger than 12 inches in any dimension that contain terminations or components: Continuous hinged enclosure with 1/4 turn latch and white back panel for mounting terminal blocks and electrical components.
- C. Cast Metal Boxes for Outdoor and Wet Location Installations: NEMA 250; Type 4 and Type 6, flat-flanged, surface-mounted junction box, UL listed as raintight. Galvanized cast iron box and cover with ground flange, neoprene gasket, and stainless steel cover screws.
- D. Cast Metal Boxes for Underground Installations: NEMA 250; Type 4, inside flanged, recessed cover box for flush mounting, UL listed as raintight. Galvanized cast iron box and plain cover with neoprene gasket and stainless steel cover screws.
- E. Flanged type boxes shall be used where installed flush in wall.

2.10 ROUGH-IN

- A. Provide with one (1) flush mount double gang box with single gang plaster ring and appropriate cover plate,
- B. Conduit stubbed to above the lay-in ceiling.
- C. RI-TECH; Technology Rough-in:
 - 1. Rough-in shall have one (1) 1" conduit.

2.11 RACEWAY SEALS AND SEALANT

- A. Duct Sealant: Field applied expandable duct sealant, closed cell field cured, water tight, air tight. Identified for use with electrical cables, conductors, and raceways. Minimum liquid withstanding of 10-feet head of water (5 PSI). Compatible with conductors and raceways, UL94 Flammability Certified.
 - 1. NOT ALLOWED. Duct seal putty, all-purpose construction sealant.
 - 2. Manufacturers:
 - a. Polywater FST / AFT Series
 - b. Approved equal
- B. Duct Seal Bushing: Custom mechanical seal, liquid tight, gas tight, stainless steel hardware. Minimum liquid withstanding of 10-feet head of water (5 PSI). Coordinate product with raceway size, cable quantities, and cable sizes.
 - 1. Manufacturers:
 - a. Polywater PHRD / PHSD Series Varia /PHSI Module Series
 - b. Jackmoon Commscope DuctPlug Series
 - c. CalAm Manufacturing WedgeSeal Series

PART 3 - EXECUTION

3.1 CONDUIT INSTALLATION SCHEDULE AND SIZING

- A. In the event the location of conduit installation represents conflicting installation requirements as specified in the following schedule, a clarification shall be obtained from the Architect/Engineer. If this Contractor is unable to obtain a clarification as outlined above, concealed rigid galvanized steel conduit installed per these specifications and the Electrical Code shall be required.
- B. Installation Schedule: Refer to drawings.
- C. Size conduit as shown on the drawings and specifications. Where not indicated in the contract documents, conduit size shall be according to the Electrical Code. Conduit and conductor sizing shall be coordinated to limit conductor fill to less than 40%, maintain conductor ampere capacity as required by the Electrical Code (to include enlarged conductors due to temperature and quantity derating values) and to prevent excessive voltage drop and pulling tension due to long conduit/conductor lengths.
- D. Minimum Conduit Size (Unless Noted Otherwise):
 - 1. Above Grade: 3/4 inch. (The use of 1/2 inch would be allowed for installation conduit to individual light switches, individual receptacles and individual fixture whips from junction box.)
 - 2. Telecommunication Conduit: 1 inch.
- E. Conduit sizes shall change only at the entrance or exit to a junction box, unless specifically noted on the drawings.

3.2 CONDUIT ARRANGEMENT

- A. In general, conduit shall be installed concealed in walls, in finished spaces and where possible or practical, or as noted otherwise. Conduit shall be installed parallel or perpendicular to walls, ceilings, and exposed structural members. In unfinished spaces, mechanical and utility areas, conduit may run either concealed or exposed as conditions dictate and as practical unless noted otherwise on drawings. Installation shall maintain headroom in exposed vicinities of pedestrian or vehicular traffic.
- B. Exposed conduit on exterior walls or above roof will not be allowed without prior written approval of Architect/Engineer. A drawing of the proposed routing and a photo of the location shall be submitted 14 days prior to start of conduit rough-in. Routing shall be shown on coordination drawings.
- C. Conduit arrangement in elevated slabs (restricted to applications specifically noted or shown on drawings):
 - 1. Conduit size shall not exceed one-third of the structural slab thickness. Place conduit between the top and bottom reinforcing with a minimum of 3" concrete cover.
 - 2. Parallel conduits shall be spaced at least 8 inches apart. Exception: Within 18 inches of commonly served floor boxes, junction boxes, or similar floor devices. Arrange conduits parallel or perpendicular to building lines and walls.
- D. Conduit shall not share the same cell as structural reinforcement in masonry walls.
- E. Conduit runs shall be routed as shown on large scale drawings. Conduit routing on drawings scaled 1/4"=1'-0" or less shall be considered diagrammatic, unless noted otherwise. The correct routing, when shown diagrammatically shall be chosen by the Contractor based on information in the contract documents, in accordance with manufacturer's written instructions, applicable codes, the NECA's "Standard of Installation", in accordance with recognized industry standards, and coordinated with other contractors.
- F. Contractor shall adapt Contractor's work to the job conditions and make such changes as required and permitted by the Architect/Engineer, such as moving to clear beams and joists, adjusting at columns, avoiding interference with windows, etc., to permit the proper installation of other mechanical and/or electrical equipment.
- G. Contractor shall cooperate with all contractors on the project. Contractor shall obtain details of other contractor's work to ensure fit and avoid conflict. Any expense due to the failure of This Contractor to do so shall be paid for in full by Contractor. The other trades involved as directed by the Architect/Engineer shall perform the repair of work damaged as a result of neglect or error by This Contractor. The resultant costs shall be borne by This Contractor.

3.3 CONDUIT SUPPORT

- A. Conduit runs installed above a suspended ceiling shall be properly supported. In no case shall conduit rest on the suspended ceiling construction, nor utilize ceiling support system for conduit support.
 - 1. Support wire used to independently support raceway and wiring systems above suspending ceilings shall be supported on both ends, minimum 12 gauge suspended ceiling support wire, and distinguishable from ceiling support systems by color (field paint), tagging, or equivalent means.

-
- B. Conduit shall not be supported from ductwork, water, sprinkler piping, or other non-structural members, unless approved by the Architect/Engineer. All supports shall be from structural slabs, walls, structural members, and bar joists, and coordinated with all other applicable contractors, unless noted otherwise.
- C. Conduit shall be held in place by the correct size of galvanized one-hole conduit clamps, two-hole conduit straps, patented support devices, clamp back conduit hangers, or by other means if called for on the drawings.
- D. Support individual horizontal raceways with separate, malleable-iron pipe hangers or clamps.
- E. Spring-steel conduit clips specifically designed for supporting single conduits or tubing may be used in lieu of malleable-iron hangers for 1-1/2" and smaller raceways serving lighting and receptacle branch circuits above accessible ceilings and for securing raceways to slotted channel and angle supports.
- F. Group conduits in parallel runs where practical and use conduit racks or trapeze hangers constructed of steel channel, suspended with threaded solid rods or wall mounted from metal channels with conduit straps or clamps. Provide space in each rack or trapeze for 25% additional conduits.
- G. Do not exceed 25 lbs. per hanger and a minimum spacing of 2'-0" on center when attaching to metal roof decking (excludes concrete on metal deck). This 25 lbs. load and 2'-0" spacing include adjacent electrical and mechanical items hanging from deck. If the hanger restrictions cannot be achieved, supplemental framing off steel framing will need to be added.
- H. Arrange supports in vertical runs so the weight of raceways and enclosed conductors is carried entirely by raceway supports, with no weight load on raceway terminals.
- I. Supports for metallic conduit shall be no greater than 10 feet. A smaller interval may be used if necessitated by building construction, but in no event shall support spans exceed the Electrical Code requirements. Conduit shall be securely fastened within 3 feet of each outlet box, junction box, device box, cabinet, or fitting.
- J. Supports of flexible conduit shall be within 12 inches of each outlet box, junction box, device box, cabinet, or fitting and at intervals not to exceed 4.5 feet.
- K. Supports for non-metallic conduit shall be at sufficiently close intervals to eliminate any sag in the conduit. The manufacturer's recommendations shall be followed, but in no event shall support spans exceed the Electrical Code requirements.
- L. Where conduit is to be installed in poured concrete floors or walls, provide concrete-tight conduit inserts securely fastened to forms to prevent conduit misplacement.
- M. Finish:
1. Prime coat exposed steel hangers and supports. Hangers and supports in crawl spaces, pipe shafts, and above suspended ceiling spaces are not considered exposed.
 2. Trim all ends of exposed field fabricated steel hangers, slotted channel and threaded rod to within 1" of support or fastener to eliminate potential injury to personnel unless shown otherwise on the drawings. Smooth ends and install elastomeric insulation with two coats of latex paint if exposed steel is within 6'-6" of finish floor and presents potential injury to personnel.

3.4 CONDUIT INSTALLATION

A. Conduit Connections:

1. Shorter than standard conduit lengths shall be cut square using industry standards. The ends of all conduits cut shall be reamed or otherwise finished to remove all rough edges.
2. Metallic conduit connections in slab on grade installation shall be sealed and one coat of rust inhibitor primer applied after the connection is made.
3. Where conduits with tapered threads cannot be coupled with standard couplings, then approved split or Erickson couplings shall be used. Running threads will not be permitted.
4. Install expansion/deflection joints where conduit crosses structure expansion/seismic joints.

B. Conduit terminations for all low voltage wiring shall have nylon bushings installed on each end of every conduit run.

C. Conduit Bends:

1. Use a hydraulic one-shot conduit bender or factory elbows for bends in conduit 2" in size or larger. All steel conduit bending shall be done cold; no heating of steel conduit shall be permitted.
2. A run of conduit shall not contain more than the equivalent of four (4) quarter bends (360°), including those bends located immediately at the outlet or body.
3. Telecommunications conduits shall have no more than two (2) 90-degree bends between pull points and contain no continuous sections longer than 100 feet. Insert pull points or pull boxes for conduits exceeding 100 feet in length.
 - a. A third bend is acceptable if:
 - 1) The total run is not longer than (33) feet.
 - 2) The conduit size is increased to the next trade size.
4. Telecommunications pull boxes shall not be used in lieu of a bend. Align conduits that enter the pull box from opposite ends with each other. Pull box size shall be twelve (12) times the diameter of the largest conduit. Slip sleeves or gutters can be used in place of a pull box.
5. Telecommunications Conduit(s): Maintain appropriate conduit bend radius at all times. For conduits with an internal diameter of less than 2", maintain a bend radius of at least 6 times the internal diameter. For conduits with an internal diameter 2" or greater, maintain a bend radius of at least 10 times the internal diameter.
6. Rigid polyvinyl chloride conduit (PVC) runs longer than 100 feet or runs which have more than two 90° equivalent bends (regardless of length) shall use rigid metal or RTRC factory elbows for bends.
7. Use conduit bodies to make sharp changes in direction (i.e. around beams).

D. Conduit Placement:

1. Conduit shall be mechanically continuous from source of current to all outlets. Conduit shall be electrically continuous from source of current to all outlets, unless a properly sized grounding conductor is routed within the conduit. All metallic conduits shall be bonded per the Electrical Code.
2. Route exposed conduit and conduit above suspended ceilings (accessible or not) parallel/perpendicular to the building structural lines, and as close to building structure as possible. Wherever possible, route horizontal conduit runs above water and steam piping.

3. Route conduit through roof openings provided for piping and ductwork where possible. If not provided or routing through provided openings is not possible, route through roof jack with pitch pocket. Coordinate roof penetrations with other trades.
4. Conduits, raceway, and boxes shall not be installed in concealed locations in metal deck roofing or less than 1.5" below bottom of roof decking.
5. Avoid moisture traps where possible. Where unavoidable, provide a junction box with drain fitting at conduit low point.
6. All conduits through walls shall be grouted or sealed into openings. Where conduit penetrates firewalls and floors, seal with a UL listed sealant. Seal penetrations with intumescent caulk, putty, or sheet installed per manufacturer's recommendations. All materials used to seal penetrations of firewalls and floors shall be tested and certified as a system per ASTM E814 Standard for fire tests or through-penetration fire stops as manufactured by 3M or approved equal; refer to Section 260503 for through penetration firestopping requirements.
7. CONTRACTOR SHALL BE RESPONSIBLE FOR ALL OPENINGS REQUIRED IN MASONRY OR EXTERIOR WALLS UNDER THIS DIVISION. A QUALIFIED MASON AT THE EXPENSE OF THIS CONTRACTOR SHALL REPAIR ALL OPENINGS TO MATCH EXISTING CONDITIONS.
8. Seal interior of conduit at exterior entries, air handling units, coolers/freezers, etc., and where the temperature differential can potentially be greater than 20°F, to prevent moisture penetration. Seal shall be placed where conduit enters warm space. Conduit seal fitting shall be a drain/seal, with sealing compound, identified for use with cable and raceway system.
9. Horizontal conduit routing through slabs above grade
 - a. No conduits are allowed to be routed horizontally through slabs above grade.
10. Do not route conduits across each other in slabs on grade.
11. Contractor shall provide suitable mechanical protection around all conduits stubbed out from floors, walls or ceilings during construction to prevent bending or damaging of stubs due to carelessness with construction equipment.
12. Contractor shall provide a polypropylene pull cord with 2000 lbs. tensile strength in each empty conduit (indoor and outdoor), except in sleeves and nipples.
13. Telecommunications conduits that protrude through the structural floor shall be installed 1 to 3" above finished floor (AFF).
14. Telecommunications conduits that enter into Telecommunications rooms below the finished ceiling shall terminate a minimum of 4" below ceiling and as close to the wall as possible.
15. Telecommunications conduits that are below grade and enter into a building shall terminate a minimum of 4" above finished floor (AFF) and as close to the wall as possible.

3.5 CONDUIT TERMINATIONS

- A. Where conduit bonding is indicated or required in the contract documents, the bushings shall be a grounding type sized for the conduit and ground bonding conductor as manufactured by O-Z/Gedney, Appleton, Thomas & Betts, Burndy, Regal, Orbit Industries or approved equal.
- B. Conduits with termination fittings shall be threaded for one (1) lock nut on the outside and one (1) lock nut and bushing on the inside of each box.
- C. Where conduits terminate in boxes with knockouts, they shall be secured to the boxes with lock nuts and provided with approved screw type tinned iron bushings or fittings with plastic inserts.

- D. Where conduits terminate in boxes, fittings, or bodies with threaded openings, they shall be tightly screwed against the shoulder portion of the threaded openings.
- E. Conduit terminations to all motors shall be made with flexible metallic conduit (FMC), unless noted otherwise. Final connections to roof exhaust fans, or other exterior motors and motors in damp or wet locations shall be made with liquidtight flexible metallic conduit (LFMC). Motors in hazardous areas, as defined in the Electrical Code, shall be connected using flexible conduit rated for the environment. Flexible conduit shall not exceed 6' in length. Route equipment ground conductors from circuit ground to motor ground terminal through flexible conduit.
- F. All conduit ends shall be sealed with plastic immediately after installation to prevent the entrance of any foreign matter during construction. The seals shall be removed and the conduits blown clear of all foreign matter prior to any wires or pull cords being installed.

3.6 COORDINATION OF BOX LOCATIONS

- A. Provide electrical boxes as shown on the drawings, and as required for splices, taps, wire pulling, equipment connections, and code compliance.
- B. Electrical box locations shown on the Contract Drawings are approximate, unless dimensioned. Verify location of floor boxes and outlets in offices and work areas prior to rough-in.
- C. Locate and install boxes to allow access. Avoid interferences with ductwork, piping, structure, equipment, etc. Recessed luminaires shall not be used as access to outlet, pull, and junction boxes. Where installation is inaccessible, provide access doors. Coordinate locations and sizes of required access doors with the Architect/Engineer and General Contractor.
- D. Locate and install to maintain headroom and to present a neat appearance.
- E. Coordinate locations with Heating Contractor to avoid baseboard radiation cabinets.

3.7 OUTLET BOX INSTALLATION

- A. Do not install boxes back-to-back in walls.
 - 1. Provide a minimum horizontal separation of 6 inches between boxes installed on opposite sides of non-rated stud walls. When the minimum separation cannot be maintained, install sound insulation pads on all five sides of the back box in accordance with the manufacturer's instructions.
 - 2. Provide a minimum horizontal separation of 24 inches between boxes installed on opposite sides of fire-rated walls. When the minimum separation cannot be maintained, the box is greater than 16 square inches or the total box area (all trades) per 100 square feet is greater than or equal to 100 square inches, install fire-rated moldable pads to all five sides of the back box to maintain the fire rating of the wall. Install moldable pads in accordance with UL listing for the specific product. Sound insulation pads are not acceptable for use in fire-rated wall applications unless the product carries the necessary fire rating.
- B. Install sound insulation pads on all five sides of the back of all boxes in sound-rated wall assemblies. Sound-rated wall assemblies are defined as partition types carrying a Sound Transmission Class (STC) rating.

- C. The Contractor shall anchor switch and outlet box to wall construction so that it is flush with the finished masonry, paneling, drywall, plaster, etc. The Contractor shall check the boxes as the finish wall surface is being installed to assure that the box is flush. (Provide plaster rings as necessary.)
- D. Mount at heights shown or noted on the drawings or as generally accepted if not specifically noted.
- E. Locate boxes in masonry walls to require cutting of masonry unit corner only. Coordinate masonry cutting to achieve neat openings for boxes.
- F. Provide knockout closures for unused openings.
- G. Support boxes independently of conduit.
- H. Use multiple-gang boxes where more than one device is mounted together; do not use sectional boxes. Provide barriers to separate wiring of different voltage systems.
- I. Install boxes in walls without damaging wall insulation.
- J. Coordinate mounting heights and locations of outlets mounted above counters, benches, backsplashes, and below baseboard radiation.
- K. Position outlets to locate luminaires as shown on reflected ceiling drawings.
- L. Provide recessed outlet boxes in finished areas; secure boxes to interior wall and partition studs, accurately positioned to allow for surface finish thickness. Use stamped steel stud bridges for flush outlets in hollow stud wall, and adjustable steel channel fasteners for flush ceiling outlet boxes.
- M. Align wall-mounted outlet boxes for switches, thermostats, and similar devices.
- N. Provide cast outlet boxes in exterior locations and wet locations, and where exposed rigid or intermediate conduit is used.

3.8 PULL AND JUNCTION BOX INSTALLATION

- A. Locate pull boxes and junction boxes above accessible ceilings or in unfinished areas.
- B. Support pull and junction boxes independent of conduit.
- C. Do not install boxes back-to-back in walls.
 - 1. Provide a minimum horizontal separation of 6 inches between boxes installed on opposite sides of non-rated stud walls. When the minimum separation cannot be maintained, install sound insulation pads on all five sides of the back box in accordance with the manufacturer's instructions.

2. Provide a minimum horizontal separation of 24 inches between boxes installed on opposite sides of fire-rated walls. When the minimum separation cannot be maintained, the box is greater than 16 square inches or the total box area (all trades) per 100 square feet is greater than or equal to 100 square inches, install fire-rated moldable pads to all five sides of the back box to maintain the fire rating of the wall. Install moldable pads in accordance with UL listing for the specific product. Sound insulation pads are not acceptable for use in fire-rated wall applications unless the product carries the necessary fire rating.

- D. Install sound insulation pads on all five sides of the back of all boxes in sound-rated wall assemblies. Sound-rated wall assemblies are defined as partition types carrying a Sound Transmission Class (STC) rating.

3.9 EXPOSED BOX INSTALLATION

- A. Boxes shall be secured to the building structure with proper size screws, bolts, hanger rods, or structural steel elements.
- B. On brick, block and concrete walls or ceilings, exposed boxes shall be supported with no less than two (2) Ackerman-Johnson, Paine, Phillips, or approved equal screw anchors or expansion shields and round head machine screws. Cast boxes shall not be drilled.
- C. On steel structures, exposed boxes shall be supported to the steel member by drilling and tapping the member and fastening the boxes by means of round head machine screws.
- D. Boxes may be supported on steel members by APPROVED beam clamps if conduit is supported by beam clamps.
- E. Boxes shall be fastened to wood structures by means of a minimum of two (2) wood screws adequately large and long to properly support. (Quantity depends on size of box.)
- F. Wood, plastic, or fiber plugs shall not be used for fastenings.
- G. Explosive devices shall not be used unless specifically allowed.

END OF SECTION 260533

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 260800 - COMMISSIONING OF ELECTRICAL

PART 1 - GENERAL

1.1 SECTION INCLUDES

- A. Description
- B. Responsibilities
- C. Related Work
- D. Test Equipment

1.2 DESCRIPTION

- A. The purpose of this section is to specify Division 26 responsibilities in the commissioning process.
- B. The systems to be commissioned are listed in Section 019100.
- C. Commissioning requires the participation of the Division 26 Contractor to ensure that all systems are operating in a manner consistent with the Contract Documents. The general commissioning requirements and coordination are detailed in Section 019100. Division 26 Contractor shall be familiar with all parts of Section 019100 and shall execute all commissioning responsibilities assigned to them in the Contract Documents.

1.3 RESPONSIBILITIES

- A. Refer to Section 019100.

1.4 RELATED WORK

- A. Specific commissioning requirements are given in the following sections of these specifications. All the following sections apply to the Work of this section.
 - 1. Section 017823 - Operations and Maintenance
 - 2. Section 017900 - Demonstration and Training
 - 3. Section 019100 - Commissioning
 - 4. Section 220800 - Commissioning of Plumbing
 - 5. Section 230800 - Commissioning of HVAC
 - 6. Section 270800 - Commissioning of Communications

PART 2 - PRODUCTS

2.1 TEST EQUIPMENT

- A. The Contractor shall provide all test equipment necessary to fulfill the testing requirements of this Division. This equipment includes, but is not limited to, the following:
 - 1. Test equipment required for NETA Acceptance Testing.
 - 2. Light meter.
 - 3. Sound level meter.
 - 4. Digital multimeter capable of measuring voltage (AC/DC), current, and resistance.
 - 5. Power quality and energy analyzer capable of capturing waveform (3 phase) and data recording.
 - 6. Handheld thermal imaging camera.
- B. All testing equipment shall be of sufficient quality and accuracy to test and/or measure system performance with the tolerances specified in the related specifications. All equipment shall be calibrated according to the manufacturer's recommended intervals and when dropped or damaged. Calibration tags shall be affixed or certificates readily available.
- C. Refer to Section 019100 for additional Division 26 requirements.

PART 3 - EXECUTION

- A. Refer to Section 019100.

END OF SECTION 260800

SECTION 260933 - LIGHTING CONTROL SYSTEMS

PART 1 - GENERAL

1.1 SECTION INCLUDES

- A. Lighting Control Overview
- B. Electrical Plan Symbols
- C. Device Color and Coverplates
- D. Standalone Line and Low Voltage Lighting Controls
 - 1. Wall switches and wall dimmers
 - 2. Sensors (occupancy, vacancy, daylighting, photocell, auxiliary power packs, etc.)
- E. Room-Based Lighting Controls (specification grade, commonly distributed controllers, occasionally networked, 'intelligent' controls)

1.2 RELATED SECTIONS

- A. The lighting system design includes a combination of luminaire sources, lighting control components, programming sequences, and supplementary components for building and energy code compliance. The design uses performance-based specifications for portions of the lighting system to account for the limitation of directly comparable product solutions available by competitive manufacturers. The Contractor shall reference related specification sections, plans, schedules, and details prior to submitting pricing, submittals, and installation. The Contractor shall coordinate system component compatibility among various manufacturers and suppliers for a turnkey lighting system. Referenced sections include, but are not limited to, the following:
 - 1. Specification Section 265119 LED Lighting
 - 2. Electrical Drawings: Electrical Coversheet, plans, luminaire schedules, lighting control sequence of operations, diagrams, and details.

1.3 RELATED WORK

- A. Section 019100 - Commissioning
- B. Section 274100 - Audio/Visual System

1.4 REFERENCES

- A. FCC Rules and Regulations, Part 15, Subpart J - Radio Frequency Interference
- B. FS W S 896 Switch, Toggle
- C. International Energy Conservation Code (IECC)
- D. NEMA WD 1 - General Color Requirements for Wiring Devices

- E. NEMA WD 7 - Occupancy Motion Sensors
- F. NFPA 70 - National Electrical Code (NEC)
- G. UL Standard 916 Energy Management Equipment
- H. UL 20 - Standards for General-Use Snap Switches
- I. UL 98 - Enclosed and Dead-Front Switches
- J. UL 1472 - Solid-State Dimming Controls

1.5 SUBMITTALS

- A. Submit product data under provisions of Section 260500.
- B. Submit a comprehensive package including devices, hardware, software, product specification, finishes, dimensions, installation instructions, component replacement instructions, warranty, system software requirements[, and roles and responsibilities of all persons and groups involved in installation, execution, and commissioning].
- C. Provide floor plan showing location, orientation, and coverage area of each control device, sensor, and controller/interface. For areas requiring multiple sensor devices for appropriate coverage, submit specific manufacturer-approved sensor layout as an overlay directly on the project drawings, either in print or approved electronic form. Sensor coverage patterns shall have a 20% overlap.
- D. Submit a list of devices and equipment that will be installed for each sequence of operation.
- E. Submit project specific control wiring diagrams showing all equipment, line voltage, and control wiring requirements for all components including, but not limited to, dimmers, relays, low voltage switches, occupancy sensors, control stations, dimmer panels, relay panels, and communication interfaces and programming instructions for each sequence of operation. Include network cable specification and end-of-line termination details, if required.
- F. Programming Sequences: Provide a copy of the initial lighting control programming sequences in narrative and manufacturer/vendor format.
- G. Lighting Control Stations: The manufacturer/vendor shall provide control station shop drawings showing arrangement of controls, dimensioned elevations, wiring diagram, and recommended backboxes. Label each applicable submittal with the applicable Sequence Of Operation SOO description. Submit data sheets on the switches, dimmers, sensors, buttons, etc. contained in the control station.
- H. Nameplate Labels and Custom Engraving: Submit sample label/engraving text for review for each applicable Lighting Sequence Of Operation SOO. Include reference to applicable SOO description. Provide stencil templates for each device requiring stenciling.
- I. [Project specific network riser diagram including floor and building level details. Illustrate points of connection to integrated systems. Coordinate integration with mechanical and/or other trades.

- J. Network / Internet Connected Equipment: These specifications may require certain equipment or systems to have network, Internet and/or remote access capability ('Network Capability'). Any requirement for Network Capability shall be interpreted only as a functional capability and is not to be constructed as authority to connect or enable any Network Capability. Network Capability may only be connected or enabled with the express written consent of the Owner. Provide Owner written consent and instructions as a submittal.

1.6 EXTRA STOCK

- A. Provide extra stock under provisions of Section 260500.
- B. Sensors, Controls, Power Supplies, and Relays: Five (5) percent of quantity installed. Minimum of two (2) of each configuration and type.
- C. Handheld Lighting Control Programming Stations: Provide two (2) lighting control programming stations when a proprietary controller is available and applicable to the specific lighting control system.
- D. Web App for Owner Provided Devices: Assist Owner with the download and setup of the web application programming tool on ten (10) Owner provided cellphones, tablets, and similar devices when available and applicable to the specific lighting control system.
- E. Commissioning Dongles: Provide ten (10) spare commissioning dongle devices for room controller, sensor, and relay programming when applicable to the specific lighting control system.
- F. Lighting Control Software / Web Application Shortcut: Provide installation of software or setup of web app shortcuts on two (2) Owner provided computers when available and applicable to the specific lighting control system.

1.7 PROJECT RECORD DOCUMENTS

- A. Submit project record documents under provisions of Section 260500.
- B. Accurately record location of all controls and devices. Include description of switching sequences and circuiting arrangements.

1.8 OPERATION AND MAINTENANCE DATA

- A. Submit emergency, operation, and maintenance data under provisions of Section 260500. Data shall also include the following:
 - 1. Schedule for routine maintenance, inspection, and calibration of all lighting control devices and system components. Recommended schedule for inspection and recalibration of sensors.
 - 2. Complete narrative describing intended operation and sequence for each control scenario and system component, updated to reflect all changes resulting from commissioning of systems. Narrative shall indicate recommended settings for devices where applicable.
 - 3. Replacement part numbers for all system components.
- B. Identify installed location and labeling for each luminaire controlled by automated lighting controls.

1.9 SYSTEM DESCRIPTION

- A. Performance Statement: The specification section and lighting design documents describe the minimum material quality, required features, and operational performance requirements of the lighting control system. The documents do not convey every component, relay, wire, and equipment connection required. The Contractor and lighting control manufacturer/vendor are solely responsible for determining all system components, wiring, and programming required for a complete and operational system based on the performance based requirements of the documents.
- B. Lighting Sequence Of Operation (SOO): The Sequence Of Operation (SOO) describes the required lighting control operation and performance in each space. The Sequence Of Operation descriptions are included on the drawings.
- C. Drawings: The drawings include the Sequence Of Operation (SOO), luminaire schedule, location of control devices, sensors, and identification of control zones, and branch power circuiting. Control wiring and manufacturer/vendor specific components are NOT shown, but shall be submitted with the shop drawing submittals.

1.10 WARRANTY

- A. Manufacturer shall warrant products under normal use and service to be free from defects in materials and workmanship for a period of two (2) years from date of commissioning.
- B. Occupancy, vacancy, daylight sensors and controls shall have a five (5) year warranty from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 LIGHTING CONTROL OVERVIEW

- A. Lighting Control System: As defined in the System Description, the design documents describe the operational performance requirements of the lighting control system. The Lighting Control System has been categorized into the following groups. Refer to the Electrical Symbol Key, this specification section, and the drawings to determine the appropriate lighting control category when more than one is applicable to the project:
 - 1. Standalone Lighting Control Devices: Independent (standalone) devices traditionally operating at line or low voltage, field configurable with other standalone devices to provide an overall lighting control system.
 - 2. Room-Based Lighting Controls: Integrated system comprised of switch stations, sensors, room controllers, control panels, and accessories, operating at line and/or low voltage, configured as an integrated overall 'intelligent' lighting control system. Lighting control zones and power circuits commonly align.
- B. All system components and materials of similar function (e.g., switches, dimmers, sensors, contactors, relays, etc.) shall be of the same manufacturer, unless specifically stated otherwise on drawings or elsewhere in the specifications. Lighting control switches, systems, and components shall be listed.

- C. The functions described in the lighting sequence of operation shall dictate the actual lighting control device required to accomplish the functions described for the space, unless otherwise noted.
- D. Emergency Lighting Override Control (UL924 and UL1008): Lighting Control Equipment coupled with remote emergency power sources (external to the luminaire) require ALCR (UL924) or BCELTS (UL1008) devices for emergency (life safety) compliance. An emergency lighting control bypass is required for every individual lighting control zone-circuit but NOT shown on the plans. Refer to this specification for ALCR and BCELTS descriptions. Refer to the sequence of operation lighting control descriptions on the plans for additional requirements. (For additional explanation purposes: Integral emergency power sources like battery drivers inside the luminaire are commonly provided with a switch and non-switched portion of the circuit allowing compliance without an ALCR nor BCELTS device to bypass the lighting controls).

2.2 ELECTRICAL PLAN SYMBOLS

- A. Refer to Electrical Coversheet for Electrical Symbols list and device specification tag.
 - 1. Standalone Lighting Control Devices: Control station commonly defined by an alpha character with subscripts.
 - a. Example symbol "S", tagged "SW-1P", description "switch- single pole switch".
 - b. Example Control Designation: a, b, c (when required to clarify design intent).
 - 2. Room-Based Lighting Controls: Control station commonly defined by a rectangle symbol.
 - a. Example Control Station: symbol "#B", tagged "SW-LV", description "Lighting Control Station".
 - b. Example Panel/Rack/Cabinet: tagged "LCPR#", description Room-Based lighting control panel/rack/cabinet.
 - c. Example Control Designations: a, b, c
 - 3. Sensors, Relays, Accessories: Common plan symbols are used for occupancy, vacancy, and daylighting sensors. The control designations (a, b, c or z1, z2, z3) and identification of a standalone or #B type control station in the space defines the basis-of-design intent category of the lighting control sensors and accessories.
 - a. Example, a standalone occupancy sensor SW-OC-## device is the basis of design when shown in the same room as a standalone S (SW-1P) single pole light switch with or without a, b, c control designations.
 - b. Example, a Room-Based Lighting occupancy sensor SW-OC-## device is the basis of design when shown in the same room as a #B (SW-#B) lighting control station with or without a, b, c control designations.

2.3 DEVICE COLOR AND COVERPLATES

- A. All switches and lighting controls shall be complete with coverplates that match material and color of the wiring device coverplates in the space. When the coverplate is proprietary to the device/manufacture and do not match the wiring device coverplates, the architect shall select the coverplate color and materials from the standard coverplate options.

- B. Where several devices are ganged together, the coverplate shall be of the ganged style for the number of devices used.
- C. Install nameplate identification as indicated in Section 260553.
- D. Plate-securing screws shall be metal with head color matching the wall plate finish.

2.4 STANDALONE LINE AND LOW VOLTAGE LIGHTING CONTROLS

A. Overview:

1. Wall Switches and Wall Dimmers:

- a. UL listed with integral air-gap switch for on/off control, integral EMI/RFI suppression, non-viewable heat sink, dimmer to match device color.
- b. Dimmer compatibility and wiring with the load being controlled shall be verified by Contractor prior to purchase and installation.

B. SW-OC-# and SW-VC-#; Occupancy / Vacancy Sensors (Standalone):

- 1. Combination Devices: Subscripts identify combination type devices when applicable. The contractor shall provide the combination device or provide multiple device(s) to meet the functionality when the manufacturer does not offer the required functionality with a single device. Manufacturer verified layouts shall include a 20% overlap of coverage patterns.
- 2. Subscripts: Subscripts are used to define the device type.

- a. Blank (or D) = Dual Technology
- b. A = Ultrasonic two-sided corridor coverage
- c. P = Passive infrared
- d. P2 = Passive infrared 100 degree coverage
- e. U = Ultrasonic 360 degree coverage
- f. HA = Highbay aisle coverage
- g. HB = Highbay
- h. W = Wireless with battery, 10 year minimum

- 3. General Description: Wall- or ceiling-mounting, solid-state units with a separate power supply/relay unit.

- 4. Detection Coverage (Corridor): Detect occupancy based on a half-step motion.

- a. Blank (or D); Dual Technology 360 Degree Coverage Occupancy/Vacancy Sensor: Combination of PIR and ultrasonic detection methods in area of coverage. Particular technology or combination of technologies that controls on and off functions shall be selectable in the field by operating controls on unit. Frequency greater than 40 KHz. Dual sensing verifications (requires both technologies to activate), either technology maintains on status. Integrated ambient light level sensor (2 to 200 FC range), adjustable sensitivity and time delay. Sensor shall control all circuits in area, unless noted otherwise.

1) Manufacturers:

- a) Watt Stopper DT 300/200 Series
- b) Hubbell OMNI-DT2000 / LODTRP / ATD2000C Series
- c) Greengate OAC-DT Series

- d) Leviton OSC-MOW / OSM12 Series
- e) Sensor Switch CM PDT 10 / WvpDT 16 series (acoustic)
- f) Steinel DT Quattro DCS

2.5 ROOM-BASED LIGHTING CONTROL SYSTEM ('INTELLIGENT CONTROLS)

- A. Manufacturers: Manufacturers as listed below meet the qualifications as outlined in this specification. Contractor is responsible for verifying that selected manufacturer is capable of furnishing the complete system as specified herein.
 - 1. Acuity Controls nLight Series
 - 2. Eaton Greengate RC3 Series (room-based system)
 - 3. Hubbell Automation NX Series
 - 4. Legrand Watt Stopper DLM Series
 - 5. Lutron
 - 6. Osram Encelium Series
 - 7. Steinel DCS Series
- B. Room-Based Lighting Control System Description: The room-based lighting control system is a distributed network of devices, components, and accessories for lighting controls and integrated control with other systems. The system includes system room controllers (network hubs), control stations, sensors (occupancy, vacancy, daylighting, etc.), switching/dimming modules, programming, 365/7 day scheduling, and associated wiring.
- C. The lighting control system manufacturer shall be responsible to assure coordination and network compatibility between all system devices, components, and accessories.
- D. Global System Typography: The system shall be provided with the following global system characteristics. When multiple exclusive options are listed the manufacturer/vendor may submit a system based on either criterion unless otherwise noted. When the drawings identify a specific option (typically identified with a subscript) provide the specific option as scheduled on the drawings. (Example, a control station (SW-#B) shown with a "W" subscript on the plans shall be provided in a wireless configuration regardless if the following specification descriptions allow both low voltage or wireless network.)
 - 1. System Controllers (Room Controllers): Room-based controllers located above accessible ceilings.
 - 2. Interior Lighting Control System Network Connectivity for System Devices, Components, and Accessories: Low voltage cabling.
 - 3. Power Source for System Devices, Components, and Accessories: AC power pack supply.
- E. Lighting Control System (Room-Based Controller):
 - 1. Lighting Control System Room-Based Controller: Provide with data network to all lighting control system components, devices, and accessories. Provide network interface with other systems via BACnet IP communication or alternative protocol acceptable to the other system. System communication protocol shall be compatible with the building automation system.
- F. Time Clock and Scheduling: Provide 24 astronomical hour-based scheduling for interior lighting controls.

-
- G. Room-Based System Controllers (Room Controllers): Distributed room-based controller, integral switching relays and dimmers.
1. Installation: Provide a dedicated controller for each space; not shared with adjacent rooms. Locate the controller near the associated wall controller, near the entry door when applicable, and above the finished accessible ceiling. As an alternative, the controller may be mounted above the finished accessible ceiling of the adjacent space when the associated ceiling space is not accessible. Example, located in adjacent corridor.
- H. Programming and Commissioning Dongle (Removable Style): Provide and permanently install a programming dongle for each room controller when a field removable dongle type device is required for programming and commissioning of the system. The programming dongle shall be permanently installed to allow for ease of programming the controller without above ceiling access.
- I. Control Devices: All occupancy, vacancy sensors (ultrasonic, PIR, dual technology, daylighting, photocell, timers), control stations, and other system components shall be provided with the system and designed to operate on system network. Sensors shall be powered from power supplies, modules, packs, or Power Over Ethernet POE.
- J. Power Supplies (Modules, Packs, etc.): Provide power supplies for control devices. Power supply shall provide physical separation of 120/277 volt line voltage wiring and low voltage control wiring. Provide supplementary power supplies when required for multiple control devices. Provide switch or dimmed control as required by the Sequence Of Operation SOO.
1. Installation: Install adjacent to wall room controller when applicable, near the entry door when applicable, and above the finished accessible ceiling. As an alternative, the controller may be mounted above the finished accessible ceiling of the adjacent space when the associated ceiling space is not accessible. Provide low voltage wiring to applicable control devices and control stations.
- K. SW-#B; Lighting Control Station, Default Dimming Control Raise/Lower/Fade: The lighting control station shall comply with the performance requirements of the lighting sequence of operation. The control station may consist of switches, pushbuttons, sliders, dimming functions, etc. Provide a common coverplate for lighting control stations.
1. #B: The '#' indicates the minimum quantity of unique lighting control scenes when shown plus raise/lower and lights 'off' scene. Refer to the Lighting Sequence Of Operation (SOO) for the minimum quantity of scenes required (when a number is not designated) and a description of each control scene.
 2. Subscripts:
 - a. (BLANK) = Dimming Control (Default)
 - b. S = Switch Control
 - c. W = Wireless w/ battery
 - d. # = Unique ID when applicable

3. Manufacturer: Room-Based Lighting Controller Manufacturer:
 - a. Dimming (Blank) or Switch (S) Control Station: Modular, momentary pushbutton, with addressable capabilities to control the scene or luminaires assigned to the switch. The switch shall be able to actuate the functions based on the described sequence of operation and intended functions.
 - 1) Preset/fader stations shall operate using programmable buttons and/or faders as indicated on drawings.
 - 2) Raise, Lower, Integral Fader Control: Provide control station with manual raise and lower fader control for each control zone of lighting control. Manual raise/lower shall be separate buttons from scene control; hold and dim scene control buttons not acceptable. Faders may be physical sliders or up/down buttons. Fader range shall provide continuous even dimming matching full range of dimmer specification.
 - 3) Integral Pilot Light or LED: Indicate that controls are active or powered by being on continuously when powered or when pushbuttons are actuated.
 - 4) Labeling of buttons and faders shall be engraved/screened by manufacturer, using approved text returned with shop drawing submittals.
 - 5) Station control components shall be designed to operate standard default or custom system functions. Components shall operate default functions unless re-assigned via direct or network connection. Function options include: preset selection, manual mode, record mode, station lockout, raise/lower, macro, cue, and room join/separate.

PART 3 - EXECUTION

3.1 PRE-CONSTRUCTION MEETING

- A. Schedule a pre-construction meeting with the controls representative, installing contractor, Architect/Engineer, and Owner to explain the proposed lighting control system and integration with other systems as when applicable per the design documents.

3.2 EXAMINATION

- A. Verify that surfaces are ready to receive work.
- B. Verify field dimensions and coordinate physical size of all equipment with the architectural requirements of the spaces into which they are to be installed. Allow space for adequate ventilation and circulation of air.
- C. Verify that required utilities are available, in proper location, and ready for use.
- D. Beginning of installation means installer accepts existing conditions.

3.3 INSTALLATION

- A. Install in accordance with manufacturer's instructions and approved shop drawings.
- B. All wiring shall be installed in conduit. Class II low voltage control wiring may be open wiring and shall maintain 6 inch spacing from electronic ballast and other RFI/EMI sources.

- C. All branch load circuits shall be live tested before connecting the loads to the lighting control panel.
- D. Lighting Control Station Wiring: Provide the grounded (neutral) conductor portion of the branch circuit with the line voltage phase conductors at each lighting control station.
- E. Lighting Control Panel Directories: Provide a typewritten directory for each lighting control panel indicating relay/dimmer and description of load controlled.

3.4 LOW VOLTAGE LIGHTING CONTROL CABLING

- A. Control Cable Raceway Routing: Class II low voltage control wiring may be open wiring, independently supported, and shall maintain 150 mm (6 inch) spacing from luminaire drivers and other RFI/EMI sources.
- B. Control Cabling Installed with Line Voltage Wiring: When low voltage control cabling is installed with line-voltage wiring, the control wiring shall be, copper conductors, minimum 16 AWG or per manufacturer, with cable insulation equal to the line-voltage rating (voltage, temp rating, etc.) and comply with Specification Section 260513 "Wire and Cable."
- C. Network Cabling: As required by manufacturer.
- D. Splices and Taps: Tapping or wire trap connectors shall be used to splice all Class 1 and Class 2 control wiring. Twist-on, wire-nut type connectors are not allowed.

3.5 SUPPORT SERVICES

- A. System Startup:
 - 1. Manufacturer shall provide factory authorized technician to confirm proper installation and operation of all system components.
- B. Pre-Program, Testing, Training Coordination:
 - 1. The construction documents and sequence of operations define the original design intent of the lighting controls as coordinated between the owner and the design team. The definition of the scope is intended to identify the hardware and programming flexibility required prior to programming, system testing, and owner training.
 - 2. The final system programming, control station labels, scene presets, dimmer presets, dimmer range limits, fade times, etc. are subject to on site coordination between the design team, owner, contractor, and manufacturer. Contractor/manufacturer programming of the system prior to an onsite coordination with the owner and design team shall not be considered final programming nor commissioning.
 - 3. The contractor and manufacturer shall provide on site representatives to provide final programming including preset, scene, switch labeling, and other programming adjustments based on owner and design team onsite observation and verbally requested adjustments as part of the based bid scope of work.
 - 4. The contractor shall document onsite requested changes and update operation and maintenance manuals to match final programming.

C. Testing:

1. System shall be completely functional tested by a factory-authorized technician. All loads shall be tested live for continuity and freedom from defects, and all control wiring shall be tested for continuity and connections prior to energizing the system components.
2. Programming of initial zones, schedules, lighting levels, control station groups, and sensor settings shall be performed by a factory-authorized technician. Lighting Control Sequence of Operation shall serve as a basis for programming. However, all final decisions regarding groups and schedules shall be at the direction of the Owner. The following procedures shall be performed at a minimum:
 - a. Confirm occupancy sensor placement, sensitivity, and time delay settings to meet specified performance criteria.
 - b. Confirm daylight sensor placement, sensitivity, deadband, and delay settings to meet specified performance criteria.
 - c. Confirm that schedules and time controls are configured to meet specified performance criteria and Owner's operating requirements.
 - d. Confirm control station labeling, presets, switch labels, and scenes.
3. Verify occupancy/vacancy and daylight sensor operation is correct after furniture and equipment is installed in each area. Make adjustments to sensor settings and time delays to allow proper operation.
4. Verify occupancy/vacancy sensors are located to provide complete coverage for the area served with no nuisance switching.
 - a. Relocate sensors or provide additional sensors as necessary to provide adequate coverage.
 - b. Mask occupancy sensors where necessary to prevent nuisance switching from adjacent areas.

D. Training:

1. Manufacturer shall provide competent factory-authorized technician to train Owner personnel in the operation, maintenance and programming of the lighting control system. Submit training plan with notification seven (7) days prior to proposed training dates.
2. Training duration shall be no less than three (3) days, with one (1) day being scheduled at least two (2) weeks after initial training.

E. Documentation:

1. Manufacturer shall provide system documentation including:
 - a. System one-line showing all panels, number and type of control stations and sensors, communication line, and network or building automation system BAS interface unit.
 - b. Drawings for each panel showing hardware configuration and numbering.
 - c. Panel wiring schedules.
 - d. Typical diagrams for each component.

3.6 SYSTEM COMMISSIONING

- A. Contractors' tests shall be scheduled and documented in accordance with the commissioning requirements. Refer to Section 010900, General Commissioning, for further details.

- B. Mask sensors where necessary to prevent nuisance switching from adjacent areas.
- C. System verification testing is part of the commissioning process. Verification testing shall be performed by the Contractor and witnessed and documented by the Commissioning Agent. Refer to Section 010900, General Commissioning, for system verification tests and commissioning requirements.
- D. Training of the Owner's operation and maintenance personnel is required in cooperation with the Owner's Representative. The instruction shall be scheduled in coordination with the Owner's Representative after submission and approval of formal training plans. Refer to Section 010900, General Commissioning, for Contractor training requirements.

END OF SECTION 260933

SECTION 262726 - WIRING DEVICES

PART 1 - GENERAL

1.1 SECTION INCLUDES

- A. Device plates and box covers
- B. Modular connectors
- C. Receptacles (REC-#)
- D. Countertop and furniture receptacle assemblies (REC-#)
- E. Pin and sleeve devices (REC-Z#)
- F. Floor boxes and floor box with service fitting (FB-#)
- G. Pedestal style box (REC-PED-##)
- H. Poke-through fittings (PT-#)
- I. Pendant cord/connector devices
- J. Cord and plug sets
- K. Cord reel (CR-#)

1.2 REFERENCES

- A. DSCC W-C-896F - General Specification for Electrical Power Connector
- B. FS W-C-596 - Electrical Power Connector, Plug, Receptacle, and Cable Outlet
- C. NEMA WD 1 - General Color Requirements for Wiring Devices
- D. NEMA WD 6 - Wiring Devices - Dimensional Requirements
- E. NFPA 70 - National Electrical Code (NEC)
- F. UL 498 - Standard for Attachment Plugs and Receptacles
- G. UL 943 - Standard for Ground Fault Circuit Interrupters

1.3 SUBMITTALS

- A. Submit product data under provisions of Section 260500.
- B. Provide product data showing configurations, finishes, dimensions, and manufacturer's instructions.

- C. Provide a non-returnable sample of each countertop and furniture-mounted receptacle assembly as part of the submittal process.

1.4 COORDINATION

- A. Receptacles for Owner Furnished Equipment: Match plug configurations.
- B. Cord and Plug Sets: Match equipment requirements.

PART 2 - PRODUCTS

2.1 DEVICE COLOR

- A. All switch, receptacle, and outlet colors shall be white, unless indicated otherwise.

2.2 COVERPLATES

- A. All switches, receptacles, and outlets shall be complete with the following:
 - 1. Kitchen: #302 stainless steel coverplates in finished spaces where walls are finished.
 - 2. Public Areas: Decorator Grade - Public: Decorator thermoset plastic and match device color wallplates in public finished spaces where walls are finished.
 - a. Manufacturer:
 - 1) Leviton Decora
 - 2) Hubbell Decorator
 - 3) Cooper Decorator
 - 4) or approved equal

2.3 RECEPTACLES

- A. Refer to Electrical Symbols List for device type.
- B. REC-DUP: NEMA 5-20R Duplex Receptacle:
 - 1. Standard Grade: 125-volt, 20 amp, 3-wire grounding type with impact resistant thermoplastic face and steel back strap.
 - a. Manufacturers:
 - 1) Hubbell 5352A
 - 2) Leviton, 5362-S
 - 3) Pass & Seymour 5362
 - 4) Cooper 5352
 - 2. Decorator Grade: Provide decorative style duplex receptacles in public spaces where walls are finished.
 - a. Manufacturers:
 - 1) Hubbell DR20

- 2) Leviton 16362
- 3) Pass & Seymour 26342
- 4) Cooper 6352

C. REC-DUP-GFI: NEMA 5-20R Ground Fault Duplex Receptacle:

- 1. Standard Grade: 125-volt, 20 amp, 3-wire grounding type with test and reset buttons in impact resistant thermoplastic face, listed.

- a. Device shall perform self-test of GFCI circuitry in accordance with UL 943.
- b. Manufacturers:

- 1) Hubbell GF20L
- 2) Leviton GFNT2
- 3) Pass & Seymour 2097
- 4) Cooper SGF20

D. REC-DUP-WP: NEMA 5-20R Weatherproof Ground Fault Duplex Receptacle:

- 1. 125-volt, 20 amp, 3-wire grounding type with test and reset buttons in impact resistant thermoplastic face, weather resistant WR listed. Provide extra-duty NEMA 3R rated while-in-use clear outlet box hood.
- 2. Device shall perform self-test of GFCI circuitry in accordance with UL 943.

- a. Manufacturers:

- 1) Hubbell:
 - a) GFTWRST20 with clear housing RW57300
 - b) GFCI type devices are not allowed. Contractor may substitute an alternative manufacturer when Hubbell is the basis of submittal for all other wiring devices.
- 2) Leviton GFWT2 with clear housing 5977-CL
- 3) Pass & Seymour 2097TRWR with clear housing WIUC10-C
- 4) Cooper WRSGF20 with clear housing WIU-1

E. REC-SIM-520R: NEMA 5-20R Simplex Receptacle:

- 1. 125-volt, 20 amp, 3-wire grounding type with impact resistant thermoplastic face.

- a. Manufacturers:

- 1) Hubbell HBL5361
- 2) Leviton 5361
- 3) Pass & Seymour 5361
- 4) Cooper 5361

- F. REC-SIM-1450R: NEMA 14-50R Simplex Receptacle:
 - 1. 125/250-volt, 50 amp, 3-pole, 4-wire grounding type with thermoplastic face. Flush mounted at +4" AFF.
 - a. Manufacturers:
 - 1) Hubbell HBL9450A
 - 2) Leviton 279
 - 3) Pass & Seymour 3894
 - 4) Cooper 5754N

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Install convenience receptacles at elevations indicated in the General Installation Notes on the contract drawings.
- B. Install specific-use receptacles at heights shown on the contract drawings. Install devices level, plumb, and square with building lines. Coordinate installation of adjacent devices of separate systems with common mounting heights, including lighting, power, systems, technology, and temperature control device rough-ins.
- C. Ground Fault Protection: Provide ground fault protection for all branch circuit breakers serving 120/208 receptacles and electrical outlets rated 50 amps or less single-phase and 100 amps or less three-phase in the following locations, as shown on drawings, or required by adopted code:
 - 1. Kitchens' all 120-volt through 250-volt receptacles
 - 2. Buffet, serving, food preparation areas; all 120-volt through 250-volt receptacles
 - 3. Rooftops
- D. Install receptacles vertically with ground slot up or where indicated on the drawings, horizontally with ground slot to the left.
- E. Install decorative plates on switch, receptacle, and blank outlets in finished areas, using jumbo size plates for outlets installed in masonry walls.
- F. Install galvanized steel plates on outlet boxes and junction boxes in unfinished areas, above accessible ceilings, and on surface-mounted outlets.
- G. Install devices and wall plates flush and level.
- H. Test receptacles for proper polarity, ground continuity and compliance with requirements.

END OF SECTION 262726

SECTION 265119 - LED LIGHTING

PART 1 - GENERAL

1.1 SECTION INCLUDES

- A. Interior luminaires and accessories
- B. Light-emitting diode (LED) luminaire systems
- C. LED emergency lighting units
- D. Emergency exit signs

1.2 REFERENCES

- A. ANSI C78.377 - Specifications for the Chromaticity of Solid State Lighting Products
- B. ANSI C82.16 - Light-Emitting Diode Drivers - Method of Measurement
- C. ANSI C82.77 - Standard for Harmonic Emission Limits and Related Power Quality Requirements for Lighting Equipment
- D. NFPA 70E - National Electrical Safety Code
- E. NEMA SSL1 - Electronic Drivers for LED Devices, Arrays or System
- F. UL 8750 - Light Emitting Diode (LED) Equipment for use in Lighting Products
- G. LM-79 - Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products
- H. LM-80 - Measuring Luminous Flux and Color Maintenance of LED
- I. FS W-L-305 - Light Set, General Illumination (Emergency or Auxiliary)

1.3 SUBMITTALS

- A. Submit product data under provisions of Section 260500.
- B. Basic Requirements of Submittal:
 - 1. Submit product data sheets for luminaires, LED light engines, drivers and poles. Include complete product model number with all options as specified. Submittal shall be arranged with luminaires listed in ascending order, and with each luminaire's, LED light engine, driver, or pole information following luminaire's product data. Failure to organize submittal in this manner will result in the submittal being rejected.
 - 2. Submit lens product data, dimensions and weights if not included in product data sheet submittal.

-
- 3. Include outline drawings, support points, weights, and accessory information for each luminaire.
 - 4. Submit manufacturer origin of LED chipset and driver.
 - C. LED Lighting - Performance Testing Submittal (when requested by Architect/Engineer):
 - 1. IESNA LM-79: Include photometric report for the latest generation system being furnished. Provide name of independent testing laboratory, report number, date of test, luminaire series/model number, input wattage, and light source specifications.
 - 2. IESNA LM-80: Measuring Lumen Maintenance of LED Light Sources.
- 1.4 EXTRA STOCK
- A. Provide extra stock under provisions of Section 260500.
 - B. LED Light Engines or Modules: Five (5) percent of quantity installed, minimum one (1) of each size and type of field replaceable light engine or module. Provide field replacement installation instructions.
 - C. Lenses: Three (3) percent of quantity installed, minimum one (1) of each size and type.
 - D. LED Drivers: Five (5) percent of quantity installed, minimum one (1) of each size and type.
 - E. Exit Signs: Provide one (1) additional exit sign luminaires complete with labor, conduit, and wire. Additional exit luminaires shall be located per the Architect/Engineer or provided as attic stock when a location is not defined prior to Owner occupancy. When multiple exit signs are scheduled, the quantity listed above shall represent each type listed.
- 1.5 DELIVERY, STORAGE, AND HANDLING
- A. Deliver products to site. Store and protect under provisions of Section 260500.
 - B. Protect luminaire finishes, lenses, and trims from damage during storage and installation. Do not remove protective films until construction cleanup within each area is complete.
 - C. Handle site lighting poles carefully to prevent breakage and damage to finish.
- 1.6 WARRANTY
- A. LED Light Engines and Drivers:
 - 1. LED Drivers and Dimming Drivers: Five (5) years
 - 2. Light Emitting Diode (LED) Light Engines: Five (5) years
 - B. Emergency Lighting Units and Exit Signs:
 - 1. Exit Signs: Three (3) year, non-prorated
 - C. Emergency Drivers:
 - 1. Emergency LED Driver: Three (3) years

1.7 REGULATORY REQUIREMENTS

- A. Conform to NFPA 101 for installation requirements.

PART 2 - PRODUCTS

2.1 INTERIOR LUMINAIRES AND ACCESSORIES - GENERAL

- A. Lensed Troffers: Provide hinged frames with latches and 0.125-inch thick virgin acrylic lenses. Prismatic lenses shall have depth of no less than 0.080", KSH12 or equal. Other lenses as scheduled.
- B. Recessed Luminaires: Confirm ceiling and wall type and furnish trim and accessories necessary to permit proper installation in each system. Where fire-rated ceiling or wall assemblies are specified, furnish and install listed enclosures around luminaires that maintain the system rating.
- C. Luminaires: Louvers shall be anodized low iridescent specular aluminum with mitered corners and interlocking construction.
- D. Suspended Luminaires: Coordinate power feed and suspension canopies with ceiling type and architectural RCP for proper fit and location. Ensure finished installations are plumb and level at elevations specified. Verify suspension length prior to submittal.
- E. Painted reflector surfaces shall have a minimum reflectance of 90%.

2.2 LIGHT EMITTING DIODE (LED) LUMINAIRE SYSTEMS

- A. Refer to the luminaire schedule for color temperature and minimum color rendering index CRI requirements. Provide light source color consistency by utilizing a binning tolerance within a maximum 3-step McAdam ellipse unless noted otherwise.
- B. LED chip arrays specified as color changing shall have chip colors as noted on the luminaire schedule.
- C. Rated life shall be minimum of 50,000 hours at L70.
- D. LED chips shall be wired so that failure of one chip does not prohibit operation of the remainder of the chip array.
- E. Luminaire delivered lumens is defined as the absolute lumens per the manufacturers LM-79-08 test report.
- F. LED luminaires shall be designed for ease of component replacement including modular replaceable boards or Zhaga sockets. Luminaires that are factory sealed and do not have field replaceable parts shall provide a 10-year warranty.
- G. LED light engine shall have a maximum LLD of 0.85 at 50,000 hours at 25°C ambient.

H. LED Driver:

1. Solid state driver with integral heat sink. Driver shall have over-heat, short-circuit and overload protection, power factor 0.90 or above and maximum total harmonic distortion of 20%. Driver shall have a voltage fluctuation tolerance of +/- 10%.
2. Drivers shall have dimming capabilities as outlined in the luminaire schedule for each luminaire type. Dimming shall control light output in a continuous curve from 100% to 10% unless noted otherwise.
3. Driver shall have a minimum of 50,000 hours rated life.
4. Driver shall be tested to ANSI C82-16 for input current inrush, total harmonic distortion (THD), and power factor. Driver start time shall be less than 0.5 seconds to 98% of initial light output. Flicker should be less than 30% throughout the operating range.
5. Driver shall be field replaceable without removal of the luminaire.
6. Class A sound rating; inaudible in a 27 dBA ambient.
7. Demonstrate no visible change in light output with a variation of plus or minus 10 percent change in line-voltage input.

2.3 EMERGENCY EXIT SIGNS

- A. Self-Powered Exit Signs: Stencil face, 6-inch high letters, directional arrows as indicated, universal mounting type as indicated on the drawings. One-piece, self-contained unit with sealed, maintenance-free nickel cadmium battery, test switch, AC ON pilot light, automatic charger, and electronic circuitry. Power failure relay automatically energizes lamp from battery when circuit voltage drops to 80 percent of nominal voltage or below. When normal voltage is restored, relay disconnects lamps from battery, and battery is automatically recharged and floated on charger.
- B. Directional Indicators: The directional indicator for exit signage shall be of a chevron type meeting all requirements of NFPA 101.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Securely fasten luminaires to the listed and labeled ceiling framing member by mechanical means such as bolts, screws, rivets or listed clips identified for use with the type of ceiling framing members. The architectural ceiling framing system may be used in lieu of independent support with prior written approval by the ceiling system manufacturer and Authority Having Jurisdiction (AHJ). Luminaires and wiring installed in fire-rated ceiling assemblies shall be independently supported for all applications.
 1. Install recessed flanged luminaires to permit removal from below. Use manufacturer-supplied plaster frames and swing gate supports. Provide independent support as follows:
 - a. Luminaires less than 56 lbs: Provide a minimum of two (2) #12 gauge suspended ceiling support wires located on diagonal corners of the luminaires.
 - b. Luminaires 56 lbs or greater: Provide a minimum of four (4) #12 gauge suspended ceiling support wires located on diagonal corners of the luminaires. Support luminaire independent of the ceiling system.

- B. Do not fasten luminaire supports to piping, ductwork, mechanical equipment, or conduit, unless otherwise noted. Support wires shall be tightly wrapped (minimum of three turns within 3 inches of the connection) and sharply bend to prevent vertical movement.
- C. Support suspended or pendant mounted luminaires independent of ceiling grid with adjustable stainless steel aircraft cables or per luminaire schedule mounting requirements. Suspension assembly and anchors shall be capable of supporting 300 pounds dead load at each suspension point.
- D. Support wire used to independently support luminaires, raceways, and wiring systems shall be distinguishable from ceiling support systems by color (field paint), tagging or equivalent means.
- E. Install lamps in lamp holders of luminaires.
- F. Adjust aimable luminaires to obtain lighting levels on objects and areas as directed to obtain desired lighting levels.

3.2 CONSTRUCTION USE OF PROJECT LUMINAIRES

- A. The Contractor shall provide temporary construction lighting per the requirements of Division 1.
- B. The project luminaires shown on the construction documents shall not be used for temporary construction purposes without providing a plan for Owner approval that addresses energy and luminaire operating hours.

3.3 RELAMPING

- A. Replace failed LED light engine modules or arrays at completion of work.

3.4 ADJUSTING AND CLEANING

- A. Align luminaires and clean lenses and diffusers at completion of work. Clean paint splatters, dirt, and debris from installed luminaires.
- B. Touch up luminaire and pole finish at completion of work.

3.5 OWNER TRAINING

- A. Test emergency lighting equipment for 60 minutes to determine proper operation, prior to Substantial Completion, with the Owner's Representative.
- B. Provide electronic copy of periodic test log form to Owner's Representative. Explain and instruct Owner's Representative of requirements for testing and maintenance. Refer to latest adopted NFPA 101 for testing and logging requirements.

3.6 LUMINAIRE SCHEDULE

- A. As shown on the drawings.

END OF SECTION 265119

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 270500 - BASIC COMMUNICATIONS SYSTEMS REQUIREMENTS

PART 1 - GENERAL

1.1 SECTION INCLUDES

- A. Basic Communications Systems Requirements specifically applicable to Division 27 sections, in addition to Division 1 - General Requirements.
- B. All materials and installation methods shall conform to the applicable standards, guidelines and codes referenced herein and within each specification section.

1.2 SCOPE OF WORK

- A. This Specification and the associated drawings govern furnishing, installing, testing and placing into satisfactory operation the Communications Systems.
- B. The Contractor shall furnish and install all new materials as indicated on the drawings, and/or in these specifications, and all items required to make the portion of the Communications Work a finished and working system.
- C. All work will be awarded under a single General Contract. The division of work listed below is for the Contractor's convenience and lists normal breakdown of the work.
- D. Description of Systems include, but are not limited to, the following:
 - 1. Complete Structured Cabling System including, but not limited to:
 - a. Backbone cabling and terminations.
 - b. Horizontal cabling and terminations.
 - c. Information outlets (IOes) including faceplates, jacks and labeling.
 - d. Equipment racks, cable management, and equipment.
 - e. Telecommunication Room equipment including patch panels, optical distribution cabinets, and termination blocks.
 - f. Cabling pathways.
 - g. Grounding and Bonding
 - h. Testing
 - 2. Complete Audio/Visual Systems.
 - 3. Low Voltage Communications Wiring (less than +120VAC) as specified and required for proper system control and communications.
 - 4. All associated electrical backboxes, conduit, miscellaneous cabling, and power supplies required for proper system installation and operation as defined in the "Suggested Matrix of Scope Responsibility".
 - 5. Firestopping of penetrations as described in Section 270503.

1.3 WORK SEQUENCE

- A. All construction work that will produce excessive noise levels and interference with normal building operations, as determined by the Owner, shall be scheduled with the Owner. It may be necessary to schedule such work during non-occupied hours. The Owner shall reserve the right to set policy as to when restricted construction hours will be required.
- B. Itemize all work and list associated hours and pay scale for each item.

1.4 DIVISION OF WORK BETWEEN ELECTRICAL AND COMMUNICATIONS CONTRACTORS

- A. Division of work is the responsibility of the Prime Contractor. Any scope of work described in the contract document shall be sufficient for including said requirement in the project. The Prime Contractor shall be solely responsible for determining the appropriate subcontractor for the described scope. In no case shall the project be assessed an additional cost for scope that is described in the contract documents. The following division of responsibility is a guideline based on typical industry practice.
- B. Definitions:
 - 1. "Electrical Contractor" as referred to herein refers to the Contractors listed in Division 26 of this Specification.
 - 2. "Electrical Contractor" shall also refer to the Contractor listed in Division 27 of this specification when the "Suggested Matrix of Scope Responsibility" indicates the work shall be provided by the EC. Refer to the Contract Documents for the "Suggested Matrix of Scope Responsibility".
 - 3. "Technology Contractor" as referred to herein refers to the Contractors listed in Division 27 of this Specification.
 - 4. Low Voltage Technology Wiring: The wiring (less than 120VAC) associated with the Technology Systems, used for analog and/or digital signals between equipment.
 - 5. Telecommunications/Technology Rough-in: Relates specifically to the backboxes, necessary plaster rings and other miscellaneous hardware required for the installation and mounting of the telecommunications/technology outlet. Rough-in shall include conduit from the information outlet backbox to above the lay-in ceiling. Where surface mounted backboxes are required, conduit shall be routed to above the lay-in ceiling.
- C. General:
 - 1. The purpose of these specifications is to outline typical Electrical and Technology Contractor's work responsibilities as related to technology systems including telecommunications rough-in, audio/visual systems rough-in, conduit, power wiring, and low voltage communications and technology wiring. The prime contractor is responsible for all divisions of work.
 - 2. The exact wiring requirements for much of the equipment cannot be determined until the systems have been purchased and submittals are approved. Therefore, only known wiring, conduits, raceways, and electrical power as related to such items, is shown on the technology drawings. Other wiring, conduits, raceways, junction boxes, and electrical power not shown on the technology drawings but required for the successful operation of the systems shall be the responsibility of the Technology Contractor and included in the Contractor's bid.

-
3. Where the Electrical Contractor is required to install conduit, conduit sleeves and/or power connections in support of technology systems, the final installation shall not begin until a coordination meeting between the Electrical Contractor and the Technology Contractor has convened to determine the exact location and requirements of the installation.
 4. Where the Electrical Contractor is required to install cable tray that will contain low voltage technology wiring, the installation shall not begin until the Technology Contractor has completed a coordination review of the cable tray shop drawing.
 5. This Contractor shall establish electrical and technology utility elevations prior to fabrication and installation. The Technology Contractor shall cooperate with the Electrical Contractor and the determined elevations in accordance with the guidelines below. This Contractor shall coordinate utility elevations with other trades. When a conflict arises, priority shall be as follows:
 - a. Lighting Fixtures
 - b. Gravity Flow Piping, including Steam and Condensate
 - c. Sheet Metal
 - d. Cable Trays, including 12" access space
 - e. Sprinkler Piping and other Piping
 - f. Conduit and Wireway
 - g. Open Cabling
- D. Electrical Contractor's Responsibility:
1. Assumes all responsibility for all required conduit and power connections when shown on the "Suggested Matrix of Scope Responsibility" to be provided by the Electrical Contractor.
 2. Responsible for Communications Systems grounding and bonding.
 3. This Contractor is responsible for coordination of utilities with all other Contractors. If any field coordination conflicts are found, the Contractor shall coordinate with other Contractors to determine a viable layout.
- E. Technology Contractor's Responsibility:
1. Assumes all responsibility for the low voltage technology wiring of all systems, including cable support where open cable is specified.
 2. Assumes all responsibility for all required backboxes, conduit and power connections not specifically shown as being provided by the Electrical Contractor on the "Suggested Matrix of Scope Responsibility."
 3. Assumes all responsibility for providing and installing all ladder rack and other cable management hardware (as defined herein).
 4. Responsible for providing the Electrical Contractor with the required grounding lugs or other hardware for each piece of technology equipment which is required to be bonded to the technology bonding system.
 5. This Contractor is responsible for coordination of utilities with all other Contractors. If any field coordination conflicts are found, the Contractor shall coordinate with other Contractors to determine a viable layout.

1.5 COORDINATION DRAWINGS

A. Definitions:

1. Coordination Drawings: A compilation of the pertinent layout and system drawings that show the sizes and locations, including elevations, of system components and required access areas to ensure that no two objects will occupy the same space.
 - a. Mechanical trades shall include, but are not limited to, mechanical equipment, ductwork, fire protection systems, plumbing piping, medical gas systems, hydronic piping, steam and steam condensate piping, and any item that may impact coordination with other disciplines.
 - b. Electrical trades shall include, but are not limited to, electrical equipment, conduit 1.5" and larger, conduit racks, cable trays, pull boxes, transformers, raceway, busway, lighting, ceiling-mounted devices, and any item that may impact coordination with other disciplines.
 - c. Technology trades shall include, but are not limited to, technology equipment, racks, conduit 1.5" and larger, conduit racks, cable trays, ladder rack, pull boxes, raceway, ceiling-mounted devices, and any item that may impact coordination with other disciplines.
 - d. Maintenance clearances and code-required dedicated space shall be included.
 - e. The coordination drawings shall include all underground, underfloor, in-floor, in chase, and vertical trade items.
2. The contractors shall use the coordination process to identify the proper sequence of installation of all utilities above ceilings and in other congested areas, to ensure an orderly and coordinated end result, and to provide adequate access for service and maintenance.

B. Participation:

1. The contractors and subcontractors responsible for work defined above shall participate in the coordination drawing process.
2. One contractor shall be designated as the Coordinating Contractor for purposes of preparing a complete set of composite electronic CAD coordination drawings that include all applicable trades, and for coordinating the activities related to this process. The Coordinating Contractor for this project shall be the Mechanical Contractor.
 - a. The Coordinating Contractor shall utilize personnel familiar with requirements of this project and skilled as draftspersons/CAD operators, competent to prepare the required coordination drawings.
3. Electronic CAD drawings shall be submitted to the Coordinating Contractor for addition of work by other trades. IMEG will provide electronic file copies of applicable drawings for contractor's use if the contractor signs and returns an "Electronic File Transfer" waiver provided by IMEG. IMEG will not consider blatant reproductions of original file copies an acceptable alternative for coordination drawings.

C. Drawing Requirements:

1. The file format and file naming convention shall be coordinated with and agreed to by all contractors participating in the coordination process and the Owner.
 - a. Scale of drawings:
 - 1) General plans: 1/4 Inch = 1'-0" (minimum).
 - 2) Mechanical, electrical, communication rooms, and including the surrounding areas within 10 feet: 1/2 Inch = 1'-0" (minimum).
 - 3) Shafts and risers: 1/2 Inch = 1'-0" (minimum).
 - 4) Sections of shafts and mechanical and electrical equipment rooms: 1/4 Inch = 1'-0" (minimum).
 - 5) Sections of congested areas: 1/2 Inch = 1'-0" (minimum).
2. Ductwork layout drawings shall be the baseline system for other components. Ductwork layout drawings shall be modified to accommodate other components as the coordination process progresses.
3. There may be more drawings required for risers, top and bottom levels of mechanical rooms, and shafts.
4. The minimum quantity of drawings will be established at the first coordination meeting and sent to the Architect/Engineer for review. Additional drawings may be required if other areas of congestion are discovered during the coordination process.

D. General:

1. Coordination drawing files shall be made available to the Architect/Engineer and Owner's Representative. The Architect/Engineer will only review identified conflicts and give an opinion, but will not perform as a coordinator.
2. A plotted set of coordination drawings shall be available at the project site.
3. Coordination drawings are not shop drawings and shall not be submitted as such.
4. The contract drawings are schematic in nature and do not show every fitting and appurtenance for each utility. Each contractor is expected to have included in his/her bid sufficient fittings, material, and labor to allow for adjustments in routing of utilities made necessary by the coordination process and to provide a complete and functional system.
5. The contractors will not be allowed additional costs or time extensions due to participation in the coordination process.
6. The contractors will not be allowed additional costs or time extensions for additional fittings, reroutings or changes of duct size, that are essentially equivalent sizes to those shown on the drawings and determined necessary through the coordination process.
7. The Architect/Engineer reserves the right to determine space priority of equipment in the event of spatial conflicts or interference between equipment, piping, conduit, ducts, and equipment provided by the trades.
8. Changes to the contract documents that are necessary for systems installation and coordination shall be brought to the attention of the Architect/Engineer.
9. Access panels shall preferably occur only in gypsum board walls or plaster ceilings where indicated on the drawings.
 - a. Access to mechanical, electrical, technology, and other items located above the ceiling shall be through accessible lay-in ceiling tile areas.
 - b. Potential layout changes shall be made to avoid additional access panels.
 - c. Additional access panels shall not be allowed without written approval from the Architect/Engineer at the coordination drawing stage.

- d. Providing additional access panels shall be considered after other alternatives are reviewed and discarded by the Architect/Engineer and the Owner's Representative.
 - e. When additional access panels are required, they shall be provided without additional cost to the Owner.
- 10. Complete the coordination drawing process and obtain signoff of the drawings by all contractors prior to installing any of the components.
 - 11. Conflicts that result after the coordination drawings are signed off shall be the responsibility of the contractor or subcontractor who did not properly identify their work requirements, or installed their work without proper coordination.
 - 12. Updated coordination drawings that reflect as-built conditions may be used as record documents.

1.6 QUALITY ASSURANCE

A. Telecommunications Structured Cabling System Standards:

- 1. All work and equipment shall conform to the most current ratified version of the following published standards unless otherwise indicated that draft standards are to be followed:
 - a. ANSI/NECA/BICSI 568 - Standard for Installing Commercial Building Telecommunications Cabling
 - b. ANSI/TIA-568-0-D - Generic Telecommunications Cabling for Customer Premises
 - 1) 1-D - Commercial Building Telecommunications Standard
 - 2) 2-D - Balanced Twisted-Pair Telecommunications Cabling and Components Standard
 - 3) 3-D - Optical Fiber Cabling Components Standard
 - 4) 4-D - Broadband Coaxial Cabling and Components Standard
 - c. ANSI/TIA-569-E - Telecommunications Pathways and Spaces
 - d. ANSI/TIA-606-C - Administration Standard for Commercial Telecommunications Infrastructure
 - e. ANSI/TIA-607-D - Commercial Building Grounding (Earthing) and Bonding Requirements for Telecommunications
 - f. ANSI/TIA-1152 - Requirements for Field Test Instruments and Measurements for Balanced Twisted-Pair Cabling
 - g. NFPA 70 (NEC) - National Electrical Code (Current Edition)
 - h. UL 444 - Standard for Safety for Communications Cable

B. Refer to individual sections for additional Quality Assurance requirements.

C. Qualifications:

- 1. Only products of reputable manufacturers as determined by the Architect/Engineer will be acceptable.
- 2. The installing Contractor shall be certified by the manufacturer of the structured cabling system. Documentation of certification is required at the time of bid. Shop drawings will not be approved until proof of certification is submitted. Refer to the end of this specification section for certification documentation requirements.
- 3. Each Contractor and their subcontractors shall employ only workers who are skilled in their respective trades and fully trained. All workers involved in the termination of cabling shall be individually certified by the manufacturer.

4. The Contractor shall be experienced in all aspects of this work and shall be required to demonstrate direct experience on recent systems of similar type and size.
5. The Contractor shall own and maintain tools and equipment necessary for successful installation and testing of optical and copper structured cabling systems and have personnel adequately trained in the use of such tools and equipment.
6. A resume of qualification shall be submitted with the Contractor's bid indicating the following:
 - a. Documentation of certification of This Contractor by the proposed structured cabling system manufacturer as required at the end of this specification section.

D. Compliance with Codes, Laws, Ordinances:

1. Conform to all requirements of the City of Kansas City, Kansas Codes, Laws, Ordinances and other regulations having jurisdiction.
2. In the event there are no local codes having jurisdiction over this job, the current issue of the National Electrical Code shall be followed.
3. If there is a discrepancy between the codes and regulations having jurisdiction over this installation, and these specifications, Architect/Engineer shall determine the method or equipment used.
4. If the Contractor notes, at the time of bidding, any parts of the drawings and specifications which are not in accordance with the applicable codes or regulations, he shall inform the Architect/Engineer in writing, requesting a clarification. If there is insufficient time to follow this procedure, he shall submit with the proposal, a separate price required to make the system shown on the drawings comply with the codes and regulations.
5. Verify the installation environment prior to purchasing or installing any cable. Cable installed in a plenum environment shall be appropriately rated. Bring all discrepancies between the contract documents and installation conditions to the attention of the Architect/Engineer prior to purchase or installation.
6. All changes to the system made after the letting of the contract, in order to comply with the applicable codes or the requirements of the Inspector, shall be made by the Contractor without cost to the Owner.

E. Permits, Fees, Taxes, Inspections:

1. Procure all applicable permits and licenses.
2. Abide by all applicable laws, regulations, ordinances, and other rules of the State or Political Subdivision wherein the work is done, or as required by any duly constituted public authority.
3. Pay all applicable charges for such permits or licenses that may be required.
4. Pay all applicable fees and taxes imposed by the State, Municipal and/or other regulatory bodies.
5. Pay all charges arising out of required inspections due to codes, permits, licenses or as otherwise may be required by an authorized body.
6. Pay all charges arising out of required contract document reviews associated with the project and as initiated by the Owner or authorized independent agency/consultant.
7. Pay any charges by the service provider related to the service or change in service to the project.
8. All equipment and materials shall be as approved or listed by the following (unless approval or listing is not applicable to an item by all acceptable manufacturers):
 - a. Factory Mutual
 - b. Underwriters' Laboratories, Inc.

F. Examination of Drawings:

1. The drawings for the technology systems work are diagrammatic, intended to convey the scope of the work and to indicate the general arrangements and locations of equipment etc., and the approximate sizes of equipment.
2. Contractor shall determine the exact locations of equipment and the exact routing of cabling to best fit the layout of the job. Scaling of the drawings will not be sufficient or accurate for determining this layout. Where a specific route is required, such route will be indicated on the drawings.
3. Where job conditions require reasonable changes in indicated arrangements and locations, such changes shall be made by the Contractor at no additional cost to the Owner.
4. If an item is either shown on the drawings, called for in the specifications or required for proper operation of the system, it shall be considered sufficient for including same in this contract.
5. The determination of quantities of material and equipment required shall be made by the Contractor from the drawings. Schedules on the drawings and in the specifications are completed as an aid to the Contractor but where discrepancies arise, the greater number shall govern.
6. Where words "provide", "install", or "furnish" are used on the drawings or in the specifications, it shall be taken to mean, to furnish, install and terminate completely ready for operation, the items mentioned.

G. Electronic Media/Files:

1. Construction drawings for this project have been prepared utilizing Revit.
2. Contractors and Subcontractors may request electronic media files of the contract drawings and/or copies of the specifications. Specifications will be provided in PDF format.
3. Upon request for electronic media, the Contractor shall complete and return a signed "Electronic File Transmittal" form provided by IMEG. If the information requested includes floor plans prepared by others, the Contractor will be responsible for obtaining approval from the appropriate Design Professional for use of that part of the document.
4. The electronic contract documents can be used for preparation of shop drawings and as-built drawings only. The information may not be used in whole or in part for any other project.
5. The drawings prepared by IMEG for bidding purposes may not be used directly for ductwork layout drawings or coordination drawings.
6. The use of these CAD documents by the Contractor does not relieve them from their responsibility for coordination of work with other trades and verification of space available for the installation.
7. The information is provided to expedite the project and assist the Contractor with no guarantee by IMEG as to the accuracy or correctness of the information provided. IMEG accepts no responsibility or liability for the Contractor's use of these documents.

H. Field Measurements:

1. Before ordering any materials, this Contractor shall verify all pertinent dimensions at the job site and be responsible for their accuracy.
2. Field conditions that will result in telecommunications drops that exceed the length limitations identified in the contract documents shall be brought to the attention of the Architect/Engineer prior to installation. The cost of reworking cabling that is too long, that was not brought to the written attention of the Architect/Engineer will be borne entirely by the Contractor.

3. This Contractor shall provide the Architect/Engineer with written documentation of any cabling drops that will not be able to use the cable tray (where cable tray is available) due to the resulting cabling lengths. This documentation shall be submitted prior to installation and installation shall not commence until approved by the Architect/Engineer.

1.7 WEB-BASED PROJECT SOFTWARE

- A. The General Contractor shall provide a web-based project software site for the purpose of hosting and managing project communication and documentation until completion of the warranty phase.
- B. The web-based project software shall include, at a minimum, the following features: construction schedule, submittals, RFIs, ASIs, construction change directives, change orders, drawing management, specification management, payment applications, contract modifications, meeting minutes, construction progress photos.
- C. Provide web-based project software user licenses for use by the Architect/Engineer. Access will be provided from the start of the project through the completion of the warranty phase.
- D. At project completion, provide digital archive of entire project in format that is readable by common desktop software applications in format acceptable to Architect/Engineer. Provide data in locked format to prevent further changes.

1.8 SUBMITTALS

- A. Submittals shall be required for the following items, and for additional items where required elsewhere in the specifications or on the drawings.

1. Submittals list:

Referenced Specification Section	Submittal Item
270503	Through Penetration Firestopping
270528	Interior Communications Pathways
270553	Identification and Administration
271500	Horizontal Cabling Requirements
271710	Testing
274100	Professional Audio Video System

- B. General Submittal Procedures: In addition to the provisions of Division 1, the following are required:

1. Transmittal: Each transmittal shall include the following:

- a. Date
- b. Project title and number
- c. Contractor's name and address
- d. Description of items submitted and relevant specification number
- e. Notations of deviations from the contract documents
- f. Other pertinent data

2. Submittal Cover Sheet: Each submittal shall include a cover sheet containing:
 - a. Date
 - b. Project title and number
 - c. Architect/Engineer
 - d. Contractor and subcontractors' names and addresses
 - e. Supplier and manufacturer's names and addresses
 - f. Description of item submitted (using project nomenclature) and relevant specification number
 - g. Notations of deviations from the contract documents
 - h. Other pertinent data
 - i. Provide space for Contractor's review stamps
3. Composition:
 - a. Submittals shall be submitted using specification sections and the project nomenclature for each item.
 - b. Individual submittal packages shall be prepared for items in each specification section. All items within a single specification section shall be packaged together where possible. An individual submittal may contain items from multiple specifications sections if the items are intimately linked (e.g., pumps and motors).
 - c. All sets shall contain an index of the items enclosed with a general topic description on the cover.
4. Content: Submittals shall include all fabrication, erection, layout, and setting drawings; manufacturers' standard drawings; schedules; descriptive literature, catalogs and brochures; performance and test data; wiring and control diagrams; dimensions; shipping and operating weights; shipping splits; service clearances; and all other drawings and descriptive data of materials of construction as may be required to show that the materials, equipment or systems and the location thereof conform to the requirements of the contract documents.
5. Contractor's Approval Stamp:
 - a. The Contractor shall thoroughly review and approve all shop drawings before submitting them to the Architect/Engineer. The Contractor shall stamp, date and sign each submittal certifying it has been reviewed.
 - b. Unstamped submittals will be rejected.
 - c. The Contractor's review shall include, but not be limited to, verification of the following:
 - 1) Only approved manufacturers are used.
 - 2) Addenda items have been incorporated.
 - 3) Catalog numbers and options match those specified.
 - 4) Performance data matches that specified.
 - 5) Electrical characteristics and loads match those specified.
 - 6) Equipment connection locations, sizes, capacities, etc. have been coordinated with other affected trades.
 - 7) Dimensions and service clearances are suitable for the intended location.
 - 8) Equipment dimensions are coordinated with support steel, housekeeping pads, openings, etc.
 - 9) Constructability issues are resolved (e.g., weights and dimensions are suitable for getting the item into the building and into place, sinks fit into countertops, etc.).

- d. The Contractor shall review, stamp and approve all subcontractors' submittals as described above.
 - e. The Contractor's approval stamp is required on all submittals. Approval will indicate the Contractor's review of all material and a complete understanding of exactly what is to be furnished. Contractor shall clearly mark all deviations from the contract documents on all submittals. If deviations are not marked by the Contractor, then the item shall be required to meet all drawing and specification requirements.
- 6. Submittal Identification and Markings:
 - a. The Contractor shall clearly mark each item with the same nomenclature applied on the drawings or in the specifications.
 - b. The Contractor shall clearly indicate the size, finish, material, etc.
 - c. Where more than one model is shown on a manufacturer's sheet, the Contractor shall clearly indicate exactly which item and which data is intended.
 - d. All marks and identifications on the submittals shall be unambiguous.
- 7. Schedule submittals to expedite the project. Coordinate submission of related items.
- 8. Identify variations from the contract documents and product or system limitations that may be detrimental to the successful performance of the completed work.
- 9. Reproduction of contract documents alone is not acceptable for submittals.
- 10. Incomplete submittals will be rejected without review. Partial submittals will only be reviewed with prior approval from the Architect/Engineer.
- 11. Submittals not required by the contract documents may be returned without review.
- 12. The Architect/Engineer's responsibility shall be to review one set of shop drawing submittals for each product. If the first submittal is incomplete or does not comply with the drawings and/or specifications, the Contractor shall be responsible to bear the cost for the Architect/Engineer to recheck and handle the additional shop drawing submittals.
- 13. Submittals shall be reviewed and approved by the Architect/Engineer **before** releasing any equipment for manufacture or shipment.
- 14. Contractor's responsibility for errors, omissions or deviation from the contract documents in submittals is not relieved by the Architect/Engineer's approval.
- 15. Schedule shall allow for adequate time to perform orderly and proper review of submittals, including time for consultants and Owner if required, and resubmittals by Contractor if necessary, and to cause no delay in Work or in activities of Owner or other contractors.
 - a. Allow at least two weeks for Architect's/Engineer's review and processing of each submittal.
- 16. Architect/Engineer reserves the right to withhold action on a submittal which, in the Architect/Engineer's opinion, requires coordination with other submittals until related submittals are received. The Architect/Engineer will notify the Contractor, in writing, when they exercise this right.
- C. Electronic Submittal Procedures:
 - 1. Distribution: Email submittals as attachments to all parties designated by the Architect/Engineer, unless a web-based submittal program is used.
 - 2. Transmittals: Each submittal shall include an individual electronic letter of transmittal.

3. Format: Electronic submittals shall be in PDF format only. Scanned copies, in PDF format, of paper originals are acceptable. Submittals that are not legible will be rejected. Do not set any permission restrictions on files; protected, locked, or secured documents will be rejected.
4. File Names: Electronic submittal file names shall include the relevant specification section number followed by a description of the item submitted, as follows. Where possible, include the transmittal as the first page of the PDF instead of using multiple electronic files.
 - a. Submittal file name: 27XXXX.description.YYYYMMDD
 - b. Transmittal file name: 27XXXX.description.YYYYMMDD
5. File Size: Files shall be transmitted via a pre-approved method. Larger files may require an alternative transfer method, which shall also be pre-approved.

1.9 PRODUCT DELIVERY, STORAGE, HANDLING & MAINTENANCE

- A. Exercise care in transporting and handling to prevent damage to fixtures, equipment and materials.
- B. Store materials on the site to prevent damage.
- C. Keep fixtures, equipment and materials clean, dry and free from deleterious conditions.

1.10 NETWORK / INTERNET CONNECTED EQUIPMENT

- A. These specifications may require certain equipment or systems to have network, Internet and/or remote access capability ("Network Capability"). Any requirement for Network Capability shall be interpreted only as a functional capability and is not to be construed as authority to connect or enable any Network Capability. Network Capability may only be connected or enabled with the express written consent of the Owner.

1.11 WARRANTY

- A. At a minimum, provide a one (1) year warranty for all equipment, materials, and workmanship. Individual specifications sections within Division 27 may require additional warranty requirements for specific equipment or systems.
- B. The warranty period for the entire installation described in this Division of the specifications shall commence on the date of substantial completion unless a whole or partial system or any separate piece of equipment or component is put into use for the benefit of any party other than the installing contractor with prior written authorization. In this instance, the warranty period shall commence on the date when such whole system, partial system or separate piece of equipment or component is placed in operation and accepted in writing by the Owner or their representative.
- C. Warranty requirements shall extend to correction, without cost to the final user, of all work and/or equipment found to be defective or nonconforming to the contract documents. The Contractor shall bear the cost of correcting all damage resulting from such defects or nonconformance with contract documents exclusive of repairs required as a result of improper maintenance or operation, or of normal wear as determined by the Architect/Engineer.

1.12 INSURANCE

- A. Contractor shall maintain insurance coverage as set forth in Division 1 of these specifications.

1.13 MATERIAL SUBSTITUTION

- A. Where several manufacturers' names are given, the first named manufacturer constitutes the basis for job design and establishes the equipment quality required.
- B. Equivalent equipment manufactured by the other named manufacturers may be used. Contractor shall ensure that all items submitted by these other manufacturers meets all requirements of the drawings and specifications and fits in the allocated space. When using other listed manufacturers, the Contractor shall assume responsibility for any and all modifications necessary (including, but not limited to structural supports, electrical connections and rough-in, and regulatory agency approval, etc.) and coordinate such with other contractors. The Architect/Engineer shall make the final determination of whether a product is equivalent.
- C. Any material, article or equipment of other unnamed manufacturers which will adequately perform the services and duties imposed by the design and is of a quality equal to or better than the material, article or equipment identified by the drawings and specifications may be used if approval is secured in writing from the Architect/Engineer via addendum. The Contractor bears full responsibility for the unnamed manufacturers equipment adequately meeting the intent of design. The Architect/Engineer may reject manufacturer at time of shop drawing submittal. The Contractor assumes all costs incurred by other trades on the project as a result of changes necessary to accommodate the offered material, equipment or installation method.
- D. Should this Contractor be unable to secure approval from the Architect/Engineer for other unnamed manufacturers as outlined above, this Contractor may list voluntary add or deduct prices for alternate materials on the bid form. These items will not be used in determining the low bidder. Should a voluntary alternate material be accepted, This Contractor shall assume all costs that may be incurred as a result of using the offered material, article or equipment necessitating extra expense on This Contractor or on the part of other Contractors whose work is affected.

PART 2 - PRODUCTS

2.1 CABLE JACKET RATING

- A. This project requires all cable jackets to carry a plenum rating.

2.2 Refer to individual sections.

PART 3 - EXECUTION

3.1 JOBSITE SAFETY

- A. Neither the professional activities of the Architect/Engineer, nor the presence of the Architect/Engineer or his or her employees and subconsultants at a construction site, shall relieve the Contractor and any other entity of their obligations, duties and responsibilities including, but not limited to, construction means, methods, sequence, techniques or procedures necessary for performing, superintending or coordinating all portions of the work of construction in accordance with the contract documents and any health or safety precautions required by any regulatory agencies. The Architect/Engineer and his or her personnel have no authority to exercise any control over any construction contractor or other entity or their employees in connection with their work or any health or safety precautions. The Contractor is solely responsible for jobsite safety. The Architect/Engineer and the Architect/Engineer's consultants shall be indemnified and shall be made additional insureds under the Contractor's general liability insurance policy.

3.2 GENERAL INSTALLATION REQUIREMENTS

- A. Installation of all conduit and cabling shall comply with Sections 26 05 33 and 26 05 13. Additional conduit requirements described within this Division shall be supplemental to the requirement described in Section 260533. Should conflicts exist between the two Divisions the more stringent (more expensive material and labor) condition shall prevail until bidding addendum or construction clarification or RFI can be submitted and responded to. In no case shall the Contractor carry the least stringent condition in the pricing.
- B. It is the Contractor's responsibility to survey the site and include all necessary costs to perform the installation as specified.
- C. The Contractor shall be responsible for identifying and reporting to the Architect/Engineer any existing conditions including but not limited to damage to walls, flooring, ceiling and furnishings prior to start of work. All damage to interior spaces caused by this Contractor shall be repaired at this Contractor's expense to pre-existing conditions, including final colors and finishes.
- D. All cables and devices installed in damp or wet locations, including any underground or underslab location, shall be listed as suitable for use in such environments. Follow manufacturer's recommended installation practices for installing cables and devices in damp or wet locations. Any cable or device that fails as a result of being installed in a damp or wet location shall be replaced at the Contractor's expense.

3.3 FIELD QUALITY CONTROL

- A. General:
 - 1. Refer to specific Division 27 sections for further requirements.
 - 2. The Contractor shall conduct all tests required and applicable to the work both during and after construction of the work.
 - 3. The necessary instruments and materials required to conduct or make the tests shall be supplied by the Contractor who shall also supply competent personnel for making the tests who has been schooled in the proper testing techniques.

4. In the event the results obtained in the tests are not satisfactory, This Contractor shall make such adjustments, replacements and changes as are necessary and shall then repeat the test or tests which disclose faulty or defective work or equipment, and shall make such additional tests as the Architect/Engineer or code enforcing agency deems necessary.
5. All communications cable tests that fail, including those due to excessive cabling lengths, shall be remedied by the Contractor without cost to the project.

B. Protection of cable from foreign materials:

1. It is the Contractor's responsibility to provide adequate physical protection to prevent foreign material application or contact with any cable type. Foreign material is defined as any material that would negatively impact the validity of the manufacturer's performance warranty. This includes, but is not limited to, overspray of paint (accidental or otherwise), drywall compound, or any other surface chemical, liquid or compound that could come in contact with the cable, cable jacket or cable termination components.
2. Application of foreign materials of any kind on any cable, cable jacket or cable termination component will not be accepted. It shall be the Contractor's responsibility to replace any component containing overspray, in its entirety, at no additional cost to the project. Cleaning of the cables with harsh chemicals is not allowed. This requirement is regardless of the PASS/FAIL test results of the cable containing overspray. Should the manufacturer and warrantor of the structured cabling system desire to physically inspect the installed condition and certify the validity of the structured cabling system (via a signed and dated statement by an authorized representative of the structured cabling manufacturer), the Owner may, at their sole discretion, agree to accept said warranty in lieu of having the affected cables replaced. In the case of plenum cabling, in addition to the statement from the manufacturer, the Contractor shall also present to the Owner a letter from the local Authority Having Jurisdiction stating that they consider the plenum rating of the cable to be intact and acceptable.

3.4 PROJECT CLOSEOUT

- A. Refer to the Division 1 Section: PROJECT CLOSEOUT for requirements. The following paragraphs supplement the requirements of Division 1.
- B. Final Jobsite Observation:
 1. The Architect/Engineer will not perform a final jobsite observation until the project is ready. This is not dictated by schedule, but rather by completeness of the project.
 2. Refer to the end of this specification section for a "STATEMENT INDICATING READINESS FOR FINAL JOBSITE OBSERVATION."
 3. The Contractor shall sign this form and return it to the Architect/Engineer so that the final observation can commence.
- C. Before final payment will be authorized, this Contractor must have completed the following:
 1. Submitted operation and maintenance manuals to the Architect/Engineer for review.
 2. Submitted bound copies of approved shop drawings.
 3. Record documents including edited drawings and specifications accurately reflecting field conditions, **inclusive** of all project revisions, change orders, and modifications.
 4. Submitted a report stating the instructions given to the Owner's representative complete with the number of hours spent in the instruction. The report shall bear the signature of an authorized agent of This Contractor and shall be signed by the Owner's representative as having received the instructions.

5. Submitted testing reports for all systems requiring final testing as described herein.
6. Submitted start-up reports on all equipment requiring a factory installation inspection and/or start.
7. Provide spare parts, maintenance, and extra materials in quantities specified in individual specification sections. Deliver to project site; submit receipt to Architect/Engineer prior to final payment being approved.
8. Provide System Assurance Warranty certificate for the telecommunications system.

3.5 OPERATION AND MAINTENANCE MANUALS

A. General:

1. Provide an electronic copy of the O&M manuals as described below for Architect/Engineer's review and approval. The electronic copy shall be corrected as required to address the Architect/Engineer's comments. Once corrected, electronic copies and paper copies shall be distributed as directed by the Architect/Engineer.
2. Approved O&M manuals shall be completed and in the Owner's possession prior to Owner's acceptance and at least 10 days prior to instruction of operating personnel.

B. Electronic Submittal Procedures:

1. Distribution: Email the O&M manual as attachments to all parties designated by the Architect/Engineer.
2. Transmittals: Each submittal shall include an individual electronic letter of transmittal.
3. Format: Electronic submittals shall be in PDF format only. Scanned copies, in PDF format, of paper originals are acceptable. Submittals that are not legible will be rejected. Do not set any permission restrictions on files; protected, locked, or secured documents will be rejected.
4. File Names: Electronic submittal file names shall include the relevant specification section number followed by a description of the item submitted, as follows. Where possible, include the transmittal as the first page of the PDF instead of using multiple electronic files.
 - a. O&M file name: O&M.div27.contractor.YYYYMMDD
 - b. Transmittal file name: O&Mtransmittal.div27.contractor.YYYYMMDD
5. File Size: Files shall be transmitted via a pre-approved method. Larger files may require an alternative transfer method, which shall also be pre-approved.
6. Provide the Owner with an approved copy of the O&M manual on compact discs (CD), digital video discs (DVD), or flash drives with a permanently affixed label, printed with the title "Operation and Maintenance Instructions", title of the project and subject matter of disc/flash drive when multiple disc/flash drives are required.
7. All text shall be searchable.
8. Bookmarks shall be used, dividing information first by specification section, then systems, major equipment and finally individual items. All bookmark titles shall include the nomenclature used in the construction documents and shall be an active link to the first page of the section being referenced.

C. Operation and Maintenance Instructions shall include:

1. Title Page: Include title page with project title, Architect, Engineer, Contractor, all subcontractors, and major equipment suppliers, with addresses, telephone numbers, website addresses, email addresses and point of contacts. Website URLs and email addresses shall be active links in the electronic submittal.

2. Table of Contents: Include a table of contents describing specification section, systems, major equipment, and individual items.
3. Copies of all final approved shop drawings and submittals. Include Architect's/Engineer's shop drawing review comments. Insert the individual shop drawing directly after the Operation and Maintenance information for the item(s) in the review form.
4. Copy of final approved test and balance reports.
5. Copies of all factory inspections and/or equipment startup reports.
6. Copies of warranties.
7. Schematic wiring diagrams of the equipment that have been updated for field conditions. Field wiring shall have label numbers to match drawings.
8. Dimensional drawings of equipment.
9. Capacities and utility consumption of equipment.
10. Detailed parts lists with lists of suppliers.
11. Operating procedures for each system.
12. Maintenance schedule and procedures. Include a chart listing maintenance requirements and frequency.
13. Repair procedures for major components.
14. List of lubricants in all equipment and recommended frequency of lubrication.
15. Instruction books, cards, and manuals furnished with the equipment.

3.6 INSTRUCTING THE OWNER'S REPRESENTATIVE

- A. Adequately instruct the Owner's designated representative or representatives in the maintenance, care, and operation of the complete systems installed under this contract.
- B. Provide verbal and written instructions to the Owner's representative or representatives by FACTORY PERSONNEL in the care, maintenance, and operation of the equipment and systems.
- C. The Owner has the option to make a video recording of all instructions. Coordinate schedule of instructions to facilitate this recording.
- D. The Architect/Engineer shall be notified of the time and place for the verbal instructions to be given to the Owner's representative so that their representative can be present if desirable.
- E. Refer to the individual specification sections for minimum hours of instruction time for each system.
- F. Operating Instructions:
 1. The Contractor is responsible for all instructions to the Owner and/or Owner's operating staff on the Communications Systems.
 2. If the Contractor does not have Engineers and/or Technicians on staff who can adequately provide the required instructions on system operation, performance, troubleshooting, care and maintenance, they shall include in the bid an adequate amount to reimburse the Owner for the Architect/Engineer to perform these services.

3.7 SYSTEM STARTING AND ADJUSTING

- A. The Communications Systems included in the construction documents are to be complete and operating systems. The Architect/Engineer will make periodic job site observations during the construction period. The system start-up, testing, configuration, and satisfactory system performance is the responsibility of the Contractor. This shall include all calibration and adjustments of electrical equipment controls, equipment settings, software configuration, troubleshooting and verification of software, and final adjustments that may be required.
- B. All operating conditions and control sequences shall be simulated and tested during the start-up period.
- C. The Contractor, subcontractors, and equipment suppliers are expected to have skilled technicians to ensure that the system performs as designed. If the Architect/Engineer is requested to visit the job site for the purpose of trouble shooting, assisting in the satisfactory start-up, obtaining satisfactory equipment operation, resolving installation and/or workmanship problems, equipment substitution issues or unsatisfactory system performance, including call backs during the warranty period through no fault of the design; the Contractor shall reimburse the Owner on a time and material basis for services rendered at the Architect/Engineer's standard hourly rates in effect at the time the services are requested. The Contractor shall be responsible for making payment to the Owner for services required that are product, installation or workmanship related. Payment is due within 30 days after services are rendered.

3.8 RECORD DOCUMENTS

- A. Refer to the Division 1 Section: PROJECT CLOSEOUT for requirements. The following paragraphs supplement the requirements of Division 1.
- B. Mark specifications to indicate approved substitutions, change orders, and actual equipment and materials used.
- C. This Contractor shall maintain at the job site, a separate and complete set of technology drawings which shall be clearly and permanently marked and noted in complete detail any changes made to the location and arrangement of equipment or made to the Technology Systems and wiring as a result of building construction conditions or as a result of instructions from the Architect or Engineer. All Change Orders, RFI responses, Clarifications and other supplemental instructions shall be marked on the documents. Record documents that merely reference the existence of the above items are not acceptable. Should This Contractor fail to complete Record Documents as required by this contract, This Contractor shall reimburse Architect/Engineer for all costs to develop record documents that comply with this requirement. Reimbursement shall be made at the Architect/Engineer's hourly rates in effect at the time of work.
- D. Record actual routing of all conduits sized 2" or larger.
- E. The above record of changes shall be made available for the Architect and Engineer's examination during any regular work time.
- F. Upon completion of the job, and before final payment is made, This Contractor shall give the marked-up drawings to the Architect/Engineer.

3.9 ADJUST AND CLEAN

- A. Contractor shall thoroughly clean all equipment and systems prior to the Owner's final acceptance of the project.
- B. Contractor shall clean all foreign paint, grease, oil, dirt, labels, stickers, and other foreign material from equipment.
- C. Contractor shall remove all rubbish, debris, etc., accumulated during the Contractor's operations from the premises.

STATEMENT INDICATING READINESS FOR FINAL JOBSITE OBSERVATION

To assist the contractor in a timely close-out of the project, it is crucial that the final jobsite observation is not conducted prior to the project being ready. The contractor is required to review the completion status of the project at the time the observation is scheduled. This review, and the subsequent submittal of this form to the Architect/Engineer, shall indicate the contractor's agreement that the area of the project being requested for final observation is ready as defined below. The following list represents the degree of completeness required prior to requesting a final observation:

1. All cabling pathways (cable tray, ladder rack, conduit sleeves, etc.) are installed and all cabling has been pulled through them.
2. All mechanical firestop products are installed and all other penetrations have been sealed.
3. All telecommunications jacks are installed in the faceplates.
4. All telecommunications cabling is pulled and at least 90% of all jacks have been terminated at the jack and at the telecom room.
5. Telecommunications testing is in progress and at least 50% of testing has been completed.
6. Telecommunications labeling has been provided on at least 50% of each type of component requiring a label.
7. All Audio/Visual components, cabling and control systems are installed, programmed and operational.

Prime Contractor: _____

By: _____

Requested Observation Date _____

Today's Date: _____

Contractor shall sign this readiness statement and transmit to Architect/Engineer at least 10 days prior to the requested date of observation.

It is understood that if the Architect/Engineer finds that the project is not complete as defined above and that the final jobsite observation cannot be completed on the requested date, the Architect/Engineer will return to the site at a later date. All additional visits to the site for the purposes of completing the final observation will be billed T&M to the Contractor at our standard hourly rates, including travel expenses or the contractor's retainage may be deducted for the same amount.

END OF SECTION 270500

SECTION 270503 - THROUGH PENETRATION FIRESTOPPING

PART 1 - GENERAL

1.1 SECTION INCLUDES

- A. Through-Penetration Firestopping.

1.2 QUALITY ASSURANCE

- A. Manufacturer: Company specializing in manufacturing products specified in this Section.
- B. Installer: Individuals performing work shall be certified by the manufacturer of the system selected for installation.

1.3 REFERENCES

- A. UL 263 - Fire Tests of Building Construction and Materials
- B. UL 723 - Surface Burning Characteristics of Building Materials
- C. ANSI/UL 1479 - Fire Tests of Through Penetration Firestops
- D. UL 2079 - Tests for Fire Resistance of Building Joint Systems
- E. UL Fire Resistance Directory Through Penetration Firestop Systems (XHEZ)
- F. Intertek / Warnock Hersey - Directory of Listed Products
- G. ASTM E84 - Standard Test Method for Surface Burning Characteristics of Building Materials
- H. ASTM E814 - Standard Test Method for Fire Tests of Through-Penetration Firestops
- I. The Building Officials and Code Administrators National Building Code
- J. 1997 Uniform Building Code
- K. Wisconsin Administrative Code
- L. 2018 International Building Code
- M. NFPA 5000 – Building Construction Safety Code

1.4 SUBMITTALS

- A. Submit under provisions of Section 270500.
- B. Submit Firestopping Installers Certification for all installers on the project.

- C. Shop Drawings: Submit for each condition requiring firestopping. Include descriptions of the specific penetrating item, actual wall/floor construction, manufacturer's installation instructions, and UL or Intertek / Warnock Hersey Assembly number.
- D. Through-Penetration Firestop System Schedule: Indicate locations of each through-penetration firestop system, along with the following information:
 - 1. Types of penetrating items.
 - 2. Types of constructions penetrated, including fire-resistance ratings and, where applicable, thicknesses of construction penetrated.
 - 3. Through-penetration firestop systems for each location identified by firestop design designation of qualified testing and inspecting agency.
 - 4. F ratings for each firestop system.
- E. Maintain a notebook on the job site at all times that contains copies of approved submittals for all through penetration firestopping to be installed. Notebook shall be made available to the Authority Having Jurisdiction at their request and turned over to the Owner at the end of construction as part of the O&M Manuals.

1.5 DELIVERY, STORAGE, AND HANDLING

- A. Store, protect and handle products on site. Accept material on site in factory containers and packing. Inspect for damage. Protect from deterioration or damage due to moisture, temperature changes, contaminants, or other causes. Follow manufacturer's instructions for storage.
- B. Install material prior to expiration of product shelf life.

1.6 PERFORMANCE REQUIREMENTS

- A. General: For penetrations through the following fire-resistance-rated constructions, including both empty openings and openings containing penetrating items, provide through-penetration firestop systems that are produced and installed to resist spread of fire according to requirements indicated, resist passage of smoke and other gases, and maintain original fire-resistance rating of construction penetrated.
 - 1. Fire-resistance-rated walls including fire partitions, fire barriers, and smoke barriers.
 - 2. Fire-resistance-rated horizontal assemblies including floors, floor/ceiling assemblies, and ceiling membranes of roof/ceiling assemblies.
- B. Rated Systems: Provide through-penetration firestop systems with the following ratings determined per UL 1479:
 - 1. F-Rated Systems: Provide through-penetration firestop systems with F-ratings indicated, but not less than that equaling or exceeding fire-resistance rating of constructions penetrated.
- C. For through-penetration firestop systems exposed to light, traffic, moisture, or physical damage, provide products that, after curing, do not deteriorate when exposed to these conditions both during and after construction.

- D. For through-penetration firestop systems exposed to view, provide products with flame-spread and smoke-developed indexes of less than 25 and 450, respectively, as determined per ASTM E 84.
- E. For through-penetration firestop systems in air plenums, provide products with flame-spread and smoke-developed indexes of less than 25 and 50, respectively, as determined per ASTM E 84.

1.7 MEETINGS

- A. Pre-installation meeting: A pre-installation meeting shall be scheduled and shall include the General Contractor, all Subcontractors associated with the installation of systems penetrating fire barriers, Firestopping Manufacturer's Representative, and the Owner.
 - 1. Review foreseeable methods related to firestopping work.
 - 2. Tour representative areas where firestopping is to be installed; inspect and discuss each type of condition and each type of substrate that will be encountered, and preparation to be performed by other trades.

1.8 WARRANTY

- A. Provide one year warranty on parts and labor.
- B. Warranty shall cover repair or replacement of firestop systems which fail in joint adhesion, cohesion, abrasion resistance, weather resistance, extrusion resistance, migration resistance, stain resistance, general durability, or appear to deteriorate in any manner not clearly specified by the manufacturer as an inherent quality of the material.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

- A. Products: Subject to compliance with requirements, provide one of the through-penetration firestop systems indicated for each application that are produced by one of the following manufacturers. All firestopping systems installed shall be provided by a single manufacturer.
 - 1. 3M; Fire Protection Products Division
 - 2. Hilti, Inc.
 - 3. RectorSeal Corporation, Metacaulk
 - 4. Tremco; Sealant/Weatherproofing Division
 - 5. Johns-Manville
 - 6. Specified Technologies Inc. (S.T.I.)
 - 7. Spec Seal Firestop Products
 - 8. AD Firebarrier Protection Systems
 - 9. Wiremold/Legrand: FlameStopper
 - 10. Dow Corning Corp.
 - 11. Fire Trak Corp.
 - 12. International Protective Coating Corp.
 - 13. HoldRite

2.2 THROUGH PENETRATION FIRESTOP SYSTEMS

- A. Provide materials and systems classified by or listed by Intertek / Warnock Hersey to provide firestopping equal to time rating of construction being penetrated.
- B. All firestopping materials shall be free of asbestos, lead, PCB's, and other materials that would require hazardous waste removal.
- C. Firestopping shall be flexible to allow for normal penetrating item movement due to expansion and contraction.
- D. Firestopping systems for plumbing and wet pipe sprinkler piping shall be moisture resistant.
- E. Provide firestopping systems capable of supporting floor loads where systems are exposed to possible floor loading or traffic.
- F. Provide firestopping systems allowing continuous insulation for all insulated pipes.
- G. Provide firestopping systems classified by UL or listed by Intertek / Warnock Hersey for penetrations through all fire rated construction. Firestopping systems shall be selected from the UL or listed by Intertek / Warnock Hersey Fire Resistance Directory Category XHEZ based on substrate construction and penetrating item size and material and shall fall within the range of numbers listed:
 - 1. Non-Combustible Framed Walls - 1 or 2 Hour Rated:
 - a. F Rating = Wall Rating
 - 2. Concrete or Masonry Floors and Walls - 1 or 2 Hour Rated:
 - a. F Rating = Wall/Floor Rating
- H. Any opening in walls or floors not covered by the listed series of numbers shall be coordinated with the firestopping manufacturer.
- I. Any openings in floors or walls not described in the UL or listed by Intertek / Warnock Hersey Fire Resistance Directory, or outlined in manufacturer's information shall be sealed in a manner agreed upon by the Firestopping Manufacturer, Owner, and the Authority Having Jurisdiction.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Ensure all surfaces that contact seal materials are free of dirt, dust, grease, oil, rust, or loose materials. Clean and repair surfaces as required. Remove laitance and form-release agents from concrete.
- B. Ensure substrate and penetrating items have been permanently installed prior to installing firestopping systems. Ensure penetrating items have been properly spaced and have proper clearance prior to installing firestopping systems.

- C. Surfaces to which sealing materials are to be installed must meet the selected UL or Intertek / Warnock Hersey system substrate criteria.
- D. Prime substrates where recommended in writing by through-penetration firestop system manufacturer. Confine primer to area of bond.

3.2 INSTALLATION

- A. In existing construction, provide firestopping of openings prior to and after installation of penetrating items. Remove any existing coatings on surfaces prior to firestopping installation. Temporary firestopping shall consist of packing openings with fire resistant mineral wool for the full thickness of substrate, or an alternate method approved by the Authority Having Jurisdiction. All openings shall be temporarily firestopped immediately upon their installation and shall remain so until the permanent UL or listed by Intertek / Warnock Hersey listed firestopping system is installed.
- B. Install penetration seal materials in accordance with printed instructions of the UL or Intertek / Warnock Hersey Fire Resistance Directory and with the manufacturer's printed application instructions.
- C. Install dams as required to properly contain firestopping materials within openings and as required to achieve required fire resistance rating. Remove combustible damming after appropriate curing.

3.3 CLEANING AND PROTECTING

- A. Clean excess fill materials adjacent to openings as Work progresses by methods and with cleaning materials that are approved in writing by through-penetration firestop system manufacturers and that do not cause damage.
- B. Provide final protection and maintain conditions during and after installation that ensure that through-penetration firestop systems are without damage or deterioration at time of Substantial Completion. If, despite such protection, damage or deterioration occurs, remove damaged or deteriorated through-penetration firestop systems immediately and install new materials to produce systems complying with specified requirements.

3.4 INSPECTION

- A. All penetrations shall be inspected by the manufacturer's representative to ensure proper installation.
- B. Access to firestop systems shall be maintained for examination by the Authority Having Jurisdiction at their request.
- C. Proceed with enclosing through-penetration firestop system with other construction only after inspection reports are issued and firestop installations comply with requirements.

- D. The Contractor shall allow for visual destructive review of 5% of installed firestop systems (minimum of one) to prove compliance with specifications and manufacturer's instructions and details. Destructive system removal shall be performed by the Contractor and witnessed by the Architect/Engineer and manufacturer's factory representative. The Architect/Engineer shall have sole discretion of which firestop system installations will be reviewed. The Contractor is responsible for all costs associated with this requirement including labor and material for removing and replacing the installed firestop system. If any firestop system is found to not be installed per manufacturer's specific instructions and details, all firestop systems are subject to destructive review and replacement at the Architect/Engineer's discretion and the Contractor's expense.

END OF SECTION 270503

SECTION 270505 - TECHNOLOGY DEMOLITION FOR REMODELING

PART 1 - GENERAL

1.1 SECTION INCLUDES

- A. Technology demolition.

1.2 RELATED WORK

- A. Section 270500 - Basic Communications Systems Requirements.

1.3 REFERENCES

- A. NFPA 70 - National Electrical Code.

PART 2 - PRODUCTS

2.1 MATERIALS AND EQUIPMENT

- A. Materials and equipment for terminating, patching and cross connecting of existing telecommunications and security systems shall be as specified in individual Sections.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. THE CONTRACTOR SHALL VISIT THE SITE PRIOR TO SUBMITTING A BID AND VERIFY EXISTING CONDITIONS AND SCOPE OF WORK.
- B. Where walls, ceilings, structures, etc., are indicated as being renovated on general drawings, the Contractor shall be responsible for the removal of all technology equipment including but not limited to: copper, fiber and coaxial cable, faceplates and jacks, raceways, racking and equipment mounted to the racking, etc., from the renovated area.
- C. Where ceilings, walls, structures, etc., are temporarily removed and replaced by others, this Contractor shall be responsible for the removal, storage, and replacement of equipment, devices, fixtures, raceways, wiring, systems, etc.
- D. Verify that abandoned wiring and equipment serve only abandoned equipment or facilities. Extend conduit and wire to facilities and equipment that will remain in operation following demolition. Extension of conduit and wire to equipment shall be compatible with the surrounding area.
- E. Coordinate scope of work with all other Contractors and the Owner at the project site. Schedule removal of equipment and technology service to avoid conflicts.

3.2 PREPARATION

- A. Not all services within the building will be inactive or abandoned. Verify abandonment status with the building owner, General Contractor and Architect/Engineer prior to demolition.
- B. Prior to commencing with demolition, a proposed implementation narrative with schedule shall be submitted to the Architect/Engineer for approval.
- C. The contractor shall provide proof that only qualified personnel with extensive telecommunications experience will perform the demolition. No laborers will be allowed in the cable removal process.
- D. The contractor shall coordinate with owner to verify all cabling, patch cords and cross connects have been removed from active equipment that is to remain during the duration of the renovation.
- E. Provide temporary wiring and connections to maintain existing systems in service during construction. When work must be performed on active equipment, use technicians experienced in such operations. Assume all equipment and systems must remain operational unless specifically noted otherwise on drawings.

3.3 DEMOLITION AND EXTENSION OF EXISTING TECHNOLOGY WORK

- A. Demolish and extend existing technology work under provisions of Division 1 of Architectural Specifications and this Section.
- B. Some cabling within the ceiling space may serve other building tenants; care shall be exercised to prevent service interrupts.
- C. Remove, relocate, and extend existing installations to accommodate new construction.
- D. Remove abandoned low voltage cabling and raceway to source of cabling according to the NEC. Refer to the NEC for definition of Abandoned Communications Cabling.
- E. Remove exposed abandoned raceway, including abandoned raceway above accessible ceiling finishes. Cut raceway flush with walls and floors, and patch surfaces. Remove all associated clamps, hangers, supports, etc. associated with raceway removal.
- F. Disconnect abandoned outlets and remove devices. Remove abandoned outlets if conduit servicing them is removed. Patch openings created from removal of devices to match surrounding finishes.
- G. Disconnect and remove abandoned patch panels, blocks and other distribution equipment.
- H. Repair adjacent construction and finishes damaged during demolition and extension work. Patch openings to match existing surrounding finishes.
- I. Maintain access to existing technology installations that remain active. Modify installation or provide access panels as appropriate.
- J. Extend existing installations using materials and methods compatible with existing technology installations, or as specified.

Unified Government Memorial Hall Kitchen & Audio/Visual Renovations

Unified Government of Wyandotte County & Kansas City, KS

ISSUED FOR BID

- K. Regulatory Requirements: Comply with governing EPA notification regulations before beginning demolition. Comply with hauling and disposal regulations of authorities having jurisdiction.
- L. This Contractor is responsible for all costs incurred in repair, relocations, or replacement of any cables, conduits, or other services if damaged without proper investigation.

3.4 CLEANING AND REPAIR

- A. Clean and repair existing materials and equipment that remain or are to be reused.
- B. Patch panels, blocks and other connectivity equipment: Clean exposed surfaces and check tightness of connections. Re-terminate any loose connections; the contractor shall notify the Architect/Engineer of any permanently damaged or unusable equipment.
- C. TECHNOLOGY ITEMS (E.G., PATCH PANELS, EQUIPMENT RACKS, JACKS, FACEPLATES, BLOCKS, CABLING, ETC.) REMOVED AND NOT RELOCATED REMAIN THE PROPERTY OF THE OWNER. CONTRACTOR SHALL PLACE ITEMS RETAINED BY THE OWNER IN A LOCATION COORDINATED WITH THE OWNER. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE DISPOSAL OF MATERIAL THE OWNER DOES NOT WANT.

3.5 INSTALLATION

- A. Install relocated materials and equipment under the provisions of applicable Division 27 specifications.

END OF SECTION 270505

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 270528 - INTERIOR COMMUNICATION PATHWAYS

PART 1 - GENERAL

1.1 SECTION INCLUDES

- A. The work covered under this section consists of the furnishing of all necessary labor, supervision, materials, equipment, tests and services to install complete wire mesh support systems, conduits, sleeves, innerduct, etc. for an interior cabling plant as shown on the drawings.
- B. Wire mesh support systems are defined to include, but are not limited to straight sections of continuous wire mesh, field formed horizontal and vertical bends, tees, drop outs, supports and accessories.

1.2 RELATED WORK

- A. Section 260533 - Conduit and Boxes
- B. Section 270500 - Basic Communications Systems Requirements
- C. Section 270526 - Communications Bonding

1.3 QUALITY ASSURANCE

- A. Refer to Section 270500 for requirements.

1.4 REFERENCES

- A. ANSI/NFPA 70 - National Electrical Code
- B. NEMA VE 2-2000 - Cable Tray Installation Guidelines

1.5 SUBMITTALS

- A. Under the provisions of Section 270500 and Division 1, prior to the start of work the Contractor shall submit:
 - 1. Manufacturer's data covering all products proposed, including construction, materials, ratings and all other parameters identified in Part 2 - Products, below.
 - 2. Manufacturer's installation instructions.
- B. Coordination Drawings:
 - 1. Include cable tray and conduit sleeve layout in composite electronic coordination files. Refer to Section 270500 for coordination drawing requirements.

1.6 DRAWINGS

- A. The drawings, which constitute a part of these specifications, indicate the general route of the wire mesh support systems, conduit, sleeves, etc. Data presented on these drawings is as accurate as preliminary surveys and planning can determine until final equipment selection is made. Accuracy is not guaranteed and field verification of all dimensions, routing, etc., is required.

PART 2 - PRODUCTS

2.1 CONDUIT

- A. Refer to Section 26 05 33 for conduit requirements for this project.

2.2 WIRE MESH CABLE TRAY - OVERHEAD

- A. General: Provide wire mesh of types and sizes indicated on drawings; with connector assemblies, clamp assemblies, connector plates, splice plates and splice bars. Provide drop-out fittings where cable tray is installed over equipment racks. Two drop-out fittings shall be installed over each rack so that a controlled radius is maintained into each side of every equipment rack that cable tray passes over. Construct units with rounded edges and smooth surfaces; in compliance with applicable standards; and with the following additional construction features.
- B. Wire mesh shall be made of high strength steel wires and formed into a standard 2 inch by 4-inch wire mesh pattern with intersecting wires welded together. All wire ends along wire mesh sides (flanges) shall be rounded during manufacturing for safety of cables and installers.
- C. Materials and Finishes: Material and finish specifications for each wire mesh type are as follows:
 - 1. Hot dip galvanized: Straight sections and accessories shall be immersed in a molten zinc bath in accordance with ASTM A123 and A653.
 - 2. Accessories:
 - a. Pre-Galvanized Zinc: Wall brackets and other pre-galvanized accessories shall be coated with zinc in accordance with ASTM A653.
 - b. Electro-Galvanized Zinc: Support accessories and miscellaneous hardware shall be coated in accordance with ASTM B633 SC3. All threaded components shall be coated in accordance with ASTM B633 SC1.
- D. Type of Overhead Wire Mesh Support System:
 - 1. All straight section longitudinal wires shall be straight (with no bends).
 - 2. Wire mesh supports shall be trapeze hangers or wall brackets. Center hung supports will not be allowed.
 - 3. Trapeze hangers are to be supported by 1/4 inch or 3/8-inch diameter rods.
 - 4. Provide manufacturer approved grounding clips as necessary for continuous grounding of tray.
 - 5. Basis of Design
 - a. nVent Caddy WBTray "Shaped" WBT#x# S Series

6. Additional acceptable manufacturers:

- a. Cooper B-Line "Flextray"
- b. Cablofil, Inc,
- c. Wiremold "Fieldmate"

2.3 CABLE HANGERS AND SUPPORTS

A. Provide a non-continuous cable support system suitable for use with open cable.

B. Cable Hooks:

- 1. Construction: Flat bottom design with a minimum cable bearing surface of 1-5/8". Hooks shall have 90-degree radius edges.
- 2. All cable hook mounting hardware shall be recessed to prevent damage to cable during installation. Installed cabling shall be secured using a cable latch retainer that shall be removable and reusable.
- 3. Finish: Pre-galvanized steel, ASTM A653 suitable for general duty use.

C. Cable Hangers:

- 1. Adjustable, non-continuous cable support slings for use with low voltage cabling.
- 2. Steel and woven laminate construction, rated for indoor non-corrosive use. Laminate material shall be suitable for use in plenum environments.
- 3. Sling length shall be adjustable to a capacity of 425 4-pair UTP cables.
- 4. Cabling hanger load limit shall be 100 lbs per foot.
- 5. Manufacturer:
 - a. Erico Caddy
 - b. CableCat CAT425
 - c. Arlington Fittings TI Series
 - d. Or approved equal.

PART 3 - EXECUTION

3.1 CABLE HOOK SUPPORT SYSTEM

- A. In areas where cabling is not supported by cable tray, ladder rack, enclosed wireway or installed in conduit, such cabling shall be supported by an approved cable hook support system.
- B. Refer to manufacturer's requirements for allowable fill capacity for selected cable hook. In no case shall a 40% fill capacity be exceeded.
- C. Cable hooks shall be securely mounted per manufacturer's instructions. In no case shall the side-to-side travel of any cable hook exceed 6".
- D. Cable hooks shall be selected based on the contractor's cable routing. Hooks shall be capable of supporting a minimum of 30 pounds with a safety factor of 3.

- E. J-hook support spans shall be based on the smaller of the manufacturer's load ratings and code requirements. In no case shall horizontal spans exceed 5 feet and vertical spans exceed 4 feet.
- F. The resting and supporting of cabling on structural members shall not meet the requirements for cabling support specified herein.
- G. The use of tie-wraps or hook and loop type fasteners is specifically prohibited as a substitute for cable hooks specified herein.

3.2 CONDUIT AND CABLE ROUTING

- A. Refer to Section 260533 for additional requirements.
- B. All conduits shall be reamed and shall be installed with a nylon bushing.
- C. Maintain appropriate conduit bend radius at all times. For conduits with an internal diameter of less than 2", maintain a bend radius of at least 6 times the internal diameter. For conduits with an internal diameter 2" or greater, maintain a bend radius of at least 10 times the internal diameter.
- D. No conduit or sleeve containing more than two (2) cables shall exceed 40% fill ratio, regardless of length.
- E. Any conduit exceeding 90' in length or containing more than two (2) 90-degree bends shall contain a pull box sized per ANSI/TIA/EIA 569 requirements.
 - 1. A separate pull box is required for each 90' (or greater) length section.
 - 2. A separate pull box is required after any two (2) consecutive 90-degree bends.
 - 3. Pull box shall be located in an area that maintains accessibility of box, including the ability to remove box lid without removal or relocation of any other materials.
- F. Any conduit with bends totaling 90 degrees or more shall have the fill capacity derated by 15% for each 90 degrees of cumulative bend.
- G. Cables installed in any conduits that do not meet the above requirements shall be replaced at the Contractor's expense, after the conduit condition has been remedied.

3.3 WIRE MESH TRAY INSTALLATION

- A. The wire mesh cable tray system shall be only for telecommunications.
- B. Install wire mesh as indicated; in accordance with recognized industry practices (NEMA VE-2 2000), to ensure that the cable tray equipment complies with requirements of NEC, and applicable portions of NFPA 70B and NECA's "Standards of Installation" pertaining to general electrical installation practices.
- C. Cable tray sections shall be grounded in accordance with manufacturer's recommendations using manufacturer approved hardware. Painted sections shall have paint removed at each grounding attachment point.

- D. Test wire mesh support systems to ensure electrical continuity of bonding and grounding connections, and to demonstrate compliance with specified maximum grounding resistance. Refer to NFPA 70B, Chapter 18, for testing and test methods.
- E. Provide sufficient space encompassing wire mesh to permit access for installing and maintaining cables.
- F. Tray shall be continuous from source to termination and shall not change elevation, direction or otherwise expose cables to travel without 2" x 4" mesh support.
- G. Overhead Tray shall be field cut using only manufacturer approved cutting device and methods. Cutting device shall be an offset blade bolt cutter; standard bolt cutters are specifically not permitted.
- H. Bends in overhead tray shall be accomplished by utilizing manufacturer's cutting guides.
- I. All splices of tray shall be provided with splice washers, bars or springs as recommended by the manufacturer.

3.4 ATTACHMENT TO METAL DECKING

- A. Where supports for cable trays and cable hook systems attach to metal roof decking, excluding concrete on metal decking, do not exceed 25 lbs. per hangar and a minimum spacing of 2'-0" on center. This 25-lb. load and 2'-0" spacing include adjacent electrical and mechanical items hanging from deck. If the hanger restrictions cannot be achieved, supplemental framing off steel framing will need to be added.

END OF SECTION 270528

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 270553 - IDENTIFICATION FOR COMMUNICATION SYSTEMS

PART 1 - GENERAL

1.1 SECTION INCLUDES

- A. This section describes the identification requirements relating to the structured cabling system and its termination components and related subsystems.
- B. Identification and labeling.

1.2 RELATED WORK

- A. Section 270500 - Basic Communications Systems Requirements

1.3 SUBMITTALS

- A. Under the provisions of Section 270500 and Division 1, prior to the start of work the Contractor shall submit:
 - 1. Documentation of labeling scheme.
 - 2. Complete documentation of nomenclature for all Administration components.

PART 2 - PRODUCTS

2.1 LABELING

- A. Adhesive labels shall meet the requirements of UL 969 (Ref D-16) for legibility, defacement and adhesion. Exposure requirements of UL 969 for indoor and outdoor (as applicable) use shall be met.
- B. Insert labels shall meet the requirements of UL 969 for legibility, defacement and general exposure.
- C. Labeling shall be consistent for all common elements in the project. This consistency shall include label size, color, typeface and attachment method.
- D. Labels incorporating bar codes shall be either Code 39 conforming to USS-39 or Code 128 conforming to USS-128.
 - 1. All Code 39 bar codes shall have a ratio between 2.5:1 and 3.0:1. Provide a minimum "quiet zone" of 0.25" on each side of the bar code.
 - 2. A descriptive label for reading by personnel shall be provided with any bar code. Bar codes by themselves are not acceptable.
- E. Color Code: Observe the following requirements for color coding:
 - 1. Labels on each end of a cable shall be the same color for each termination.
 - 2. Labels for cross-connects shall be two different colors at each termination fields, representative of the color of that field.

3. Orange (Pantone 15C) shall be used for the demarcation point.
4. Green (Pantone 353C) shall be used for the termination point of network connection on the facility side of the demarc.
5. Purple (Pantone 264C) shall be used to identify the termination of cables from common equipment (PBX, computers, LANS, etc.)
6. White shall be used to identify the first-level backbone termination in the main cross-connect.
7. Gray (Pantone 422C) shall be used to identify the second-level backbone termination in the main cross-connect.
8. Blue (Pantone 291C) shall be used to identify the termination of station cabling at the telecommunications closet and/or equipment room end of the cable.
9. Brown (Pantone 465C) shall be used to identify the termination of the interbuilding backbone cable terminations.
10. Yellow (Pantone 101C) shall be used to identify the termination of auxiliary circuits, alarms, maintenance, security, etc.
11. Red (Pantone 184C) shall be used to identify the termination of key telephone systems.
12. In facilities that do not contain a main cross-connect, the color white may be used to identify second-level backbone terminations.

- F. Tag all CAT 3, CAT 5E, CAT 6, and optical fiber cables at both the Communications Equipment Room and the information outlets using the following alphanumeric labeling system:

1. (Room Number) - (Outlet Number) - (Jack Number) - (Use).
2. "Outlet Number" shall start with 1 in each room, with additional outlets in each room numbered sequentially.
3. "Jack Number" shall start with 1 for the upper left jack in each outlet, increasing sequentially from left to right and top to bottom across the outlet face.
4. "Use" shall be designated by the following:
 - a. "V" for voice (RJ-45)
 - b. "D" for data (RJ-45)
 - c. "C" for video (coax)
 - d. "M" for multimedia retrieval (coax)
 - e. "S" for speaker (RCA)
5. Example #1: "106-1-1-V" indicates the top left voice jack in outlet #1 in Room 106.
6. Example #2: "109-3-4-D" indicates the bottom right data jack (assuming a 4-port faceplate) in outlet #3 in Room 109.

2.2 DOCUMENTATION/AS-BUILTS/RECORDS

A. General:

1. Upon completion of the installation, the Contractor shall submit as-builts per the requirements of Section 270500 and Division 1. Documentation shall include the items detailed in the subsections below.
2. All documentation, including hard copy and electronic forms shall become the property of the Owner.

B. Record Drawings:

1. The drawings are to include cable routes and outlet locations. Outlet locations shall be identified by their sequential number as defined elsewhere in this document. Numbering, icons and drawing conventions used shall be consistent throughout all documentation provided.

PART 3 - EXECUTION

3.1 IDENTIFICATION AND LABELING

A. Cable Labeling:

1. Horizontal cables shall be labeled at each end.
 - a. Cables that differ only by performance class shall have a suitable marking or label to indicate the higher performance class. For example, station cabling utilizing the blue color may include blue with a white stripe to indicate the higher performance class station cabling.

B. Information Outlet Labeling: Tag all voice and data jacks as defined herein.

END OF SECTION 270553

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 270800 - COMMISSIONING OF COMMUNICATIONS

PART 1 - GENERAL

1.1 SECTION INCLUDES

- A. Description
- B. Responsibilities
- C. Related Work
- D. Test Equipment

1.2 DESCRIPTION

- A. The purpose of this section is to specify Division 27 responsibilities in the commissioning process.
- B. The systems to be commissioned are listed in Section 019100.
- C. Commissioning requires the participation of the Division 27 Contractor to ensure that all systems are operating in a manner consistent with the Contract Documents. The general commissioning requirements and coordination are detailed in Section 019100. Division 27 Contractor shall be familiar with all parts of Section 019100 and shall execute all commissioning responsibilities assigned to them in the Contract Documents.

1.3 RESPONSIBILITIES

- A. Refer to Section 019100.

1.4 RELATED WORK

- A. Specific commissioning requirements are given in the following sections of these specifications. All the following sections apply to the Work of this section.
 - 1. Section 017823 - Operations and Maintenance
 - 2. Section 017900 - Demonstration and Training
 - 3. Section 019100 - Commissioning
 - 4. Section 220800 - Commissioning of Plumbing
 - 5. Section 230800 - Commissioning of HVAC
 - 6. Section 260800 - Commissioning of Electrical

PART 2 - PRODUCTS

2.1 TEST EQUIPMENT

- A. The Contractor shall provide all test equipment necessary to fulfill the testing requirements of this Division. This equipment includes, but is not limited to, the following:
 - 1. Digital multimeter capable of measuring voltage (AC/DC), current, and resistance.
 - 2. Power quality and energy analyzer capable of capturing waveform (3 phase) and data recording.
- B. All testing equipment shall be of sufficient quality and accuracy to test and/or measure system performance with the tolerances specified in the related specifications. All equipment shall be calibrated according to the manufacturer's recommended intervals and when dropped or damaged. Calibration tags shall be affixed or certificates readily available.
- C. Refer to Section 019100 for additional Division 27 requirements.

PART 3 - EXECUTION

- A. Refer to Section 019100.

END OF SECTION 270800

SECTION 271500 - HORIZONTAL CABLING REQUIREMENTS

PART 1 - GENERAL

1.1 SECTION INCLUDES

- A. This section describes the products and execution requirements relating to furnishing and installing horizontal communications cabling and termination components and related subsystems as part of a cabling plant. The cabling plant consists of copper cabling.

1.2 RELATED WORK

- A. Section 270500 - Basic Communications Systems Requirements
- B. Section 271720 - Structured Cabling System Warranty

1.3 QUALITY ASSURANCE

- A. Refer to Section 270500 for relevant standards and plenum or non-plenum cable requirements.
- B. The channel shall be required to meet the performance requirements indicated herein. The manufacturer shall warranty the performance of their system to the required performance (and not just to the Standard, should the required performance exceed the Standard).
- C. Specific components of the channel shall be required, at a minimum, to meet the Standard component requirements for that particular component.
- D. The installing contractor must be certified by the manufacturer of the structured cabling system.

1.4 SUBMITTALS

- A. Under the provisions of Section 270500 and Division 1, prior to the start of work the Contractor shall submit:
 - 1. Manufacturer's data covering all products proposed, including construction, materials, ratings and all other parameters identified in Part 2 - Products, below.
 - 2. Manufacturer's installation instructions.

PART 2 - PRODUCTS

2.1 HORIZONTAL CABLE

- A. CAT 6A Cable:
 - 1. The horizontal cable requirements must be met, as well as the following channel requirements.
 - 2. CAT 6A cable shall terminate on rack-mounted modular patch panels in their respective communication equipment room as indicated on the drawings.

3. Cable shall exceed transmission requirements listed in ANSI/TIA/EIA-568-C.2. Performance tests shall be conducted using swept frequency testing through 500 MHz for the channel. All numbers given are for a 4-connection channel.
4. Performance tests shall be conducted using swept frequency testing through 500 MHz for the channel. All numbers given are for a 4-connection channel. Discrete frequency testing results at 500 MHz is not acceptable.
5. Performance data shall be provided by third-party independent testing laboratories only. Testing data shall be submitted on the third-party testing laboratory letterhead. Test data will only be accepted if it displays testing as a channel. Electrical characteristics of the performance of the cable itself will not satisfy this requirement.
6. The structured cabling and connectivity may be provided by the same company. For the purpose of this specification that shall mean that the cabling and connectivity must be marketed, branded, supported, warranted, and distributed by the same company. Specifically, ally or partnerships between cabling manufacturers and connectivity manufacturers do not meet this requirement unless otherwise listed below. Specifically, products made by others through an OEM relationship are acceptable if the products are marketed, branded, supported, warranted, and distributed by the same company.
7. The 4-connector channel performance margins listed in the below criteria shall be guaranteed minimum margins above ANSI/TIA/EIA-568-C.2 with electrical parameters between 1-500 MHz.
 - a. Insertion Loss: 3%
 - b. NEXT: 2 dB
 - c. PS NEXT: 3 dB
 - d. PSA NEXT: 3 dB
 - e. PSA NEXT (Average):
 - f. ACR-F: 2 dB
 - g. PS ACR-F: 3 dB
 - h. PSA ACR-F: 3 dB
 - i. PSA ACR-F (Average): 3 dB
 - j. Return Loss: 2dB
8. The jacket color for CAT 6A cable shall be white for voice applications and blue for data applications.
9. Basis of Design:
 - a. Hubbell C6ASP Series
 - b. Additional acceptable manufacturers:
 - 1) Belden
 - 2) Berk-Tek
 - 3) General Cable
 - 4) Panduit
 - 5) Siemon
 - 6) Superior Essex

2.2 FACEPLATES/JACKS

A. Cat 6A Jacks:

1. CAT 6A horizontal cable shall each be terminated at its designated work area location on RJ-45 modular jacks. These modular jack assemblies shall snap into a modular mounting frame. The combined modular jack assembly is referred to as an information outlet.

-
2. The same orientation and positioning of modular jacks shall be utilized throughout the installation. Prior to installation, the Contractor shall submit the proposed configuration for each information outlet type for review by the Architect/Engineer.
 3. Information outlet faceplates shall incorporate recessed designation strips at the top and bottom of the frame for identifying labels. Designation strips shall be fitted with clear plastic covers.
 4. Where standalone CAT 6A only modular jacks are identified, the information outlet faceplate shall be configured as to allow for the addition of one (1) additional modular jack (CAT 3, CAT 5E, or CAT 6) to be installed to supplement each such modular jack as defined by this project. The installation of these supplemental modular jacks is NOT part of this project.
 5. Any unused modular jack positions on an information outlet faceplate shall be fitted with a removable blank inserted into the opening.
 6. The information outlet faceplate shall be constructed of high impact plastic (except where noted otherwise). The information outlet faceplate color shall:
 - a. Match the receptacle color used for other utilities in the building, or
 - b. When installed in surface raceway (if applicable), match the color of that raceway.
 7. Different faceplate and frame designs for locations, which include optical fiber cabling relative to those, that terminate only copper cabling are acceptable. Information outlets that incorporate optical fiber shall be compliant with the above requirements plus:
 - a. Be a low-profile assembly.
 - b. Incorporate a mechanism for storage of cable and fiber slack needed for termination.
 - c. Position the optical fiber couplings to face downward or at a downward angle to prevent contamination.
 - d. Incorporate a shroud that protects the optical fiber couplings from impact damage.
 8. All information outlets and the associated modular jacks shall be of the same manufacturer throughout the project.
 9. The CAT 6A modular jacks shall be non-keyed 8-pin modular jacks.
 10. The interface between the modular jack and the horizontal cable shall be an angled insulation displacement type contact and shall provide separation for ANEXT suppression. Termination components shall be designed to maintain the horizontal cable's pair twists as closely as possible to the point of mechanical termination.
 11. CAT 6A modular jacks shall be pinned per TIA-568B.
 12. CAT 6A termination hardware shall, as a minimum, meet all the mechanical and electrical performance requirements of the following standards:
 - a. ANSI/TIA/EIA-568-B.2-10
 - b. IEEE 802.af (PoE)
 - c. IEEE 802.an 10GBASE-T
 - d. ISO/IEC 60603-7
 - e. ISO 11801 Class E Compliant
 - f. FCC PART 68.5 SUBPART F
 13. The color for CAT 6A jacks shall be white for voice applications and blue for data applications. Alternately, a color-coded bezel or icon may be used to identify the CAT 6A modular jack.

PART 3 - EXECUTION

3.1 CABLE INSTALLATION REQUIREMENTS

A. Horizontal Cabling:

1. The maximum horizontal cable drop length for Data UTP shall not exceed 295 feet in order to meet data communications performance specifications. This length is measured from the termination panel in the wiring closet to the outlet and must include any slack required for the installation and termination. The Contractor is responsible for installing horizontal cabling in a fashion so as to avoid unnecessarily long runs. Any area that cannot be reached within the above constraints should be identified and reported to the Architect/Engineer prior to installation. Changes to the contract documents shall be approved by the Architect/Engineer.
2. All cable shall be free of tension at both ends. In cases where the cable must bear some stress, Kellum grips may be used to spread the strain over a longer length of cable.
3. Manufacturer's minimum bend radius specifications shall be observed in all instances.
4. Horizontal cabling installed as open cabling shall be supported at a maximum of 5' between supports. Refer to the specifications for required cable supports.
5. Horizontal cabling installed as open cable or in cable tray shall be bundled at not less than 10' intervals with hook-and-loop tie wraps. The use of plastic cable ties is strictly prohibited.
6. The maximum conduit fill for horizontal cabling shall not exceed 40% regardless of conduit length.
7. Cable sheaths shall be protected from damage from sharp edges. Where a cable passes over a sharp edge, a bushing or grommet shall be used to protect the cable.

- B. A coil of 3 feet in each cable shall be placed in the ceiling at the last support (e.g., J-hook, bridle ring, etc.) before the cables enter a fishable wall, conduit, surface raceway or box. At any location where cables are installed into movable partition walls or modular furniture via a service pole, approximately 15-feet of slack shall be left in each horizontal cable under 250 feet in length to allow for change in the office layout without re-cabling. These "service loops" shall be secured at the last cable support before the cable leaves the ceiling and shall be coiled from 100% to 200% of the cable recommended minimum bend radius.

1. To reduce or eliminate EMI, the following minimum separation distances from 480V power lines shall be adhered to:
 - a. Twelve (12) inches from power lines of less than 5-kVa.
 - b. Eighteen (18) inches from high-voltage lighting (including fluorescent).
 - c. Thirty-nine (39) inches from power lines of 5-kVa or greater.
 - d. Thirty-nine (39) inches from transformers and motors.
2. Information outlets shown on floor plans with the subscript "W" are intended to be used for wall mounted telephones. Back boxes for wall mounted telephones shall not be located within 12" vertically, or horizontally, from any light switches, power receptacles, nurse call devices, thermostats, or any other architectural element that would otherwise prevent the installation of a wall mounted telephone on the mating lugs.

3.2 CABLE TERMINATION REQUIREMENTS

A. Cable Terminations - Data UTP:

1. Modular patch panels shall be designed and installed in a fashion as to allow future horizontal cabling to be terminated on the panel without disruption to existing connections.
2. If the "last" patch (per rack) is greater than 50% utilized, one additional patch panel shall be provided for future use..
3. At information outlets and modular patch panels, the Contractor shall ensure that the twists in each cable pair are preserved to within 0.5-inch of the termination for data cables. The cable jacket shall be removed only to the extent required to make the termination.

B. Cable Terminations - Shielded (T1):

1. Shielded cabling shall be terminated on 110-type termination blocks. The blocks shall be wall-mounted at all locations.
2. Blocks shall be sized to provide for a minimum 20% growth in capacity relative to the initial installation.
3. Consistency shall be maintained throughout the installation relative to conductor sequence on the blocks. Building ground and cable shield drain wire shall be terminated immediately to the left of each two data pairs on the cross-connect fields.
4. Designation labels shall be color-coded YELLOW to identify the cabling as a Network Connection. Pairs shall be identified on the labels numerically. Ground and shield shall be identified for each pair.

END OF SECTION 271500

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 271710 - TESTING

PART 1 - GENERAL

1.1 SECTION INCLUDES

- A. This section describes the testing requirements relating to the structured cabling system and its termination components and related subsystems.

1.2 RELATED WORK

- A. Section 270500 - Basic Communications Systems Requirements

1.3 QUALITY ASSURANCE

- A. Refer to Section 270500 for relevant standards.

1.4 SUBMITTALS

- A. Under the provisions of Section 270500 and Division 1, prior to the start of work, the Contractor shall submit:
 - 1. Complete information on testing procedure as described herein.
 - 2. Test plan summary for each cable type to be tested including equipment to be used, setup, test frequencies or wavelengths, results format, etc.

PART 2 - PRODUCTS

2.1 TESTING COPPER

- A. General Requirements:
 - 1. Should it be found by the Architect/Engineer that the materials or any portion thereof furnished and installed under this Contract fail to comply with the specifications and drawings with respect or regard to the quality, amount, or value of materials, appliances, or labor used in the work, it shall be rejected and replaced by the Contractor and all work disturbed by changes necessitated in consequence of said defects or imperfections shall be made good at the Contractor's expense.
 - a. CAT 6A Cable:
 - 1) Testing shall be from the modular jack at the information outlet to the modular patch panel in the communication equipment room.
 - 2) Horizontal cable shall be free of shorts within the pairs and be verified for continuity, pair validity and polarity, and conductor position on the modular jack (e.g., wire map). Any defective, split, or mis-positioned pairs must be identified and corrected.
 - 3) The maximum length of horizontal cable shall not exceed 295 feet, which allows 33 feet for technology equipment and modular patch cords.

-
- 4) To establish testing baselines, cable samples of known length and of the cable type and lot installed shall be tested. The cable may be terminated with an eight-position CAT 6A modular connector (8-pin) to facilitate testing. Nominal Velocity of Propagation (NVP) and nominal attenuation values shall be calculated based on this test and be used during the testing of the installed cable plant. This requirement can be waived if NVP and nominal attenuation data is available from the cable manufacturer for the exact cable type under test.
 - 5) CAT 6A horizontal cable testing shall be performed using a test instrument designed for testing to 500 MHz or higher. Test records shall verify "PASS" on each cable and display the specified parameters, comparing test values with standards based "templates" integral to the unit. Test records that report a PASS*, FAIL*, or FAIL result for any of the parameters will not be accepted.
 - 6) In the event results of the tests are not satisfactory, the Contractor shall make adjustments, replacements, and changes as necessary and shall then repeat the test or tests that disclosed faulty or defective material, equipment, or installation methods, and shall make additional tests as the Architect/Engineer deems necessary at no additional expense to the project or user agency.

PART 3 - EXECUTION (Not Used)

END OF SECTION 271710

SECTION 271720 - STRUCTURED CABLING SYSTEM WARRANTY

PART 1 - GENERAL

1.1 SECTION INCLUDES

- A. This section describes support and warranty requirements relating to the structured cabling system and related subsystems.

1.2 RELATED WORK

- A. Section 270500 - Basic Technology Systems Requirements.
- B. Section 271500 Horizontal Cabling Requirements.

1.3 SUBMITTALS

- A. Under the provisions of Section 270500 and Division 1, prior to close of the project the Contractor shall submit:
 - 1. A numbered certificate from the manufacturing company registering the installation.

PART 2 - PRODUCTS

2.1 WARRANTY

- A. A fifteen (15) year Product Installation Warranty shall be provided for the structured cabling system as described in the contract documents.
- B. The Product Installation Warranty shall cover the replacement or repair of the defective product(s) and labor for the replacement or repair of such defective product(s).
- C. Upon successful completion of the installation and subsequent inspection, the Owner shall be provided with a numbered certificate from the manufacturing company registering the installation.

PART 3 - EXECUTION

3.1 WARRANTY REQUIREMENTS

- A. This Contractor shall be responsible for providing, installing and testing a structured cabling system that will meet the manufacturer's warranty requirements.

END OF SECTION 271720

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 274100 - PROFESSIONAL AUDIO/VIDEO SYSTEM

PART 1 - GENERAL

1.1 SECTION INCLUDES

- A. System Components
- B. Audio Connectors
- C. Audio Cabling
- D. Video Connectors
- E. Analog Video Cabling
- F. Digital Video Cabling
- G. Control Cabling
- H. Horizontal Copper and Fiber Cabling and Connectors

1.2 RELATED WORK

- A. Section 260533 - Conduit
- B. Section 260513 - Wire and Cable
- C. Section 270500 - Basic Communications Requirements

1.3 QUALITY ASSURANCE

- A. Manufacturer: The manufacturer of equipment shall have a complete service organization for all products in the manufacturer's line.
- B. Integrator/Dealer: The Contractor shall be a factory-authorized and certified integrator/dealer specializing in each selected manufacturer's products, with demonstrated prior experience with the selected manufacturer's system installation and programming.
- C. The following qualifications have been endorsed by the AudioVisual and Integrated Experience Association (AVIXA), which is formerly known as InfoComm International.
 - 1. The Contractor shall have the services of a Certified Technology Specialist with a specialized Installation endorsement (CTS-I) supervising the project. This service shall not be subcontracted. In addition to supervising the project, the CTS-I shall perform the following tasks on the project:
 - a. Review submittals and provide a letter stating the submittals are in compliance with the contract documents.

-
- b. Provide written and dated confirmation of an observation of the contractor's installation activities no less than every 2 weeks month during the construction period.
 - c. Provide a final written and dated confirmation of a final construction review prior to testing.
 - d. Review final testing and calibration of the systems and provide a letter with the documented results or transmittal of the results stating the test results and calibration compliance with the contract documents.
 - D. This project uses a audio over IP AV solution and will require that the Contractor be proficient in distribution of audio over an IP network..
 - E. The Contractor(s) shall provide a resume of prior experience in similar types and scales of projects, and other projects that may have been completed with the client. The resume shall include the project name, year of completion, square footage, budget, system descriptions, and references with email addresses and phone numbers.
 - F. Control System Dealer: The media control system shall be provided, terminated, installed, and programmed by a factory-authorized and certified dealer and integrator in good standing with the manufacturer. The dealer shall have direct purchasing and support authority. These services shall not be subcontracted.
 - G. Control System Programmer: The media control system shall be programmed by a factory-trained and certified programmer. These services shall not be subcontracted.
 - 1. The Contractor shall have all certifications required by the manufacturer(s) for the installed system components on staff for the appropriate duties and responsibilities required by the manufacturer.
 - a. The control system programmer shall have all refresher courses completed for the latest features of the control platform prior to bidding the project to ensure that the Contractor is up to date with the latest software features.
 - b. The control system programmer shall have achieved the highest programmer level obtainable by the installed control manufacturer (e.g., master programmer).
 - 2. The Contractor shall be fluent in the control systems preferred language (e.g., Python, C#, Java, JavaScript, SQL, PHP, etc.) required to complete the programing requirements of the AV system.
 - H. Audio System Programmer: All digital sound processing equipment (DSP) used on the project shall be setup, programmed and calibrated by a factory-trained and certified technician. The audio system programmer shall have the following complementary certifications:
 - 1. Associated manufacturer certifications
 - I. Video System Programmer: All video distribution and processing used on the project shall be setup, programmed and calibrated by a factory-trained and certified technician.
 - J. The Contractor shall employ an ISF (Imaging Science Foundation) Level I certified video calibration specialist on staff to perform the calibration of the projector and displays.
 - K. The Contractor shall have acquired and maintained all certifications for a minimum of one (1) year prior to the posted bid date of this project.

-
- L. Servicing Contractor: The installer must be factory certified to provide service on the installed manufacturer's equipment and must have local service representatives within a 100 mile radius of the project site.
 - M. Contractor to provide line item pricing for all equipment in bid documents.
 - N. REFERENCES
 - O. ADA - Americans with Disabilities Act
 - P. ADAAG - Americans with Disability Accessibility Guidelines
 - Q. ANSI - American National Standards Institute
 - R. AVIXA - Audiovisual and Integrated Experience Association (Formerly InfoComm)
 - S. ANSI/InfoComm A102.01:2017 - Audio Coverage Uniformity
 - T. ANSI/InfoComm 2M-2010 - Standard Guide for Audiovisual Systems Design and Coordination Processes
 - U. ANSI/InfoComm F501.01:2015 - Cable Labeling for Audiovisual Systems
 - V. ANSI/InfoComm 10:2013 - Audiovisual Systems Performance Verification
 - W. ANSI/AVIXA V202.01:2016 - Display Image Size for 2D Content in Audiovisual Systems
 - X. ANSI/InfoComm 3M-2011 - Projected Image System Contrast Ratio
 - Y. IBC - International Building Code
 - Z. IEC - International Electrotechnical Commission
 - AA. NFPA 70 - National Electrical Code (NEC)
 - BB. UL 813 - Commercial Audio Equipment
 - CC. UL 1419 - Professional Video and Audio Equipment
 - DD. UL 1480 - Speakers for Fire Alarm, Emergency, and Commercial and Professional Use
 - EE. UL 1492 - Audio/Video Products and Accessories
- 1.4 SUBMITTALS
- A. Submit shop drawings and product data under provisions of Section 270500.
 - B. General Requirements:
 - 1. Submittals will be submitted in multiple passes over the course of construction. Each pass will be a dedicated single submission for review as outlined in the general submittal requirements outlined in section 270500.

-
2. Upon acceptance of an item in the submittal, the Contractor shall remove them from future resubmittals of the same submittal "pass".
 3. Should the Contractor not provide shop drawings in a timely fashion, not complete requirements, or extend the time of any resubmittals so as to jeopardize schedules, cause delay, or limit access for field work, the Contractor bears responsibility for impact and delay that may occur. This includes access or lift to overhead positions and associated protection of work already in place.
- C. First Pass Submittals: To be submitted after the project is awarded but before equipment is submitted, purchased and installed.
1. Contractor(s) resume of qualifications.
 2. All certifications shall be current and valid. Any certificate with expired dates will not be accepted.
 3. All applicable AudioVisual and Integrated Experience Association (AVIXA) certifications. Qualifications from InfoComm that have not expired will be accepted.
 4. All certifications outlined in the qualifications shall be included in this submittal. Refer to the qualifications section for additional information. Certifications include, but are not limited to:
 - a. All installed manufacturer certifications required by the manufacturer.
 - b. Control system authorized dealer certification.
 - c. Control system certified programmer certification(s).
 - d. Audio system DSP dealer certification.
 - e. Audio system DSP programmer certification.
 - f. Professional audio components dealer certification(s).
 - g. Video system dealer certification(s).
 - h. All other applicable dealer, installation and programming certifications.
 - i. All applicable networking certifications.
 5. If an alternate manufacturer(s) is submitted, the equivalent certifications to the basis of design manufacturer(s) shall be required and submitted.
 6. Audio and video calibration equipment certifications.
 7. Audio and video testing and calibration equipment and software procedures and manufacturer-specific equipment calibration certificates.
- D. Second Pass Submittals: To be submitted after all initial submittals have been approved but before equipment is purchased, installed, configured, and programmed.
1. The submittal shall include a list of all equipment submitted, listing out each product manufacturer and model number cross referenced with the equipment's Technology Equipment Schedule items Equipment List Abbreviation.
 2. Alternate System Drawings: If an approved alternate manufacturer is submitted, the Contractor shall provide project-specific system CAD drawings. These will be required to be submitted with the product data.
 - a. Provide a system block diagram noting system components and interconnection between components. The interconnection of components shall clearly indicate all wiring required in the system. When multiple pieces of equipment are required in the exact same configuration (e.g., multiple identical controllers), the diagram may show one device and refer to the others as "typical" of the device shown.

-
3. Product Data: Provide manufacturer's technical product specification sheet for each individual component type. Submitted data shall show the following:
 - a. Compliance with each requirement of these documents.
 - b. All component options and accessories specific to this project.
 - c. Electrical power consumption rating and voltage.
 - d. Wiring requirements.
 - e. Pre-terminated cable distances and requirements identified by each room where required.
 - f. Product manuals are not an acceptable format and will be rejected.
 4. Available wireless microphone frequencies within a 50 mile range based on the submitted system(s) and coordinated with the number of channels.
- E. Final Pass Submittals: To be submitted after all initial submittals have been approved but before the equipment is installed, configured and programmed. These should not be submitted until after the pre-installation meeting outlined in Part 3.
1. System Drawings: Project-specific system drawings shall be provided as follows:
 - a. Provide a system block diagram noting system components and interconnection between components. The interconnection of components shall clearly indicate all wiring required in the system. When multiple pieces of equipment are required in the exact same configuration (e.g., multiple identical controllers), the diagram may show one device and refer to the others as "typical" of the device shown.
 - b. Submittals shall contain shop drawings indicating physical plan locations and placement of installed devices and accessories with associated scope or field conditions for review and coordination. Provide mounting details, suspensions, and rough-in notes with trade demarcations.
 - 1) Identify any non-standard back boxes or mounting assembly required by product or specifications and elaborate contractor means and methods for mounting.
 - 2) Provide rack drawing(s) showing the mounting of equipment in each rack or cabinet on the project.
 - 3) All display mounts shall be coordinated with the Architect to verify the exact vertical and horizontal positioning of the display. Coordinate in-wall stud locations for installation of recessed display mounts to install in the exact location as coordinated with the architectural drawings.
 - 4) Projector mounts shall be coordinated with other utilities on the ceiling and wall to minimize any potential obstructions for the visual beam of the projector prior to installation of the projector mount.
 - 5) Projector mounts, projector screens, recessed ceiling speakers, in-ceiling microphones, and all other above ceiling devices shall be coordinated with other trades in the field (e.g., mechanical ductwork, lights, diffusers, etc.) to minimize changes that will impact the performance of the system design.
 - c. Submit wiring and cable path requirements, including field wiring, path verification, signal separation, and outside diameter of cables for conduit sizing and verification that can be used for field installation and electrical coordination.
 - d. Reproduction of contract documents is not acceptable for submittals. Wire CAD type drawings and cable tag lists or schedules, or typical manufacturer's abbreviated single lines alone, are not complete.

-
2. The Contractor shall submit graphic or emulated representations of the control system touch panels for each unique space and layout prior to purchase, installation and programming for review and comment by the Architect/Engineer and Owner. These shall show and describe the intended programming/macro control features and functions of each button/icon for all pages.
 3. The Contractor shall submit graphic or emulated representations of the control system keypads for each unique space and layout prior to purchase, installation and programming for review and comment by the Architect/Engineer and Owner. These shall show and describe the intended programming/macro control features and functions of each button/knob.
 4. The Contractor shall submit the actual DSP audio processor files or single line audio path file diagram prior to installation for review and comment by the Architect/Engineer. Provide preliminary settings with processor blocks identified and note resources allocated.
 5. The Contractor shall submit the number of IP addresses, VLANs, and subnetworks that will be required from the Owner's Information Systems Department.
 6. Provide system checkout and commissioning procedure to be performed at acceptance.
 - a. The A/E provides electro-acoustic and technical testing including punch list on behalf of the Owner for final performance verification and optimization of the systems. The AVC shall include a site test in his/her bid for A/E Commissioning and testing services.
 - b. AVC shall provide two (2) week written advance notice to the Prime Contractor for the A/E and schedule a minimum of one "quiet day" on the CM project schedule chart for A/E electro-acoustic testing, when project nears Substantial Completion and loudspeakers are properly aimed.
 - 1) A "quiet day" means General Contractor activity may proceed in certain areas, but A/E shall retain the ability to call off any noise or intrusive construction activity in the main seat area for noise control measurements and main loudspeaker testing as required. This is at the will of the site acoustician and AV Commissioning Firm (A/E).
 - 2) A test report and pre-commissioning check list shall be filed by AVC prior to scheduling A/E performance verification.
 7. Submit meeting agenda for planning/programming meetings as required in Part 3 of this specification.
 8. Submit detailed description of Owner training to be conducted at project end, including specific training times and typical attendees expected.
 9. Provide rack drawing(s) showing the mounting of equipment in each rack or cabinet on the project. Rack drawings shall include the following:
 - a. Equipment placement including mounting on the front or rear of the rack.
 - b. Spacing separation as required by equipment for adequate airflow and heat dissipation.
 - c. Signal separation based on AVIXA standards as required by the design.
 - d. Heating/cooling load requirements for submitted equipment to verify the heating/cooling load of the rack. This shall include Owner-provided equipment coordinated with the Owner.
 - e. Power requirements for each rack including plug type and loads based on the final approved products.

-
10. A console and equipment rack plan shall be provided showing console, countertop, rough-in, cable paths, and wall plates with dimensions in plan view and elevation. The plan shall include equipment layout within the console and rack.
 11. Submit the detailed engineered and coordinated mounting solution(s) for wall-mounted and ceiling-mounted devices including the following items:
 - a. Surface-mounted and/or flown loudspeakers.
 - b. Ceiling-mounted and/or flown projectors, including distance from the screen, height to the lens, and the angle of the projector based on actual field conditions.
 - c. Projection screens, including height from the finished floor and black screen masking from finished ceiling.
 - d. Video displays including blocking or ceiling span requirements, height from finished floor, and back box location.
 12. Submit engineered PE stamped rated rigging solution(s) for performance loudspeakers and videowalls, including, but not limited to, the following items:
 - a. Provide PE stamped shop drawings that detail suspension means and methods including rated loudspeaker rigging components, attachments, supplemental spans, and independent safety cables. Note load for each location.
 - b. Clearly note and confirm the XYZ "reference" point being used on floor plans ("0" point) for determining proper aim, horn rotation, location, heights and clearance of main speakers. Refer to Loudspeaker Aim Schedule and confirm XYZ location and aim angle for each loudspeaker device. Verify clear sightline from speaker to aim point. Notify A/E of any anticipated conflicts.
 13. If an alternate loudspeaker design is going to be utilized, the Contractor shall submit the following sets of calculations:
 - a. EASE Calculations:
 - 1) All calculations shall be completed at a minimum patch size resolution of 1.00ft at 1/3 octave, 35ms split time, and shown with Summed Interference and Map with Shadow turned on. The calculations shall be submitted electronically as EASE OpenGL (*.egl) files. The Contractor shall also provide a copy of the latest version of the EASE GLL viewer to view the electronic EASE files.
 - 2) Provide coverage maps (print or pdf) for each main loudspeaker and combined composite of all main loudspeakers as Direct SPL at 500 Hz, 1000 Hz, 2000 Hz, 4000 Hz, 8000 Hz, and three octave mid-band sum centered at 2000 Hz.
 - 3) Articulation Loss of Consonants (ALCons).
 - 4) Calculated Speech Transmissible Index (STI) using the Modulation Transfer Index (MTI) with noise levels.
 - 5) The Contractor shall use the latest version of EASE.
 - 6) The Contractor shall refer to the architectural drawings and specifications for room geometry, room dimensions and surface finishes.
 - 7) The Contractor shall use a listener sitting height of four (4) feet for rooms where the primary function will be sitting. The Contractor shall utilize a listener standing height of five feet three inches (5.25') for rooms where the primary function will be standing.

- 8) The Contractor shall use a standard indoor temperature of 68°F, 60% humidity and a standard pressure of 29.8 Hg, unless more specific data is available.
- 9) The Contractor shall submit packed electronic EASE files or an EASE generated list of materials and room data for review and approval by the Architect/Engineer.

F. Discontinued Products and New Model Releases:

1. For each product, the Contractor shall submit (in addition to the specified product) a product cut sheet if the specified product has been replaced, improved upon, phased out or otherwise upgraded at the time of shop drawing submittal.
 - a. The intent of this requirement is for the Contractor to submit only direct replacements for the specified products. A direct replacement shall be defined as a product of newer release that has equal or greater capabilities. The Contractor shall submit a letter from the manufacturer with a direct replacement that includes both model numbers to clarify the replacement.
 - b. It is not the intent of this requirement for the Contractor to submit new products or other product options that significantly differ in capability and/or cost from the specified product.

G. Coordination Drawings:

1. Include all ceiling-mounted devices in composite electronic coordination files. Refer to Section 270500 for coordination drawing requirements.

1.5 SYSTEM DESCRIPTION

- A. This specification section describes the furnishing, installation, commissioning and programming of audio/video components and systems.
- B. Performance Statement: This specification section and the accompanying Contract Documents are performance based, describing the minimum material quality, required features, and operational requirements of the system. These documents do not convey every wire that must be installed, every equipment connection that must be made and every feature and function that must be programmed and configured. Based on the equipment constraints described and the performance required of the system, as presented in these documents, the Vendor and the Contractor are solely responsible for determining all wiring, programming and miscellaneous equipment required for a complete and operational system.
- C. This document describes the major components of the system. All additional hardware, subassemblies, supporting equipment and other miscellaneous equipment required for proper system installation and operation shall be provided by the Contractor.
- D. This document describes the major programming features and functions of the system. All additional programming, configuration and integration required for proper system installation and operation shall be provided by the Contractor.
- E. When a specific manufacturer is not provided in this document for minor pieces of equipment, the Contractor shall provide only those materials considered to be of the same industry commercial and professional quality level as the major equipment manufacturers.

F. General System Description:

1. The purpose of this section is to define the overall AV system requirements for each space identified on the project drawings. This is to represent the end-user needs, applications, tasks and Functions and features for each space to assist with identifying programing requirements for each space.

G. Room Type Requirements:

1. Auditorium Requirements Professional AV cable infrastructure, sound reinforcement system, and video presentation system shall include:
 - a. Cabling infrastructure includes conduit pathways, analog audio field lines, shielded CAT6 twisted pair for data and digital audio.
 - b. A main sound reinforcement system with dedicated DSP path files that is preset, commissioned, and balanced before A/E testing date. System is preset with touch panel control for simple mix use or manual full production use.
 - 1) Mono center main loudspeaker array with additional balcony and underbalcony delay loudspeakers.
 - 2) Subwoofers for media bass impact.
 - 3) Typical audio and AV inputs at stage and overhead locations with field lines to main DSP headend.
 - 4) Digital mixer location in front of projection booth with connectivity for audio network distribution system for full manual full production.
 - 5) Integration and reuse of existing back of house audio system including loudspeakers and amplifiers.
 - 6) Integration and reuse of existing wireless microphone system.
 - c. Video projection and video wall system.
 - 1) Large venue laser projector positioned in balcony projection booth.
 - 2) Large format motorized main video screen at proscenium. PE rated suspension to existing building are required.
 - 3) Two large format video walls mounted to either side of the proscenium for additional video image viewing support.
 - 4) Video matrix switcher with HD-SDI video inputs. All other video input signals will be converted to HD-SDI at equipment rack where noted in system diagrams.
 - d. RF-based hearing assistance system with ADA required amount of receivers, headsets, and additional accessories.
 - e. Provide alternate 1 pricing for mixing console at FOH location in front of projection booth in balcony, a remote digital audio stagebox, and (3) PTZ automated cameras.
 - f. Provide alternate 3 pricing for L-Acoustics loudspeaker system.

1.6 INTELLECTUAL PROPERTY OWNERSHIP

- A. All supporting documentation, programming, uncompiled source code, graphic files, DSP code and diagrams, written and electronic files, including all latest versions of the documentation and software necessary to edit and adapt the system(s), shall be provided to the Owner for all spaces and all systems. The integrator and/or programmer shall also maintain a current copy to be provided at the Owner's request.
 - 1. The Owner shall have the right to modify the intellectual property directly, or to have the intellectual property modified by any party of the Owner's choosing.

1.7 PROJECT RECORD DOCUMENTS

- A. Submit documents under the provisions of Section 270500.
- B. Provide all applicable certifications.
- C. Provide statement that system checkout test, as outlined in the shop drawing submittal, is complete and satisfactory.
- D. Provide schedules documenting all terminal block wiring, including cable numbers.
- E. Warranty: Submit written warranty and complete all Owner registration forms.
- F. Complete all operation and maintenance manuals as described below.
- G. The Contractor shall include all factory-provided test results for equipment installed on the project.
- H. The Contractor shall include all test results from system demonstration and performance testing specified in this document.
- I. Record Drawings shall minimally include:
 - 1. All revisions to, or deviations from the original drawings, as well as final dimensions, cable routes, connector panel drawings, cable numbering charts, and control system programming documentation. A complete as-installed equipment list, listed by room, and with manufacturers' names, model numbers, serial numbers, and quantities of each item.
 - 2. A complete and correct system schematic, showing detailed connections for all parts of the system, including wire numbers, terminal block numbers and layouts, and other designations and programming code.
 - 3. Complete equipment rack layouts showing locations of all rack-mounted equipment items.
 - 4. Additional information, diagrams or explanations as designated under respective equipment or systems specification section.
- J. Within each equipment room, the appropriate floor plan for which that equipment room serves shall be laminated and mounted for use by the Owner. Functional drawings shall be posted at each AV closet or included at every AV rack within a room.

- K. Upon completion and final acceptance of the project, the Contractor shall provide the Owner a copy of the programming code for any and all AV systems and devices programmed by the Contractor.

1. For any subsequent modifications to the programming code, an updated copy of the code shall be provided to the Owner.

1.8 UNIT PRICES

- A. Contractor shall provide a unit price for the following pieces of equipment:

1. One (1) projector filter for each projector type on the project.

- B. Unit costs shall indicate material, installation and programming costs separately.

1.9 OPERATION AND MAINTENANCE DATA

- A. Submit documents under the provisions of Section 270500.

- B. Manuals: Final copies of the manuals shall be delivered after completing the installation. Each manual's contents shall be identified on the cover. The manual shall include names, addresses, and telephone numbers of the Contractor responsible for the installation and maintenance of the system and the factory representatives for each item of equipment for each system. The manuals shall have a table of contents and labeled sections. The final copies delivered after completion of the installation shall include all modifications made during installation, checkout, and acceptance. Manuals shall be submitted in electronic format. The manuals shall consist of the following:

1. Functional Design Manual: The functional design manual shall identify the operational requirements for the system and explain the theory of operation, design philosophy, and specific functions. A description of hardware and software functions, interfaces, and requirements shall be included.
2. Hardware Manual: The manual shall describe all equipment furnished including:
 - a. General description and specifications.
 - b. Installation and checkout procedures.
 - c. Equipment layout and electrical schematics to the component level.
 - d. System layout drawings and schematics.
 - e. Alignment and calibration procedures.
 - f. Manufacturers repair parts list indicating sources of supply.
3. Software Manual: The software manual shall describe the functions of all software and shall include all other information necessary to enable proper loading, testing, and operation. The manual shall include:
 - a. Definition of terms and functions.
 - b. System use and application software.
 - c. Initializations, startup, and shutdown.
 - d. Reports generation.
 - e. Details on forms customization and field parameters.
4. Operator's Manual: The operator's manual shall fully explain all procedures and instructions for the operation of the system including:

-
- a. Computers and peripherals.
 - b. System startup and shutdown procedures.
 - c. Use of system, command, and applications software.
 - d. Recovery and restart procedures.
 - e. Use of report generator and generation of reports.
 - f. Data entry.
 - g. Operator commands.
 - h. Alarm messages and reprinting formats.
 - i. System permissions functions and requirements.
 - 5. Maintenance Manual: The maintenance manual shall include descriptions of maintenance for all equipment including inspection, periodic preventive maintenance, fault diagnosis, and repair or replacement of defective components.
 - C. Video Calibration Data: Provide documentation of all calibrated settings for each projector and display.
 - D. Audio Calibration Data: Provide documentation on all EQ settings, crossover points, limiter settings, gate settings and all other applicable settings.
 - E. Intellectual Property Ownership: Provide all uncompiled source code and DSP programming for all systems and spaces as described in Part 3 of this specification section.
- 1.10 WARRANTY
- A. Unless otherwise noted, provide warranty for one (1) year after Date of Substantial Completion for all materials and labor.
 - B. Operation: Upon the performance of any scheduled adjustments or repairs, Contractor shall verify operation of the systems.
 - C. Emergency Service: The Owner will initiate service calls when the systems are not functioning properly. Qualified personnel shall be available to provide service within the distance defined within this specification section. The Owner shall be furnished with telephone number(s) where service personnel can be reached 24/7/365. Service personnel shall be at site within 24 hours after receiving a request for service.
 - D. Records and Logs: The Contractor shall keep records and logs of each task completed under warranty. The log shall contain all initial settings at substantial completion. Complete logs shall be kept and shall be available for review on site, demonstrating that planned and systematic adjustments and repairs have been accomplished for the systems.
 - E. Work Requests: The Contractor shall separately record each service call request on a service request form. The form shall include the model and serial number identifying the component involved, its location, date and time the call was received, specific nature of trouble, names of service personnel assigned to the task, instructions describing what must be done, the amount and nature of the materials used, the time and date work started, and the time and date of completion. The Contractor shall deliver a record of the work performed within five (5) business days after work is accomplished.

- F. System Modifications: The Contractor shall make any recommendations for system modification in writing to the Owner. No system modifications shall be made without prior approval of the Owner. Any modifications made to the system shall be incorporated into the operations and maintenance manuals, and other documentation affected. To the fullest extent possible, the Owner shall be provided with electronic restorable versions of all configurations prior to the modifications being made.
- G. Software: The Contractor shall provide all software and firmware updates during the period of the warranty and verify operation of the system upon installation. These updates shall be accomplished in a timely manner, fully coordinated with system operators, shall include training for the new changes/features, and shall be incorporated into the operations and maintenance manuals, and software documentation.
- H. Refer to the individual product sections for further warranty requirements of individual system components.

1.11 ANNUAL SERVICE CONTRACT

- A. Provide annual cost for extended service and maintenance warranty after the first year for the audio/video systems according to the following terms:
 - 1. The term of the warranty shall begin on the system acceptance date and shall continue for one (1) year. The extended service and maintenance warranty may begin following this first year if accepted by the Owner. The term may be automatically renewed for successive one-year periods unless canceled by the Owner. The service and maintenance agreement shall include the following basic services to the Owner, including all necessary parts, labor and service equipment:
 - a. Repair or replace any equipment item that fails to perform as initially installed, as specified, or as determined per the manufacturer's performance criteria.
 - b. Perform semi-annual preventive maintenance on the equipment. This preventive maintenance shall include, but is not limited to, cleaning, realignment, bulb replacement, filter cleaning and replacement, inspection, re-calibration, and testing of devices. The Owner shall receive a written report of these inspections that identifies the device's status and, if required, a list of all necessary repairs or replacements.
 - c. Provide software and firmware maintenance on the system. Contractor shall install and configure any software and firmware updates that the manufacturer provides at no cost. Any additional software or firmware options, updates, or enhancements purchased by the Owner shall be installed. The Contractor shall not be responsible for the purchase of additional software packages or the maintenance of Owner data.
 - 2. The Contractor shall be compensated for any repairs or maintenance provided as a result of Owner abuse, misuse, intentional damage, accidental damage, or power fluctuations exceeding specified equipment tolerances.
- B. Provide complete terms and conditions of warranty and service.

1.12 EXTRA MATERIALS

- A. Furnish extra materials as described below.

- B. Extra stock shall match products installed and shall be packaged with protective covering for storage. Provide identification labels describing contents. Deliver extra materials to Owner.
 - 1. Filters: Provide a total of two (2) filters for each device that uses filters. If the device is equipped with more than (1) filter, provide a total of two (2) filters for each filter.

PART 2 - PRODUCTS

2.1 OWNER FURNISHED PRODUCTS

- A. Existing equipment as shown on drawings.

2.2 SYSTEM COMPONENTS

- A. Refer to the project drawings for basis of design system components. Equivalent products shall meet or exceed all requirements defined on the project drawings. The following product information represents the minimum additional requirements for equivalent products:
- B. Media Players:
 - 1. All media players, including Blu-ray players that are capable of outputting protected content including HDCP and DPCP, shall have a minimum of 16 keys available.
- C. Audio/Video GUI Control Systems:
 - 1. Contractor shall furnish a programmable software-based audio/video control system. The system shall be field configurable and programmable by the factory and/or a factory-trained programmer.
 - 2. The control system shall be TCP/IP based allowing direct connection of the system processors to a 10/100BaseT compatible Ethernet network.
 - 3. Virtual touch panel and keypad control shall be provided for remote trouble shooting and control.
 - 4. Refer to project drawings for required central processors, touch panels, keypads and additional information.
- D. Microphone Systems:
 - 1. Wireless Microphones:
 - a. Wireless microphones shall not operate in the 614 to 806 MHz band (channels 38 to 69).
 - b. Features:
 - 1) Dual antenna reception with true diversity reception.
 - c. Microphone systems that are common (shared) by multiple spaces or when the receivers are in a remote area shall include a compatible wireless antenna distribution system by the same manufacturer as the wireless microphone system.
 - d. Provide antenna cabling and connectors per manufacturer recommendations.

E. Audio Amplifiers:

1. Power Amplifier(s), 25, 70.7 and 100 Volt:

a. Power: The following calculation shall be used to determine the minimum required output of the amplifier(s):

1) Calculate the total power tap value of each transformer with insertion loss using the following equation:

a) $\text{Tap wattage} \times 10^{(x\text{dB}/10)}$ where x = the rated insertion loss at 1,000Hz.

2) Calculate the total wattage loss based on cable distance, cable gauge and cable resistance.

3) Add together all the speaker taps' total power values that will be on a single channel of the amplifier. Multiply that total by 1.2, which will allow for a 20% future expansion. Multiply that number by 1.25 to ensure the amplifier never exceeds 75% of its total output. Utilize the final number to determine the minimum amplifier power requirements.

F. Assisted Listening Systems (ALS):

1. All spaces with amplified audible communications require an ALS. The Contractor shall refer to the ADA and ADAAG guidelines, as well as IBC Section 1108.2.7 for ALS rules, regulations and guidelines. Refer to the table below for the required number of receivers to be provided for each space (Source: IBC, Table 1108.2.7.1). Alternatively, if the building is managed by a single entity and all systems are fully compatible and interoperable, the total number of seats for all areas can be used in accordance with the table below.

Capacity of Seating in Assemble Areas	Minimum Required Number of Receivers	Minimum Number of Receivers to be Hearing-aid (T-coil) Compatible
50 or less	2	2
51 to 200	2, plus 1 per 25 seats over 50 seats	2
201 to 500	2, plus 1 per 25 seats over 50 seats	1 per 4 receivers
501 to 1,000	20, plus 1 per 33 seats over 500 seats	1 per 4 receivers
1,101 to 2,000	35, plus 1 per 50 seats over 1,000 seats	1 per 4 receivers
Over 2,000	55, plus 1 per 100 seats over 2,000 seats	1 per 4 receivers

2. Receivers required to be hearing-aid compatible shall interface with telecoils in hearing aids through the provision of neckloops and shall be over-the-ear type headphones. Earbuds are not acceptable for this use.

3. Receivers shall include a 1/8" (3.2mm) standard mono output jack.

4. Refer to the Access Board Research "Large Area Assistive Listening Systems: Review and Recommendations" ALS report for additional recommendations.

G. Power Conditioning and Surge Protective Devices:

1. All equipment shall be plugged in through a power conditioning surge arrestor.
2. Provide a minimum of 50 dB noise attenuation.

3. Provide a minimum of 1,500 joules of surge protection.
4. UL 1449 – Standard for Safety for Surge Protective Devices listed to 330 volt clamping voltage.
5. Power sequencers shall be equipped with contact closures or Ethernet control for remote turn on and off.
6. Refer to the project drawings for additional information.

H. Digital Video Signal Equalizers and Regenerators:

1. For any cable run that exceeds the manufacturer-recommended distances or fails to transmit video or audio due to cable length, the Contractor shall provide and install a signal equalizer at the far end (sink) with the following minimum features:
 - a. HDMI/DVI equalizers shall be HDCP compliant and support actively buffered DDC transmission.
 - b. Display port equalizers shall be HDCP and DPCP compliant, support actively buffered DDC transmission, and be DP++ compatible.
 - c. Provide automatic equalization.
 - d. Pass all embedded audio and metadata.
 - e. Have an auxiliary power input when adequate power is not available on the cable.
 - f. Provide output reclocking and jitter reduction for multi-rate SDI signals.
2. For any cable run that fails to transmit video or audio due to a weak source signal, the Contractor shall provide and install a signal regenerator at the near end (source) with the following minimum features:
 - a. HDMI/DVI regenerators shall be HDCP compliant and support actively buffered DDC.
 - b. Display port regenerators shall be HDCP and DPCP compliant, support DDC transmission, and be DP++ compatible.
 - c. Provide automatic output reclocking and jitter reduction.
 - d. Pass all embedded audio and metadata.
 - e. Have an auxiliary power input when adequate power is not available on the cable.

I. Audio Unbalanced to Balanced Converters, Balanced to Unbalanced Converters, Combiners, Dividers, Isolation Transformers, and Line Drivers Minimum Requirements:

1. Unbalanced to Balanced Active Converter:
 - a. Provide signal isolation from the audio signals of differing channels.
 - b. Provide output trim gain and set to optimal output level while preventing over amplification and clipping of the signal.
 - c. Minimum frequency response of 20 Hz to 20 kHz ($\pm 0.5\text{dB}$).
 - d. Provide with appropriate power supply and mounting kit for rack or wall use.
 - e. Provide appropriate converter for mono to mono, mono to stereo, stereo to stereo, or stereo to mono to match the input of the equipment to which it is being connected.
2. Balanced to Unbalanced Passive Converter:
 - a. Provide transformer isolation from the input to output.
 - b. Provide output trim attenuation and set to optimal output level while preventing over-amplification and clipping of the signal.

-
- c. Minimum frequency response of 20 Hz to 20 kHz ($\pm 0.5\text{dB}$).
 - d. Provide with appropriate mounting kit for rack or wall use.
 - e. Provide appropriate converter for mono to mono, mono to stereo, stereo to stereo, or stereo to mono to match the input of the equipment to which it is being connected.
 - 3. Stereo to Mono and Mono to Stereo Passive Combiner/Divider:
 - a. Passive resistive network.
 - b. Provide RF filtering.
 - c. Provide a minimum of 3dB of isolation between channels.
 - d. Provide no greater than 3dB of Insertion Loss.
 - e. Minimum frequency response of 20 Hz to 20 kHz ($\pm 3\text{dB}$).
 - f. Provide with appropriate mounting kit for rack or wall use.
 - g. Provide appropriate passive combiner for low impedance or high impedance and balanced or unbalanced signals to maintain the original signal type.
 - 4. Passive Isolation Transformer:
 - a. Provide Galvanic Isolation.
 - b. Minimum frequency response of 20 Hz to 20 kHz ($\pm 3\text{dB}$).
 - c. Isolate the input shield from the output shield. Input shield is electrically isolated from the transformer chassis and provides a ground return. The output shield is connected to the transformer chassis.
 - d. Provide with appropriate mounting kit for rack or wall use.
 - e. Provide appropriate isolation transformer for low impedance or high impedance, stereo or mono signals, and balanced or unbalanced signals to maintain the original signal type.
 - 5. Active Signal Line Driver:
 - a. Provide balanced or unbalanced inputs with balanced outputs.
 - b. Provide input trim gain for a minimum of unity gain from -14dBu to +24dBu, set to optimal output level while preventing over-amplification and clipping of the signal.
 - c. Provide a minimum balanced output of +4dBu nominal for a minimum output gain of +25dBu.
 - d. Minimum frequency response of 20 Hz to 20 kHz ($\pm 0.5\text{dB}$).
 - e. Provide with appropriate power supply and mounting kit for rack or wall use.
 - f. Provide appropriate line driver for low impedance or high impedance and stereo or mono signals.
 - J. Refer to project drawings for all other equipment not listed.
- 2.3 AUDIO CONNECTORS
- A. This article includes minimum requirements for all connectors that are acceptable on this project. Should the Contractor request an alternative connector, it shall be submitted with the product submittals and clearly identified with which connector it will be replaced.
 - B. Phono Jack:
 - 1. Panel Mount:

-
- a. Professional grade, three conductor, stereo, 0.375" hole diameter mounting, self-locking, double-open circuit.
 - b. Manufacturers:
 - 1) Switchcraft
 - 2) Neutrik
 - 2. Cable Mount:
 - a. Professional grade, three conductor, stereo, all-metal construction, integral cable clamp, nickel body, cable strain relief.
 - b. Manufacturers:
 - 1) Switchcraft
 - 2) Neutrik
- C. Phono Plug:
- 1. Professional grade, 1/4" stereo phone plug, strain relief, internal cable clamp, all metal body, tin-plated solder terminals.
 - 2. Manufacturers:
 - a. Switchcraft
 - b. Neutrik
 - c. Mogami
- D. RCA Jack:
- 1. Panel Mount:
 - a. Professional grade, isolated, gold-plated connectors, solders connection.
 - 1) Manufacturers:
 - a) Switchcraft
 - b) Neutrik
 - c) Mogami
 - 2. Panel Mount (Recessed):
 - a. Professional grade, isolated, gold-plated connectors, solders connection.
 - b. Manufacturers:
 - 1) Switchcraft
 - 2) Neutrik
 - 3) Mogami
 - 3. Cable Mount:
 - a. Professional grade, nickel-plated body, metal shell, heavy-duty cable clamp.
 - b. Manufacturers:

- 1) Switchcraft
- 2) Neutrik
- 3) Mogami

E. RCA Plug:

1. Professional grade, nickel-plated metal shell, solid center pin, gold-plated contact surface.
2. Manufacturers:
 - a. Switchcraft
 - b. Neutrik
 - c. Mogami

F. XLR Jack:

1. Panel Mount: Professional grade, crimped insert for vibration control, nickel shell, silver pins, pin quantity as required for application.
2. Manufacturers:
 - a. Switchcraft
 - b. Neutrik
 - c. Mogami

G. XLR Plug:

1. Professional grade, 360° strain relief, nickel shell, silver pins. Provide colored boot.
2. Manufacturers:
 - a. Switchcraft
 - b. Neutrik
 - c. Mogami

H. Loudspeaker Connector:

1. Panel Mount: Twist-lock type, 4-conductor.
2. Manufacturers:
 - a. Neutrik
 - b. Speakon

2.4 AUDIO CABLING

A. Refer to Section 270500 for cable rating requirements.

B. Microphone Level Audio Cabling:

1. For patch cables less than or equal to 25 feet:
 - a. 24 AWG 2-conductor, foil shield, twisted, stranded (19x36) tinned bare copper.
2. For cable runs greater than or equal to 25 feet:

- a. 22 AWG 2-conductor, foil and braid shield, twisted, stranded (16x34) tinned bare copper.
- C. Line Level Audio Cabling:
 - 1. For patch cables less than or equal to 25 feet:
 - a. 22 AWG 2-conductor, foil shield, twisted, stranded (7x30) tinned bare copper.
 - 2. For cable runs greater than or equal to 25 feet:
 - a. 18 AWG 2-conductor, foil shield, twisted, stranded (16x30) tinned bare copper.
- D. AES/EBU Digital Audio Cabling:
 - 1. For patch cables less than or equal to 25 feet:
 - a. 24 AWG 2-conductor, foil shield, twisted, stranded (7x32) tinned bare copper.
 - b. Nominal Impedance: 110 ohms
 - 2. For cable runs greater than or equal to 25 feet:
 - a. 22 AWG 2-conductor, foil and braid shield, twisted, stranded (7x30) tinned bare copper.
 - b. Nominal Impedance: 110 ohms
- E. Constant Voltage Speaker Cabling:
 - 1. Class 2, stranded, twisted, 2-conductor, minimum of 16-gauge wire for all 25/70.7/100-volt applications unless noted otherwise.
 - 2. The Contractor shall size cabling as required for distance power and shall provide larger gauge cable as required.
- F. High Performance Constant Voltage Speaker Cabling:
 - 1. Class 2, stranded, twisted, minimum of 12-gauge wire for all 25/70.7/100-volt high wattage (50-watts per speaker or greater) applications unless noted otherwise.
 - 2. The Contractor shall size cabling as required for distance power and shall provide larger gauge cable as required.
- G. Low Capacitance Speaker/Subwoofer Cabling:
 - 1. Class 2, high strand count (65x34), oxygen free copper, low capacitance (19.9 pF/Ft), twisted, 2-conductor, 16-gauge wire for all 2/4/8/16 ohm low impedance applications where amplifier output is 150 watts or less and/or the distance is less than 50', unless noted otherwise.
 - 2. The Contractor shall size cabling as required for distance power and shall provide larger gauge cable as required.
 - 3. Cable shall be installed in conduit within plenum areas.
- H. High Performance Low Capacitance Speaker/Subwoofer Cabling:

1. Class 2, high strand count (259x34), oxygen free copper, low capacitance (23.2 pF/Ft), twisted, 2-conductor, 10-gauge wire for all 4/8-ohm low impedance applications where amplifier output is 150 watts or greater and/or the distance is greater than 50', unless noted otherwise.
2. The Contractor shall size cabling as required for distance power and shall provide larger gauge cable as required.
3. Cable shall be installed in conduit within plenum areas.

2.5 ANALOG VIDEO CONNECTORS

A. RF Video F-Connector:

1. 75 ohm, broadcast quality, two-piece compression type. Return Loss: Less than -36 dB to 1 GHz, -25 dB to 2 GHz, -23 dB to 3 GHz. Twist-on and crimp connectors are not acceptable.

B. BNC Bulkhead:

1. Chassis Mount: 1/2" D jack, 75 ohm, feed-through jack-to-jack type.
2. Recessed: 1/2" D jack, 75 ohm, nickel face, feed-through jack-to-jack type.

C. BNC Connector:

1. 75 ohm, broadcast quality, two-piece compression type. Return Loss: Less than -36 dB to 1 GHz, -25 dB to 2 GHz, -23 dB to 3 GHz. Twist-on and crimp connectors are not acceptable.

2.6 ANALOG VIDEO CABLING

A. RF Video Cable:

1. For cable runs less than or equal to 100 feet:
 - a. RG-6, center conductor: Quad shield, 18 AWG bare copper covered steel; 0.040" OD (nominal).
2. For cable runs greater than or equal to 100 feet:
 - a. For any cable run that exceeds the manufacturer-recommended distances, the Contractor shall provide and install an RF booster amplifier and set the gain and slope to achieve the proper signal level.
 - b. RG-11, center conductor: Quad shield, 14 AWG bare copper covered steel; 0.064" OD (nominal).

2.7 DIGITAL VIDEO CABLING

- A. All digital video cabling shall be pre-assembled and tested in a factory and not field terminated. The contractor shall field verify the cable distance and provide the proper cable type and length.
- B. High Definition Multi-Media Interface (HDMI) Cable:

1. For cable runs less than or equal to 25 feet:
 - a. The cable shall be a minimum of HDMI 2.0 certified.
 - b. HDCP compliant.
2. For cable runs greater than 25 feet:
 - a. HDMI optical cabling can be used as an alternate to copper cabling for distances over 25 feet.
 - b. For any cable run that exceeds the manufacturer-recommended distances, the Contractor shall provide and install an HDCP compliant signal equalizer approved by the cable manufacturer at the far end (sink).
 - c. The cable shall be a minimum of HDMI 2.0 certified.
 - d. HDCP compliant.

C. Display Port Cable:

1. For any cable run that exceeds the manufacturer-recommended distances, the Contractor shall provide and install an HDCP and DPCP compliant signal equalizer approved by the cable manufacturer at the far end (sink).
2. The cable shall be a minimum of DisplayPort 1.2 certified.
3. Supports HDCP and DPCP.

D. Serial Digital Interface (SDI) Cabling:

1. For horizontal cable runs less than or equal to 100 feet:
 - a. For any cable run that exceeds the manufacturer-recommended distances or fails to transmit video or audio due to cable length, the Contractor shall provide and install a signal equalizer at the far end (sink).
 - b. RG-6, center conductor: Foil and copper braid shield, 18 AWG solid bare copper, 0.274" OD (nominal).

2.8 CONTROL CABLING

A. Control:

1. For Bidding Purposes: Two-pair, twisted, shielded, one (1) #18 AWG pair and one (1) #22 AWG pair. Provide with plenum-rated jacket where used in a plenum space without conduit.
2. Size conductors as required for distance and voltage drop.
3. Coordinate exact requirements with selected manufacturer and system prior to submitting bid.

B. Other Control Circuits:

1. #20 AWG, stranded, shielded cable, number of conductors as required for the applications. Provide with plenum-rated jacket where used in a plenum space without conduit. Provide PVC jacket where installed in conduit or non-plenum areas.
2. Coordinate exact requirements with selected manufacturers prior to submitting bid.

2.9 HORIZONTAL COPPER DATA AND FIBER CABLING AND CONNECTORS

- A. Refer to Section 271500 - Horizontal Cabling Requirements, for telecommunications cabling and connector requirements including fiber optics being utilized for A/V systems.
- B. Refer to Section 271710 - Testing, for telecommunications cabling testing requirements including fiber optics being utilized for A/V systems.
- C. All category-rated copper data cabling and fiber optic cabling shall be installed, terminated, tested and certified by the Division 27 Telecommunications contractor certified by the selected manufacturers for the copper and fiber optic cabling plant. The Contractor shall submit all cabling and certifications to the Architect/Engineer for approval in the shop drawings.
- D. The A/V contractor shall coordinate purchase, installation, testing and certification with the telecommunications contractor for all required category-rated copper data cabling and fiber optic cabling required for A/V system operation prior to bid.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Verify that surfaces are ready to receive work.
- B. Verify field dimensions and coordinate physical size of all equipment with the architectural requirements of the spaces into which they are to be installed. Allow space for adequate ventilation and circulation of air.
- C. Verify that required utilities are available, in proper location, and ready for use.
- D. Beginning of installation means installer accepts existing conditions.

3.2 PRE-INSTALLATION

- A. A pre-installation meeting shall be held after the project has been awarded but before any submittals or work has been conducted. The purpose of this meeting is to review the drawings and specifications to assist with the construction and installation process that will occur during construction. The meeting will include the Engineer, Architect, Owner's Representative, and all relevant installing contractors for this system.
- B. The Contractor shall be responsible for submitting all requested submittals and holding the pre-installation meeting prior to any purchasing, installation, programming, and construction coordination. Any delays or changes to the project as a result of meeting this requirement will be at the Contractor's expense.

3.3 INSTALLATION

- A. Comply with the manufacturer's instructions and recommendations for installation of all products.
- B. Provide all system wiring between all components as directed by the manufacturer or required for proper system operation.

-
- C. Mount all touch screen and keypad devices where shown on plans in accordance with Americans with Disabilities Act (ADA) requirements for both side reach and front reach.
- D. Cabling Requirements:
1. Non-plenum rated cabling may be used instead of plenum when installed with-in conduit in plenum rated areas.
 2. All cabling shall be routed according to function. Cabling shall be grouped and bundled by groups, such as: microphone and line level audio, control, video and speaker. In no case shall cabling from different functional groups be intermixed. No cabling shall be routed parallel to 120 VAC or higher power circuits unless separated by a minimum of 6" and the 120 VAC or higher power is installed in conduit.
 3. When cabling is installed in conduit, a separate conduit shall be provided for each cabling functional type.
 4. Cable bundles shall be loosely bundled to allow the visual following of individual cables within the bundle and to permit the easy removal and addition of cables as necessary.
 5. Horizontal cabling installed as open cable or in cable tray shall be bundled at not less than 10' intervals with hook-and-loop tie wraps. The use of plastic cable zip ties is strictly prohibited in any situation.
 6. Cabling shall not be spliced under any circumstances.
 7. Each cable shall be appropriately identified (as defined on the record documents) at each end's termination point using pressure sensitive label strips.
 8. Audio Cabling:
 - a. All amplified audio cabling shall not be in the same enclosed pathway as any other type of cabling as required by the NEC. Refer to the NEC for definitions and additional requirements.
 - b. The polarity of all cabling shall remain consistent throughout the project, on all equipment. Red conductors shall be used for the positive "+" side, and black used for the negative "-" side.
 - c. Cable shield length shall be equal to the cable's conductor length.
 - d. All shielded cables drain wire SHALL be grounded and continuous throughout the entire length of the system, including splices where speakers are installed.
 - e. Balanced audio connections shall be used whenever the mating equipment allows.
 - f. Do not run unbalanced cables longer than 3m. For interconnecting of unbalanced equipment in lengths longer than 3m, the Contractor shall provide a line driver located at the source.
 9. Twisted Pair Cabling for All Applications:
 - a. The Contractor shall ensure that the twists in each cable pair are preserved to within 0.5 inch of the termination. The cable jacket shall be removed only to the extent required to make the termination.
 - b. The Contractor shall ensure that the cable shields are continuous throughout, terminated, and grounded according to the manufacturer's recommendations.
- E. Grounding Requirements:
1. Provide a minimum of #6 AWG conductor from the nearest electrical service ground bus or nearest telecommunications room ground bus bar to the A/V equipment racks and cabinets regardless of location. Size cable as required by the NEC.
 2. Cables containing shields shall not have the shields grounded at conduits, boxes, racks, etc. Ground the shield only at the equipment end.

3. Audio cable shields for line-level signals shall be connected to the metal equipment chassis at both ends of the cable.
4. Audio cables connected to transformers shall have the cable shield connected to the transformer shield and transformer case ground.
5. The Contractor shall not connect cable shields together from differing cables.
6. XLR cable shields shall be connected to chassis ground.
7. Signal-grounded balanced shields are not acceptable and shall not be installed. All balanced shields shall be chassis grounded.

F. Rack and Cabinet Requirements:

1. Ground equipment racks/cabinets as noted within this specification section and Section 270526 - Communications Grounding.
2. Provide one (1) RU of space between adjacent pieces of equipment with top and/or bottom vents, above the topmost piece of equipment, and below the bottommost piece of equipment. Provide a vented cover panel covering each rack space.
3. Terminate all speaker cabling on individual barrier strips for positive "+", negative "-", and shield. The shield barrier strip shall be grounded.
4. Provide a power conditioning surge arrestor in the rack for distribution of AC power from the wall receptacles indicated on the plans. The quantity of plugs shall be adequate so that no equipment in the rack shall require plugging into an AC source outside the rack.
5. Power sequencing shall be provided in the racks where shown on the drawings. All amplifiers located in the racks shall be sequenced "last on – first off". Power sequencers shall provide power conditioning and surge protection.

G. Video System Installation Requirements:

1. The Contractor shall confirm calculations for the optimal distance from the screen to the projector lens based on actual field conditions and submit to the Architect/Engineer for review and approval.
2. If the projector and screen are in a fixed position, the Contractor shall provide the appropriate lens for the throw distance.
3. Video display image shall fill screen area with native aspect ratio

H. Audio System Installation Requirements:

1. The Contractor shall perform calculations for the optimal speaker tap settings to reach the desired SPL level and coverage without overloading the amplifier(s).
 - a. At a minimum, the following calculations shall be used:
 - 1) Add together all speaker taps that will be on a single channel of the amplifier. Multiply that total by 1.2, which will allow for a 20% future expansion. Multiply that number by 1.25 to ensure the amplifier never exceeds 75% of its total output. Utilize the final number to determine the minimum amplifier power requirements.
 - 2) For direct coupled systems (low impedance), allow a minimum of 10 dB headroom before any distortion occurs at the amplifier input indicator when beginning gain stage tests are set up. Increase headroom as appropriate for high impact and clarity needs, typically exceeding 12 to 15 dB during continuous operation.

2. Connections of balanced to unbalanced equipment shall only be done through an active converter at the unbalanced side.
3. Connections of unbalanced to balanced equipment shall only be done through an active converter at the unbalanced side.
4. Connections from stereo balanced or unbalanced equipment to mono equipment of the same signal type shall only be done through a passive combiner.
5. Connections from mono balanced or unbalanced equipment to stereo equipment of the same signal type shall only be done through a passive divider.
6. The Contractor shall provide an isolation transformer for any balanced or unbalanced audio line that exhibits a hum, noise from EMI or RFI, power line noise, or ground loops.
7. The Contractor shall provide an active audio line driver for all balanced and unbalanced signals that exceed the distance limitations of the cabling.

I. Control System Installation Requirements:

1. The Contractor shall perform calculations for the required wire AWG size based on distance for system power for touch panels, keypads and other devices being powered. A minimum of a 15% overhead is required.

3.4 VIDEO SYSTEM TESTING AND CALIBRATION

A. All video equipment shall receive proper testing and configuration.

B. Color Space Optimization:

1. The Contractor shall set the color space of each source and display device to a uniform color space to optimize the switching speed and compatibility of a digital video system. Each device shall be set to an RGB or YCbCr color space depending on the systems primary function and compatibility of the devices.
2. If the primary function of the space is video and other digital media, the color space of each device shall be set to a YCbCr color space. If the primary function of the space is computer-based graphics and presentations, the color space of each device shall be set to an RGB color space.
3. Chroma subsampling shall be set to a consistent 4:4:4 or 4:2:2 across all devices. Set to 4:4:4 when all equipment is capable.
4. If all devices are not capable of displaying a certain color space, all devices shall be set to a common shared color space.

C. Extended Display Identification Data (EDID) Management:

1. The Contractor shall set the EDID management tables in capable equipment so all sources output the highest common EDID table of the displays (sinks).
2. For systems with capable matrix switches, the matrix shall dynamically adjust its EDID tables so any source will output the highest common EDID table of the displays (sinks) being outputted to.
3. If any source or Owner-furnished equipment (OFE) is not outputting properly, the Contractor shall provide and install an EDID Emulator and set it to the highest common EDID table of the displays (sinks) being outputted to.

D. Projectors, monitors and receivers shall be tested and adjusted for proper signal sync, convergence, brightness, contrast, and color level. The Contractor shall adjust all other parameters necessary to achieve a proper video image.

-
- E. All video source selections shall be tested and verified.
- F. All projectors and displays shall have a minimum burn-in time of 96 hours prior to any adjustments are made and the completion of the project
- G. All projectors and displays shall have their hue/tint and color/saturation calibrated with a video signal test generator and blue lens filter after a minimum warmup time of 20 minutes. Provide all calibrated settings results for each projector and display in the final documentation.
- H. All projectors and displays shall have their brightness, contrast and sharpness calibrated with a video signal test generator after a minimum warmup time of 20 minutes. Provide all calibrated settings results for each projector and display in the final documentation.
- I. All dynamic contrast functions shall be turned off.
- J. The Contractor shall utilize a portable oscilloscope to set video output gain and peaking levels on all line drivers and receivers for analog signals.
1. The Contractor shall submit screen shots of the fixed signal.
 2. Calibration by eye is not acceptable.
- K. Full video calibration for all projectors and displays shall be provided with the following minimum requirements:
1. The Contractor shall utilize non-contact professional video calibration tools such as Sencore OTC1000-CM ColorPro Optical Tri-stimulus Colorimeter or Klein K-10 Tri-stimulus CIE Colorimeter, Sencore or Extron Video Generator and the latest version of ColorPro by CalMan software or pre-approved equal.
 2. The projector or display shall have a minimum burn-in time of 96 hours prior to calibration.
 3. The projector or display shall have a minimum warmup time of 20 minutes before calibration begins. All efforts shall be taken to allow the display to warm up for a minimum of 60 minutes to allow the luminance to fully stabilize.
 4. The space shall be as dark as possible. The colorimeter's ambient light sensor filter shall be recalibrated every 30 minutes when outside ambient light is present to account for the changes in daylight levels.
 5. All inputs utilized on the projector or display shall be calibrated using the appropriate video signal, aspect ratio and resolution. Submit results for each input as a separate report.
 6. The projector or display shall be calibrated to the Rec. 709 HDTV color standard. White balance shall be calibrated as close as possible to the D65 point for both high IRE and low IRE levels.
 7. The projector or display shall have its 3D Color Management calibrated.
 8. The projector or display shall have its brightness and contrast adjusted both before and after the gamma is calibrated.
 9. Gamma shall be calibrated to an average of 2.2. Gamma shall be verified after the calibration is completed and readjusted as necessary.
 10. The projector or display shall have its hue/tint and color/saturation calibrated with a blue lens filter.
 11. For calibrating 3D projectors and displays, the matching 3D glasses shall be secured to the front of the Colorimeter "looking" through the glasses for the 3D mode calibration only.

12. Record the full on/full off contrast ratio both before and after calibration. Provide these results in the final documentation.
13. The Contractor shall submit the final calibration results to the Architect/Engineer for approval and include the approved results in final documentation submitted to the Owner.
14. Calibration by eye is not acceptable.
15. Any setting that cannot be calibrated because the projector or display lacks the functions shall be noted in the final documentation.
16. For video wall applications, or where multiple projectors or displays that will share content are being used within a single space, all displays after calibration shall be adjusted to match the lowest performing projector or display so all projectors or displays are uniform. If a projector or display differs greatly from the other displays, that projector or display shall be replaced at no cost to the Owner and recalibrated.

3.5 AUDIO SYSTEM TESTING AND CALIBRATION:

- A. This Contractor shall field adjust any surface-mounted or flown loudspeaker orientation to achieve the necessary coverage pattern to the intended listening plane. Loudspeakers always face listeners and minimize coverage on walls. The contractor shall be familiar with the named and specified nominal coverage angle of all speakers above its crossover point or for speech range, (500-4,000 Hz).
- B. All speakers shall be tested for polarity prior to high work and a table of test results shall be included for A/E inspection. All loudspeakers shall be connected with uniform polarity, where a positive pressure pulse at the input corresponds to a positive driver excursion, and all drivers are uniform always moving in the same direction. Main speakers shall not be lifted or hoisted into high access areas without polarity testing.
- C. The Contractor shall make incremental adjustments on the equipment output and input tolerances to achieve matching signal levels while preserving +10 dB minimum headroom and also unity gain. Insert all broadband or high pass filters first for system protection after review of manufacturers specifications for power and bandpass.
- D. The Contractor shall utilize a Real Time Audio (RTA) spectrum analyzer with AES2 Broadband pink noise at a minimum of 1/3 octave, capable of providing detailed plots and reports.
 1. The Contractor shall have and own a calibrated Type 1 or Type 1.5 microphone for all measurements, that is recently calibrated within the last year.
 2. Calibration by ear, tablets and portable phones with integrated microphones are never acceptable. All software analysis tools require a calibrated interface and calibrated microphone. No Android devices are used for metering or calibration. IOS devices with calibrated software and interfaces may be used.
- E. Provide high quality media with full bandpass program material for critical listening. MP3 or streaming audio is not acceptable. Testing shall illustrate WAV file quality playback for impact and clarity.
- F. The Contractor shall provide graphic plots of the reference ambient noise for each space at the time of the calibration and submit with the calibration results. Test signal shall be 10dB minimum above ambient noise levels during testing.
- G. The Contractor shall use a listener sitting height of four (4) feet $\pm$ 1" for rooms where the primary function will be sitting. The Contractor shall use a listener standing height of five feet three inches (5.25') $\pm$ 1" for rooms where the primary function will be standing

3.6 AUDIO SYSTEM PERFORMANCE REQUIREMENTS

- A. The Contractor shall test and provide documents verifying all the following performance criteria. The Architect/Engineer shall be informed when the testing will take place and have the option to witness the testing and ask for additional testing for any reason.
- B. The Contractor shall develop an Audio Coverage Uniformity Measurement Location (ACUML) plan for each required space based on the project floor plans, and submit to the Architect/Engineer for review and approval prior to testing. The plan shall represent the majority of the listening area and perimeter seating in the direct field of main speakers.
- C. The tests shall be performed at the multiple locations defined on the ACUML plan representing the majority of the listening area(s). The Contractor shall indicate on the floor plan drawings where each test was performed, with the corresponding graphic plot, and submit with the final documentation for review and approval by the Architect/Engineer.
- D. The test shall be taken with AES2 Broadband pink noise at a minimum of 15 dB above the reference ambient noise level, taking caution to not overdrive and clip any component of the system beyond 0.5% Total Harmonic Distortion (THD), with a maximum system THD of 1.0%.
- E. The audio system(s) shall meet the following minimum requirements:
 - 1. Achieve a total average SPL of 95 dBA in the majority of seating area with additional headroom. Use dBC for levels above 95 dBA.
 - 2. The system's total SPL frequency response shall be within ± 4 dB from 500 Hz to 8000 Hz. All efforts shall be made to equalize the system's frequency response possible throughout the system's entire 100 Hz to 16kHz spectrum.
 - 3. All vocal microphones shall have high and low pass filters set to minimize rumble, pop and hiss. The high pass filter cutoff frequency shall be set between 125 and 160 Hz, with a 12 dB per octave slope, minimum. The low pass filter cutoff frequency shall be set at 12,000 Hz, with a 6 dB per octave slope. Adjust frequency and slope as required to maximize performance for both male and female voices.
 - 4. The subwoofer/speaker low/high crossover points shall be a Butterworth (BW) filter set at 80 Hz with a 24 dB per octave slope. This crossover point shall be adjusted as needed to achieve a smooth frequency response. The subwoofer high-pass filter shall be set to manufacturer's recommended half-power point or 40 Hz, whichever is higher.
 - 5. Achieve a minimum RaSTI value of 0.63.

3.7 ASSISTED LISTENING SYSTEM (ALS) PERFORMANCE REQUIREMENTS

- A. The Contractor shall verify that the ALS system(s) meets the following minimum performance requirements at the earphone or headset:
 - 1. Reach a minimum total SPL of 75 dBA and no greater than 95 dBA, with a minimum of a 50dB dynamic range volume control.
 - 2. Achieve a minimum signal-to-noise (S/N) ratio of 18dB. It is recommended to achieve a minimum signal-to-noise (S/N) ratio of 25dB to accommodate children.
 - 3. Ensure the peak clipping levels do not exceed 18dB down from the peak input signal level.
- B. FM-based systems shall operate within the FCC-reserved assisted listening frequencies of 72 to 76 MHz or the 216 to 217 MHz (preferred) range and comply with the FCC transmitter power requirements.

3.8 DSP-BASED AUDIO PROCESSOR PROGRAMMING

- A. Full system programming shall be provided for the system. Programming shall be performed by a factory trained and certified programmer or an employee of the equipment manufacturer.
- B. DSP pathfile with initial settings shall be provided by the Contractor for review by the Architect/Engineer before installation.
- C. The IP-based audio (IEEE AVB, Dante, etc.) and components shall be on a dedicated Virtual LAN (VLAN) for the A/V systems. These components shall be on a dedicated subnetwork of the VLAN. The Contractor shall coordinate these requirements with the Owner prior to installation.
- D. A parametric EQ shall be provided after each crossover point or as approved in the DSP pathfile during shop submittal review. These shall be utilized to set the speaker output as defined in the Audio System Calibration section within this specification. These equalizers should not be made available to the user to adjust.
- E. Levelers, compressor/limiters, duckers, gates and delays shall be preset during testing and commissioning and are not available for user adjustment following commissioning.
 - 1. Adjust delays for time of flight plus 8 to 10 ms, typical.
- F. Provide each microphone input with high-pass filter, 5-band parametric EQ, auto-leveler and volume module. Provide line level inputs with high-pass filter, 3-band parametric EQ, compressor/limiter, and volume module.
- G. A broadband pink noise generator shall be provided with a selectable on/off control button within the DSP pathfile. The noise shall be routable through all processing EQs and speaker outputs during testing.
- H. Provide volume meters with labeling for each input and each output.
- I. The Contractor shall utilize the latest version of the programming software.
- J. The Contractor shall ensure that all components are updated to the latest firmware at the completion of the project.

3.9 DSP-BASED AUDIO PROCESSOR CONTROL SOFTWARE PROGRAMMING

- A. Full system software programming shall be provided for the system. Programming shall be performed by a factory-trained and certified programmer or an employee of the equipment manufacturer.
- B. The Contractor shall schedule a series of meetings with the Owner and Architect/Engineer to define and determine the exact page layout requirements prior to the final configuration of the audio system. An Owner sign-off of the final layouts shall be required.
- C. The Contractor shall use the latest version of the software.

- D. At a minimum, there shall be password-protected pages for zone combining, input/output volume control with meters, speaker output volume control with meters, signal routing, signal processing (EQ's, feedback suppression, etc.), and supervision/maintenance for all spaces and combined zones.

3.10 MULTIMEDIA CONTROL SYSTEM INTEGRATION AND PROGRAMMING

A. Programming and Integration for Control Systems:

1. Full system programming shall be provided for the system. Programming shall be performed by a factory trained and certified programmer or an employee of the equipment manufacturer.
2. The Contractor shall schedule a series of meetings with the Owner and Architect/Engineer to define and determine the exact integration requirements of the control system prior to the installation of the control system and components. An Owner sign-off of the final configuration shall be required.
3. This section only defines the minimum requirements. The programmer shall provide complete programming for a fully functional system.
4. The Contractor shall utilize the latest version of the programming software.
5. The Contractor shall ensure that all components are updated to the latest firmware at the completion of the project.
6. The IP-based control system and controlled components shall be on a dedicated Virtual LAN (VLAN) for the A/V systems. These components shall be on a dedicated subnetwork of the VLAN. The Contractor shall coordinate these requirements with the Owner prior to installation.
7. Integration and programming of the following pieces of equipment shall be provided, with the following minimum features and functions:
 - a. All equipment shall include on/off control, except for equipment that must remain active for system functionality.
 - b. Integration of HDCP (High-bandwidth Digital Content Protection) and DPCP (Display Port Content Protection) protected content and sources:
 - 1) No protected sources or content shall be allowed to be selected to route through non-protected devices and displays. A warning shall be displayed stating this information to the user.
 - c. Matrix Switcher Integration:
 - 1) The Contractor shall provide bi-directional RS-232 or Ethernet control system connections and programming with the following minimum functions:
 - a) On/off control of the matrix switcher.
 - b) Allow for independent video routing of individual video inputs to any audio number of audio outputs.
 - c) Allow for audio follow video switcher mode.
 - d) Allow for independent audio routing of individual audio inputs to any audio number of audio outputs.
 - e) Provide source detection of video inputs.
 - f) HDCP (High-bandwidth Digital Content Protection) and DPCP (Display Port Content Protection) Protection:
 - g) For HDCP/DPCP - compliant sources; switcher shall only allow for routing of signals to HDCP compliant devices.

- h) For HDCP/DPCP - complaint switchers; room combining/uncombining features shall allow for complete audio and /or video devices to be connected to the system using a simplified interface.
 - d. DSP Audio Processor Integration:
 - 1) The Contractor shall provide bi-directional RS-232 or Ethernet control system connections and programming with the following minimum functions:
 - a) On/off control of all microphones.
 - b) Volume and mute control of all microphones and input sources.
 - c) Volume and mute control of all outputs.
 - d) Independent volume and mute control of all assisted listening outputs.
 - e) Advanced routing of audio signals.
 - e. Projector Integration:
 - 1) The projectors shall be integrated into the A/V control system via bi-directional RS-232 or Ethernet control. Provide with the following minimum functions:
 - a) On/off control.
 - b) Lamp status feedback.
 - c) Filter status feedback.
 - d) Source switching control.
 - e) Audio volume control with mute.
 - f) Video mute.
 - g) Auto image.
 - f. Display Integration:
 - 1) The displays shall be integrated into the A/V control system via bi-directional RS-232 or Ethernet control. Provide with the following minimum functions:
 - a) On/off control.
 - b) Display status feedback.
 - c) Source switching control.
 - d) Audio volume control with mute.
 - e) Video mute.
 - f) Tuner channel control with direct channel access.
 - g) Station presets with station icons.
 - g. Motorized Projection Screen Integration:
 - 1) Screens shall be integrated into the A/V control system via contact closures OR bi-directional RS-232 or Ethernet control.
 - a) Up/down and stop control shall be provided.
 - h. Pan/Tilt/Zoom (PTZ) Camera Integration:
 - 1) The Contractor shall provide bi-directional RS-232 or Ethernet control system connections and programming with the following minimum functions:

- a) Provide full pan, tilt and zoom control.
 - b) Provide presets for fixed camera positions, contractor shall coordinate with the Owner for desired preset positions.
 - i. DVD/Blu-ray Integration:
 - 1) The Contractor shall provide IR based control bi-directional RS-232 or Ethernet control system connections and programming with the following minimum functions:
 - a) Typical DVD/Blu-ray functions shall be provided.
 - b) Real time metadata (if available).
 - c) Player status feedback.
 - d) Provide standard Blu-ray menu navigation Red, Green, Blue and Yellow buttons, in that order, for touch panel-based systems.
 - j. Power Sequencer Integration:
 - 1) The Contractor shall provide contact closure based control or Ethernet control system connections and programming with the following minimum functions:
 - a) Power on/off control.
 - b) On/off status via +12VDC output from the sequencer to the I/O input of the control system processor.
 - k. Digital Audio Mixing Board Integration:
 - 1) The Contractor shall provide bi-directional RS-232 or Ethernet control system connections and programming with the following minimum functions:
 - a) On/off control of device.
 - b) Master volume control.
 - c) Scene or preset recall.
 - d) This defines only the basic integration requirements. Coordinate with Owner on additional required functions.
- B. Programming and Configuration for Touch Panels:
 - 1. This section only defines the minimum requirements. The programmer shall provide complete touch panel layouts and programming for a fully functional system.
 - 2. The Contractor shall schedule a series of meetings with the Owner and Architect/Engineer to define and determine the exact touch panel layout requirements prior to the purchase and installation of the touch panels. An Owner sign-off of the final layouts shall be required.
 - a. Some tabs, pages, buttons and functions may be required to have a password at the Owner's discretion. This shall be coordinated during the meetings.
 - 3. Contractor logos are not allowed on the touch panels. The Contractor shall coordinate with the Owner on desired logos to be displayed.
 - 4. All programming for interface and control of all devices shown on the drawings shall be provided. Programming shall be provided for the following minimum functionality:

- a. The main screen shall include graphical buttons for the primary room functions.
 - 1) Upon selection of the graphical button, all the required functions shall be displayed on the screen. All required equipment shall turn on.
- b. Master System On/Off Control:
 - 1) When the master system off button is selected, all capable components within the system shall be turned off or placed on standby, except for equipment that is required to remain on for the system to function like the control system processor.
- c. The main screen shall include graphical buttons for the selection of individual source selections.
 - 1) Upon selection of the graphical button for a source selection, all functional controls for the pieces of equipment, as well as all status indicators, shall be provided in graphical format on the screen.
 - 2) Rooms with multiple independent outputs and displays shall have a source routing matrix to allow any input to be routed to any output.
- d. The main screen shall include a button for advanced equipment status and monitoring.
 - 1) Upon selection of the graphical button, the page shall display the on/off status of all monitored equipment, projector lamp hours, projector filter status, and all other features listed within this section that require monitoring
- e. The main screen shall include a button for microphone volume control and muting.
 - 1) Upon selection of the graphical button, it shall display the individual volume level of each wired and wireless microphone, with a mute for each.
 - 2) Rooms with multiple independent audio outputs and zones shall have a source routing matrix to allow any input to be routed to any output or zone.
- f. At all times, on all screens, a button shall be provided to return to the main screen, except for modal pop-ups.
- g. A master volume control and mute shall be provided at all times on all screens, except for modal pop-ups.
- h. A master video mute shall be provided at all times on all screens, except for modal pop-ups and audio-only functions.
- i. A modal countdown timer shall be displayed showing the warmup and cooldown time of the projector. All functions shall be locked out while the projector is in cooldown mode.
- j. All unused hard buttons shall not be labeled. A blank touch panel bezel shall be provided if no hard buttons are used.

C. Touch Panel Layout Principles, Considerations and Guidelines:

- 1. Icons and Buttons:
 - a. Icons shall not be used solely as a button but can be embedded in a button.
 - b. Icons shall appear to be flat and unpressable.

-
- c. Status bars or text windows for time, date, room number, and similar information shall appear to be slightly depressed into the screen and appear to be unpressable.
 - d. Buttons shall appear to be pressable by appearing to come off the screen with beveled edges, lighting gradients, and shadows. When pressed, the button shall appear to be depressed into the screen.
 - 1) Buttons that are momentary shall change color when pressed, appear to depress, then pop back up and revert to the original button color and state.
 - 2) Buttons that are not momentary shall change color when pressed, appear to depress, remain depressed, then pop back up, and revert to the original button color and state when pressed again.
 - e. Buttons and icons shall appear to be lit from the top left corner of the screen.
 - f. Buttons shall be grouped together according to general function.
 - g. Button size shall be based on the ratio of Phi (1:1.618) and be sized appropriately based on the screen area and dpi (pixel pitch).
 - h. Maintain a minimum of 5 to 10 pixels between buttons on small to medium touch panels, and a minimum of 10 to 15 pixels between buttons on medium to large touch panels.
 - i. Buttons such as Power, Play, Stop, Record, Rewind, Previous, Forward, Eject, Return, Next, Up, Down, Left, Right, Plus, Minus, etc. shall use standard industry symbols. Record shall always be a solid red circle.
2. Text and Fonts:
- a. The Contractor shall use a standard sans-serif bold Arial or Calibri font style unless the Owner dictates otherwise.
 - b. Words shall have the first letter capitalized and the rest of the word lower case. No words shall be all capitals or all lower case. Follow standard grammatically correct sentence structure where the first word is capitalized and the rest of the sentence is lower case, followed by the appropriate punctuation mark with accurate syntax and correct verbs.
 - c. All font size in a single group or cluster shall maintain the same font size. Headers to a group or cluster shall have a slightly enlarged font size. and footers shall have a slightly smaller font size in comparison to the group font size to maintain a visual hierarchy.
3. Color Considerations:
- a. Colors shall be selected so that, when converted to monochrome, all text, buttons, icons, groups, clusters, borders, etc. are clearly visible to accommodate all color blind or color-impaired individuals and ADA requirements.
 - b. Background colors shall be cool low saturation colors such as grey, blue, or green and their analogous colors, and be a gradient from top down or top left to bottom right.
 - c. Base colors shall be analogous to the background color but be of a higher saturation to stand out more clearly.
 - d. Button colors shall be analogous to the background color, stand out clearly from the base colors, and be of a higher saturation cool color, gray, or a low saturation black.
 - e. Icon, symbols, and text color shall be a neutral white or black, or a low saturation grey, and shall clearly stand out from the background or button it is placed on.

-
- f. Buttons for modal acknowledgement, exit or return, or other modal action shall be a warm color such as red or yellow and their analogous colors.
 - g. Buttons, icons, symbols or text for emergency or urgent notifications shall be bright red.
 - 4. Pages and Background:
 - a. Groups and clusters shall have clearly defined borders, with spacing between adjacent groups.
 - b. Modal pop-up windows or pages shall be required when a command requires user input before it is executed or when a button has multiple nested elements to control, such as microphone volumes, zone control, lighting and environment control, advanced system controls, etc.
 - 1) The modal pop-up pages shall dim and grey out the background and buttons, overlay the main page, and have a clear back or exit button to bring the user back into the active page the user was on before the modal pop-up.
 - 2) A model pop-up timer page shall appear when a projector is being turned on or off for the appropriate warmup or cooldown time. No additional commands shall be allowed during this time.
 - 3) Model pop-ups shall not replace or completely overlay the background.
 - c. Images or pictures shall never be used as backgrounds to any page other than a master start page, if appropriate.
 - D. A 15% programming dollar allowance shall be included for Owner and Architect/Engineer comments on additional system functionality as construction progresses. This shall be shown as a separate line item in the bid (include hours).
- 3.11 SYSTEM COMMISSIONING
- A. The Contractor shall notify the Architect/Engineer and Owner prior to conducting final system commissioning.
 - B. Contractors' tests shall be scheduled and documented in accordance with the commissioning requirements. Refer to Section 010900 - General Commissioning.
 - C. System verification testing is part of the commissioning process. Verification testing shall be performed by the Contractor and witnessed and documented by the Commissioning Agent. Refer to Section 010900 - General Commissioning for system verification tests and commissioning requirements.
 - D. Contractor shall demonstrate system performance of all equipment and adjust settings as directed by the Architect/Engineer and/or Owner.
 - 1. All system settings, software options and other parameters shall be simulated and tested by the Contractor

3.12 FIELD QUALITY CONTROL

- A. Where these specifications require a product or assembly without the use of a brand or trade name, provide a product that meets the requirements of the specifications, as supplied and warranted by the system vendor. If the product or assembly is not available from the system vendor, provide product or assembly as recommended by the system vendor.
- B. Periodic observations will be performed during construction to verify compliance with the requirements of the specifications. These services do not relieve the Contractor of responsibility for compliance with the Contract Documents.

3.13 FIELD SERVICES

- A. The installer shall conduct a planning meeting with the Owner. The purpose of this meeting shall be to determine all equipment settings that are considered preferences (where proper system operation does not depend on the setting).
- B. The installer shall include labor for all planning and all programming activities required to implement the Owner's preferences for equipment settings.
- C. It shall be the responsibility of the Contractor/installer to provide a complete, functional system as described by the design documents. These responsibilities include:
 - 1. Complete hardware setup, installation and wiring and software configuration.
 - 2. Complete programming of software in accordance with the Owner's desires determined by the planning meeting.
 - 3. Complete system diagnostic verification.
 - 4. Complete system commissioning.

3.14 SYSTEM ACCEPTANCE

- A. The Contractor shall submit for review a formal acceptance and system checkout procedure. The system checkout procedures shall include all system components and software. The Contractor shall perform the tests and settings and document all results.

3.15 SYSTEM DOCUMENTATION

- A. Complete documentation shall be provided for the system. The documentation shall describe:
 - 1. All operational parameters of the system.
 - 2. Complete documentation of programming and features.
 - 3. Complete operating instructions for all hardware and software.
- B. The following sections shall be provided in the system documentation:
 - 1. User Manual: A step-by-step guide and instructions detailing all system user functions.
 - 2. Technical Manual: A comprehensive document providing all system operations, troubleshooting flowcharts, functional system layout, wiring diagrams, block diagrams and schematic diagrams.
 - 3. Maintenance Manual: A comprehensive document on all aspects of physical maintenance of the systems, including cleaning of the displays, bulb changes, filter cleaning, filter changing and UPS maintenance.

3.16 SYSTEM TRAINING

- A. All labor and materials required for on-site system training shall be provided. Training shall be conducted at the project site using the project equipment.
 - 1. Provide two week's advanced notice of training to the Owner and Architect/Engineer.
 - 2. The Architect/Engineer shall be presented with the option to attend the training.
 - 3. Provide a training outline agenda describing the subject matter and the recommended audience for each topic.
- B. At a minimum, the following training shall be conducted:
 - 1. User Manual: A course detailing the system functions and operations that a daily user will encounter.
 - 2. Technical User: Provide configuration training on all aspects of the system(s), including equipment and software.
 - 3. Maintenance User: Provide training on all aspects of physical maintenance of the systems, including cleaning of the displays, bulb changes, filter cleaning and filter changing.
- C. Minimum on-site training times shall be:
 - 1. User Manual: One (1) day.
 - 2. Technical user: One (1) day.
 - 3. Maintenance user: Four (4) hours.
 - 4. Attend first event and support owner operation of the system: 6 hours.
 - 5. The Contractor shall include in his/her bid one (1) additional day of training each quarter for the 12-month period of the project warranty. The Contractor shall return to the site for additional follow-up training during this period.

END OF SECTION 274100